



- (51) **International Patent Classification:**
F16H 1/28 (2006.01) *F02K 3/04* (2006.01)
- (21) **International Application Number:**
PCT/US2015/010026
- (22) **International Filing Date:**
2 January 2015 (02.01.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/929,145 20 January 2014 (20.01.2014) US
- (71) **Applicant:** UNITED TECHNOLOGIES CORPORATION [US/US]; One Financial Plaza, Hartford, Connecticut 06101 (US).
- (72) **Inventors:** MCCUNE, Michael E.; 43 Hunters Court, Colchester, Connecticut 06415 (US). SHERIDAN, William G.; 38 Beal Drive, Southington, Connecticut 06489 (US). OGDEN, William P.; 168 Fern Street, Glastonbury, Connecticut 06033 (US).
- (74) **Agent:** OLDS, Theodore W.; Carlson, Gaskey & Olds, 400 W. Maple Road, Ste. 350, Birmingham, Michigan 48009 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** LIGHTWEIGHT JOURNAL SUPPORT PIN

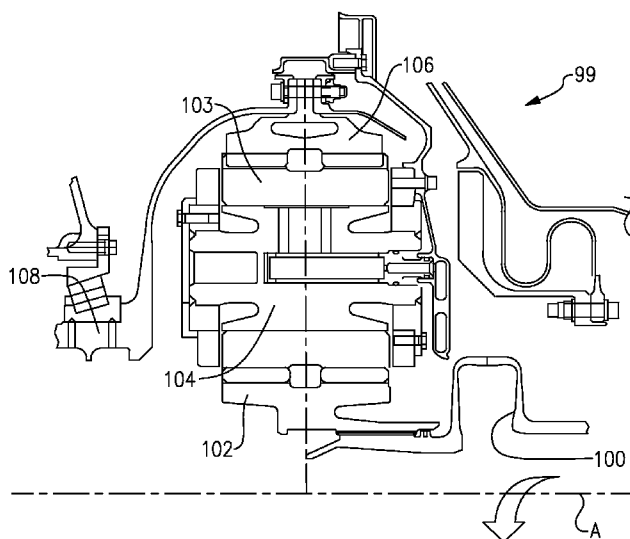


FIG. 2

(57) **Abstract:** A journal support pin to support intermediate gears for use in gas turbine engine comprises a titanium body, and an outer surface outside of the titanium body having a surface hardness that is harder than the body. A gas turbine engine and a method of forming a journal support pin to support intermediate gears for use in gas turbine engine are also disclosed.

LIGHTWEIGHT JOURNAL SUPPORT PIN

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority to United States Provisional Patent Application No. 61/929,145, filed January 20, 2014.

BACKGROUND OF THE INVENTION

[0002] This application relates to a journal support pin for supporting a planet gear in an epicyclic gear set for a gear reduction system.

[0003] Gas turbine engines are known and, typically, include a fan delivering air into a bypass duct as propulsion air. The fan also delivers air into a compressor as core air. The core air is compressed and delivered into a combustion section where it is mixed with fuel and ignited. Products of this combustion pass downstream over turbine rotors driving them to rotate.

[0004] Historically, the fan rotated at a single speed with a fan drive turbine. This compromised both elements as the fan rotor could not rotate as slow as would be desired and the fan drive turbine rotor could not rotate as quickly as would be desired. Thus, it has been proposed to include a gear reduction between the two. Now, the fan rotor can rotate at a slower speed than the fan drive turbine.

[0005] With the inclusion of the gear reduction between the fan and the turbine rotor, however, it becomes desirable to limit the additional weight associated with the gear reduction.

SUMMARY OF THE INVENTION

[0006] In a featured embodiment, a journal support pin to support intermediate gears for use in gas turbine engine comprises a titanium body, and an outer surface outside of the titanium body having a surface hardness that is harder than the body.

[0007] In another embodiment according to the previous embodiment, oil supply holes extend from a central bore in the body through the surface.

[0008] In another embodiment according to any of the previous embodiments, the oil supply holes extend through the outer surface at a recess. A thickness of the outer surface is thinner than at axial ends of the titanium body.

[0009] In another embodiment according to any of the previous embodiments, the recess extends only over a limited circumferential portion of the outer surface.

[0010] In another embodiment according to any of the previous embodiments, the outer surface is provided by a steel sleeve.

[0011] In another embodiment according to any of the previous embodiments, the steel sleeve is pinned to the body to secure the sleeve to the body.

[0012] In another embodiment according to any of the previous embodiments, the outer surface is provided by a coating.

[0013] In another embodiment according to any of the previous embodiments, the coating is one of silver, steel and titanium nitride.

[0014] In another embodiment according to any of the previous embodiments, the outer surface is provided by nitriding.

[0015] In another embodiment according to any of the previous embodiments, the outer surface is provided by high velocity oxyfuel spray.

[0016] In another featured embodiment, a gas turbine engine comprises a fan and a fan drive turbine, which drives the fan through a gear reduction. The gear reduction includes a sun gear engaging intermediate gears and the intermediate gears engaging a ring gear. The intermediate gears are supported on journal support pins. The journal support pins have a titanium body. An outer surface outside of the titanium body has a surface hardness that is harder than the body.

[0017] In another embodiment according to the previous embodiment, oil supply holes extend from a central bore in the body through the surface.

[0018] In another embodiment according to any of the previous embodiments, the oil supply holes extend through the outer surface at a recess. A thickness of the outer surface is thinner than at axial ends of the titanium body.

[0019] In another embodiment according to any of the previous embodiments, the recess extends only over a limited circumferential portion of the outer surface.

[0020] In another embodiment according to any of the previous embodiments, the outer surface is provided by a steel sleeve.

[0021] In another embodiment according to any of the previous embodiments, the steel sleeve is pinned to the body to secure the sleeve to the body.

[0022] In another embodiment according to any of the previous embodiments, the outer surface is provided by a coating.

[0023] In another embodiment according to any of the previous embodiments, the coating is one of silver, steel and titanium nitride.

[0024] In another embodiment according to any of the previous embodiments, the outer surface is provided by nitriding.

[0025] In another embodiment according to any of the previous embodiments, the outer surface is provided by high velocity oxyfuel spray.

[0026] In another embodiment according to any of the previous embodiments, the gear reduction is a planetary epicyclic gear system and the intermediate gears are planet gears.

[0027] In another embodiment according to any of the previous embodiments, the gear reduction is a star epicyclic gear system and the intermediate gears are star gears.

[0028] In another embodiment according to any of the previous embodiments, a reduction ratio of the gear reduction is greater than about 2.3.

[0029] In another embodiment according to any of the previous embodiments, a core is surrounded by a core nacelle defined about the axis. A fan nacelle is mounted at least partially around the core nacelle to define a fan bypass airflow path for a fan bypass airflow. A bypass ratio defined by the fan bypass airflow divided by airflow through the core is greater than about eight (8).

[0030] In another featured embodiment, a method of forming a journal support pin to support intermediate gears for use in gas turbine engine comprises providing a titanium body, and enveloping an outer surface outside of the titanium body with a material having a surface hardness that is harder than the titanium body.

[0031] In another embodiment according to the previous embodiment, pin holes are drilled through the material and into the titanium body. Pins are inserted into the holes. The pins are welded to at least one of the material and the titanium body. Oil supply holes extend from a central bore in the body through the surface.

[0032] In another embodiment according to any of the previous embodiments, oil supply holes are drilled through the material and into the titanium body to a depth of a central passage in the titanium body.

[0033] In another embodiment according to any of the previous embodiments, the material is provided by a steel sleeve.

[0034] In another embodiment according to any of the previous embodiments, the material is provided by a coating.

[0035] In another embodiment according to any of the previous embodiments, the coating is one of silver, steel and titanium nitride.

[0036] These and other features may be best understood from the following drawings and specification.

BRIEF DESCRIPTION OF THE DRAWINGS

[0037] Figure 1 shows a schematic of a gas turbine engine.

[0038] Figure 2 is a detail of a gear reduction.

[0039] Figure 3A is a cross-sectional view through a journal support pin.

[0040] Figure 3B is a perspective view.

[0041] Figure 3C is a cross-sectional view.

[0042] Figure 4 shows an alternative embodiment.

DETAILED DESCRIPTION

[0043] Figure 1 schematically illustrates a gas turbine engine 20. The gas turbine engine 20 is disclosed herein as a two-spool turbofan that generally incorporates a fan section 22, a compressor section 24, a combustor section 26 and a turbine section 28. Alternative engines might include an augmentor section (not shown) among other systems or features. The fan section 22 drives air along a bypass flow path B in a bypass duct defined within a nacelle 15, while the compressor section 24 drives air along a core flow path C for compression and communication into the combustor section 26 then expansion through the turbine section 28. Although depicted as a two-spool turbofan gas turbine engine in the disclosed non-limiting embodiment, it should be understood that the concepts described herein are not limited to use with two-spool turbofans as the teachings may be applied to other types of turbine engines including three-spool architectures.

[0044] The exemplary engine 20 generally includes a low speed spool 30 and a high speed spool 32 mounted for rotation about an engine central longitudinal axis A relative to an engine static structure 36 via several bearing systems 38. It should be understood that

various bearing systems 38 at various locations may alternatively or additionally be provided, and the location of bearing systems 38 may be varied as appropriate to the application.

[0045] The low speed spool 30 generally includes an inner shaft 40 that interconnects a fan 42, a first (or low) pressure compressor 44 and a first (or low) pressure turbine 46. The inner shaft 40 is connected to the fan 42 through a speed change mechanism, which in exemplary gas turbine engine 20 is illustrated as a geared architecture 48 to drive the fan 42 at a lower speed than the low speed spool 30. The high speed spool 32 includes an outer shaft 50 that interconnects a second (or high) pressure compressor 52 and a second (or high) pressure turbine 54. A combustor 56 is arranged in exemplary gas turbine 20 between the high pressure compressor 52 and the high pressure turbine 54. A mid-turbine frame 57 of the engine static structure 36 is arranged generally between the high pressure turbine 54 and the low pressure turbine 46. The mid-turbine frame 57 further supports bearing systems 38 in the turbine section 28. The inner shaft 40 and the outer shaft 50 are concentric and rotate via bearing systems 38 about the engine central longitudinal axis A which is collinear with their longitudinal axes.

[0046] The core airflow is compressed by the low pressure compressor 44 then the high pressure compressor 52, mixed and burned with fuel in the combustor 56, then expanded over the high pressure turbine 54 and low pressure turbine 46. The mid-turbine frame 57 includes airfoils 59 which are in the core airflow path C. The turbines 46, 54 rotationally drive the respective low speed spool 30 and high speed spool 32 in response to the expansion. It will be appreciated that each of the positions of the fan section 22, compressor section 24, combustor section 26, turbine section 28, and fan drive gear system 48 may be varied. For example, gear system 48 may be located aft of combustor section 26 or even aft of turbine section 28, and fan section 22 may be positioned forward or aft of the location of gear system 48.

[0047] The engine 20 in one example is a high-bypass geared aircraft engine. In a further example, the engine 20 bypass ratio is greater than about six (6), with an example embodiment being greater than about eight (8) or greater than about ten (10), the geared architecture 48 is an epicyclic gear train, such as a planetary gear system or other gear system, with a gear reduction ratio of greater than about 2.3 and the low pressure turbine 46 has a pressure ratio that is greater than about five. In one disclosed embodiment, the engine 20 bypass ratio is greater than about ten (10:1), the fan diameter is significantly larger than

that of the low pressure compressor 44, and the low pressure turbine 46 has a pressure ratio that is greater than about five 5:1. Low pressure turbine 46 pressure ratio is pressure measured prior to inlet of low pressure turbine 46 as related to the pressure at the outlet of the low pressure turbine 46 prior to an exhaust nozzle. The geared architecture 48 may be an epicycle gear train, such as a planetary gear system or other gear system, with a gear reduction ratio of greater than about 2.3:1. It should be understood, however, that the above parameters are only exemplary of one embodiment of a geared architecture engine and that the present invention is applicable to other gas turbine engines including direct drive turbofans.

[0048] A significant amount of thrust is provided by the bypass flow B due to the high bypass ratio. The fan section 22 of the engine 20 is designed for a particular flight condition -- typically cruise at about 0.8 Mach and about 35,000 feet. The flight condition of 0.8 Mach and 35,000 ft, with the engine at its best fuel consumption - also known as “bucket cruise Thrust Specific Fuel Consumption (‘TSFC’)” - is the industry standard parameter of lbf of fuel being burned divided by lbf of thrust the engine produces at that minimum point. “Low fan pressure ratio” is the pressure ratio across the fan blade alone, without a Fan Exit Guide Vane (‘FEGV’) system. The low fan pressure ratio as disclosed herein according to one non-limiting embodiment is less than about 1.45. “Low corrected fan tip speed” is the actual fan tip speed in ft/sec divided by an industry standard temperature correction of $[(T_{\text{Ram}} / (518.7 \text{ } ^\circ\text{R}))]^{0.5}$. The “Low corrected fan tip speed” as disclosed herein according to one non-limiting embodiment is less than about 1150 ft / second.

[0049] Figure 2 shows a detail of a gear reduction 99 which may be incorporated into the engine 20 of Figure 1. An input drive 100 includes a flexible connection which may be connected to a fan drive turbine such as turbine 46 of Figure 1. The input connection 100 drives a sun gear 102. The sun gear 102 engages intermediate gears 103 which are mounted on journal support pins 104. In some embodiments, the intermediate gears 103 may be planet gears of a planetary epicyclic gear system. In other embodiments, the intermediate gears 103 may be star gears of a star epicyclic gear system. The intermediate gears 103 engage a ring gear 106. An output 108 of the ring gear 106, in some embodiments, drives a fan shaft for fan rotor 42. In other embodiments, a planetary gear carrier (not shown) driven by planetary gears may drive the fan shaft.

[0050] The gear reduction as shown in Figure 2 is one in which the intermediate gears 103 are star gears and rotate on respective axes but are otherwise stationary relative to the sun gear 102. However, other types of epicyclic gear systems would benefit from the teachings of this application.

[0051] The journal support pins 104 add a good deal of weight to gear reduction system 99. As such, it would be desirable to reduce the overall weight.

[0052] The journal support pins 104 receive a high volume of stress and have typically been formed of hardened steel. However, steel is relatively heavy.

[0053] In an embodiment shown in Figure 3A, a journal support pin body 110 is formed of titanium. Alone, titanium may be insufficient due to rubbing contact with the intermediate gears 103, as titanium is not sufficiently hard and has poor adhesive wear properties. It is, however, lighter weight than steel.

[0054] Thus, a sleeve 112, which may be a hardened steel sleeve, is placed around an outer periphery of the body 110 of the journal support pin 104.

[0055] End caps 120 and 121 are attached to ends of the body of the journal support pin 110 and are welded at 119.

[0056] Oil holes 114 extend through the body 110 of the journal pin 104 and also through the sleeve 112. Central oil channel 113 receives oil which is then delivered through holes 114 to the outer periphery at a location 115. As shown at location 115, the thickness of the sleeve 112 is thinner than at axial ends 111 and 117 of the sleeve 112. Location 115 could be described as a recess 115.

[0057] Steel shear pins 116 extend through holes 118 in the sleeve 112 and secure the sleeve 112 to the body 110.

[0058] As shown in Figure 3B, recess 115 provides an area to receive oil from the oil holes 114 and distribute that oil within the gears 103.

[0059] The shear pins 116 are preferably placed at a location which is relatively neutral of stress. The circumferential location for the pins is preferably a location that will not contact the planet gears.

[0060] As shown in Figure 3C, the oil holes 114 extend through the sleeve 112 at the recess 115 and the pins 116 extend through the holes 118 in the sleeve 112.

[0061] In assembling the journal support pin 104, the sleeve is initially press fit onto the pin body 110. The shear pin holes 118 are drilled and pins 116 are press fit into the

holes 118. The pins 116 are then welded to the sleeve 112. Thereafter, the oil holes 114 are drilled through the sleeve 112 and the body 110 to the central oil channel 113.

[0062] Then, the titanium end caps 120 and 121 are press fit and welded 119. The final grinding of the outer diameter may then occur.

[0063] Figure 4 shows an alternative embodiment 150 wherein there is not a separate sleeve placed on the body 152. The end caps 154 and 155 are shown, as is the oil supply hole 160 and a recess 156 which provides a pocket to receive the oil, like the recess 115 in the Figure 3B embodiment. In the embodiment 150, some outer treatment to the outer surface of the titanium body is performed.

[0064] In one example, a coating may be provided. The coating may be silver in one embodiment. The coating could alternatively be a titanium nitride. Alternatively, the outer surface may simply be nitride treated, by nitriding, carbonitride or carburized to increase surface strength. Alternatively, the coating could be a steel material which is cold sprayed onto the outer periphery, rather than being a separate sleeve. In addition, a high velocity oxyfuel layer may be applied.

[0065] In all embodiments, a journal support pin 104 supports planet gears 103 for use in gas turbine engine. The journal support pin 104 has a titanium body 110, and an outer surface outside of the titanium body having a surface hardness that is harder than the body. Oil supply holes 114 extend through the outer surface at a recess 115. A thickness of the outer surface at the recess is thinner than at axial ends 111, 117 of the titanium body. The recess 115 extends only over a limited circumferential portion of the outer surface.

[0066] All of the disclosed embodiments provide a journal support pin which will be able to survive in the environment that it will see in operation on a gas turbine engine, but still allow the use of relatively lightweight titanium.

[0067] Although an embodiment of this invention has been disclosed, a worker of ordinary skill in this art would recognize that certain modifications would come within the scope of this invention. For that reason, the following claims should be studied to determine the true scope and content of this invention.

CLAIMS

1. A journal support pin to support intermediate gears for use in gas turbine engine comprising:
a titanium body, and an outer surface outside of said titanium body having a surface hardness that is harder than said body.
2. The journal support pin as set forth in claim 1, wherein oil supply holes extend from a central bore in said body through said surface.
3. The journal support pin as set forth in claim 2, wherein said oil supply holes extend through said outer surface at a recess, wherein a thickness of said outer surface is thinner than at axial ends of said titanium body.
4. The journal support pin as set forth in claim 3, wherein said recess extends only over a limited circumferential portion of said outer surface.
5. The journal support pin as set forth in claim 1, wherein said outer surface is provided by a steel sleeve.
6. The journal support pin as set forth in claim 5, wherein said steel sleeve is pinned to said body to secure said sleeve to said body.
7. The journal support pin as set forth in claim 1, wherein said outer surface is provided by a coating.
8. The journal support pin as set forth in claim 7, wherein said coating is one of silver, steel and titanium nitride.
9. The journal support pin as set forth in claim 1, wherein said outer surface is provided by nitriding.

10. The journal support pin as set forth in claim 1, wherein said outer surface is provided by high velocity oxyfuel spray.
11. A gas turbine engine comprising:
 - a fan and a fan drive turbine, said fan drive turbine driving said fan through a gear reduction;
 - said gear reduction including a sun gear engaging intermediate gears and said intermediate gears engaging a ring gear, said intermediate gears being supported on journal support pins; and
 - said journal support pins having a titanium body and an outer surface outside of said titanium body having a surface hardness that is harder than said body.
12. The gas turbine engine as set forth in claim 11, wherein oil supply holes extend from a central bore in said body through said surface.
13. The gas turbine engine as set forth in claim 12, wherein said oil supply holes extend through said outer surface at a recess, wherein a thickness of said outer surface is thinner than at axial ends of said titanium body.
14. The gas turbine engine as set forth in claim 13, wherein said recess extends only over a limited circumferential portion of said outer surface.
15. The gas turbine engine as set forth in claim 11, wherein said outer surface is provided by a steel sleeve.
16. The gas turbine engine as set forth in claim 15, wherein said steel sleeve is pinned to said body to secure said sleeve to said body.
17. The gas turbine engine as set forth in claim 11, wherein said outer surface is provided by a coating.

18. The gas turbine engine as set forth in claim 17, wherein said coating is one of silver, steel and titanium nitride.
19. The gas turbine engine as set forth in claim 11, wherein said outer surface is provided by nitriding.
20. The gas turbine engine as set forth in claim 11, wherein said outer surface is provided by high velocity oxyfuel spray.
21. The gas turbine engine as set forth in claim 11, wherein said gear reduction is a planetary epicyclic gear system and said intermediate gears are planet gears.
22. The gas turbine engine as set forth in claim 11, wherein said gear reduction is a star epicyclic gear system and said intermediate gears are star gears.
23. The gas turbine engine as set forth in claim 11, wherein a reduction ratio of said gear reduction is greater than about 2.3.
24. The gas turbine engine as set forth in claim 11, comprising
a core surrounded by a core nacelle defined about the axis; and
a fan nacelle mounted at least partially around the core nacelle to define a fan bypass airflow path for a fan bypass airflow, wherein a bypass ratio defined by the fan bypass airflow divided by airflow through the core is greater than about eight (8).

25. A method of forming a journal support pin to support intermediate gears for use in gas turbine engine comprising:
- providing a titanium body, and
 - enveloping an outer surface outside of said titanium body with a material having a surface hardness that is harder than said titanium body.
26. The method as set forth in claim 25, comprising:
- drilling pin holes through the material and into the titanium body;
 - inserting pins into the holes; and
 - welding the pins to at least one of the material and the titanium body.
- wherein oil supply holes extend from a central bore in said body through said surface.
27. The method as set forth in claim 26, comprising:
- drilling oil supply holes through said material and into said titanium body to a depth of a central passage in said titanium body.
28. The method as set forth in claim 25, wherein said material is provided by a steel sleeve.
29. The method as set forth in claim 24, wherein said material is provided by a coating.
30. The method as set forth in claim 29, wherein said coating is one of silver, steel and titanium nitride.

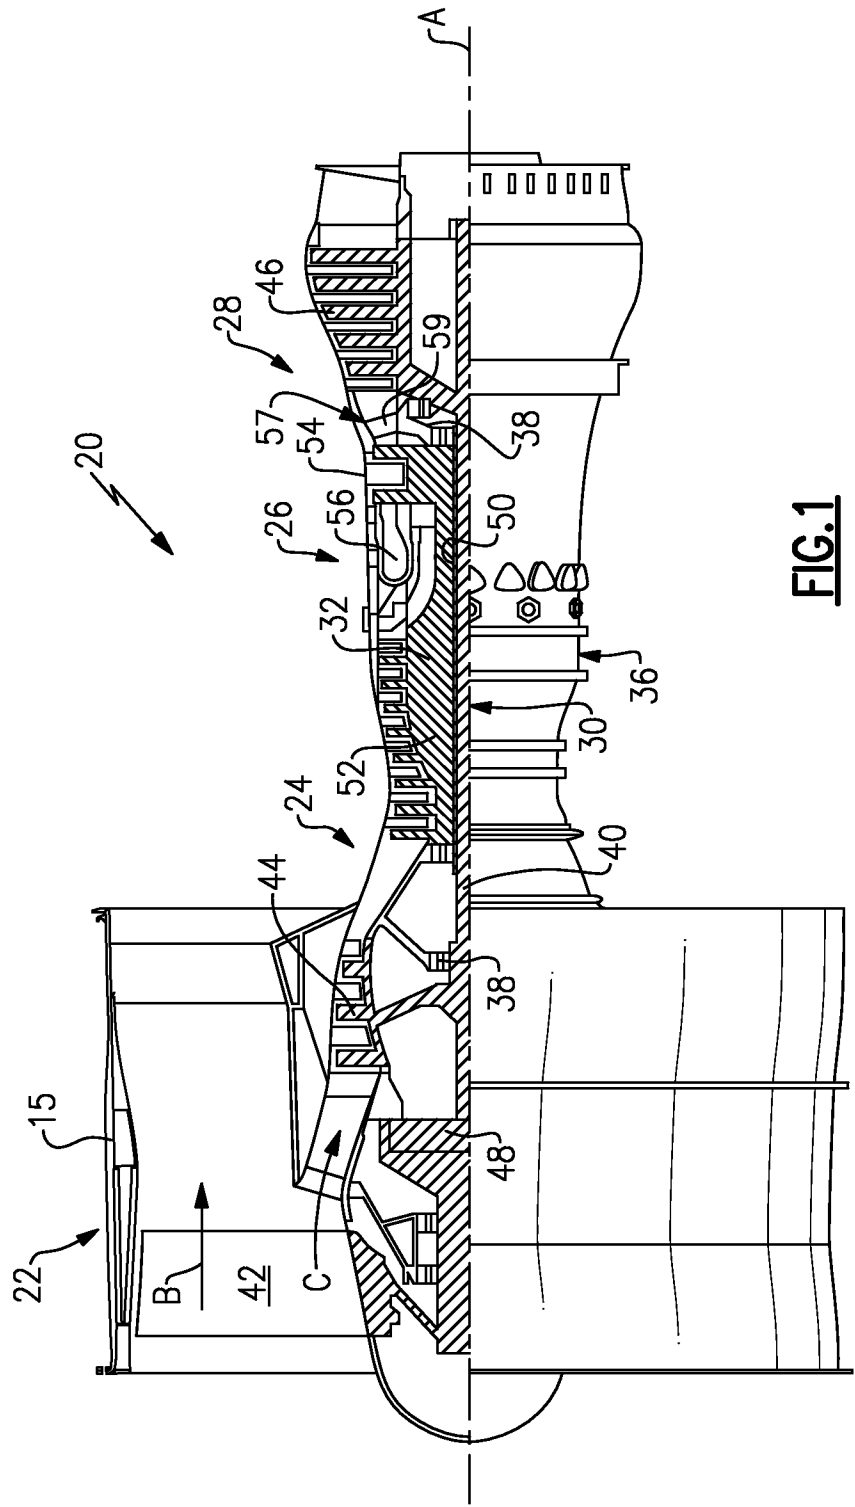


FIG. 1

2/5

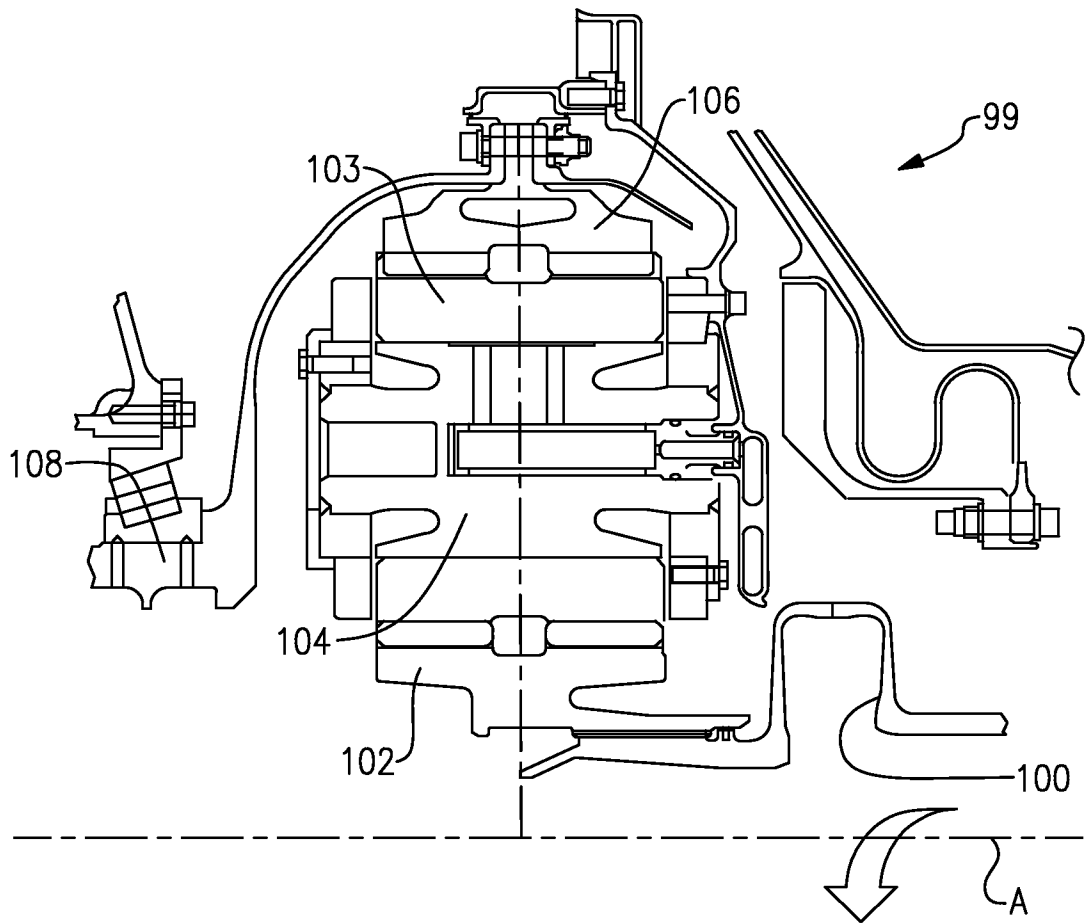


FIG. 2

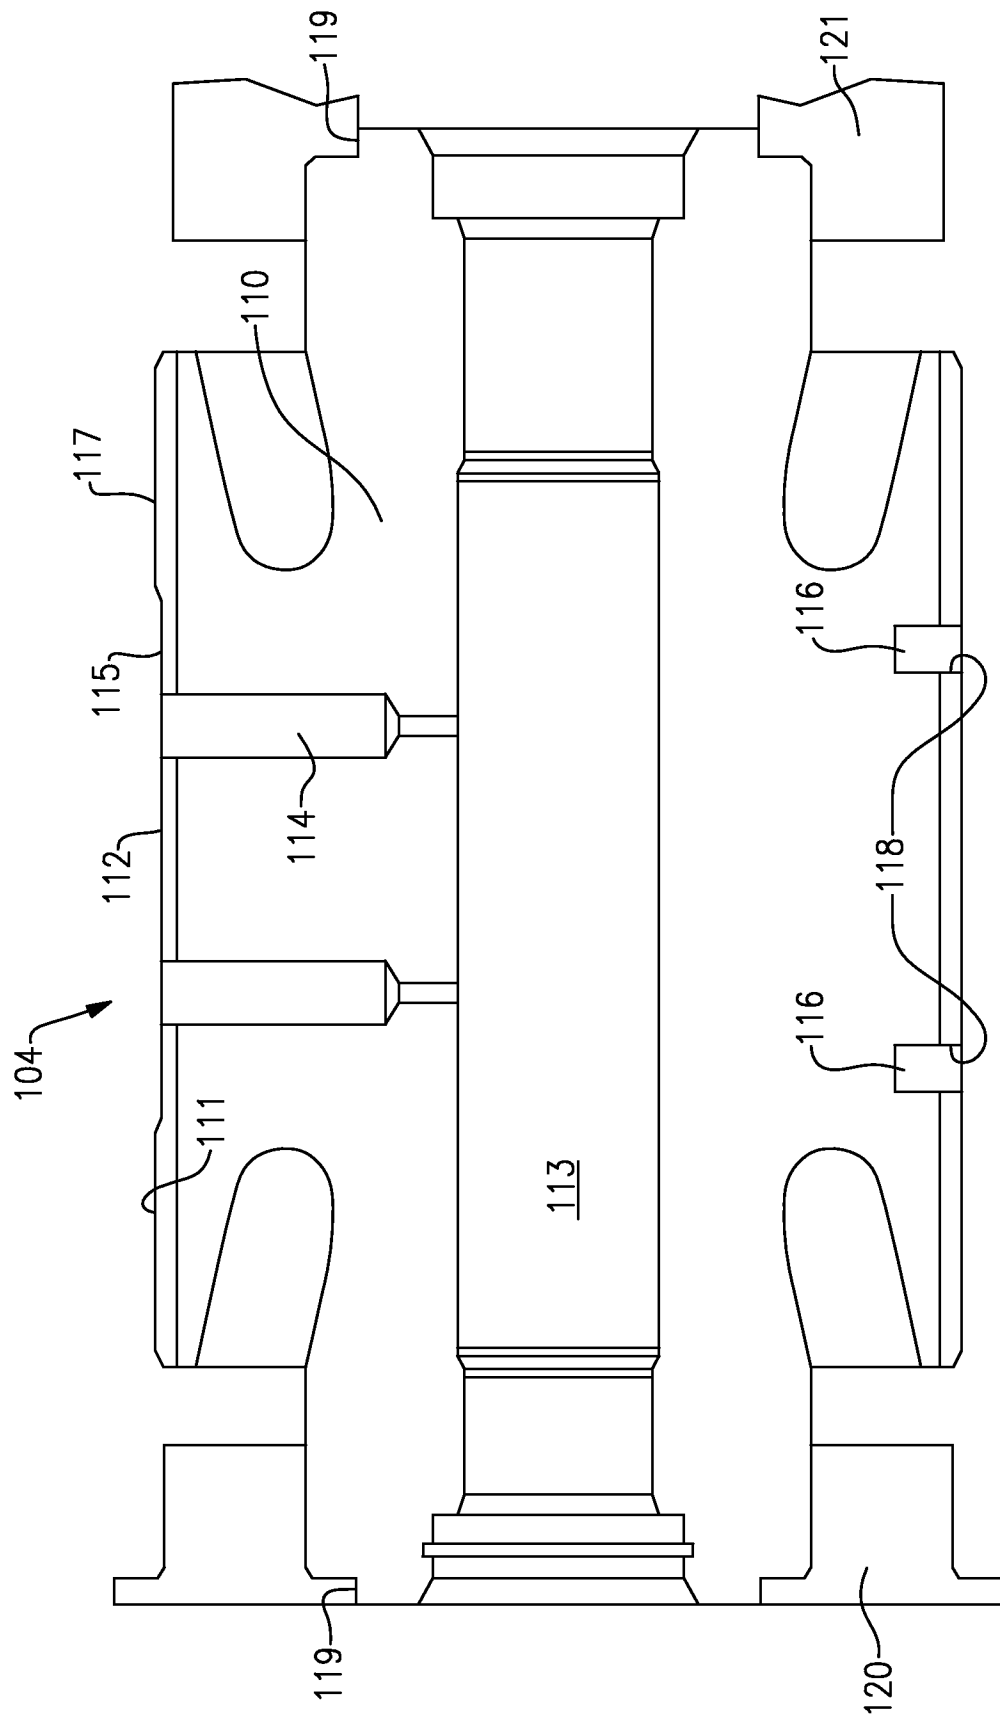


FIG. 3A

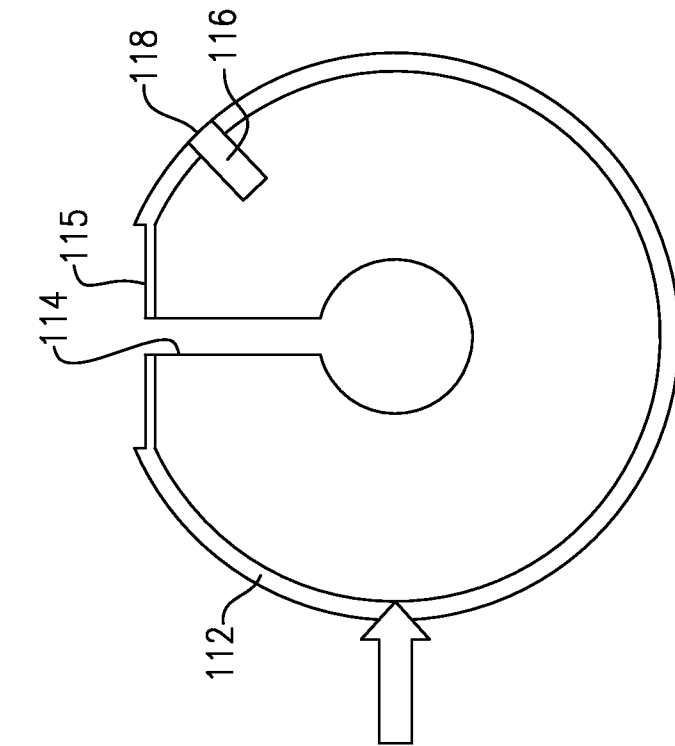


FIG. 3C

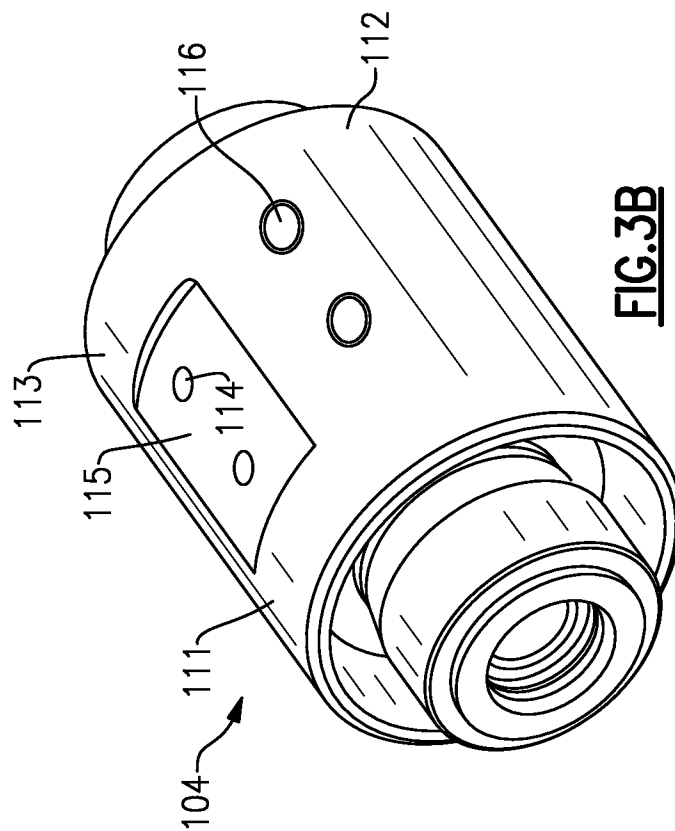


FIG. 3B

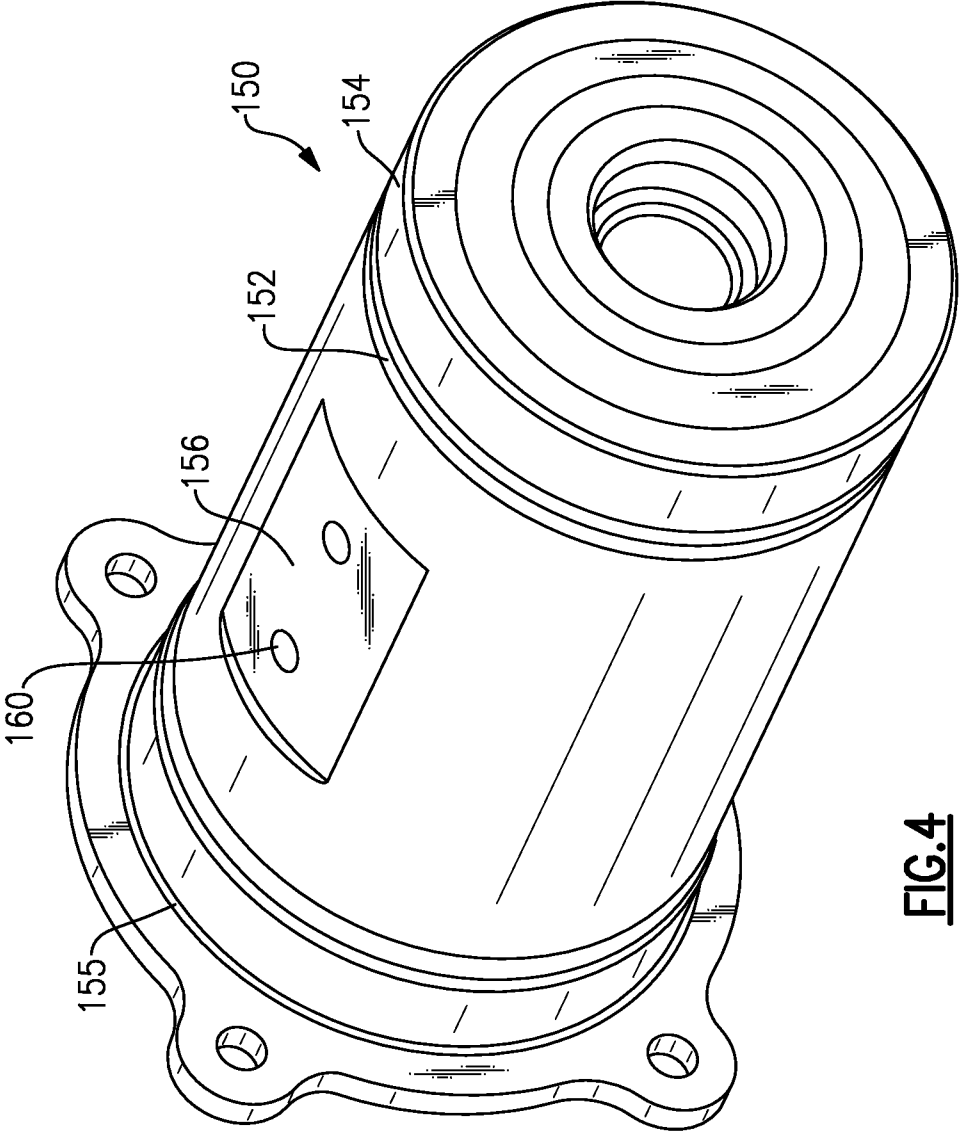


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/010026**A. CLASSIFICATION OF SUBJECT MATTER****F16H 1/28(2006.01)i, F02K 3/04(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F16H 1/28; F16C 23/04; F16H 57/08; B23P 15/14; F16C 33/04; F01D 15/12; F02K 3/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: journal, pin, gear, titanium body, outer surface, hole, fan, and gas turbine engine

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2013-0023378 A1 (MCCUNE et al.) 24 January 2013 See abstract, paragraphs [0039]-[0048], [0057], and figures 1-2, 7C.	1-30
Y	US 2005-0220381 A1 (SMITH, PAUL) 06 October 2005 See abstract, paragraphs [0013]-[0014], and figures 1-2.	1-30
A	US 2013-0004297 A1 (SHERIDAN, WILLIAM G.) 03 January 2013 See abstract, paragraphs [0031]-[0033], and figures 1-2.	1-30
A	US 2012-0237336 A1 (MCCUNE et al.) 20 September 2012 See abstract, paragraphs [0029]-[0032], and figures 1-2.	1-30
A	US 4848934 A (BLAKELY et al.) 18 July 1989 See abstract, column 3, line 34 - column 4, line 2, and figures 3-4.	1-30



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

31 March 2015 (31.03.2015)

Date of mailing of the international search report

01 April 2015 (01.04.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. ++82 42 472 7140

Authorized officer

RHEE, Jun Ho

Telephone No. +82-42-481-8288



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/010026

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2013-0023378 A1	24/01/2013	US 2014-0045645 A1 US 2014-0206496 A1 US 8667688 B2 US 8763251 B2 US 8939714 B1 WO 2014-099087 A2 WO 2014-099087 A3	13/02/2014 24/07/2014 11/03/2014 01/07/2014 27/01/2015 26/06/2014 26/06/2014
US 2005-0220381 A1	06/10/2005	AT 557192 T CN 1676959 A EP 1582756 A2 EP 1582756 A3 EP 1582756 B1 GB 0407313 D0 GB 2412701 A GB 2412701 B JP 04570998 B2 JP 2005-291495 A US 7165890 B2	15/05/2012 05/10/2005 05/10/2005 06/01/2010 09/05/2012 05/05/2004 05/10/2005 22/03/2006 27/10/2010 20/10/2005 23/01/2007
US 2013-0004297 A1	03/01/2013	EP 2610461 A2	03/07/2013
US 2012-0237336 A1	20/09/2012	US 2012-0237334 A1 US 8858388 B2	20/09/2012 14/10/2014
US 4848934 A	18/07/1989	None	