




(86) Date de dépôt PCT/PCT Filing Date: 2003/10/30  
(87) Date publication PCT/PCT Publication Date: 2004/07/08  
(45) Date de délivrance/Issue Date: 2008/07/08  
(85) Entrée phase nationale/National Entry: 2005/06/14  
(86) N° demande PCT/PCT Application No.: EP 2003/012102  
(87) N° publication PCT/PCT Publication No.: 2004/057708  
(30) Priorité/Priority: 2002/12/19 (DE102 59 803.7)

(51) Cl.Int./Int.Cl. *H01R 13/646* (2006.01),  
*H01R 13/504* (2006.01), *H01R 9/05* (2006.01)  
(72) Inventeurs/Inventors:  
STANISZEWSKI, WALTER, DE;  
HANTSCH, RALF, DE  
(73) Propriétaire/Owner:  
KATHREIN-WERKE KG, DE  
(74) Agent: ROBIC

(54) Titre : RACCORDEMENT ELECTRIQUE, NOTAMMENT POUR RACCORDER UN CONDUCTEUR EXTERIEUR  
D'UN CABLE COAXIAL  
(54) Title: ELECTRICAL TERMINAL CONNECTION, ESPECIALLY FOR CONNECTING AN OUTER CONDUCTOR OF A  
COAXIAL CABLE

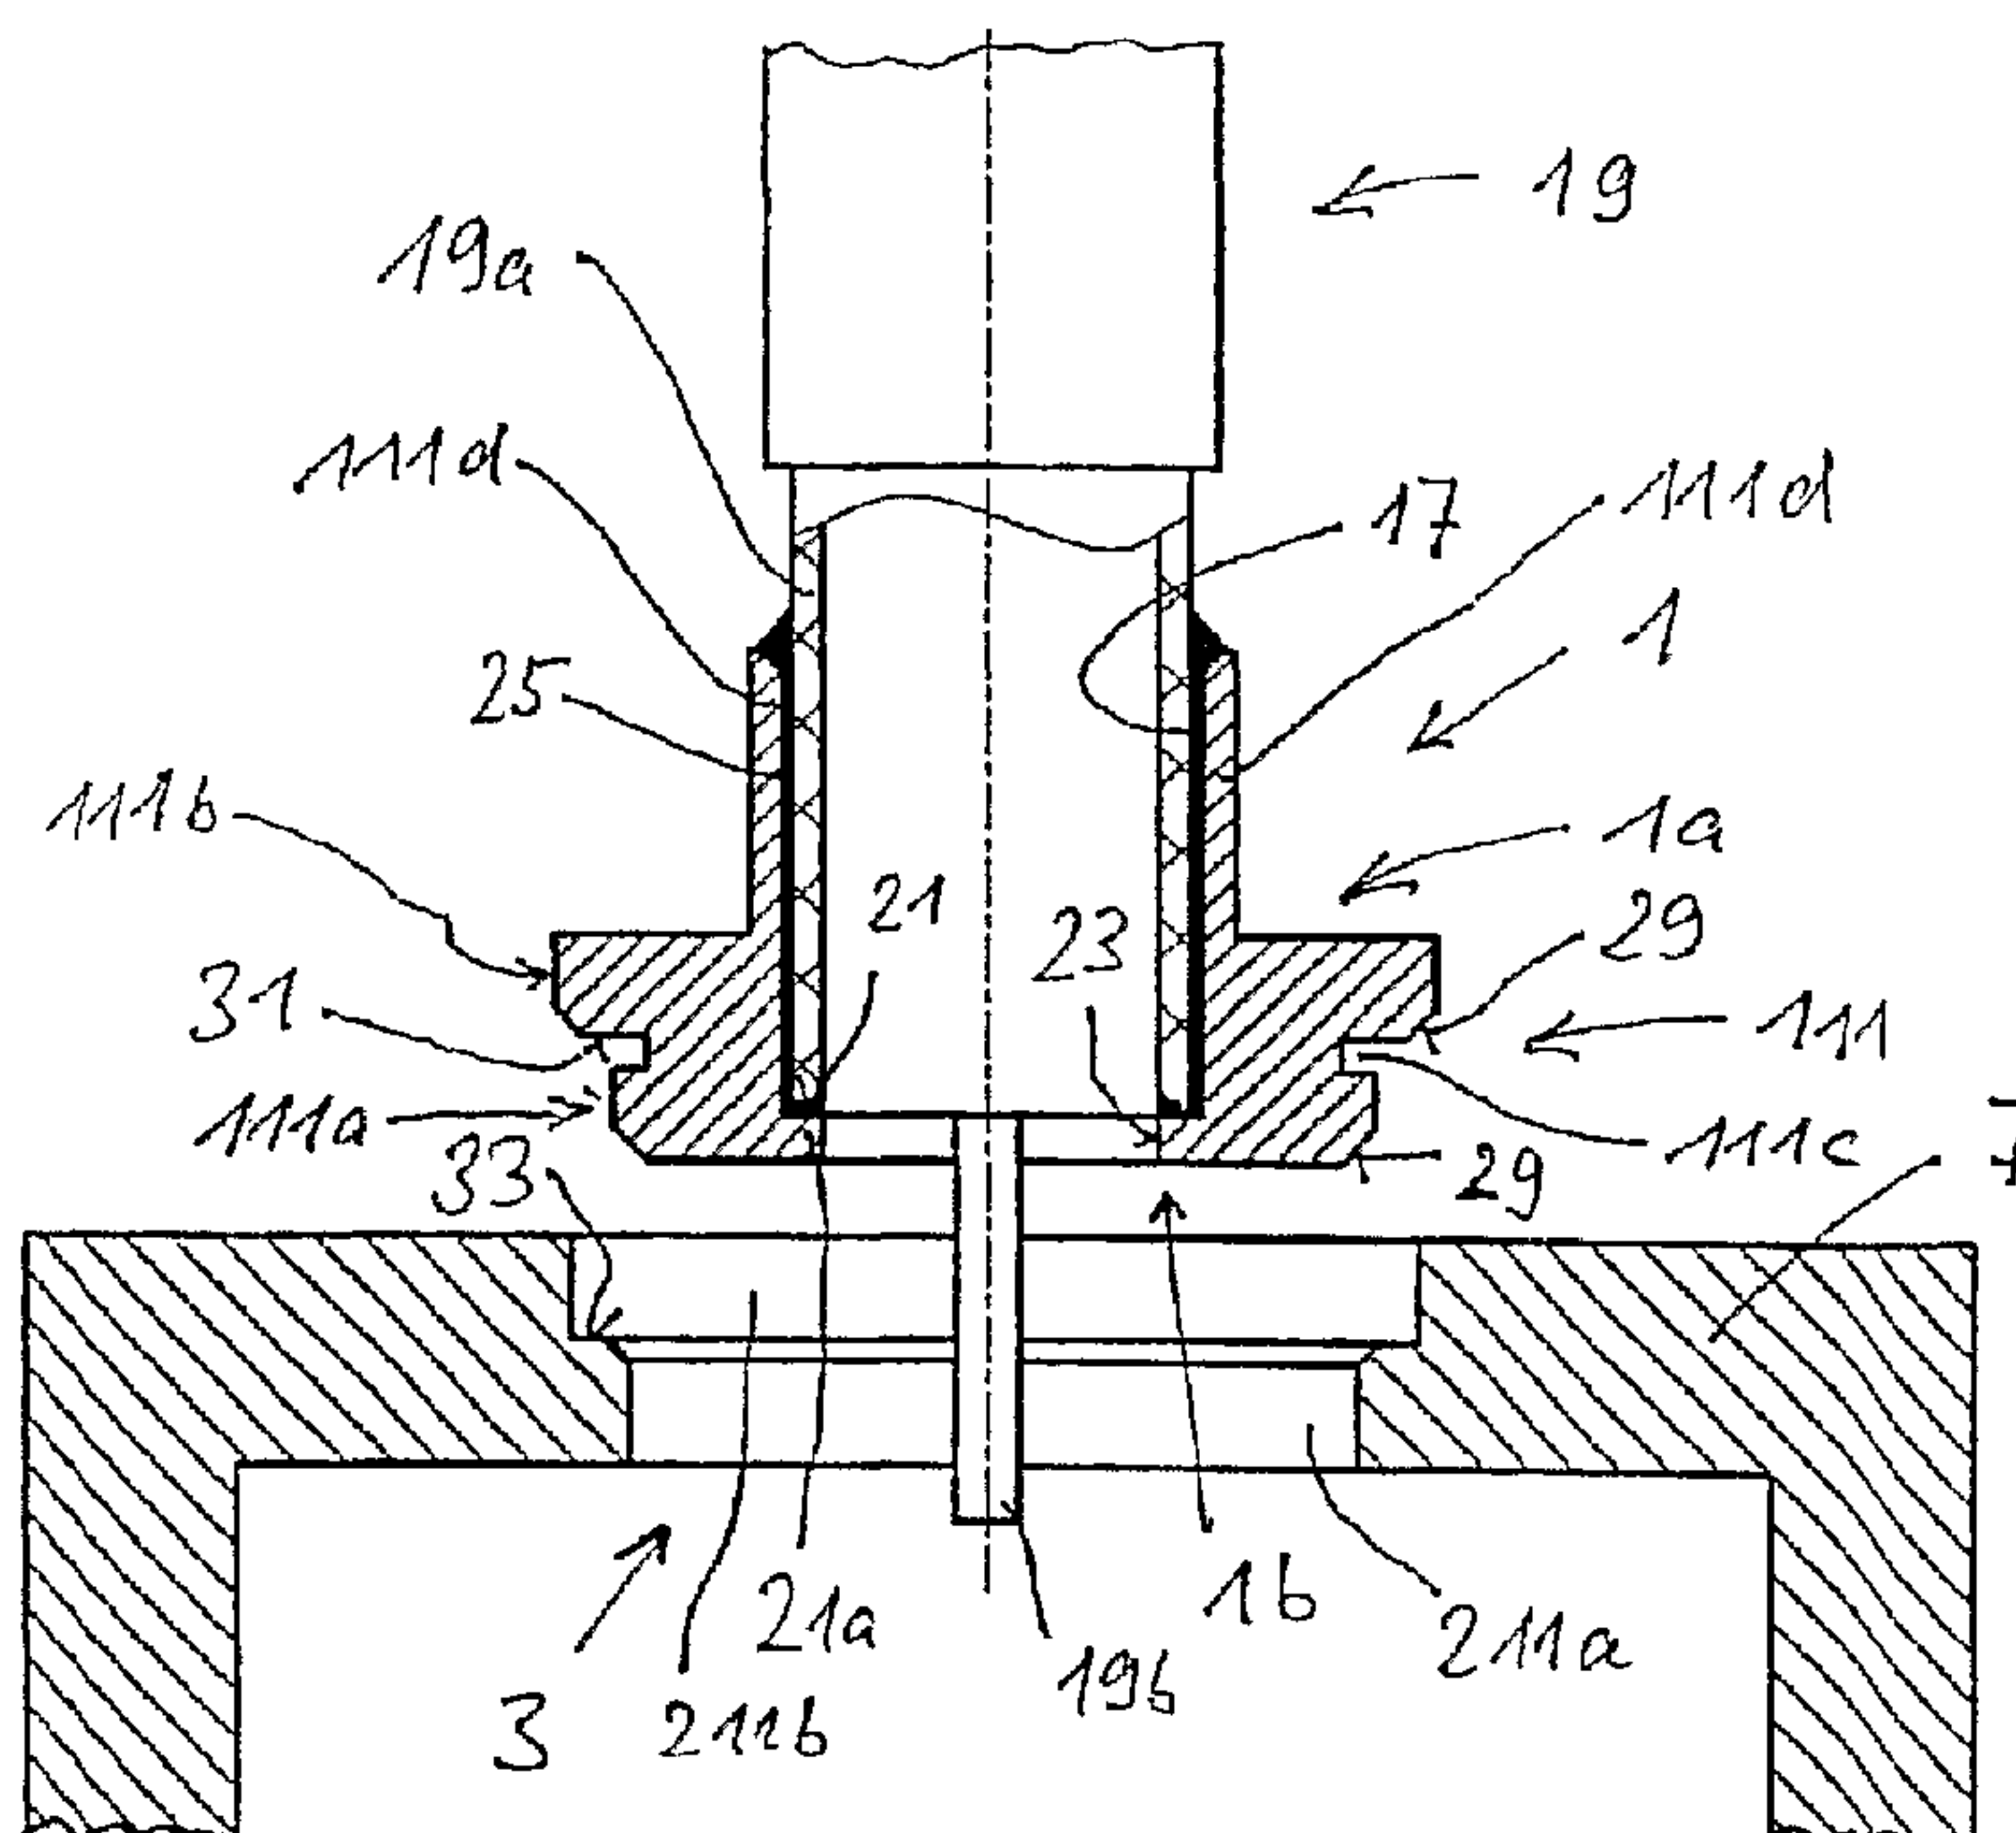

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES  
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG(19) Weltorganisation für geistiges Eigentum  
Internationales Büro(43) Internationales Veröffentlichungsdatum  
8. Juli 2004 (08.07.2004)

PCT

(10) Internationale Veröffentlichungsnummer  
**WO 2004/057708 A1**(51) Internationale Patentklassifikation<sup>7</sup>: **H01R 13/646**

(21) Internationales Aktenzeichen: PCT/EP2003/012102

(22) Internationales Anmeldedatum:  
30. Oktober 2003 (30.10.2003)

(25) Einreichungssprache: Deutsch


(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:  
102 59 803.7 19. Dezember 2002 (19.12.2002) DE(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme  
von US): **KATHREIN-WERKE KG** [DE/DE]; An-  
ton-Kathrein-Strasse 1-3, 83022 Rosenheim (DE).

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): **STANISZEWSKI,**  
**Walter** [DE/DE]; Bach 18, 83229 Aschau (DE).  
**HÄNTSCH, Ralf** [DE/DE]; Drosselweg 10, 83064  
Raubling (DE).(74) Anwalt: **FLACH, Dieter**; Adlzreiterstrasse 11, 83022  
Rosenheim (DE).(81) Bestimmungsstaaten (national): AE, AG, AL, AM,  
AT (Gebrauchsmuster), AT, AU, AZ, BA, BB, BG,  
BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ  
(Gebrauchsmuster), CZ, DE (Gebrauchsmuster), DE,  
DK (Gebrauchsmuster), DK, DM, DZ, EC, EE (Ge-  
brauchsmuster), EE, EG, ES, FI (Gebrauchsmuster), FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH,  
PL, PT, RO, RU, SC, SD, SE, SG, SK (Gebrauchsmuster),

[Fortsetzung auf der nächsten Seite]

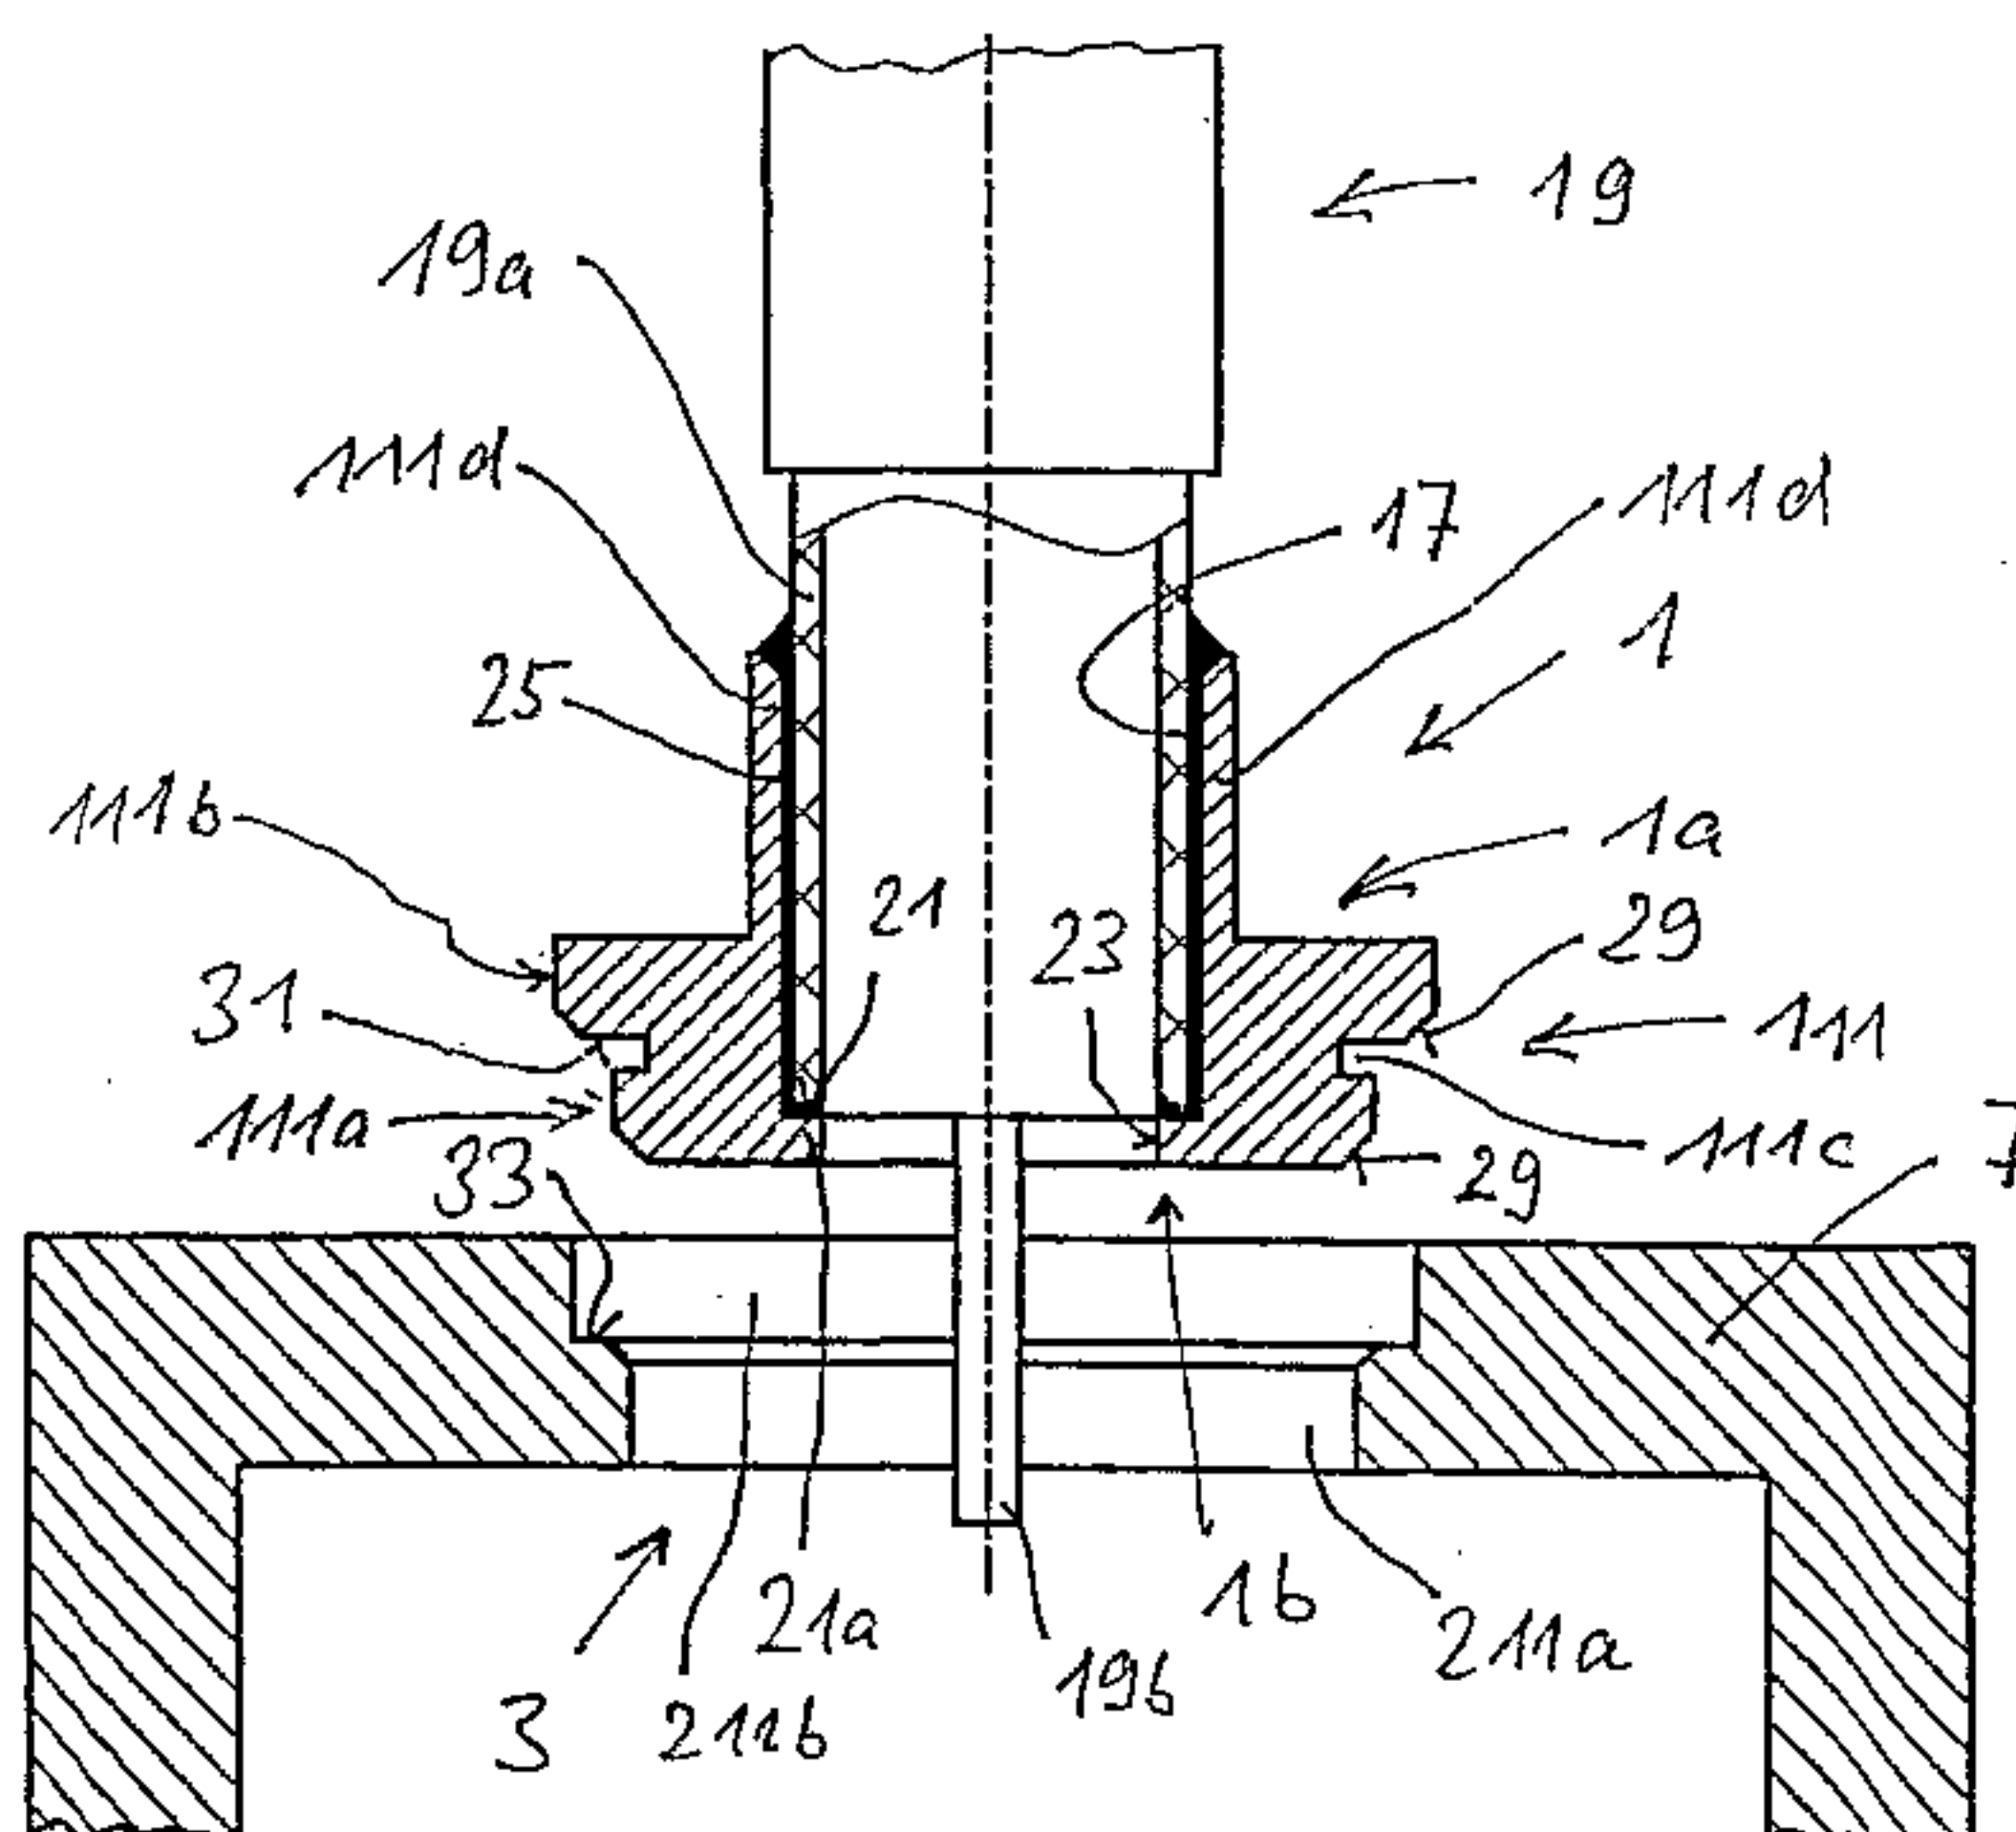(54) Title: ELECTRICAL TERMINAL CONNECTION, ESPECIALLY FOR CONNECTING AN OUTER CONDUCTOR OF A  
COAXIAL CABLE(54) Bezeichnung: ELEKTRISCHE ANSCHLUSSVERBINDUNG, INSBESONDERE FÜR DEN ANSCHLUSS EINES AUS-  
SENLEITERS EINES KOAXIALKABELS

(57) Abstract: The invention relates to an electrical terminal connection, especially for connecting an outer conductor of a coaxial cable, characterised by the following novel developments: the electrical terminal connection is embodied in a two-stage manner; the plug-in element (1) comprises at least two plug-in sections (11a, 11b) which are staggered in the plug-in and axial direction, both the first plug-in section in the plug-in direction and the following plug-in section (11a, 11b) being provided with a knurl (27) on the outer periphery thereof; the receiving opening (3) comprises a first receiving section and a second receiving section (21a, 21b) which are staggered in the plug-in and axial direction of the plug-in element (1); and the cross-sectional size of the two plug-in sections (11a, 11b) and the two complementary receiving sections (21a, 21b) differs in that the radial dimension or outer dimension of the plug-in sections (11a, 11b) provided with the knurl (27) is slightly larger than the radial or outer dimension of the receiving section (21a, 21b) respectively co-operating therewith.

[Fortsetzung auf der nächsten Seite]

WO 2004/057708 A1

**WO 2004/057708 A1**

SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW.

CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,  
TG).

**(84) Bestimmungsstaaten (regional):** ARIPO-Patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches Patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI-Patent (BF, BJ, CF,

**Veröffentlicht:**

— mit internationalem Recherchenbericht

*Zur Erklärung der Zweibuchstaben-Codes und der anderen Abkürzungen wird auf die Erklärungen ("Guidance Notes on Codes and Abbreviations") am Anfang jeder regulären Ausgabe der PCT-Gazette verwiesen.*

**(57) Zusammenfassung:** Eine elektrische Anschlussverbindung, insbesondere für den Anschluss eines Aussenleiters eines Koaxialkabels, zeichnet sich durch folgende Neuentwicklung aus: dass die elektrische Anschlussverbindung zweistufig aufgebaut ist, dass das Steckelement (1) zumindest zwei in Steck- und Axialrichtung versetzt ausgebildete Steckabschnitte (111a, 111b) aufweist, wobei sowohl der in Steckrichtung vorlaufende als auch der nachlaufende Steckabschnitt (111a, 111b) an ihrem Aussenumfang mit einer Rändelung (27) versehen sind, dass die Aufnahmeöffnung (3) in Steck- und Axialrichtung des Steckelementes (1) versetzt liegend einen ersten und einen zweiten Aufnahmeabschnitt (211a, 211b) aufweist, und dass die beiden Steckabschnitte (111a, 111b) und die beiden dazu komplementären Aufnahmeabschnitte (211a, 211b) in ihrer Querschnittsgrösse unterschiedlich ausgebildet sind, wobei das Radial- oder Aussenmass der mit der Rändelung (27) versehenen Steckabschnitte (111a, 111b) geringfügig grösser ist, als das Radial- oder Aussenmass der jeweils damit zusammenwirkenden Aufnahmeabschnitte (211a, 211b).

WO 2004/057708

PCT/EP2003/012102

---

Electrical terminal connection, especially for connecting an outer conductor of a coaxial cable

---

5

The invention relates to an electrical terminal connection, especially for connecting an outer conductor of a coaxial cable in accordance with the preamble of claim 1.

10

Electrical terminal connections, especially for connecting an outer conductor of a coaxial cable, generally comprise a plug-in element which can be plugged into a socket or generally into a coupling  
15 having a corresponding plug accommodating opening.

20

Such coupling devices may also be formed, for example, on an electrically conductive metal part, a plate, a wall, i.e. generally a housing part or an electrically  
20 conductive housing, to which, for example, it is intended to connect an electrical coaxial cable. The inner conductor is insulated from the outer conductor and is in this case plugged into an inner conductor coupling part. The coaxial cable provided with a  
25 corresponding outer conductor sleeve in this case makes contact with a sleeve-like part of the coupling device in order to produce an electrical connection between the outer conductor of the coaxial cable and the plug-in element and, by means of this, generally with a  
30 housing or housing part.

35

When flexible coaxial cables are used which, as is known, are not capable of absorbing high torques or radial forces, various problems may, however, result. Firstly, it is not possible to realize a force-fitting connection between the outer conductor and, for example, an electrical housing without the use of additional parts.

WO 2004/057708

- 2 -

PCT/EP2003/012102

On the basis of this, it has already been suggested, for example, in US 2001/0053633 A1, to press a plug-in element into an accommodating opening in a metallic wall. For this purpose, the end of a coaxial conductor generally has the insulation stripped from it in a corresponding manner, i.e. the insulation is also stripped from the outer conductor over a certain axial dimension, in order to position an adapter part there which is in the form of a metal sleeve. The distancing area between the inner wall of the sleeve-like adapter part and of the coaxial cable outer conductor is electrically connected by means of soldering. This adapter part is then pressed into a hole in a force-fitting manner, said hole being formed, for example, in an electrically conductive housing, housing part, an intermediate wall etc. The inner conductor may then protrude through the corresponding hole in the housing wall part into the interior and be electrically connected there using conventional means.

If castings are used in the case of such press-in connections, press-in sleeves having a corresponding outer knurl need to be used owing to high tolerances. In this case, the sleeves each have a radially protruding and circumferential ring which, in the pressed-in position, rests on the outer side of the wall with which electrical contact is to be made or of the stop etc. Since this stop surface, however, can never lie evenly (owing to irregularities of the corresponding stop wall, the misalignment of the pressing-in die etc.), no clear, unique electrical contact conditions can result which can always be reproduced, which is associated with all of the disadvantages emanating therefrom. In addition, there is the risk of slackening owing to relaxation and owing to thermal cycling.

WO 2004/057708

- 3 -

PCT/EP2003/012102

DE 73 35 171 U discloses a device for connecting an outer conductor and for providing strain relief for a coaxial cable, it not being possible to see clearly from the figures whether the plug-in element is only  
5 plugged or even pressed into an accommodating opening.

Finally, however, electrical connection devices are also known, in particular for coaxial cables, in the case of which a contact bushing is placed onto the  
10 coaxial cable at the plug end over a certain axial length on an outer conductor region which has had the insulation stripped from it, said contact bushing in this case interacting with a union nut so as to produce axial forces. The union nut may be screwed onto a  
15 corresponding threaded attachment, which is, for example, formed on the housing wall with which contact is to be made. However, since the union nut may have a radial spacing, even if it is a minimum radial spacing, radially on the inside in the region in which the outer  
20 conductor sleeve of the coaxial cable is passed through, in this case likewise undefined electrical contacts result.

DE 198 24 808 C1 discloses a holder for elongate bodies  
25 having an electrical shield, said known holder having two accommodating sections, which lie offset with respect to one another and which have at least two associated plug-in sections which lie offset with respect to one another in the plug-in direction. The  
30 arrangement of the plug-in element in the accommodating opening in this case takes place by means of the plug-in element being pressed into the accommodating opening.

35 DE 20 22 318 B2 also discloses a tubular mounting element in the form of an electrical terminal connection for the purpose of inserting and fixing components for radio interference suppression in a manner which is resistant to high frequencies in

WO 2004/057708

- 4 -

PCT/EP2003/012102

shielding walls, which comprises a plug-in element which interacts with an accommodating opening formed in a housing wall. This plug-in element has at least two plug-in sections, which are formed so as to be offset  
5 in the plug-in and axial direction, which have different diameters and which are separated from one another in the axial direction by means of a circumferential groove. The plug-in section having the greater diameter has a knurl on its circumferential  
10 surface. For the purpose of producing the electrical connection, the plug-in element is pressed into the corresponding accommodating opening in the housing wall. During the pressing-in operation, the material of the housing wall is pressed into the groove of the  
15 plug-in element, which results in the plug-in element being fixed axially in the housing wall. In addition, the knurl is forced into the housing wall, which makes it possible to fix the plug-in element such that it is secured against rotation in the housing wall.

20

Finally, EP 1 087 466 A2 discloses a sleeve-like terminal connector having a plug-in element which interacts with an accommodating opening which is introduced into a housing wall. The plug-in element  
25 likewise has a knurl there on its circumferential surface.

Merely for reasons of completeness, mention is also made of the fact that naturally outer conductors of  
30 flexible coaxial cables, for example, can also be electrically connected to a housing by means of soldering. In principle, it is thus possible to produce a good electrical connection. However, consideration should be made of the fact that surfaces of cast  
35 housings cannot be soldered. It would first be necessary for the castings to be galvanized. This would lead, on the one hand, however, to considerable excess expense. Secondly, problems with quality owing to complex contours and uniform layer thicknesses would

result. In addition, large quantities of heat would be required on soldering, which would lead to high thermal stresses on the housing and the cable.

10 If the mentioned electrical connection devices are provided in an electromagnetic field (for example an antenna), additional problems result which have hitherto been unknown. This is because, in this case, not only the current flow which can always be fixed on the inner side of the coaxial cable outer conductor is provided but, owing to the electromagnetic field, there is also a current flow on the outer side of the outer conductor.

20 If one of the abovementioned electrical connection devices which are known from the prior art is now chosen, this results in the current flowing on the inner side of the outer conductor being able to flow in a defined manner towards the inner side of the coupling element, but the current flowing on the outer side of the outer conductor not being able to flow towards the outer side of the coupling element. Owing to mechanical or thermal stresses, vibrations and jiggling phenomena, the contact conditions are altered and interference signals occur.

30 It is therefore the object of the present invention to provide an improved electrical terminal connection, in the case of which electrical contact conditions, which are clearly defined and which can always be clearly reproduced, can be produced both between the inner side of the coaxial cable outer conductor and housing and between the outer side of the coaxial cable outer conductor and housing, to be precise in particular even when the electrical terminal connection is located in an electrical field.

The object is achieved according to the invention an electrical terminal connection, for connecting an outer conductor of a coaxial cable, comprising:

a housing including a wall; a plug-in elements which has a sleeve attachment for accommodating and connecting an electrical conductor of the coaxial cable, the housing wall having an accommodating opening, which interacts with the plug-in element thereof,

the plug-in element being pressed into the accommodating opening for the purpose of making an electrical connection to the housing wall, wherein the electrical terminal connection is designed to have two stages,

10 the plug-in element having at least two plug-in sections which are formed such that they are offset in the plug-in direction,

both the plug-in section which leads in the plug-in direction and the plug-in section which lags in the plug-in direction each being provided with a knurl on their outer circumference,


a second accommodating opening having a first and a second accommodating section which lie such that they are offset in the plug-in direction of the plug-in element, and

the two plug-in sections and the two accommodating sections, complementary thereto, being designed to have differing cross-sectional sizes, the radial or  
20 outer dimension of the plug-in sections, which are provided with the knurl, being slightly greater than the radial or outer dimension of the accommodating sections respectively interacting therewith.

The improved electrical terminal connection is characterized by the fact that both the plug-in connection element, which is sometimes also referred to below as the plug-in element 1, and the associated coupling element, which is sometimes also referred to below as the accommodating opening, and into which the plug-in element can be inserted, are designed to have  
30 at least two stages in the axial plug-in direction. The plug-in element has, when viewed in the plug-in

6a

10 direction, a first plug-in section and, adjoining it in the axial direction (preferably lying at a spacing offset from said plug-in section), at least one second plug-in section which has a radially larger transverse extent than the first radial plug-in section, at least in partial circumferential regions. The coupling device is likewise designed to have two stages and to interact with it. In this case, the plug-in sections of the plug-in element are provided on their outer circumference with corresponding engaging elevations, i.e. a form of knurl, which has a radial or outer or distance dimension, before the plug-in connection is produced, which is at least slightly larger than the corresponding dimensions of the accommodating opening. When one part is pressed inside the other, an inner and an outer engagement zone is thus formed, namely an inner engagement zone with the interaction of the plug-in section, which has smaller dimensions, which leads in the plug-in direction and which interacts with a first and/or more inwardly lying and at least with a correspondingly matched coupling opening having slightly smaller dimensions, the plug-in section, which has larger dimensions and which lags in the plug-in direction, interacting with a section, which has correspondingly slightly larger dimensions, in the accommodating opening (coupling device). The inner

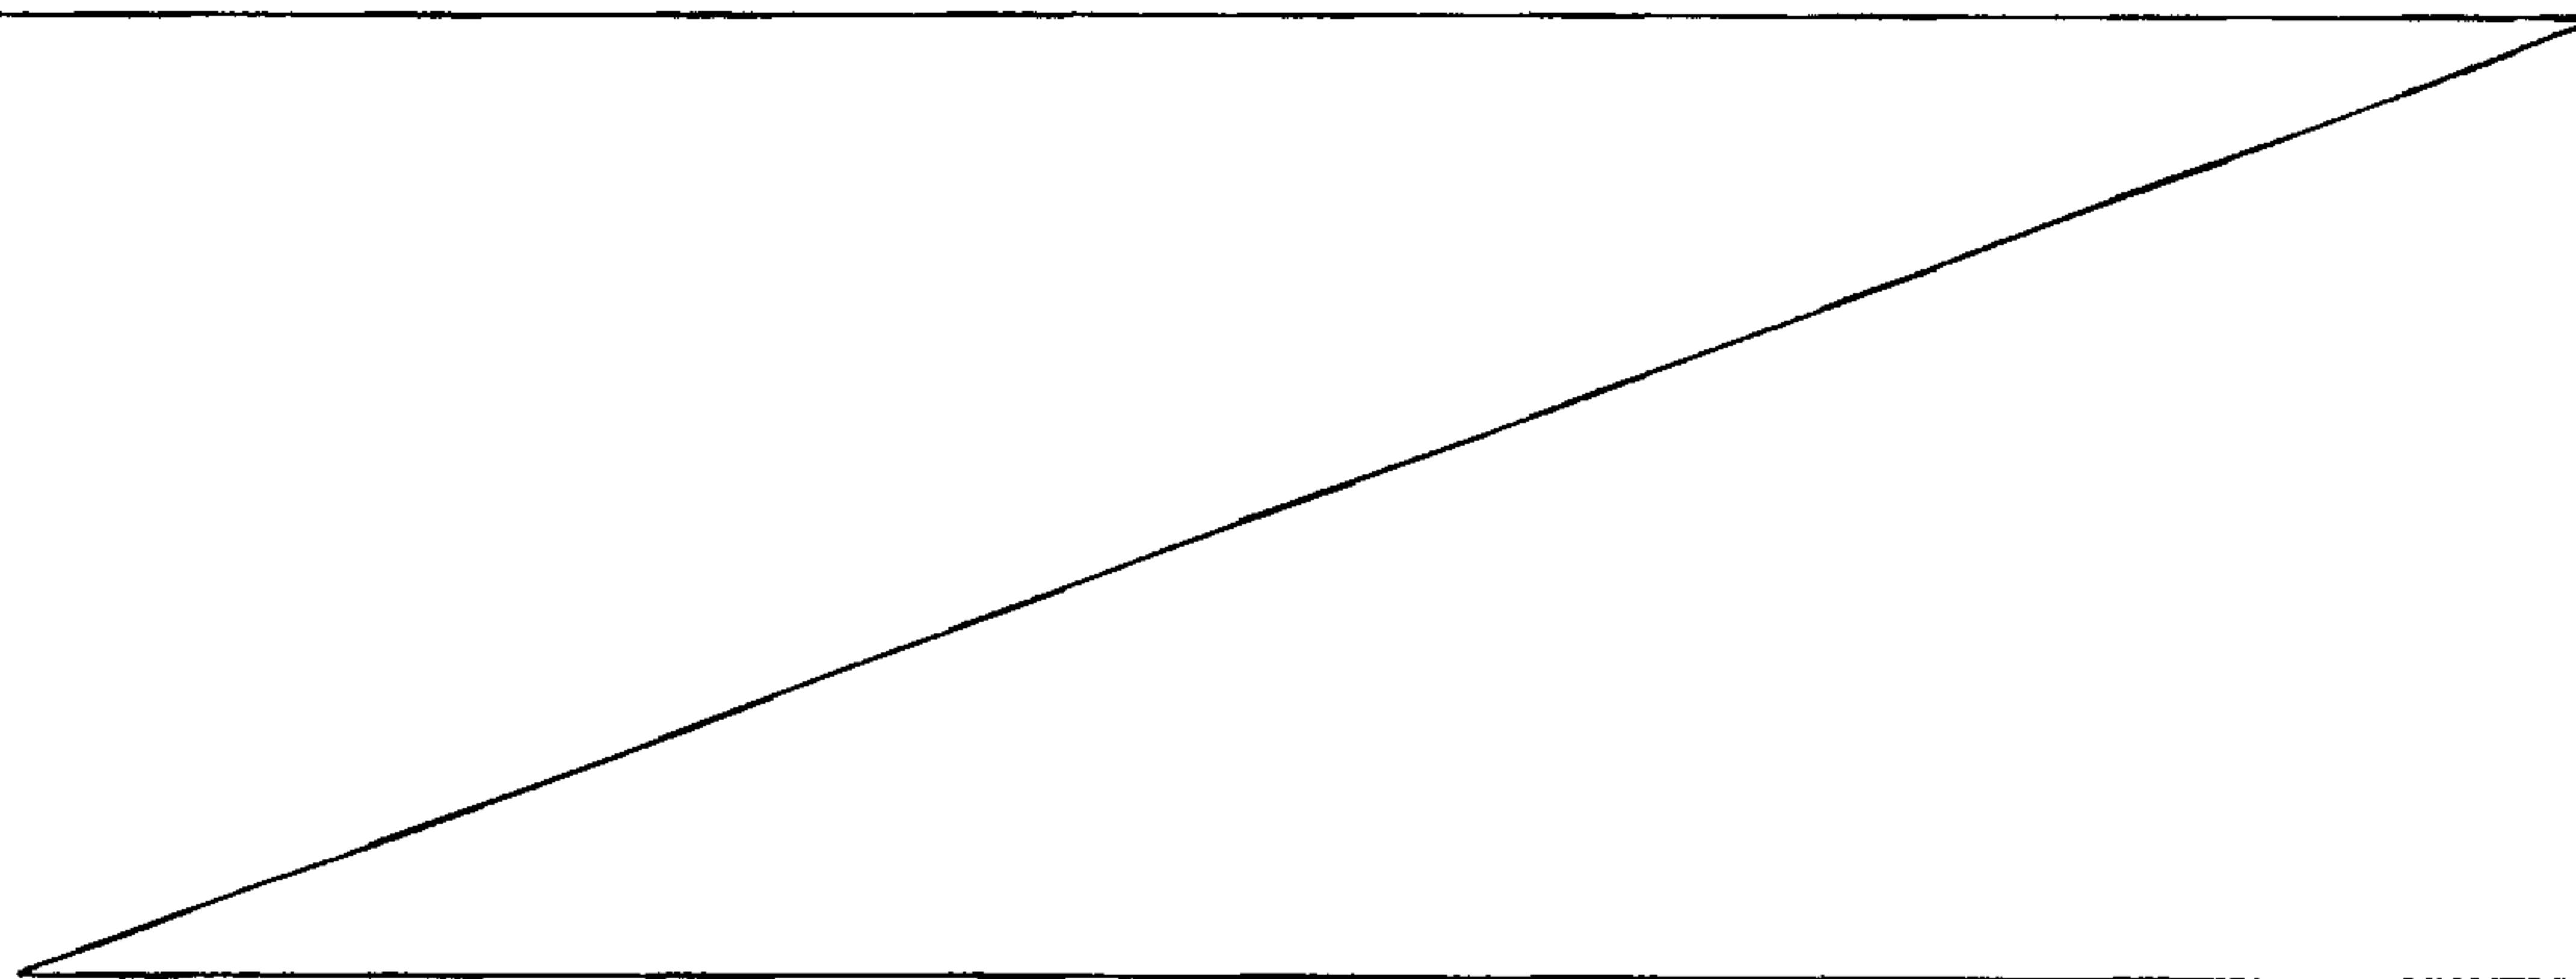

WO 2004/057708

- 7 -

PCT/EP2003/012102

press-in zone produces optimum contact between the outer conductor inner side and the coupling inner side, which may, for example, at the same time also represent the inner side of a housing part or a housing. The  
5 outer press-in zone produces optimum contact between the outer conductor outer side and the coupling outer side, i.e. likewise, for example, again a housing outer side. As a result, in contrast to the prior art, two clear and optimal electrical contact connections are  
10 always realized between the plug-in device and the coupling device, i.e. between the plug-in element and the accommodating opening.

In this case, a sleeve-like plug-in element is  
15 preferably used which is made of a material which is harder than the material of the coupling device, i.e., for example, the material of a plate, wall, housing wall or generally of a housing etc. with which contact is to be made and into which the accommodating opening  
20 is introduced for the purpose of accommodating the plug-in element. However, it is preferably intended for the material of the sleeve-like plug-in element to have the same, or at least a similar, coefficient of thermal expansion as the material of the coupling device.

25 An axial knurl or a transverse knurl is preferably provided. The knurl teeth can in this case be formed with tips, in which case they are preferably provided with insertion slopes at their leading end. These  
30 insertion slopes serve the purpose of preventing chipping during the press connection procedure.

The overall mode of operation is preferably such that the knurl tips of the plug-in connection element make  
35 notches in the housing material of the coupling element, which interacts with said plug-in connection element and which is generally in the form of a socket. As a result, there is elastic and plastic deformation of the corresponding material. In turn, this results in

WO 2004/057708

- 8 -

PCT/EP2003/012102

an excellent force-fitting connection. Owing to the elastic deformation component, the explained connection can thus also be used in the case of thermal cycling, and it is not necessary to form an interlocking  
5 connection of the plug-in element such that it is fixed in position.

The entire system can preferably be adapted such that both outer knurls at the same time make contact with  
10 corresponding material holes in the coupling device. This makes it easier to center and align the sleeve prior to pressing-in.

In principle, it is also possible for the system to be  
15 adapted such that, for example, initially the leading press-in section of the electrical plug-in connection elements comes into contact with the corresponding accommodating section in the coupling element and then, only after an albeit small axial press-in movement of  
20 the lagging second press-in section, comes into contact with the outer accommodating section, having larger dimensions, of the coupling device, or vice versa.

In principle, it is in addition also possible for the  
25 corresponding knurls to be provided on the inner surfaces of the coupling element which then interacts with possibly smooth outer circumferential surfaces on the at least two-stage plug-in element.

30 The defined contact situations which are markedly improved in accordance with the invention both in the inner and in the outer plug-in connection region result owing to the fact that the number of contacts is the same as the number of knurl tips. The contacts are  
35 preferably evenly distributed over the circumference. Furthermore, gas-tight, metallic end contacts can be realized, since oxide layers are destroyed by the sliding movement when pressing-in and, at the same time, a self-cleaning process also takes place.

WO 2004/057708

- 9 -

PCT/EP2003/012102

In one development of the invention, provision may be made for the section acting as the stop to hit against a correspondingly shaped stop section in the coupling device, which is in the interior of the coupling device, between the leading plug-in section having smaller dimensions and the lagging plug-in section which is provided with a larger diameter. If the coupling device is, for example, formed in an electrically conductive housing wall, the inner stop lies in the inner section of the housing wall. This results in optimum assembly conditions, since the pressing-in procedure can be ended simply by means of force limitation. Finally, as a result even higher bending stresses of the preferably sleeve-like plug-in connection elements are possible. Owing to the stop limitation realized in the interior of the coupling, it is also not possible for any dust particles to penetrate the housing or the coupling device.

20

Owing to this formation, it is also possible for the diameter of a pressing-in die used to have the same dimensions or even to have smaller dimensions than the diameter of the preferably sleeve-like plug-in connection device. This is because the axial advance movement is limited by the mentioned stepped stop. This ensures that the coupling device or the housing is not partially pressed in during the pressing-in procedure and that impressions of the die are not visible after the assembly process.

30

Finally, the axial length of the preferably sleeve-like plug-in element, which is also sometimes referred to below as the plug-in connection element, is dimensioned such that the height of the press-in section corresponds to the height or the axial physical length of the coupling device, which is advantageous in particular when the coupling device is part of a plate or housing wall with which contact is to be made. Since

35

WO 2004/057708

- 10 -

PCT/EP2003/012102

high-frequency alternating currents flow on the surface of conductors owing to the skin effect, optimum current flow towards the inner side and the outer side of the housing wall or the like, which is provided with the  
5 accommodating opening, is thus realized.

It has also proved to be favorable if at least a small circumferential groove is provided between the two press-in sections on the electrical plug-in connection  
10 element. This makes it possible, for example, for the knurl structure to be cut cleanly into the outer circumferential regions of the two press-in sections. This also makes it possible to produce a clearly defined, stepped stop surface between the press-in  
15 sections.

Finally, it is also possible for a protrusion to be formed over the press-in section of the plug-in element which has larger dimensions, said protrusion preventing  
20 solder from being able to flow onto the two press surfaces when the cable is connected to the preferably sleeve-like plug-in connection device by means of soldering.

25 Naturally, the sleeve-like plug-in element may be soldered to the outer conductor of a coaxial cable before it is pressed into the coupling device. However, it is likewise also possible for there to be a pressing-in procedure into the coupling device in order  
30 in this case then to solder the electrical conductor, in particular the outer conductor of a coaxial cable, in a second step.

The multi-stage connection device according to the  
35 invention may particularly advantageously be used if the coupling element is intended to be produced by means of casting and if it needs to be provided with beveled deformations.

WO 2004/057708

- 11 -

PCT/EP2003/012102

The invention will be explained in more detail below with reference to exemplary embodiments. In the drawing:

- 5 figure 1: shows a schematic cross-sectional illustration through a first exemplary embodiment according to the invention having a sleeve-like plug-in element (positioned on a section of an outer conductor of a coaxial cable from which the insulation has been stripped) and an accommodating opening (coupling device) formed in a housing wall prior to the press connection;
- 10
- 15 figure 2: shows a schematic perspective illustration of a preferred embodiment of a sleeve-like plug-in element;
- 20 figure 3: shows a corresponding schematic perspective illustration of the sleeve-like plug-in element shown in figure 2, but viewed more from the rear;
- 25 figure 4: shows a further perspective illustration, but at a viewing angle more from the rear compared with that in figure 3;
- 30 figure 5: shows an illustration corresponding to that in figure 1 once the press connection is complete;
- 35 figure 6: shows a modified exemplary embodiment to that shown in figure 5, in the case of which the accommodating opening (coupling device) is formed on a thicker housing section;

WO 2004/057708

- 12 -

PCT/EP2003/012102

figure 7: shows an exemplary embodiment, which is modified compared to that shown in figures 1 to 5, in the case of which the two-stage plug-in element can be inserted from the opposite side into the accommodating opening (coupling device) which is formed on the housing wall;

figure 8: shows an exemplary embodiment, which is modified compared to that shown in figures 1 to 5, in the case of which the plug-in element with its two-stage press attachment does not have an axial hole passing through it for the purpose of accommodating an electrical connection line, in particular coaxial connection line, but has an accommodating hole, which extends perpendicular thereto, in an accommodating section;

figure 9: shows an illustration corresponding to that in figure 8, but more in the direction of the front side of the sleeve-like plug-in element;

figure 10: shows a perspective illustration of a modified exemplary embodiment having a more rectangular basic shape; and

figure 11: shows a corresponding illustration to that in figure 10 with a perspective view, but viewed more from the rear.

A first exemplary embodiment will be explained below with reference to figures 1 to 5.

Figure 1 shows a schematic cross section of a coaxial terminal connection, which comprises, firstly, a plug-in element 1 and, secondly, a coupling device 3, which

WO 2004/057708

- 13 -

PCT/EP2003/012102

in the exemplary embodiment shown is in the form of a two-stage hole in a wall 7, i.e. an electrically conductive housing wall 7 or a wall 7 forming part of a housing.

5

The plug-in element 1 is in this case in the form of a sleeve and has an actual plug-in insert 111, which comprises a leading plug-in section 111a and a second plug-in section 111b which lags in the plug-in direction. The two plug-in sections 111a and 111b are provided such that they are offset with respect to one another in the plug-in direction, i.e. in the axial direction, by the width of an annular groove 111c. The annular groove 111c in this case has a smaller diameter than the two outer diameters of the plug-in inserts 111a and 111b.

The illustration shown in figures 1 to 5 shows the fact that the plug-in element 1 is formed with a sleeve attachment 111d, which is formed such that it extends axially, on the side 1a which is at the rear with respect to the plug-in direction.

The plug-in element 1 has an inner hole 17, which is at least slightly larger than the outer diameter of an outer conductor 19a, from which the insulation has been stripped, of a coaxial cable 19. The axial length of the inner hole 17 almost passes through the entire axial length of the plug-in element 1, except for a stop shoulder 21 having a hole 23 having a slightly smaller diameter than the inner hole 17. This stop shoulder 21 having the annular attachment 21a formed thereby is thus formed on the end side 1b which lies at the front in the plug-in direction. As a result, the coaxial cable 19, from which the insulation has been stripped away down to the outer conductor 19a, can be inserted into the plug-in element 1 until it stops against the stop shoulder 21. Before the further connection to the accommodating opening 3 or else after

WO 2004/057708

- 14 -

PCT/EP2003/012102

the connection to the coupling device 3 has been produced, a soldering procedure can then be carried out in order to effectively electrically conductively connect the outer conductor 19a to the electrically  
5 conductive plug-in element 1 by means of the solder 25. The corresponding inner conductor 19b finally passes through the plug-in element 1 at a suitable length, as is illustrated, for example, in figure 1. In this case, it can also be seen from the drawings that the hole 23  
10 is dimensioned such that the inner conductor 19b of the coaxial cable 19 can be passed through it without any problems and plugged in, without, in the finally positioned state of the inner conductor, electrical contact being made with the plug-in element 3.

15

As can be seen in figures 2 to 4, the plug-in section 111a lying at the front in the plug-in direction has a smaller outer diameter than the second plug-in section 111b which lags in the plug-in direction. The two plug-  
20 in sections are provided on their outer circumference with a knurl 27, for example an axial knurl or a transverse knurl etc., whose outer diameter, before the connection to the coupling device 3, is at least slightly larger than the corresponding inner diameter  
25 of the coupling device 3 which is yet to be explained below.

As can be seen in figure 1 with reference to the exemplary embodiment, the coupling device 3, which is  
30 in this case incorporated in the form of an electrical housing wall 7, is likewise of two-stage design and has a first accommodating section 211a having a smaller diameter and a second accommodating section 211b, which lies offset with respect thereto in the axial  
35 direction, having a larger diameter. The two diameters or the two shapes and sizes of the accommodating plug-in sections 211a and 211b are matched in principle to the shape and size of the two plug-in sections 111a and 111b, which are likewise offset, and differ only in the

WO 2004/057708

- 15 -

PCT/EP2003/012102

fact that the outer circumference on the plug-in attachments is slightly larger than the respectively associated accommodating sections 211a and 211b owing to the knurl 27 which is introduced at said plug-in attachments before they are inserted into the accommodating opening 3 (coupling device). The core diameters of the plug-in sections provided with a knurl are, however, smaller than the corresponding inner diameters of the accommodating opening 3, with the result that after pressing-in, contact is only made with the knurl tips, and only low joining forces are required even in the case of very large dimensions. Owing to the introduction of the circumferential annular groove 111c, advantages in terms of manufacturing result when the knurl 27 formed on the outer circumference is produced. In the lead direction, in this case the respective knurl 27 is in each case provided with a flattened section 29 in order to prevent chipping during assembly. The surface 31, which points towards the front in the plug-in direction, of the plug-in section 111b having larger dimensions in this case at the same time acts as a stop surface or stop shoulder 31, which is formed on a corresponding stop surface or stop shoulder 33 at the transition from the accommodating section 211a having smaller dimensions to the accommodating section 211b having larger dimensions of the accommodating opening 3.

In order to produce the fixed connection, the plug-in element 1 is then pressed into the accommodating opening 3, which is sometimes also referred to as the coupling element 3, by means of a suitable pressing tool (which may have smaller dimensions than the diameter of the plug-in section 111b having larger dimensions), the outwardly protruding teeth of the knurls 27 now forming notches in the material of the housing wall 7. Owing to the sliding movement, possible oxide layers are destroyed, and a self-cleaning effect

WO 2004/057708

- 16 -

PCT/EP2003/012102

takes place which ensures optimal contact-making without electrical faults.

The two-stage contact mechanism ensures that currents  
5 can flow back and forth both from the inner and from  
the outer side of the coaxial cable outer conductor (in  
particular if it is located in an electromagnetic  
field) in a clearly defined manner to the housing wall  
7, that is to say both via the contact region A between  
10 the leading plug-in section 111a in interaction with  
the accommodating section 211a and also via the further  
interaction in the contact region B between the second  
plug-in section 111b which is formed such that it lags  
in the plug-in direction and the accommodating section  
15 211b.

The in each case uniquely defined electrical contact  
zones are identified by A and B in figure 5.

20 Naturally, a plurality of inner holes 17 may also be  
provided on the plug-in element 1 for the purpose of  
accommodating coaxial cables.

The exemplary embodiment shown in figure 6 differs from  
25 the previous exemplary embodiment only by the fact that  
the wall section 7 is provided with a thicker section  
of material 7' in the region of the accommodating  
opening 3 compared with the remaining housing or wall  
sections 7.

30

With reference to exemplary embodiment 7, it is merely  
shown that the arrangement of the axially offset plug-  
in sections 111a and 111b and the associated  
accommodating sections 211a and 211b of the  
35 accommodating opening 3 may also be formed in the  
opposite fashion to that shown in the exemplary  
embodiment shown in figures 1 and 5. In the exemplary  
embodiment shown in figure 7, the plug-in element 1 is  
introduced into the corresponding recess from the inner

WO 2004/057708

- 17 -

PCT/EP2003/012102

side of the housing. In this case, the soldered connections between the plug-in element 1 and the coaxial cable can be produced once the press connection between the plug-in element 1 and the coupling device 3 has been produced or even beforehand. In this case, the cable needs to be passed through the coupling opening 211 before pressing-in.

In the exemplary embodiment shown in figure 8, it is shown that the plug-in element 1 does not need to be in the form of a sleeve but that the corresponding inner hole 17 can also be formed transversely with respect to the axial direction of the plug-in attachments 111a and 111b in a rear section 111f of the plug-in element 1 so as to form a stop shoulder 21. It is also possible for knurls to be provided at both ends of the plug-in element, and for contact to be made with said plug-in element and, at the same time, two parallel housing walls.

20

With reference to figures 10 and 11, it is also shown that the plug-in element 1 does not necessarily need to approximate a circular shape in the axial view. Elliptical shapes, rectangular shapes or generally n-polygonal or other basic shapes are also conceivable. In this case, the accommodating sections 211a and 211b of the coupling device 3 would also have to have a corresponding shape. In this embodiment too, it is the case that the circumferential contour or cross-sectional surface, viewed in the axial or plug-in direction, or the cross-sectional size of the plug-in attachment 111a, which leads in the plug-in direction, is preferably overall smaller than the cross-sectional sizes of the second plug-in attachment 111b, which lags in the plug-in direction. Under certain circumstances, it would also be sufficient, however, for the leading plug-in section 111a to have smaller dimensions than the lagging plug-in section 111b, at least in a cross-sectional extent. In addition, the cross-sectional

35

WO 2004/057708

- 18 -

PCT/EP2003/012102

shapes of the two plug-in sections may be different, for example the leading plug-in section may be of rectangular design, cf. figure 10, whereas the lagging plug-in section having larger dimensions again has more  
5 of a circular cross-sectional shape, for example.

For reasons of completeness, mention will also be made of the fact that the mentioned knurls 27 do not necessarily need to be formed on the outer  
10 circumference of the two plug-in sections, but, quite the reverse, may also be formed on the inner wall, interacting therewith, of the two accommodating sections 211a and 211b or, alternately, on the outer circumference of one plug-in section and on the inner  
15 surface of a second accommodating section, which is offset with respect thereto, of the coupling device.

It can also be seen in the drawings that the respective axial height of the plug-in sections corresponds to the  
20 axial heights of the accommodating sections of the coupling device. As a result, in each case the limit surface which leads in the plug-in direction and the outer limit surface which lags in the plug-in direction are arranged such that they are aligned with the inner  
25 and outer housing wall sections.

**WHAT IS CLAIMED IS:**

1. An electrical terminal connection, for connecting an outer conductor of a coaxial cable, comprising:

a housing including a wall; a plug-in elements which has a sleeve attachment for accommodating and connecting an electrical conductor of the coaxial cable, the housing wall having an accommodating opening, which interacts with the plug-in element thereof,

10 the plug-in element being pressed into the accommodating opening for the purpose of making an electrical connection to the housing wall, wherein the electrical terminal connection is designed to have two stages,

the plug-in element having at least two plug-in sections which are formed such that they are offset in the plug-in direction,

both the plug-in section which leads in the plug-in direction and the plug-in section which lags in the plug-in direction each being provided with a knurl on their outer circumference,

a second accommodating opening having a first and a second accommodating section which lie such that they are offset in the plug-in direction of the plug-in element, and

20 the two plug-in sections and the two accommodating sections, complementary thereto, being designed to have differing cross-sectional sizes, the radial or outer dimension of the plug-in sections, which are provided with the knurl, being slightly greater than the radial or outer dimension of the accommodating sections respectively interacting therewith.

2. The terminal connection as claimed in claim 1, wherein the leading plug-in section has a cross-sectional dimension in a circumferential region transverse to the plug-in direction of the plug-in element that is smaller than a corresponding cross-sectional dimension of the lagging plug-in section.

3. The terminal connection as claimed in claim 1, wherein the cross-sectional size of the leading plug-in section is smaller than the cross-sectional size of the lagging plug-in section in the entire circumferential region and transverse to the plug-in direction of the plug-in element.
4. The terminal connection as claimed in claim 2, wherein the first accommodating section of the accommodating opening has a dimension in a circumferential region that is smaller than a corresponding dimension in the offset, second accommodating section.
- 10 5. The terminal connection as claimed in claim 3, wherein the first accommodating section of the accommodating opening is smaller than the offset, second accommodating section in the entire circumferential region corresponding to the circumferential region of the plug-in section interacting therewith.
6. The terminal connection as claimed in claim 1, wherein the inner surfaces of the accommodating sections of the accommodating opening are designed to have no knurls.
- 20 7. The terminal connection as claimed in claim 1, wherein, of the outer circumferential surfaces of a plug-in section which each interact in pairs and the inner surface of the associated accommodating section of the accommodating opening, in each case only one section is formed with a knurl and the other surface interacting therewith is formed without a knurl.
8. The terminal connection as claimed in claim 1, wherein the knurl is in the form of an axial knurl or in the form of a transverse knurl.
9. The terminal connection as claimed in claim 1, wherein the knurl is provided with leading flattened sections in the plug-in direction.

10. The terminal connection as claimed in claim 1, wherein a circumferential annular groove arranged therebetween is provided between the two outer circumferential surfaces of the plug-in sections.
11. The terminal connection as claimed in claim 1, wherein a surface, which leads in the plug-in direction, of the lagging plug-in section of the plug-in element acts as a stop shoulder which interacts with a corresponding stop surface between the first and second accommodating section of the accommodating opening.
- 10 12. The terminal connection as claimed in claim 1, wherein the entire axial plug-in height of the plug-in attachment corresponds to the axial accommodating height of the accommodating opening such that, once the pressing-in procedure has been carried out, the plug-in insert which has been pressed into the accommodating opening ends flush with the housing wall both on the inside and on the outside.
13. The terminal connection as claimed in claim 1, wherein the cross-sectional shape of the plug-in sections of the plug-in element and the accommodating sections, interacting therewith, of the accommodating opening are circular or n-polygonal.
- 20 14. The terminal connection as claimed in claim 1, wherein the plug-in element or housing wall provided with the knurl is made of a harder material than the housing wall or plug-in element interacting therewith.
15. The terminal connection as claimed in claim 1, wherein the sleeve attachment of the of plug-in element is arranged axially, counter to the plug-in direction, on the lagging plug-in section for the purpose of connecting the coaxial cable.

16. The terminal connection as claimed in claim 1, wherein the sleeve attachment of the plug-in element is arranged axially, in the plug-in direction, on the leading plug-in section for the purpose of connecting the coaxial cable.

17. The terminal connection as claimed in claim 1, wherein a plurality of internal holes are formed on the plug-in element for the purpose of accommodating coaxial cable.

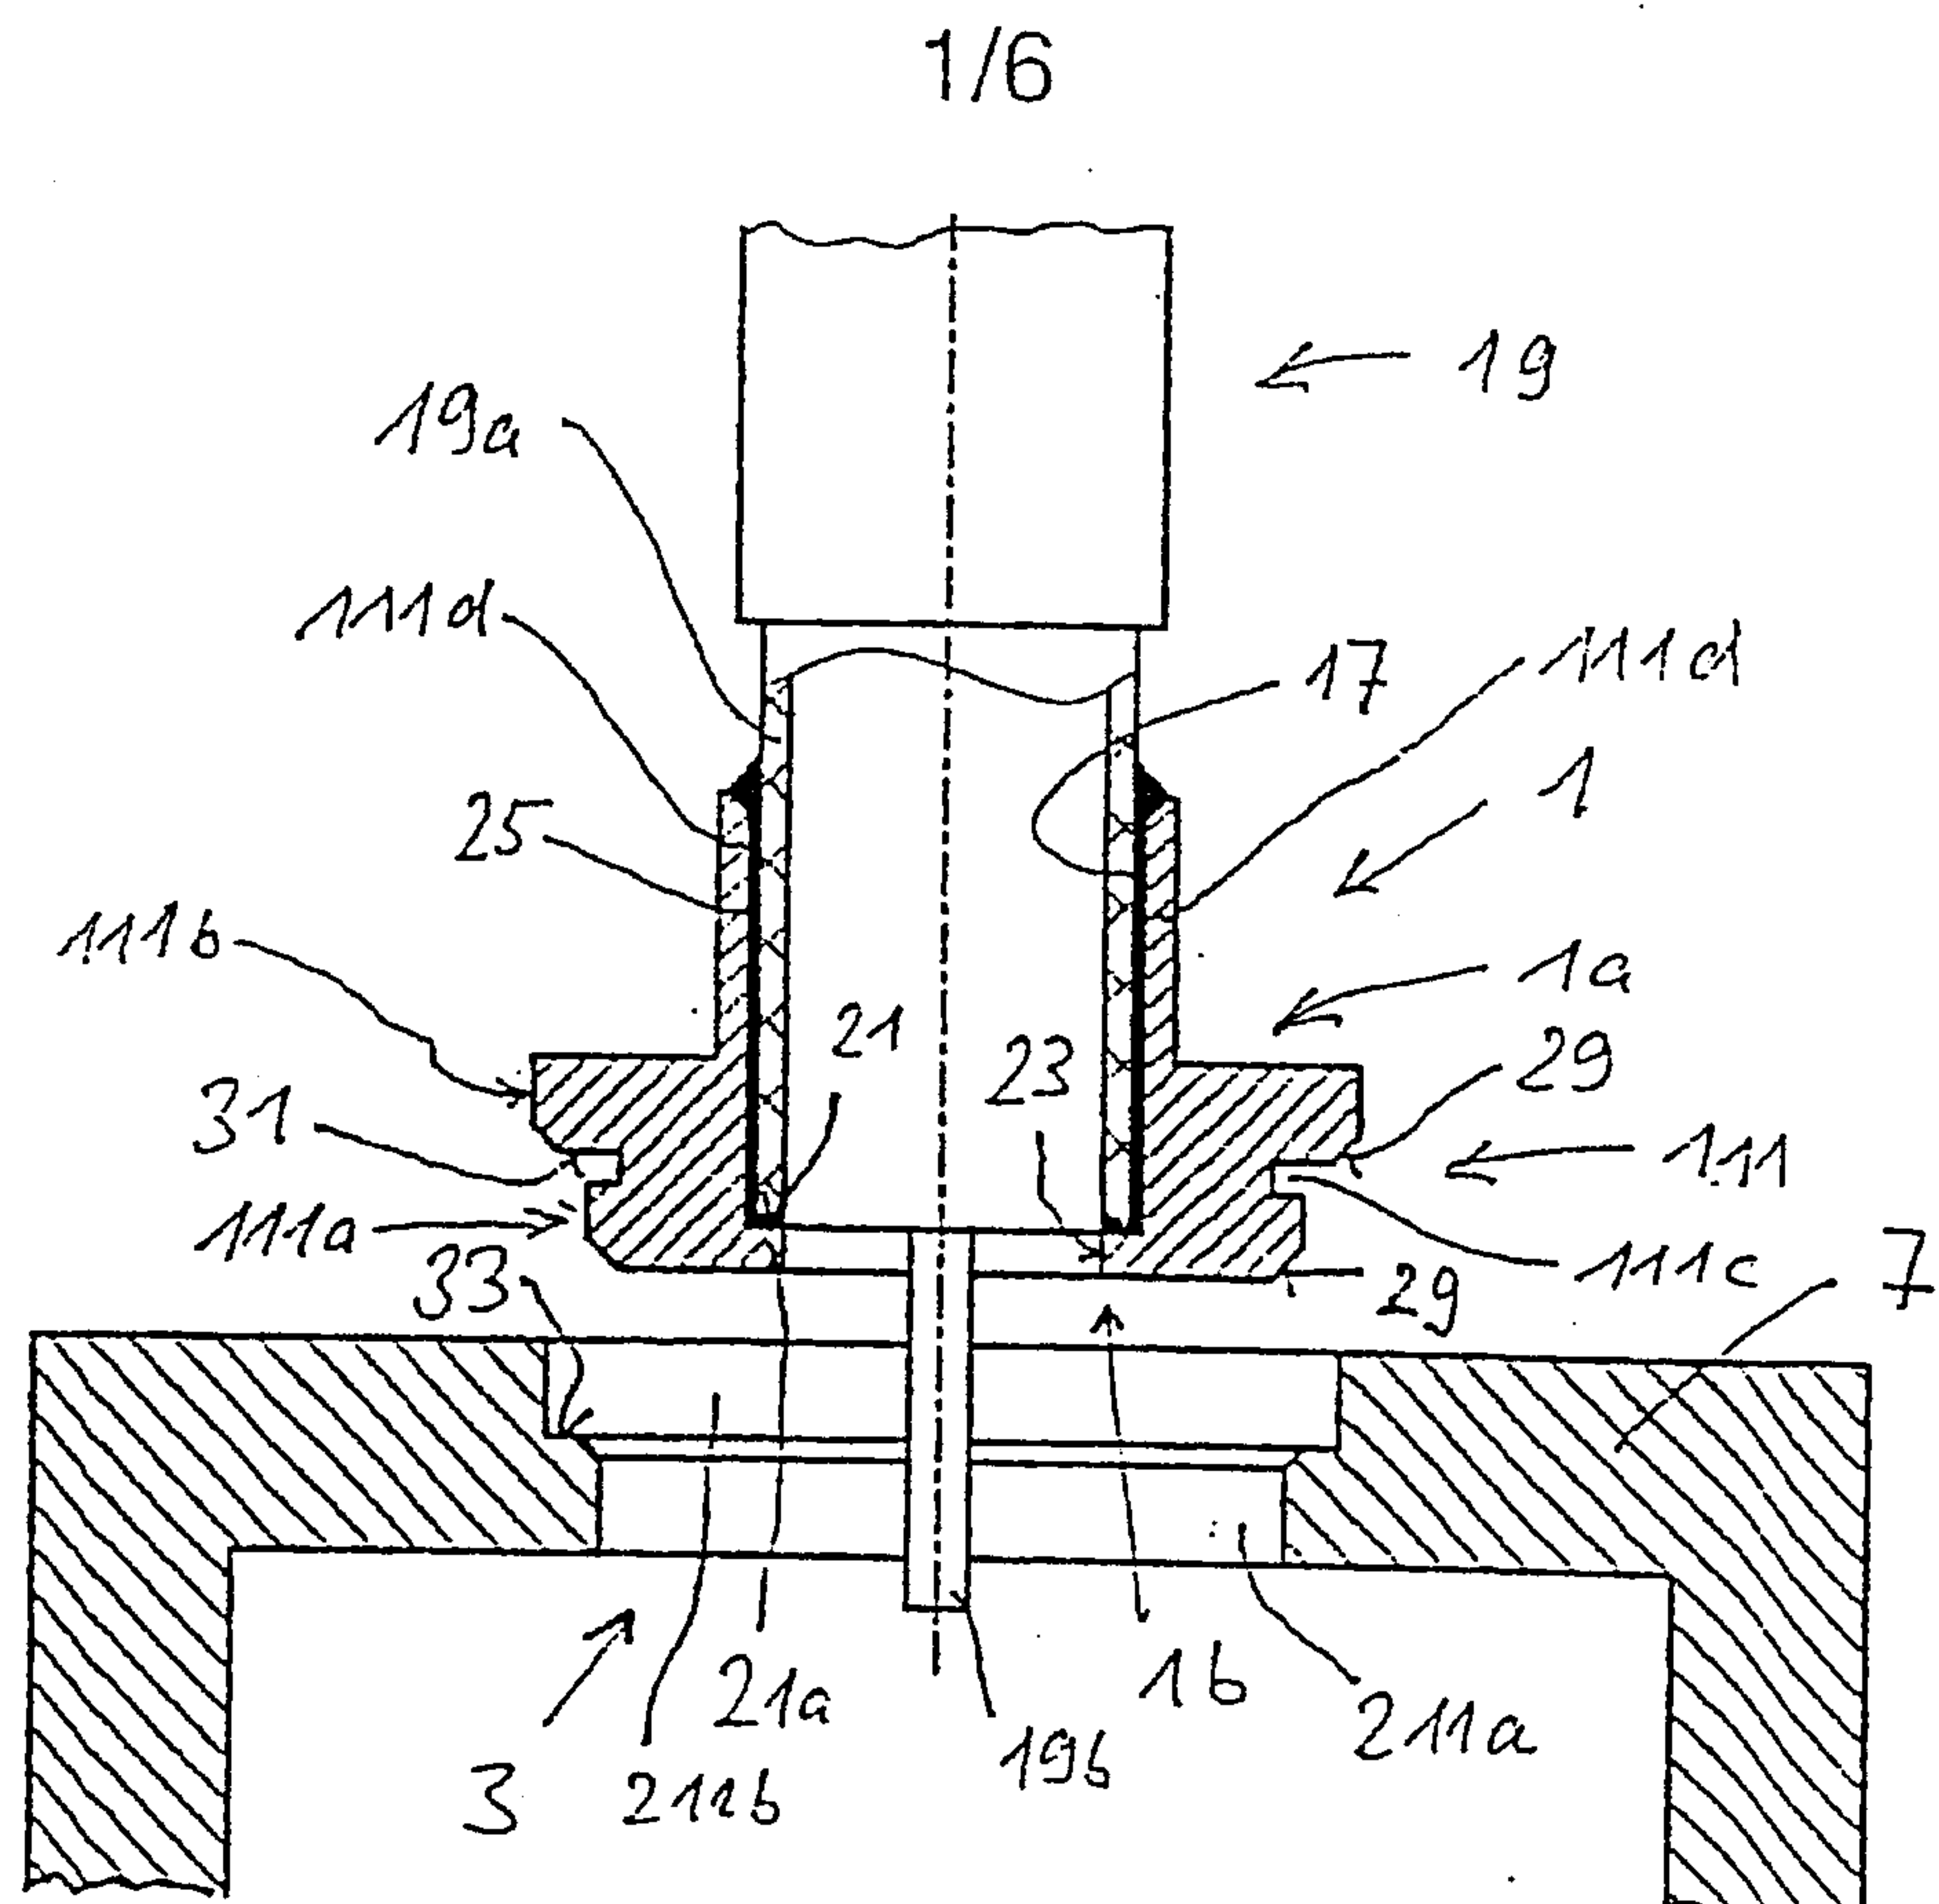


Fig. 1



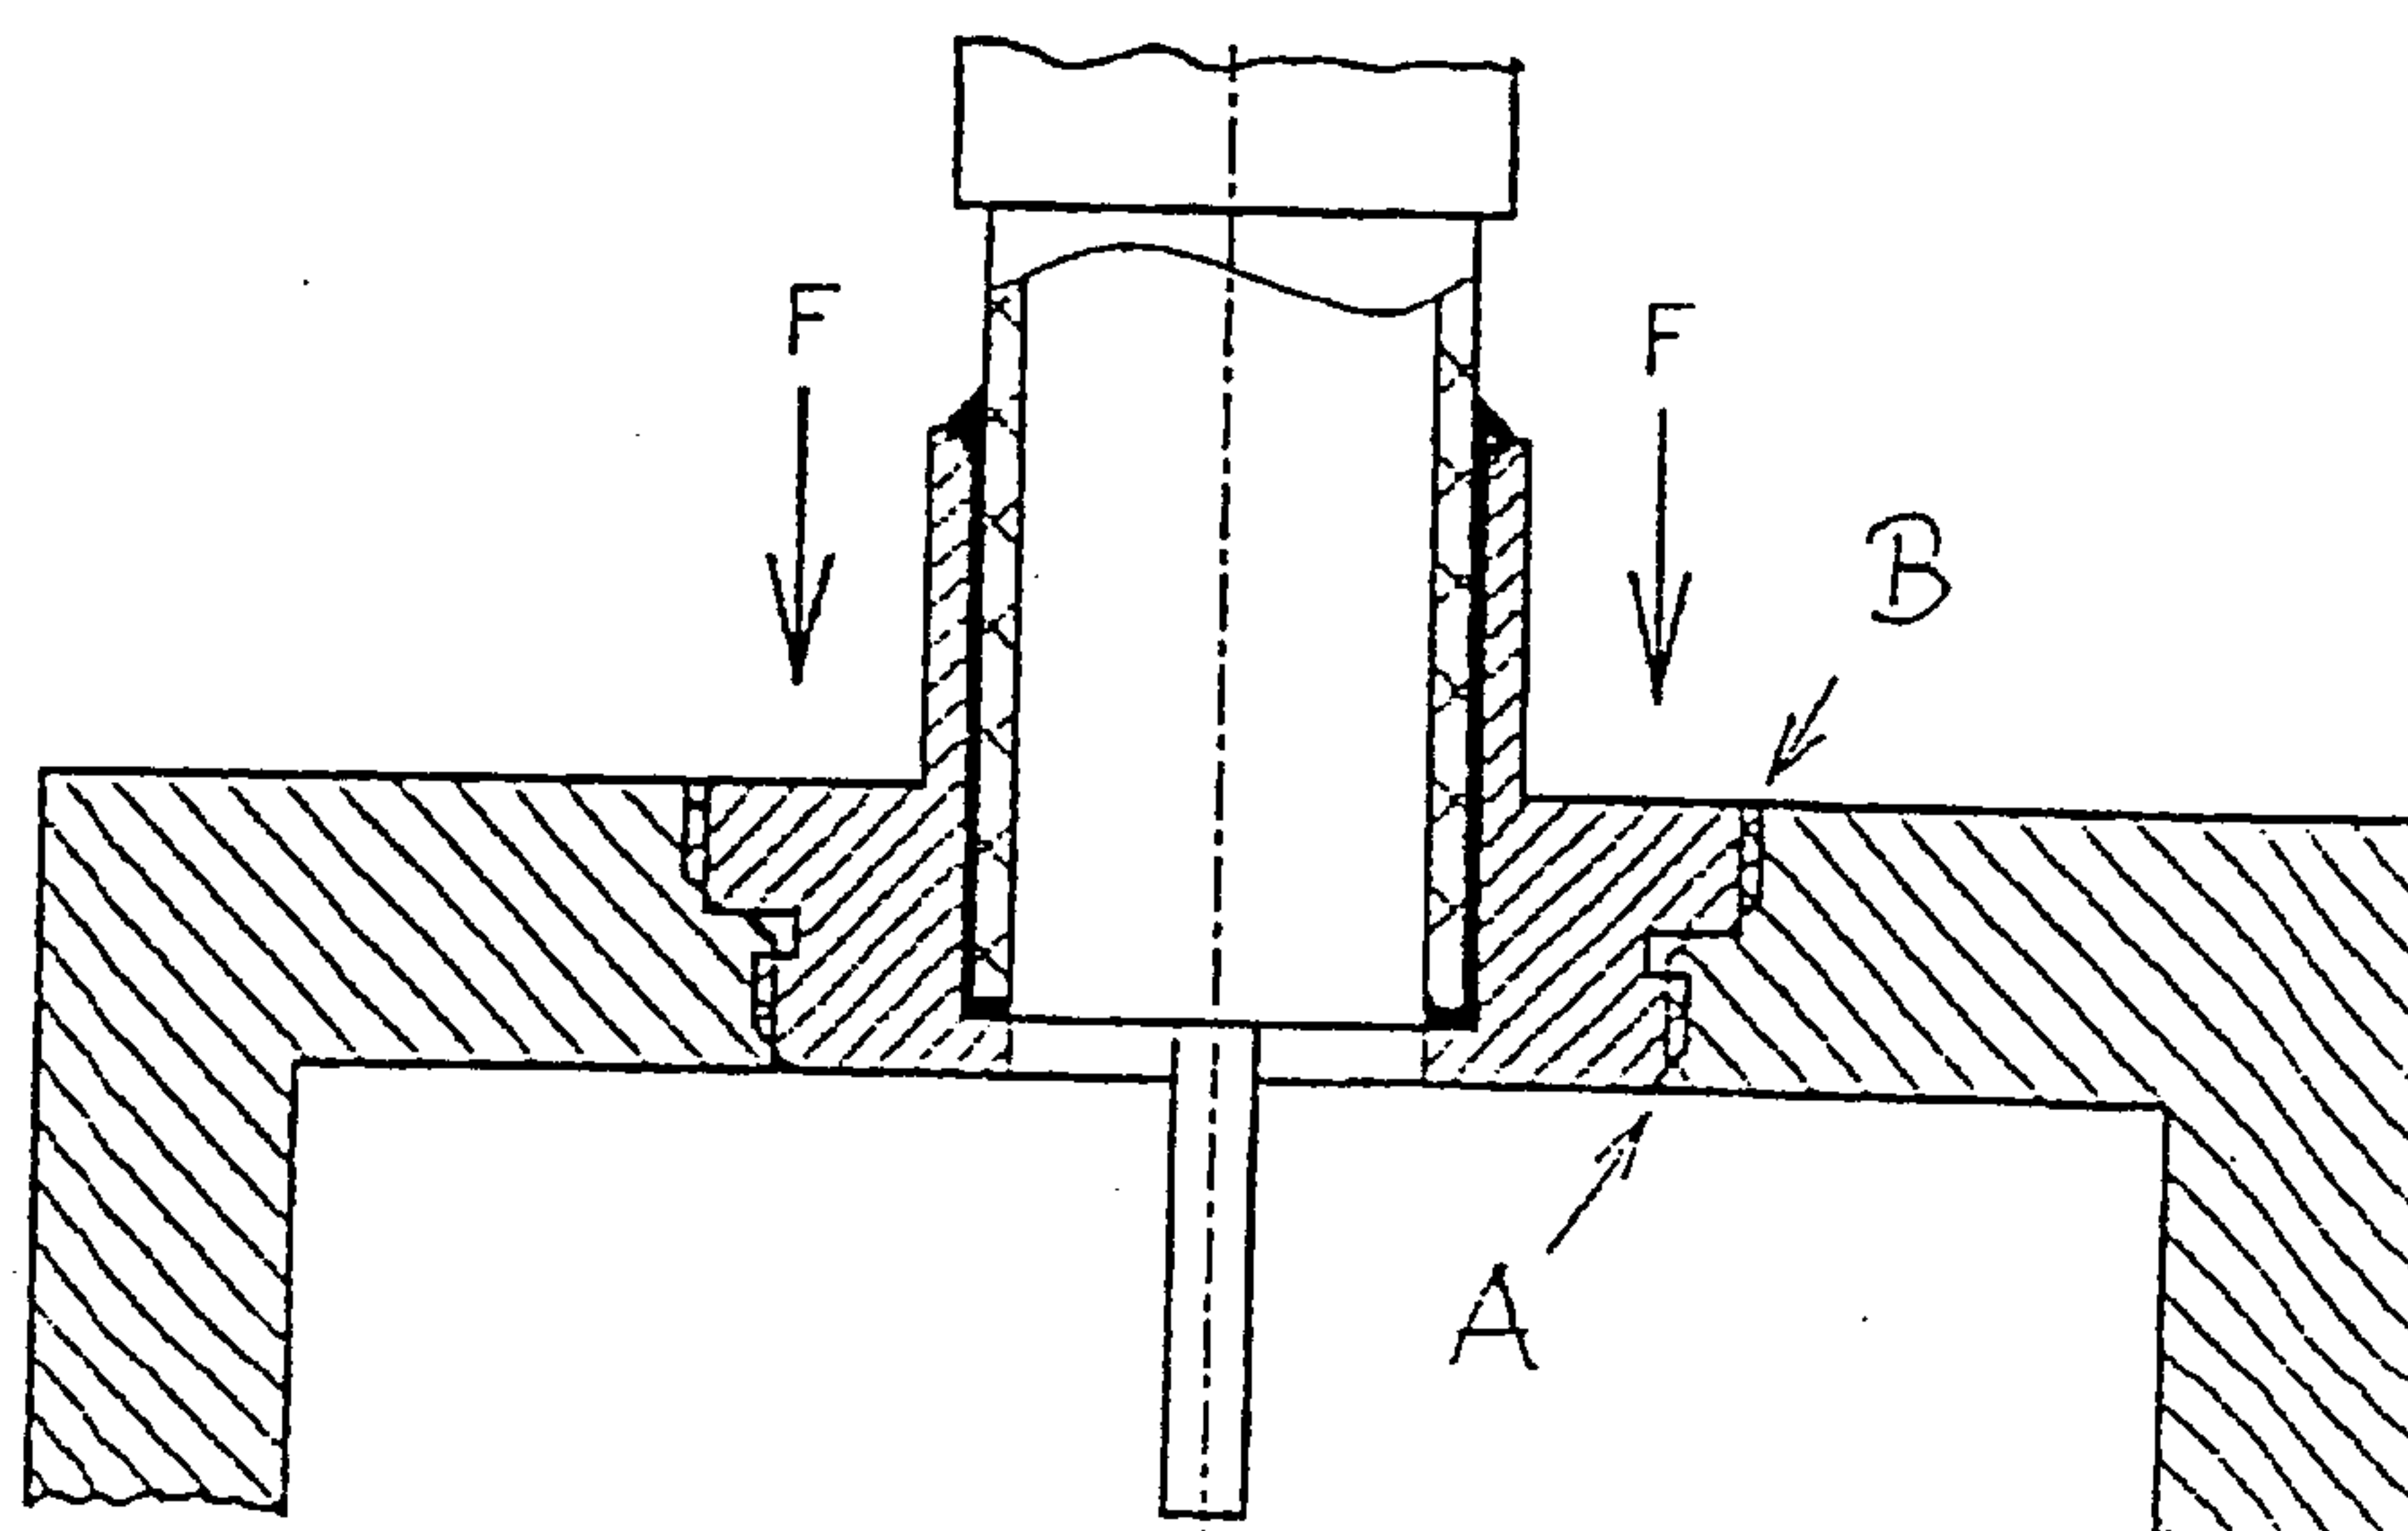


Fig. 5

WO 2004/057708

PCT/EP2003/012102

2/6

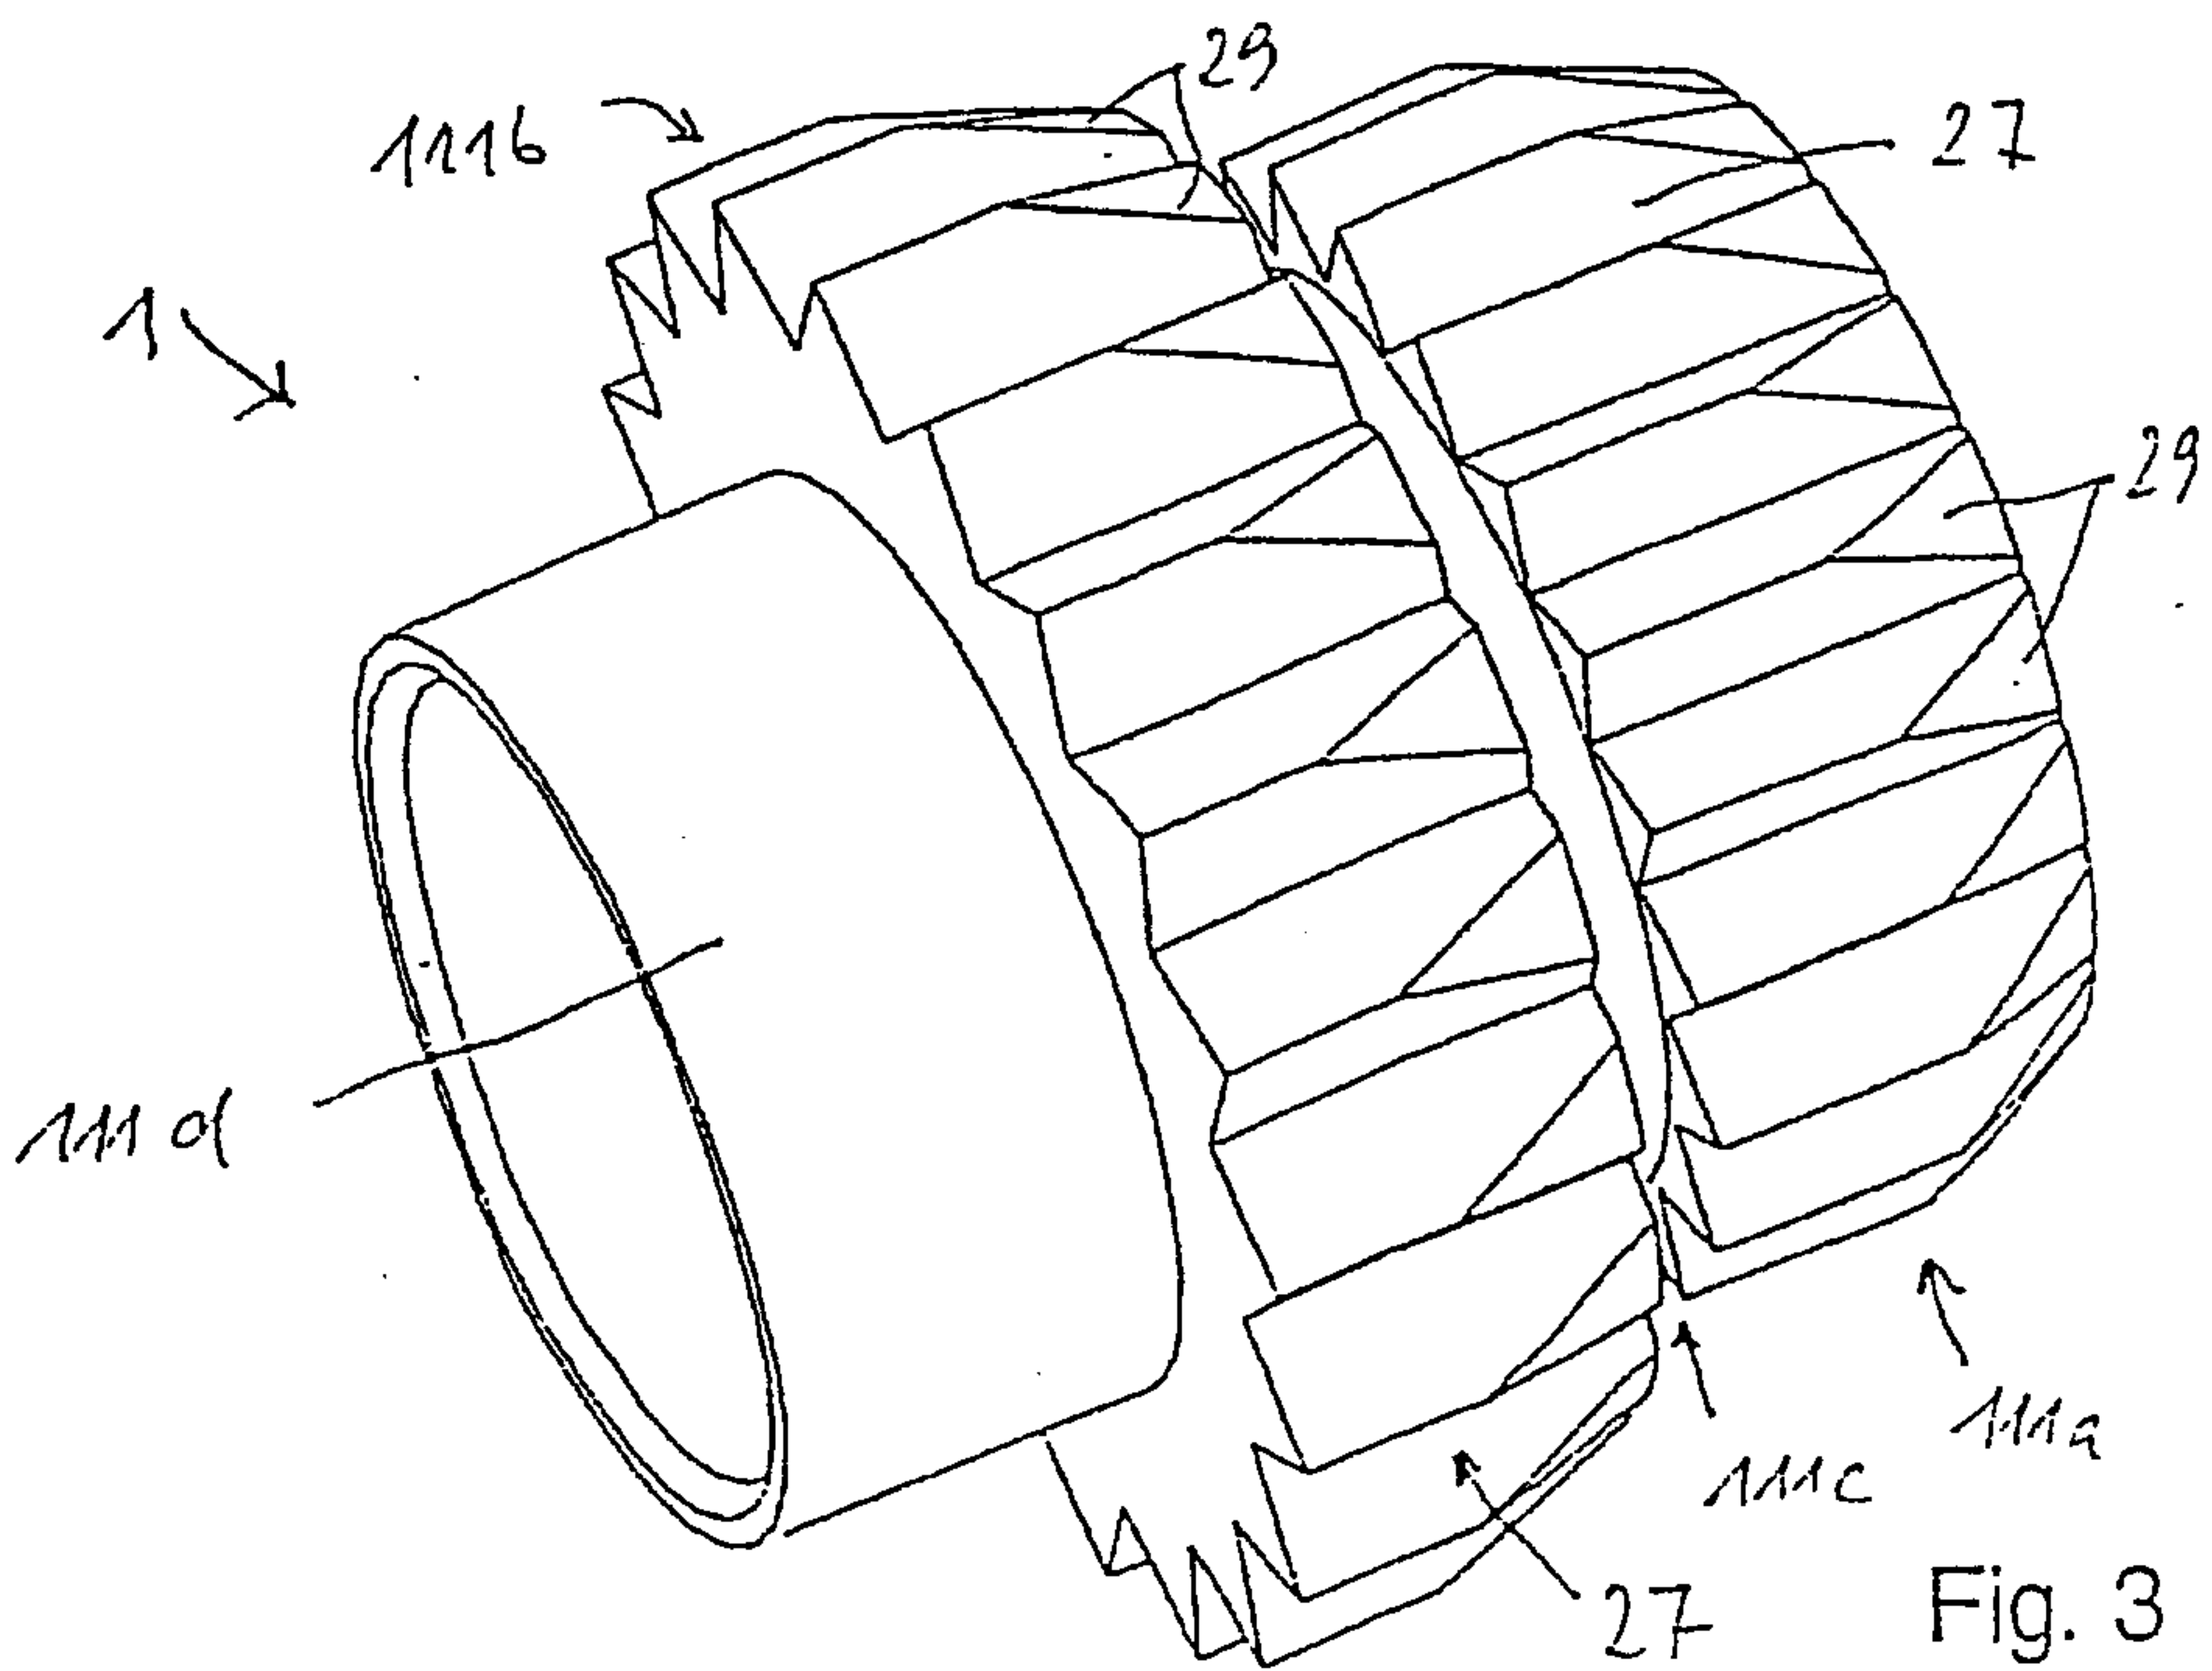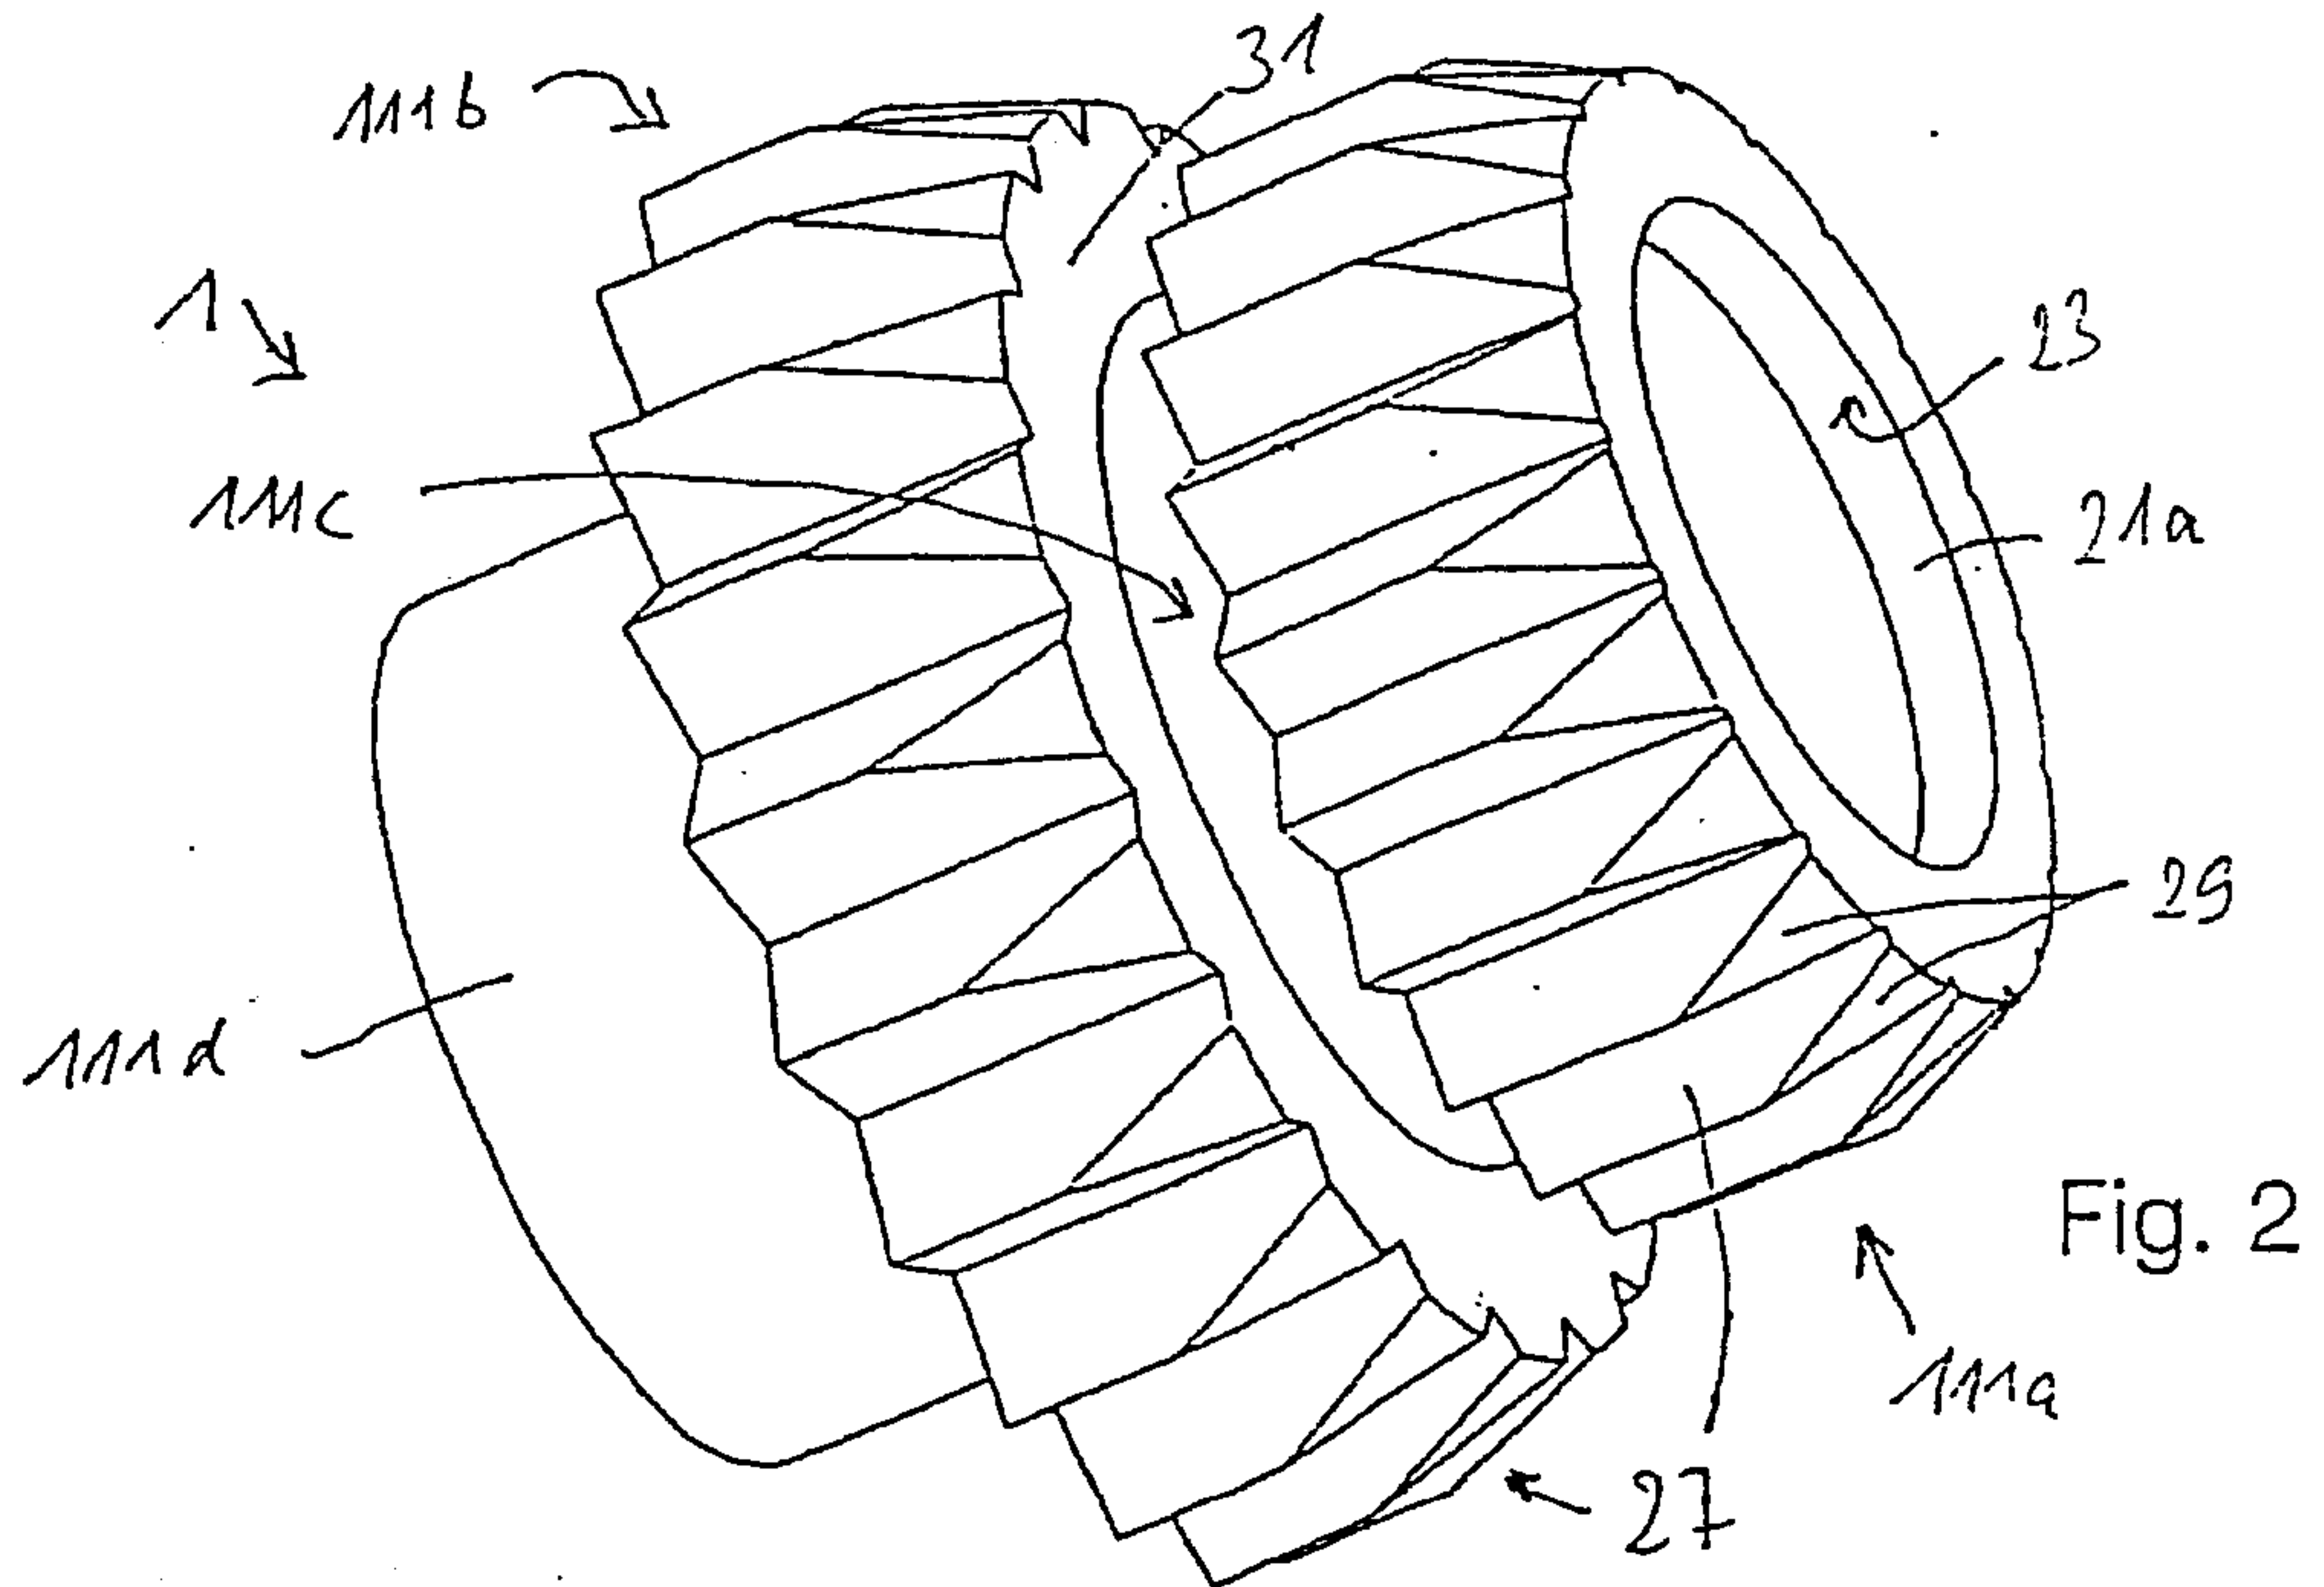

3/6

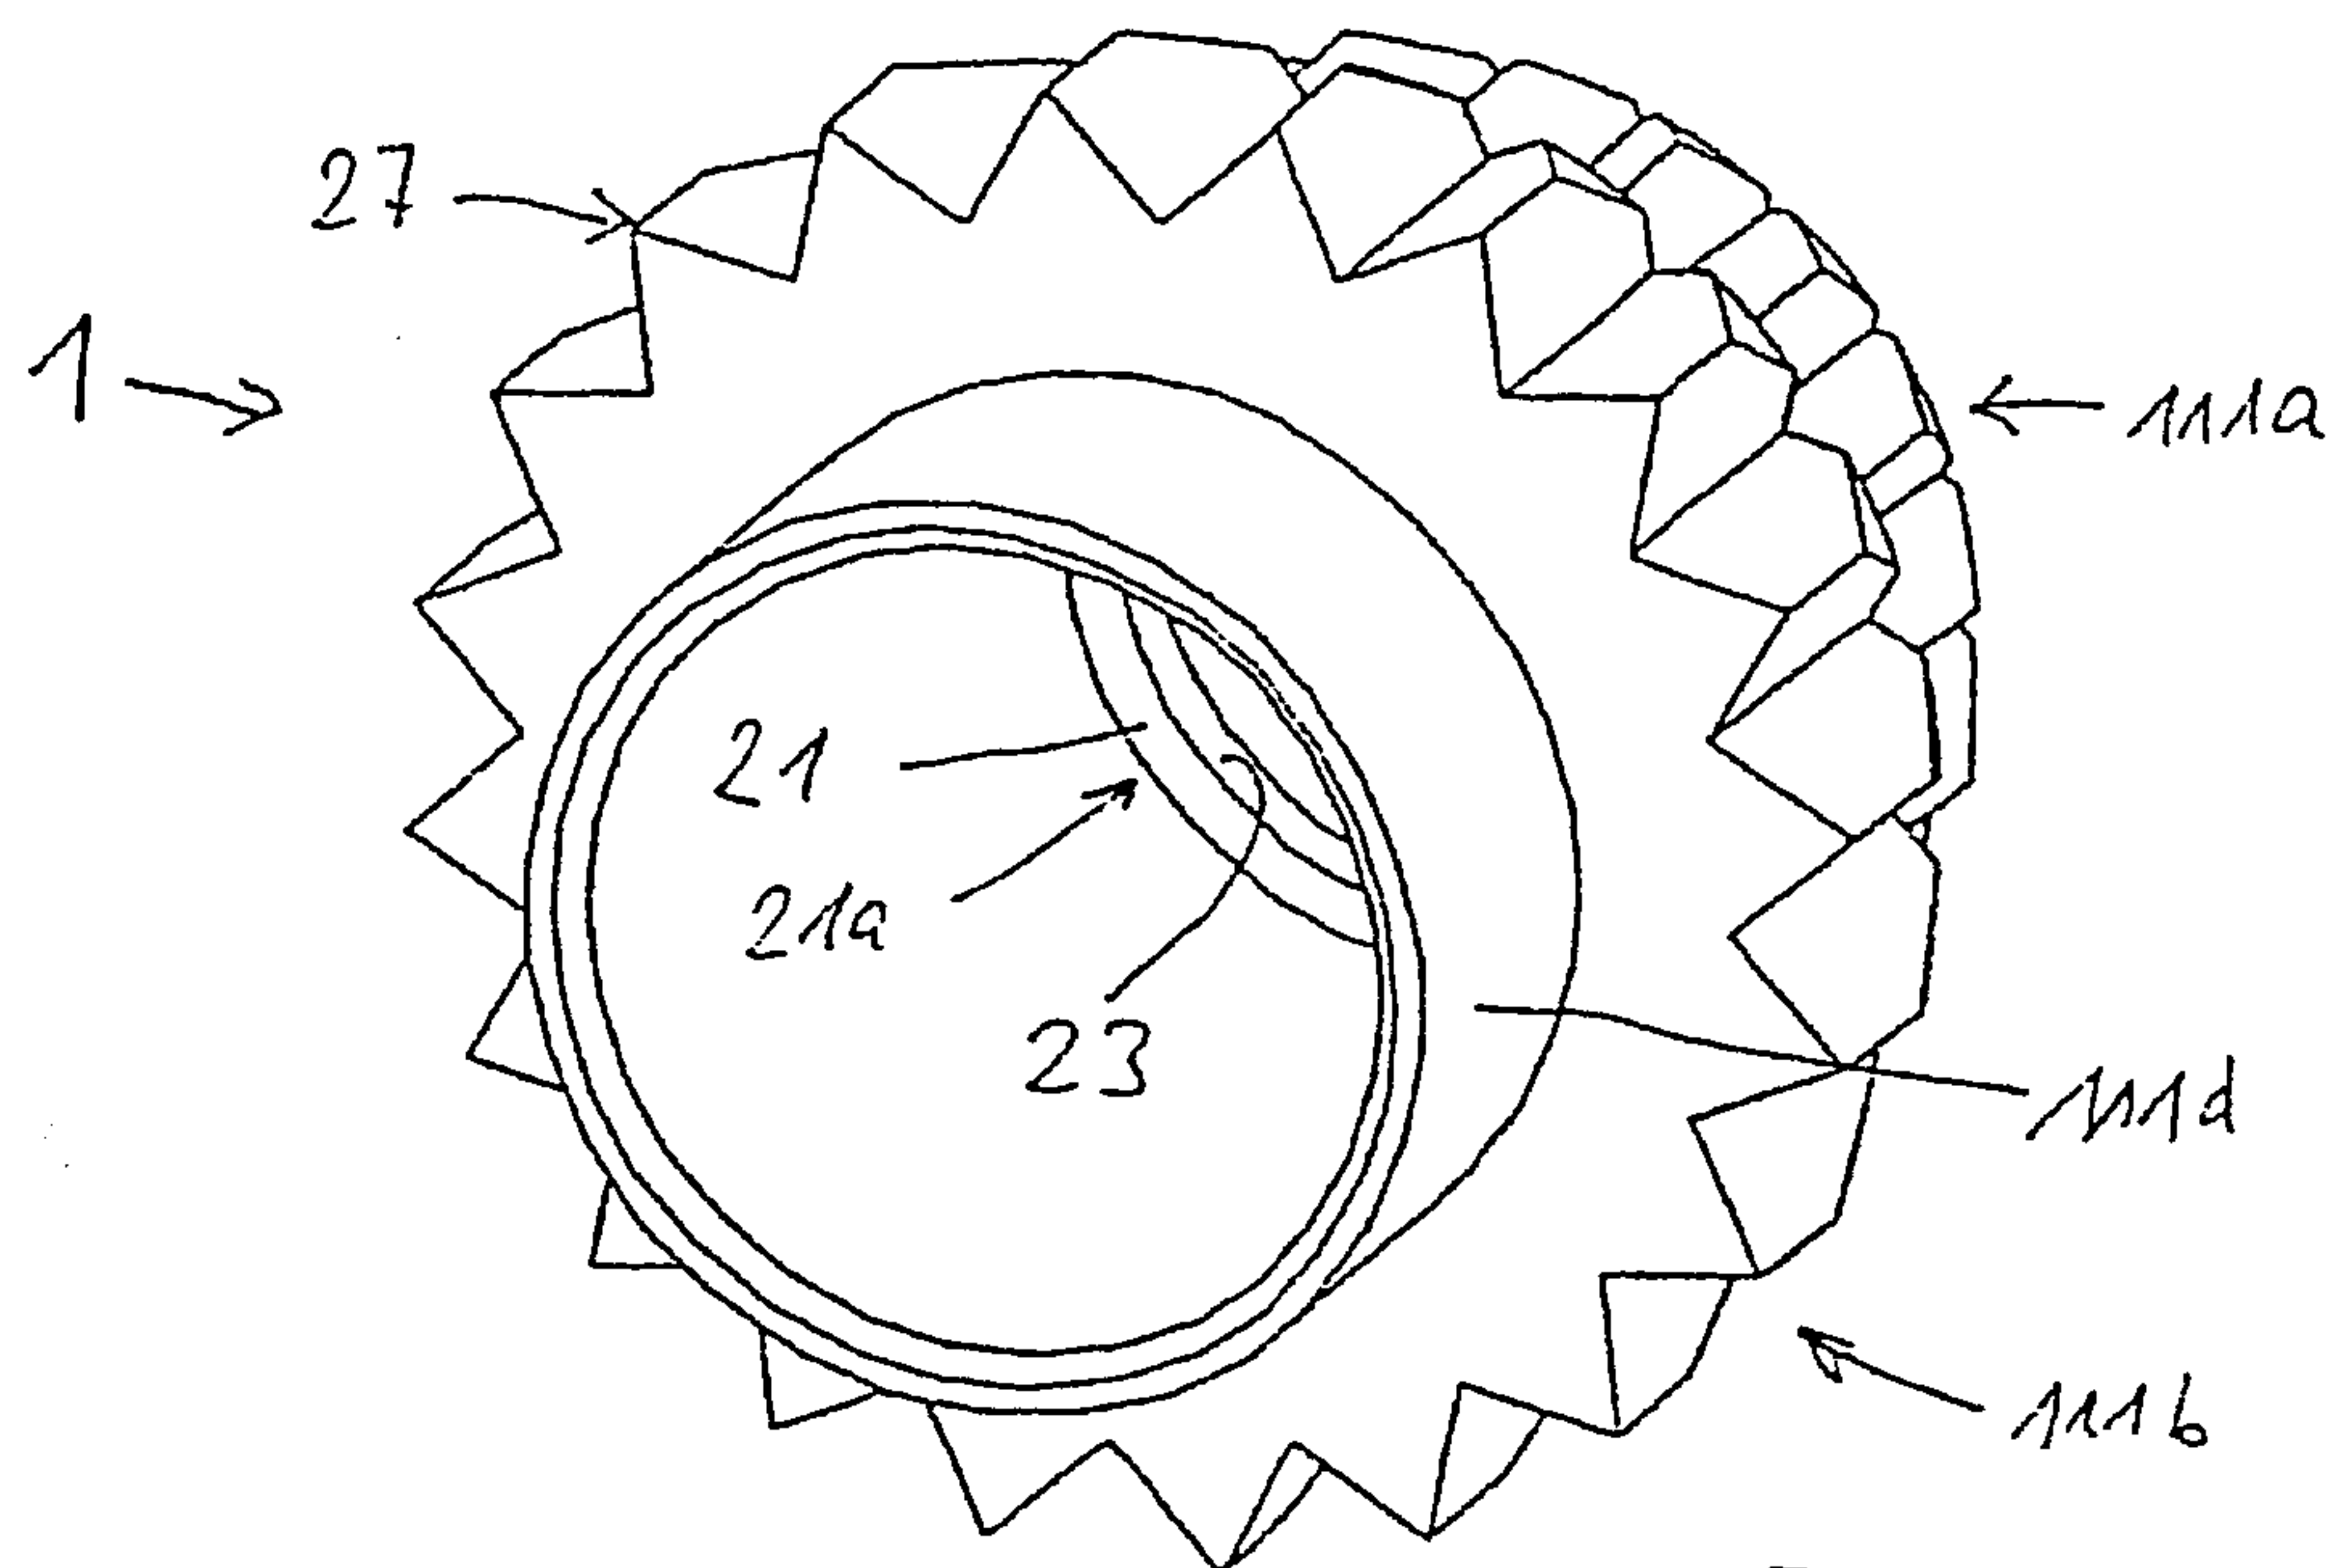


Fig. 4

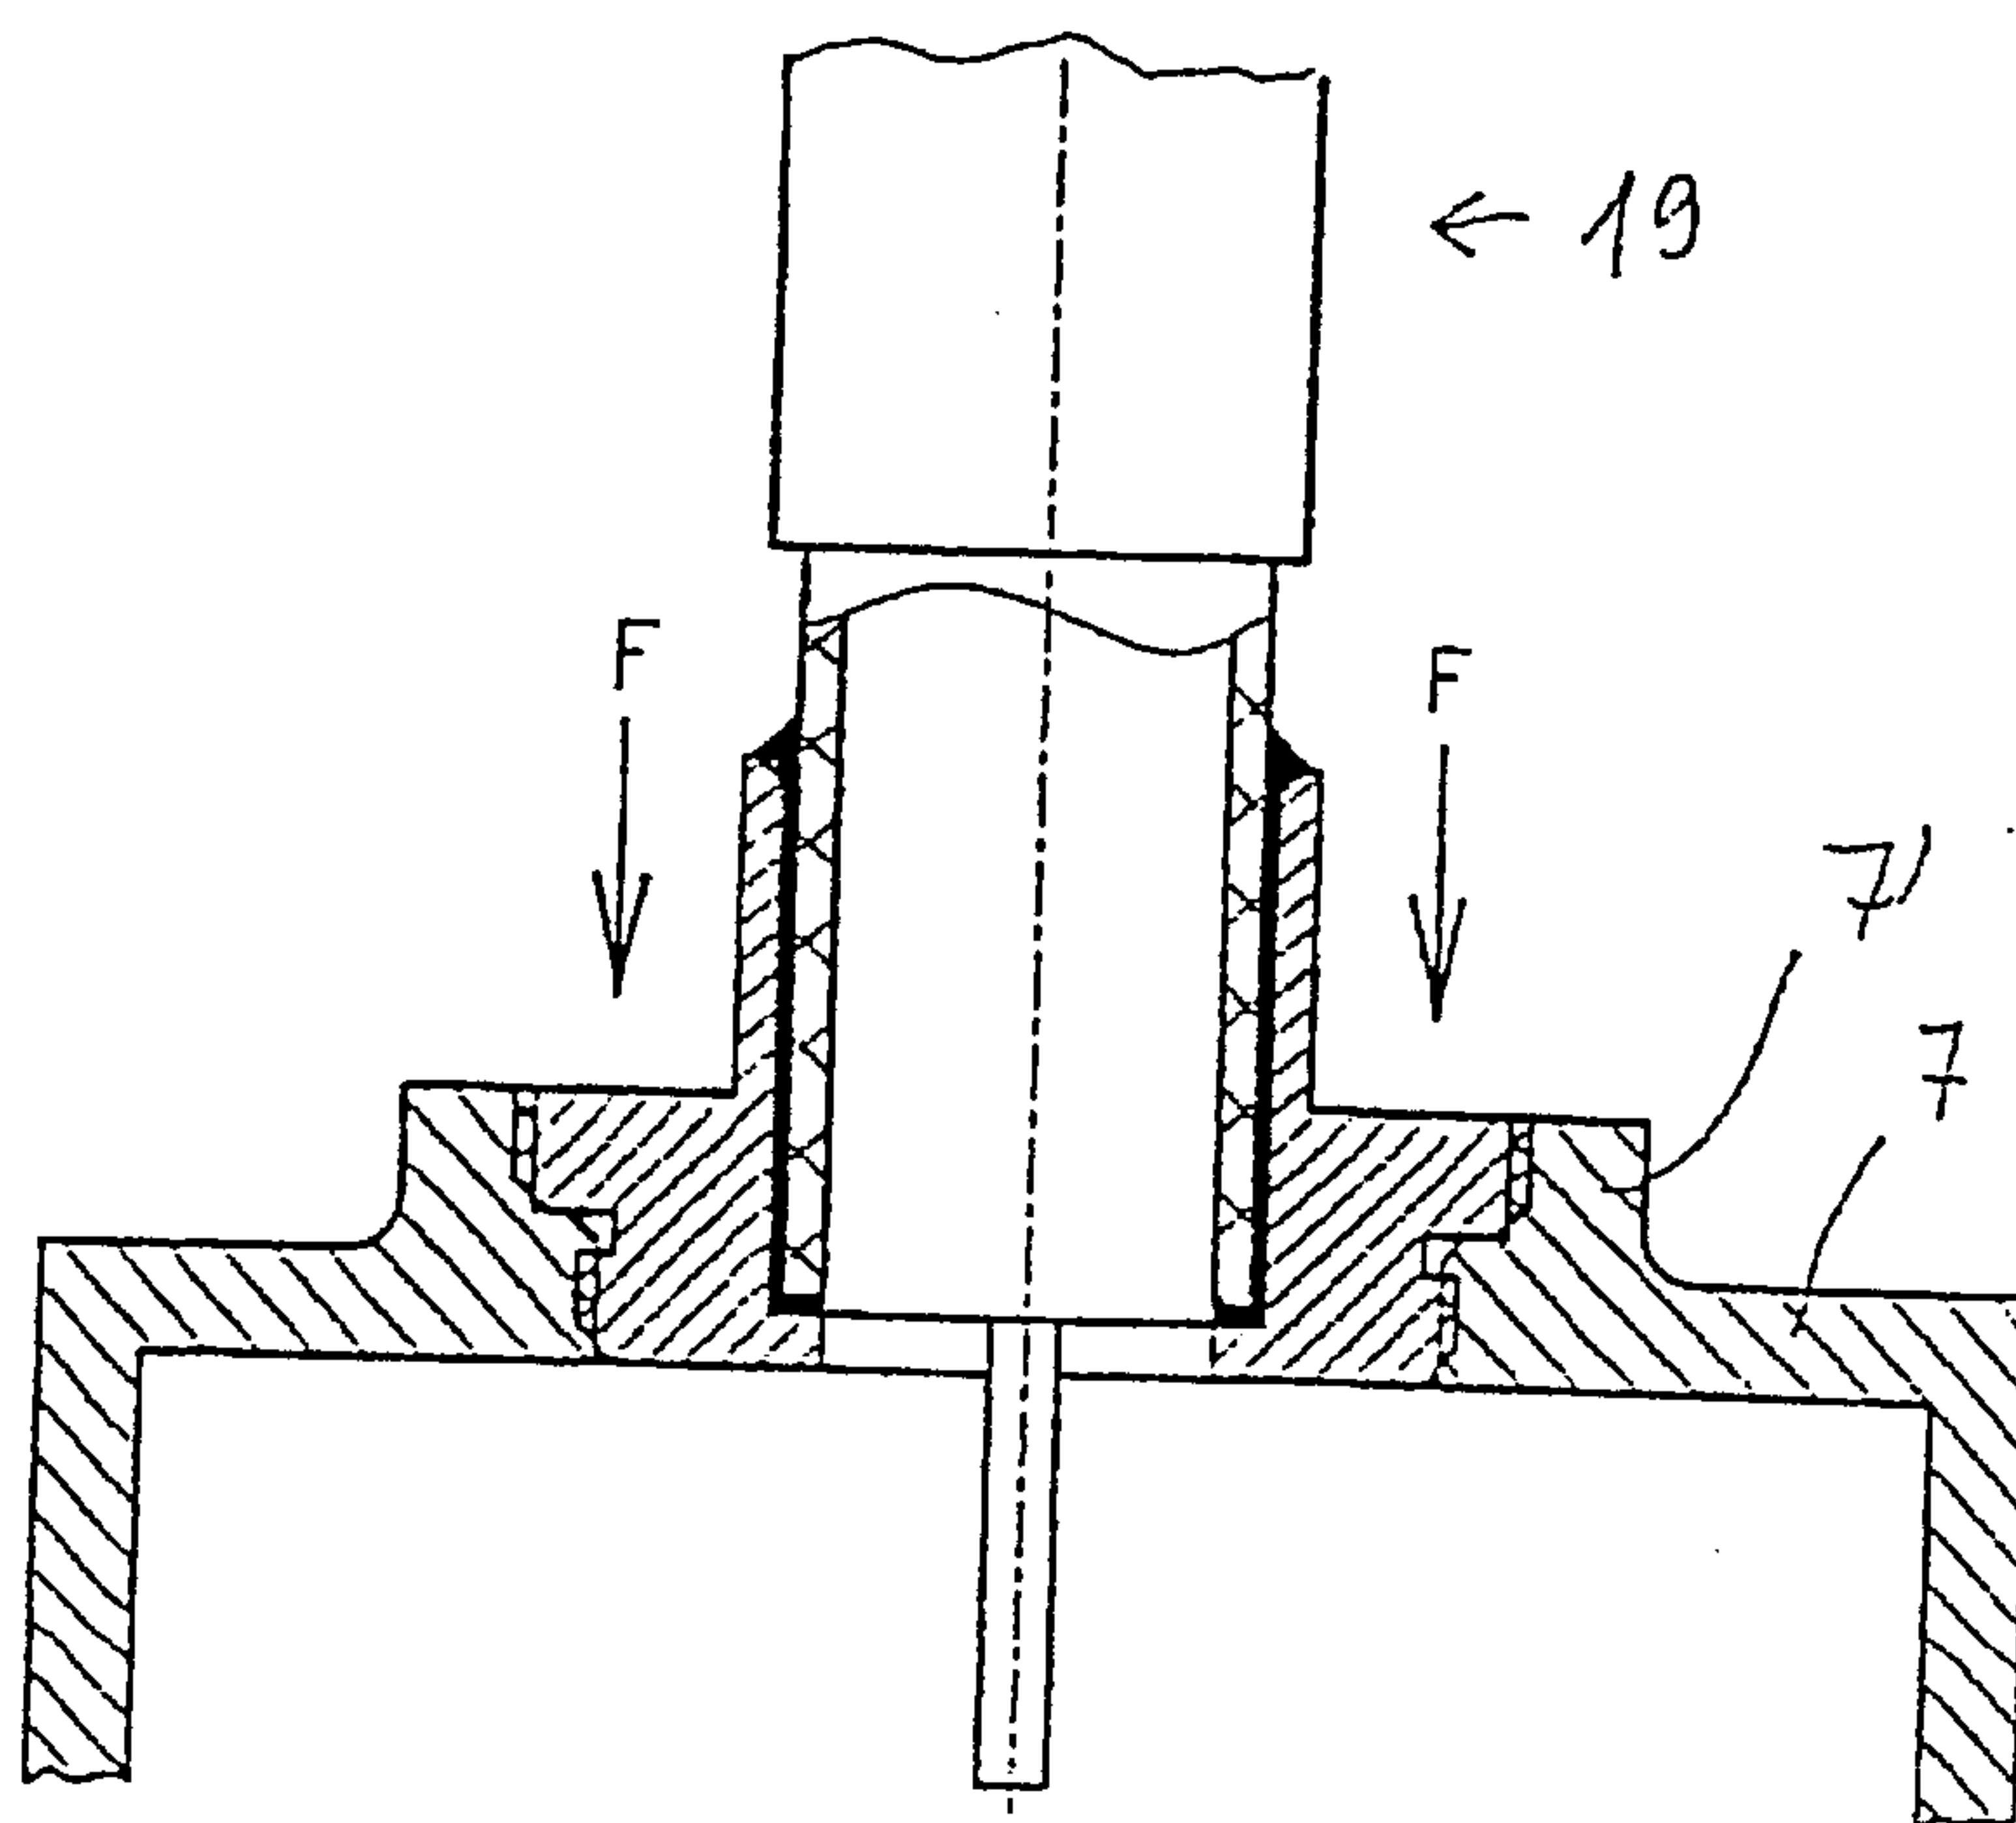


Fig. 6

4/6

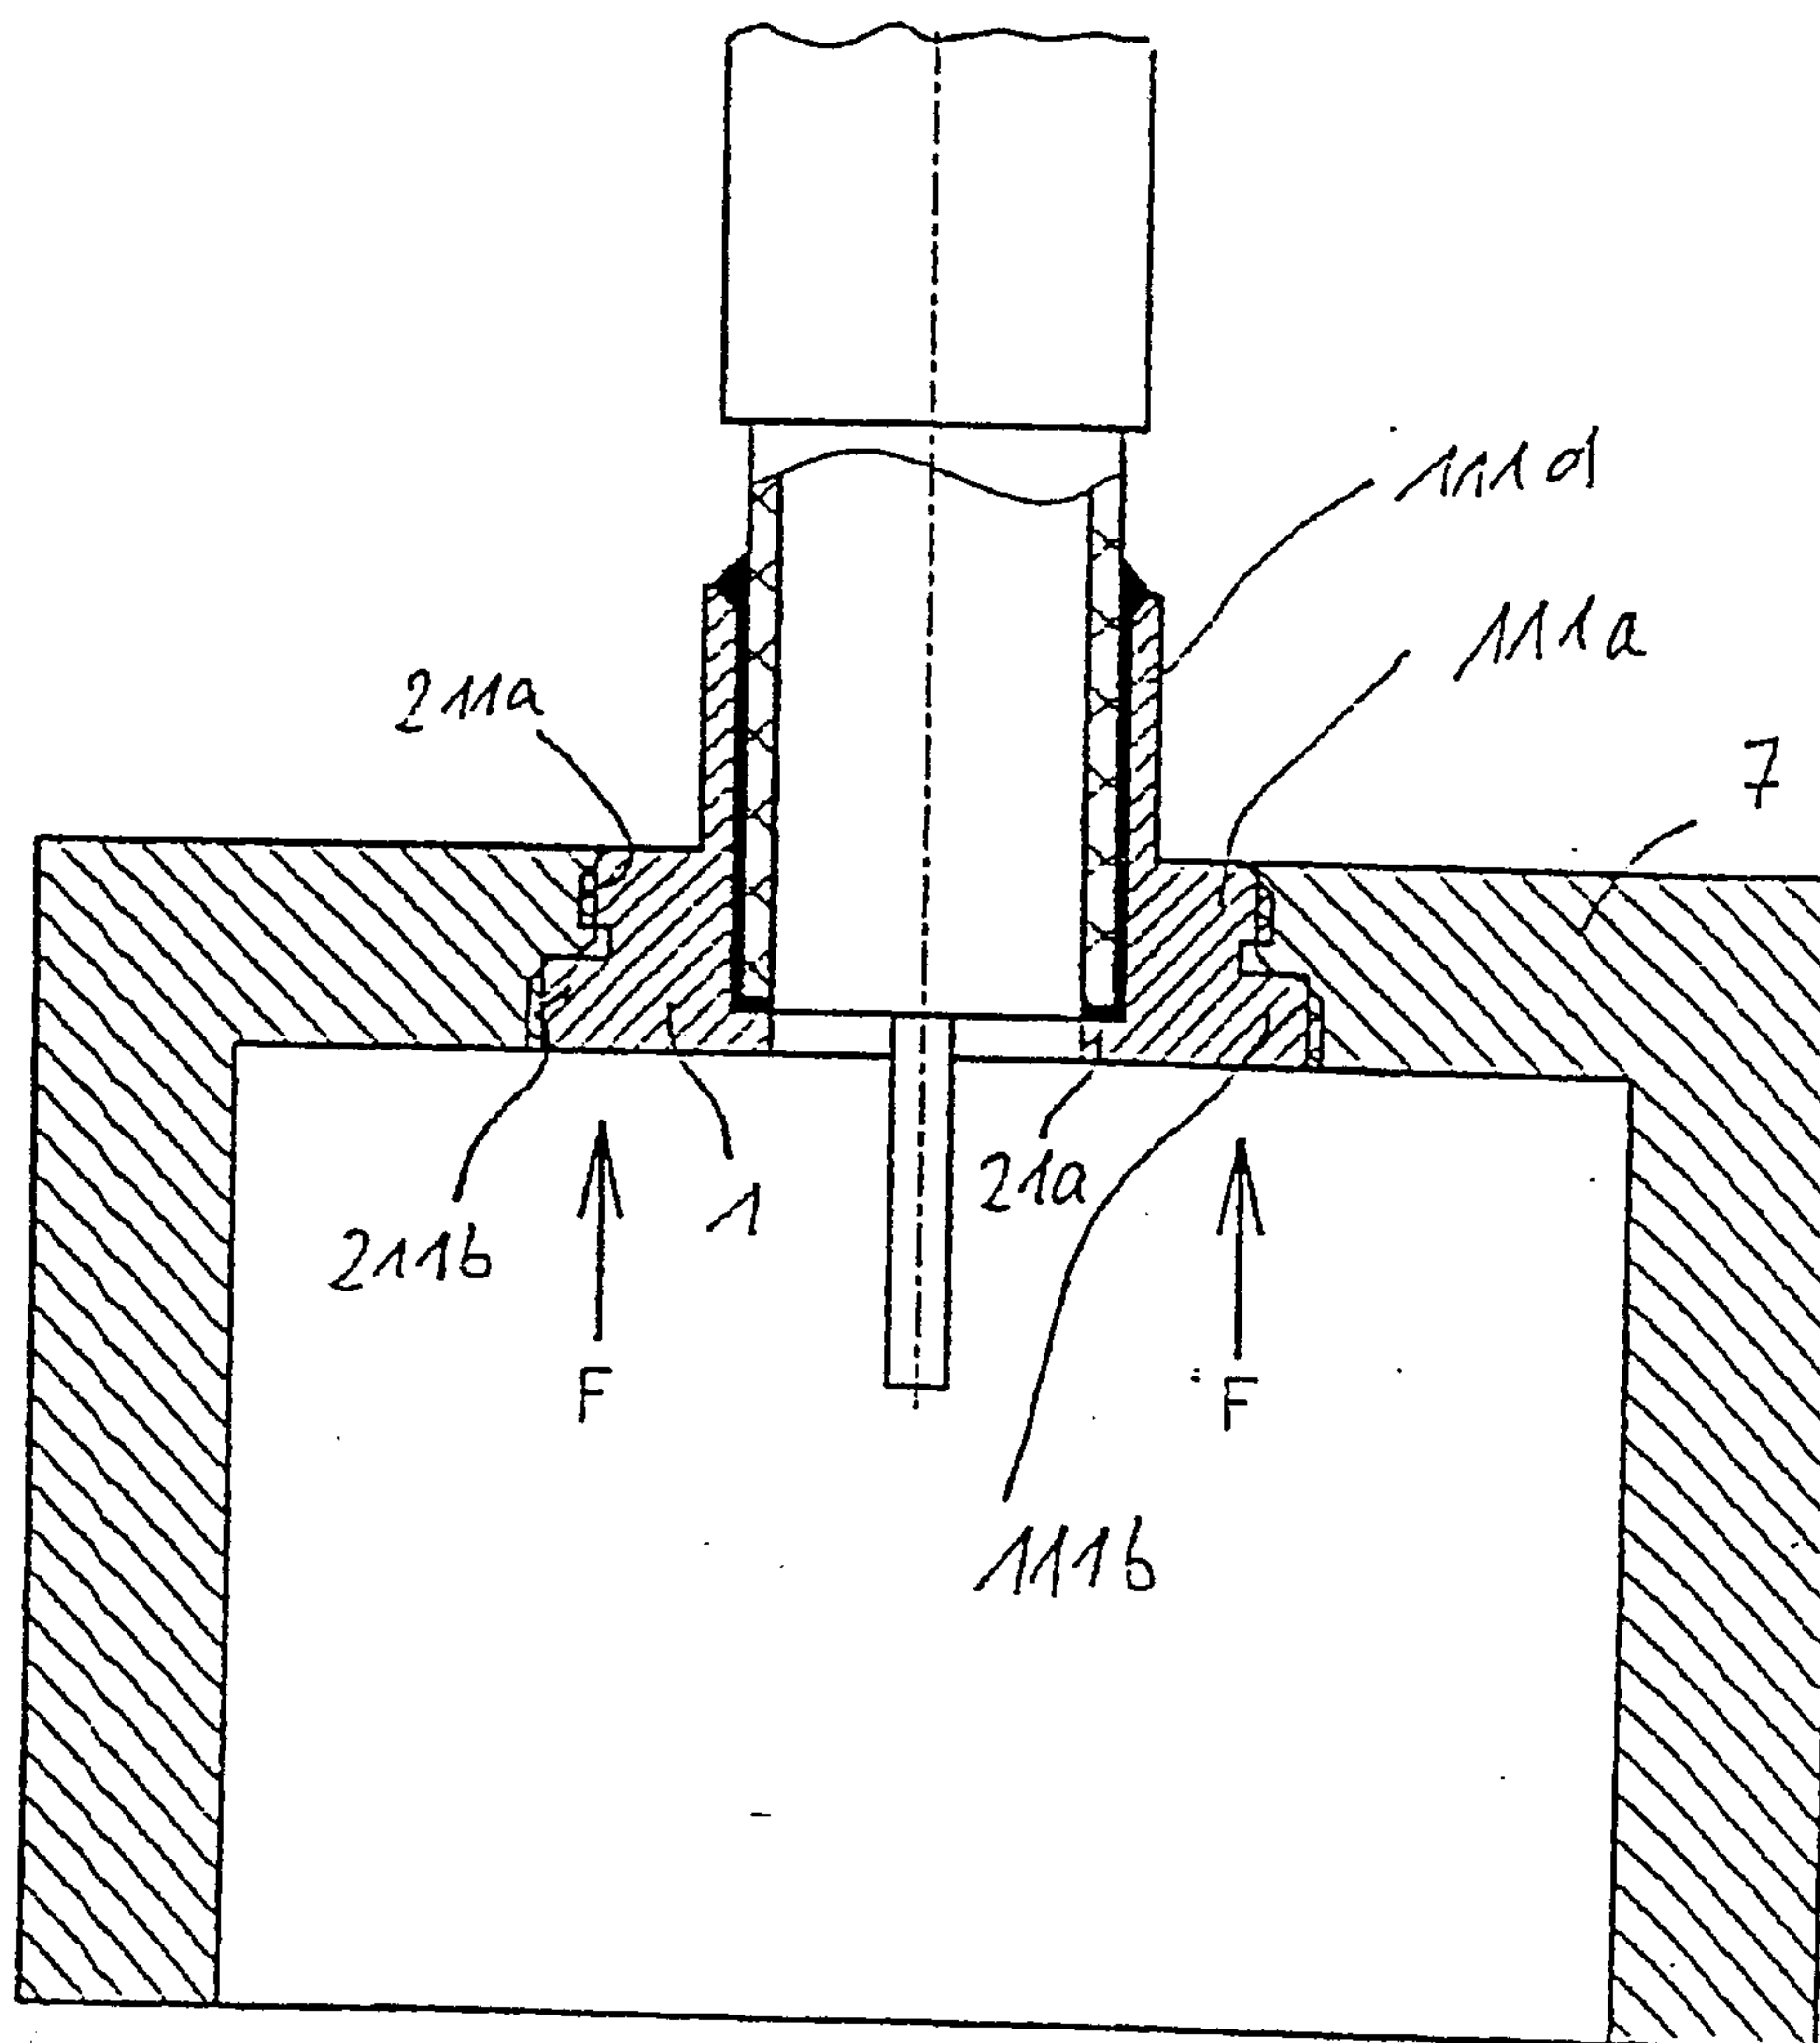


Fig. 7

5/6

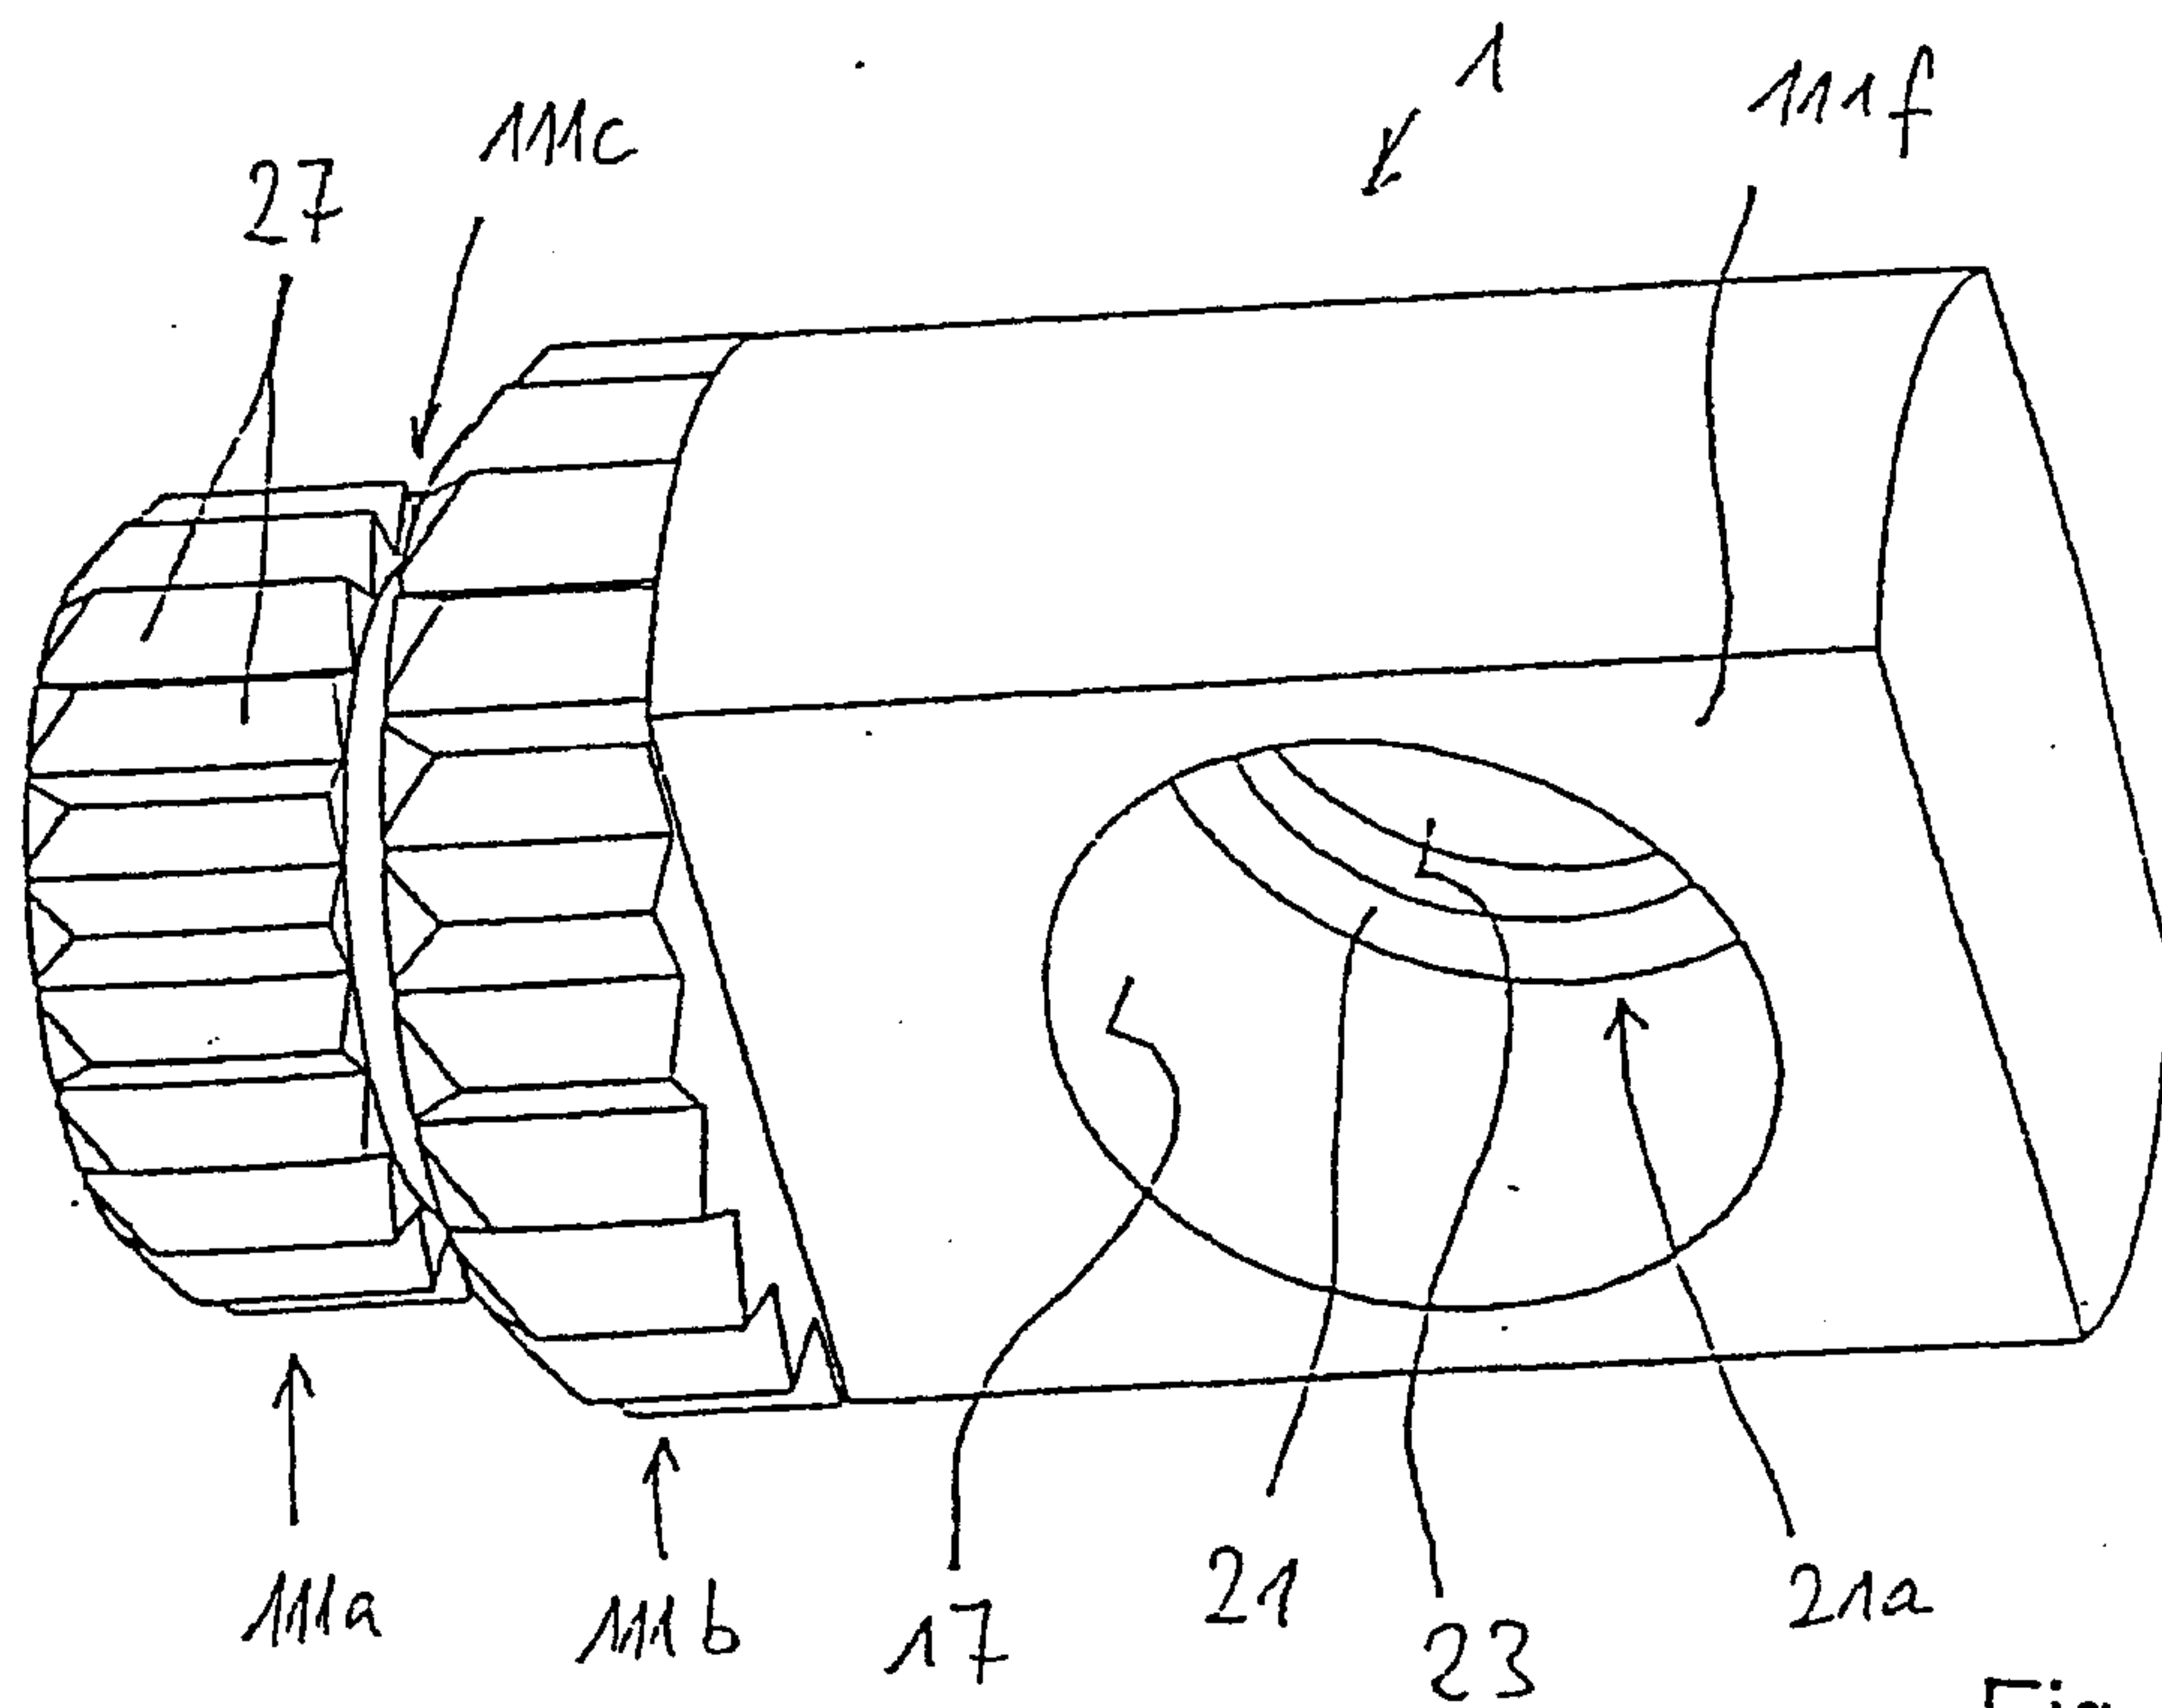


Fig. 8

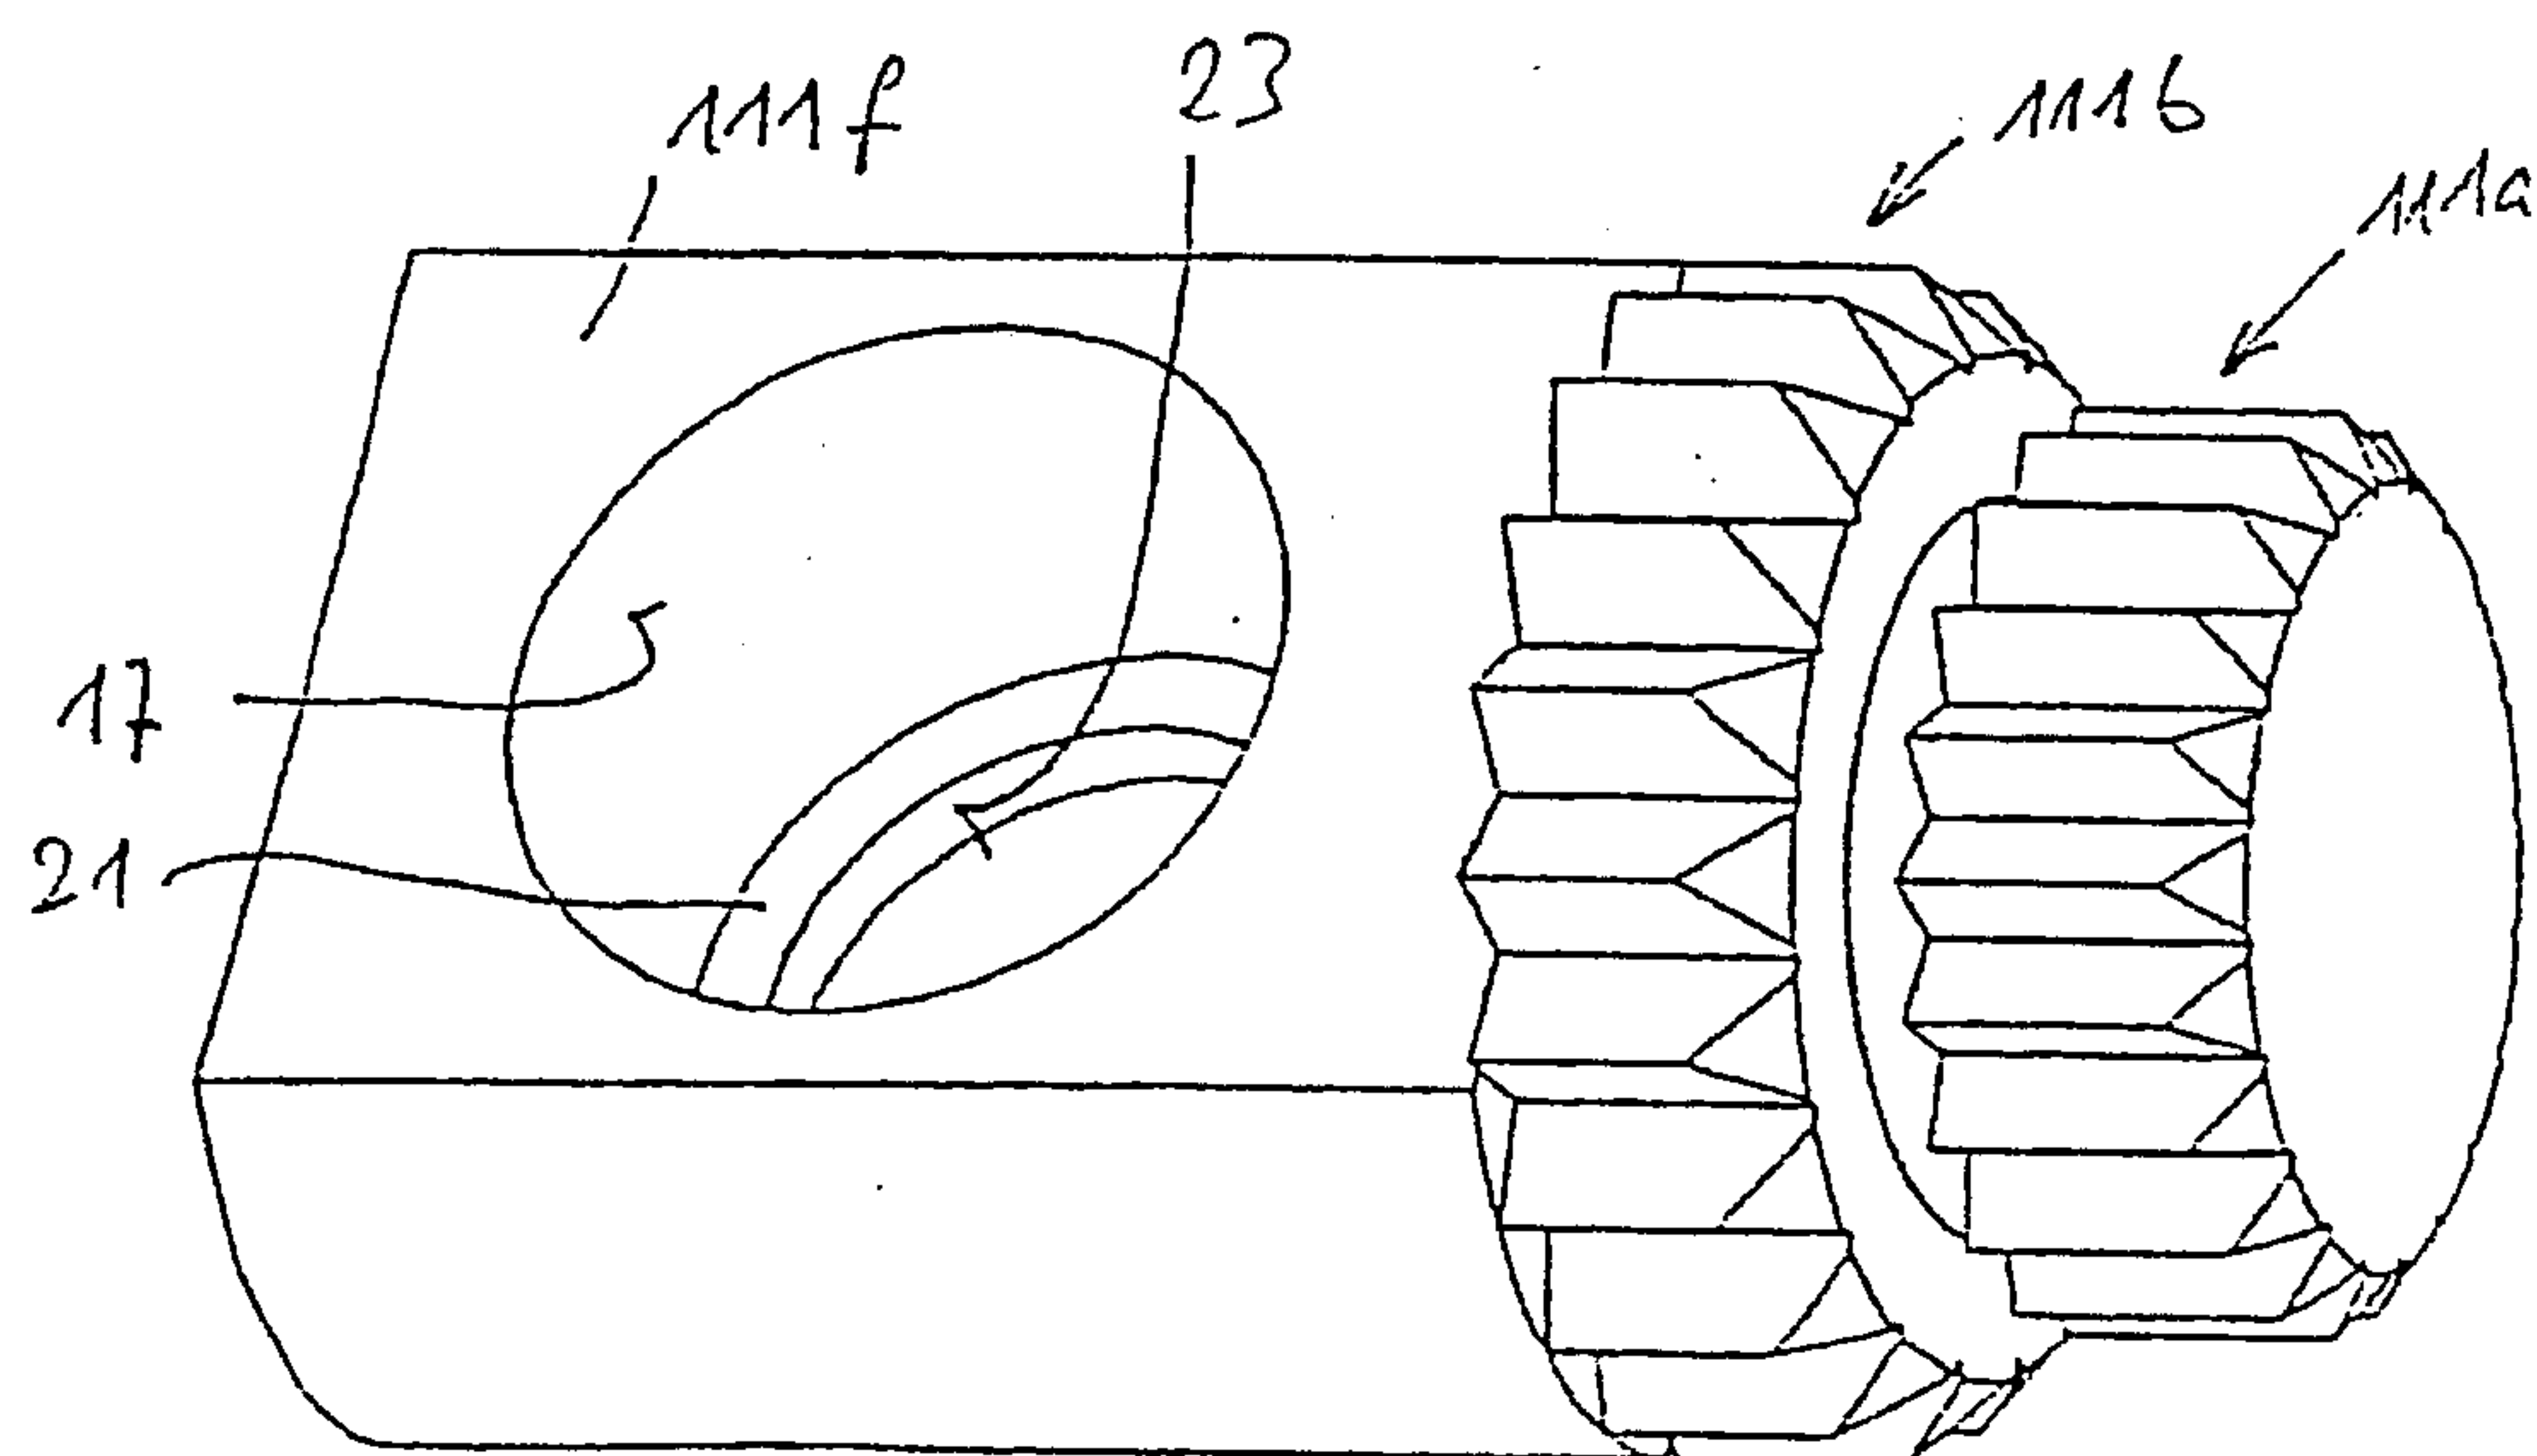


Fig. 9

6/6

