



(51) International Patent Classification:
H01B 3/56 (2006.01)

(21) International Application Number:
PCT/EP2009/062640

(22) International Filing Date:
29 September 2009 (29.09.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PCT/EP2009/057294 12 June 2009 (12.06.2009) EP

(71) Applicant (for all designated States except US): **ABB TECHNOLOGY AG** [CH/CH]; Affolternstrasse 44, CH-8050 Zürich (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HYRENBACH, Maik** [DE/DE]; Gerhardstrasse 76, 40878 Ratingen (DE). **GRANHAUG, Ole** [NO/NO]; Hoyasvegen 49, N-3727 Skien (NO). **CLAESSENS, Max-Steffen** [DE/CH]; Weinbergstrasse 29, CH-5417 Untersiggenthal (CH). **Skarby, Per** [SE/CH]; Bachstrasse 46, CH-5436 Würenlos (CH).

(74) Agent: **ABB Patent Attorneys**; c/o ABB Schweiz AG, Intellectual Property (CH-LC/IP), Brown Boveri Strasse 6, CH-5400 Baden (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **ENCAPSULATED SWITCHGEAR**

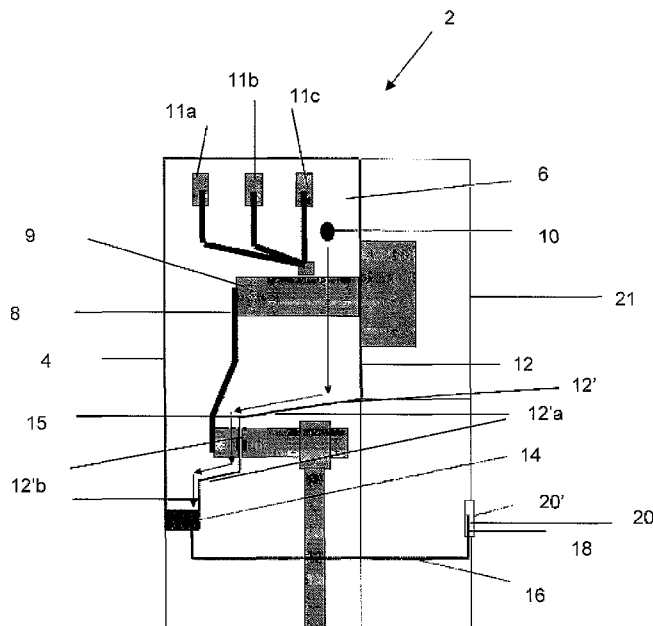


Fig. 1

(57) Abstract: The present invention relates to an encapsulated switchgear comprising a housing (4) defining an insulating space (6) and an electrical active part (8; 9, 11a, 11b, 11c) arranged in the insulating space (6), said insulating space (6) comprising an insulation medium.. The switchgear is characterized in that the insulation medium comprises a dielectric compound having a boiling point of above -25°C.



Published:

— *with international search report (Art. 21(3))*

- 1 -

Encapsulated switchgear

The present invention relates to an encapsulated switchgear, according to claim 1, to a process for providing an encapsulated switchgear, according to claim 5 15, and to the use of a dielectric compound having a boiling point of above -25°C in an insulation medium for an encapsulated switchgear, according to claim 18, in particular a medium voltage encapsulated switchgear.

In medium or high voltage encapsulated switchgears, the 10 electrical active part is arranged in a gas-tight housing, which defines an insulating space, said insulating space usually comprising an insulation gas and separating the housing from the electrical active part without letting electrical current to pass through. Thus, metal- 15 encapsulated switchgears allow for a much more space-saving construction than switchgears which are insulated solely by ambient air.

For conventional encapsulated switchgears, insulation gases comprising a dielectric compound having a boiling 20 point below -25°C are used in order to prevent condensation over the complete operation temperature range. The required pressure of the insulation gas and/or the amount of the dielectric compound comprised in the insulation gas is governed by gas pressure measurement 25 (with or without temperature compensation) or direct density measurement.

The equipment used for gas pressure measurement is in general relatively complex and expensive.

- 2 -

In addition, it is usually required that the insulation gas has a slight overpressure, which in medium voltage switchgears ranges typically from about 100 mbar to about 500 mbar, in order to allow for a precise pressure
5 measurement in the insulating space of the switchgear. Due to this overpressure, the housing of the switchgear can be subject to mechanical stress and therefore be prone to gas leakage if appropriate technical measures are not taken.

However, the demands on the gas-tightness of the currently
10 used switchgears are very strict, because conventional insulation gases with a high insulation and arc extinction performance have some environmental impact when released to the atmosphere and, in particular, have a relatively high global warming potential (GWP).

15 For this reason, the housing of the switchgear must be very robust even under the overpressure conditions mentioned above.

Also, for allowing repair work to be carried out in the inside of the housing, means are required for evacuating
20 the housing prior to it being opened and reintroducing the insulation gas afterwards, before operation of the switchgear can be restarted.

The construction of the housing of a switchgear is thus relatively complex, which - in addition to the expensive
25 gas pressure measurement equipment - further contributes to the relatively high cost of conventional switchgears.

With regard to the switchgear's potential impact on the environment and the corresponding constructive demands on the housing, efforts have been made in the past to replace
30 the conventional insulation gases by suitable substitutes.

- 3 -

For example, WO 2008/073790 discloses a dielectric gaseous compound which - among other characteristics - has a boiling point in the range between about -20°C to about -273°C, which is low-ozone-depleting, preferably non-ozone-depleting, and which has a GWP less than about 22,200. Specifically, WO 2008/073790 discloses a number of different compounds which do not fall within a generic chemical definition.

Further, EP-A-0670294 discloses the use of perfluoropropane as a dielectric gas and EP-A-1933432 refers to trifluoriodomethane (CF_3I) and its use as an insulating gas in a gas-insulated switchgear.

For improving the breakdown field strength compared to standard insulation media, US-A-4175048 suggests a gaseous insulator comprising a compound selected from the group of perfluorocyclohexene and hexafluoroazomethane.

However, using the compounds according to the documents given above in an encapsulated switchgear requires sophisticated gas pressure measuring means, as pointed out above. Also, if high amounts of the insulation gas leak out of the housing, the reaction time for establishing sufficient insulating properties is often relatively long. In this case the panel has to be disconnected immediately to avoid damage of the switchgear.

The object of the present invention is thus to provide an encapsulated switchgear which can be operated in an environmentally friendly manner and which at the same time allows for a very simple and cost-effective design by meeting highest safety requirements.

- 4 -

The object is achieved by the subject matter of claim 1. Preferred embodiments of the invention are defined in the dependent claims.

5 The term "encapsulated switchgear" according to the present invention includes an air-insulated or gas-insulated metal- (or otherwise)-encapsulated switchgear.

The term "electrical active part" used in the context of the present invention is to be interpreted broadly including a conductor, a conductor arrangement, a switch,
10 a conductive component, and the like.

Due to the feature that the dielectric compound comprised in the insulation medium comprises a dielectric compound having a boiling point of above -25°C , the present invention allows a two-phase system to be established.
15 Said system comprises at operational conditions an insulation gas comprising a gaseous part of the dielectric compound. This gaseous part is in equilibrium with a liquid part of the dielectric compound. Thereby, the liquid part functions as a reservoir of the dielectric
20 compound which at a too low partial gas pressure enters the gas phase.

The present invention is based on the finding that by suitably choosing the dielectric compound, a concentration of the dielectric compound in the insulating gas of such a
25 two-phase system can be achieved, which is sufficient for most applications of an encapsulated switchgear, and in particular for a medium voltage encapsulated switchgear.

In view of this, dielectric compounds having a relatively high vapour pressure are particularly preferred. Examples

- 5 -

of such dielectric compounds will be described in detail below.

If insulation gas leaks out of the housing, the equilibrium between gas and liquid phase - and thus the required concentration of the dielectric compound in the insulation gas - is maintained or readily reestablished. Consequently, the required insulation performance is maintained even if the housing is leaking. Thus, no immediate interruption of the operation is necessary, which renders the switchgear very safe.

Given the fact that a sufficient concentration of the dielectric compound and thus sufficient insulation performance can be readily established as long as at least a part of the dielectric compound is in liquid phase, complex gas pressure measurement equipment can be avoided. In contrast, simply checking that a liquid part is present is sufficient for ensuring that the insulation gas comprises the dielectric compound in a sufficient concentration and thus has the required high insulation performance.

According to a preferred embodiment, the switchgear of the present invention comprises a receptacle determined for comprising at least a portion of the liquid part of the dielectric compound comprised in the housing. This allows checking of the required insulation performance by simply checking the level of liquid in the receptacle.

The receptacle is in general arranged in the insulating space.

In order to ensure that the presence of the liquid part comprised in the housing can be determined by checking the

- 6 -

level of liquid in the receptacle, it is further preferred that the housing comprises collecting means for collecting at least a portion of the liquid part of the dielectric compound and transferring it to the receptacle. According to a particularly preferred embodiment, the inner surface of the housing's bottom wall is at least partly inclined, thus forming a spout leading into the receptacle. The receptacle is thus preferably arranged on the lowest point of the insulating space. During operation, the liquid collected on the bottom of the housing flows down the inclined inner surface of the housing's bottom wall and is received by the receptacle.

In addition, the switchgear preferably comprises an indicator for determining the amount of the liquid part of the dielectric compound in the insulating space, said indicator being arranged in a compartment, which is separated from the insulating space and connected with the receptacle by a channel. In general, the indicator is formed by the part of the channel, which extends into the separate compartment.

According to a further preferred embodiment, the housing comprises a transparent area allowing the receptacle and/or the indicator to be viewed from the outside. Thus, the determination of a sufficient insulation performance of the insulation gas can be carried out by simply looking through the transparent area and visually checking whether a liquid phase is present or not. The transparent area can for example be in the form of a watchglass, on which the minimum operation level of the liquid is indicated.

In the above mentioned embodiment, in which the indicator is formed by the part of the channel extending into the

- 7 -

separate compartment, said part is generally transparent. As in this embodiment, the compartment comprising the indicator is in general placed according to the height of the insulation space, direct metering is possible, since
5 under the same pressure the liquid in the compartment will have the same level as the liquid in the insulating space.

Theoretically, the dielectric compound and optionally the carrier gas can be introduced anywhere in the insulating space. In order to allow the dielectric compound to be
10 introduced into the system during operation, respective means can be provided. For example, nozzles can be provided in the housing wall, through which an aerosol, in which small droplets of the liquid dielectric compound are dispersed in a carrier gas, can be introduced into the
15 insulating space. Alternatively, the liquid dielectric compound can be introduced without a carrier gas through an inlet into the bottom part of the insulating space and preferably into the receptacle.

The present invention allows the use of a dielectric
20 compound, which has excellent insulating properties, in particular a high breakdown field strength, and which at the same time is non-toxic and has no environmental impact when released to the atmosphere. This also allows for a simpler design of the switchgear for the reason that no
25 means for evacuation and reintroduction of the insulation medium has to be provided. If repair work has to be carried out and the housing of the switchgear has thus to be opened, the insulation gas is simply released to the atmosphere. The liquid part of the dielectric compound,
30 which is generally rather small, can be removed by means of a simple outlet, stored in a simple vessel and reintroduced by pouring it back to the insulation space

- 8 -

after repair work is finished and before restarting operation of the switchgear.

According to a preferred embodiment, the dielectric compound is a fluoroketone having from 4 to 12 carbon atoms. Thereby, an insulation medium can be provided having high insulation capabilities and a very low GWP.

In general, the fluoroketone according to this embodiment has the general structure



wherein R1 and R2 are at least partially fluorinated chains, said chains being independently from each other linear or branched and having from 1 to 10 carbon atoms. The definition encompasses both perfluorinated ketones as well as hydrofluorinated ketones. Generally, these fluoroketone have a boiling point of at least -5°C at ambient pressure.

It has now been found that for many applications of the insulation gas, such as applications in the medium voltage range, a sufficient concentration or molar ratio, i.e. the ratio between the number of molecules of the fluoroketone to the number of molecules of the remaining components of the medium (generally the carrier or buffer gas), and thus also a sufficient breakdown field strength can be achieved even at very low operational temperatures e.g. of down to about -5°C or even less, without additional measures such as external heating or vaporization.

Preferably, the fluoroketone has from 4 to 10 carbon atoms, more preferably from 4 to 8 carbon atoms, and most


- 9 -

preferably 6 carbon atoms (also referred to as a C6-fluoroketone). As mentioned above, said C6-fluoroketone can be a perfluorinated ketone (having the molecular formula $C_6F_{12}O$) or a hydrofluorinated ketone.

- 5 Among the most preferred fluoroketones having 6 carbon atoms, dodecafluoro-2-methylpentan-3-one has been found to be particularly preferred.

Dodecafluoro-2-methylpentan-3-one (also named 1,1,1,2,2,4,5,5,5-nonafluoro-4-(trifluoromethyl)-3-
 10 pentanone, perfluoro-2-methyl-3-pentanone or $CF_3CF_2C(O)CF(CF_3)_2$) has previously only been considered useful for completely different applications, namely the processing of molten reactive metals (as referred to in WO 2004/090177), for the cleaning of a vapour reactor (as
 15 referred to in WO 02/086191) and in fire extinction systems, or in liquid form for cooling of electronic systems, or for the Rankine-process in small power plants (as referred to in EP-A-1764487).

Dodecafluoro-2-methylpentan-3-one is clear, colorless and
 20 almost odourless. Its structural formula is given in the following:

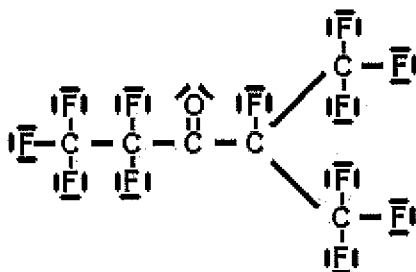

- 10 -

Dodecafluoro-2-methylpentan-3-one has an average lifetime in the atmosphere of about 5 days and its GWP is only about 1. In addition, its ozone depletion potential (ODP) is zero. Thus, the environmental load is much lower than
5 the one of conventional insulation gases.

In addition, dodecafluoro-2-methylpentan-3-one is non-toxic and offers outstanding margins of human safety.

Dodecafluoro-2-methylpentan-3-one has a boiling point of 49.2°C at 1 bar. Its vapour pressure, i.e. the pressure of
10 the vapor in equilibrium with its non-vapor phases, is about 40 kPa at 25°C. Given the high vapour pressure of dodecafluoro-2-methylpentan-3-one, an insulation gas having a breakdown field strength sufficient for many applications, in particular in the medium voltage range,
15 can in general also be achieved at very low temperatures down to e.g. -30°C.

According to a preferred embodiment of the present invention, the insulation gas is a gas mixture, which apart from the dielectric compound, and in particular the
20 fluoroketone, further comprises a carrier (or buffer) gas. In a particularly preferred embodiment, the gas mixture comprises or is air, in particular dry air, or comprises or is at least one air component, in particular selected from the group consisting of carbon dioxide (CO₂), oxygen
25 (O₂) and nitrogen (N₂). Alternatively, the insulation gas can substantially consist of the dielectric compound.

Based on the finding that at a temperature of 550°C or higher, dodecafluoro-2-methylpentan-3-one is decomposed to very reactive fluorocarbon compounds having a lower number
30 of carbon atoms, it is preferred that the insulating gas

- 11 -

comprises sufficient oxygen (O_2) with which the fluorocarbon compounds formed can react to form inert compounds, such as e.g. CO_2 .

The insulation properties of the insulation gas, and in particular its breakdown field strength, can be controlled by the temperature, pressure and/or composition of the insulation medium. By using the two-phase system comprising the dielectric compound, in particular the fluoroketone, both in liquid and gaseous phase, an increase of the temperature does not only result in an increase of the absolute pressure, but also in an increase of the dielectric compound's concentration in the insulation gas due to a higher vapour pressure.

According to a particularly preferred embodiment of the present invention, the molar ratio of the fluoroketone, in particular of dodecafluoro-2-methylpentan-3-one, in the insulation gas is at least 1%, preferably at least 2%, more preferably at least 5%, more preferably at least 10%, most preferably at least 15%. These preferred molar ratios refer to a given standard or prescribed operating condition. Under deviating conditions, the molar ratio may still vary from these preferred values.

The significance of an insulating medium comprising dodecafluoro-2-methylpentan-3-one in a molar ratio of at least 1%, or 2% respectively, is based on the finding that an insulation gas having this molar ratio can also be obtained at very low temperature conditions down to $-30^\circ C$ for 2% and down to $-40^\circ C$ for 1% and that this insulation gas has a sufficient dielectric strength for e.g. medium voltage gas-insulated switchgears, which are operated at

- 12 -

an insulation gas pressure below 1.5 bar, in particular at around 1 bar.

Apart from the switchgear described above, the present invention further relates to a process, in which a dielectric compound is introduced into the insulating space of the switchgear, the amount of the dielectric compound introduced being such that at operational conditions the insulation medium comprises an insulation gas comprising a gaseous part of the dielectric compound, said gaseous part being in equilibrium with a liquid part of the dielectric compound. Thus, a two-part system having the above mentioned advantages can be established in the insulating space of the switchgear.

According to a preferred embodiment of this process, the dielectric compound is introduced in liquid form, whereupon only a part of the dielectric compound evaporates in the insulating space. Thus, the two-part system can be established in a very simple and straightforward manner.

It is further preferred that the dielectric compound is introduced into the bottom part of the insulating space. This allows the filling level of the dielectric compound to be monitored immediately after introduction. Further, a homogenous distribution of the gaseous part in the insulating space can be readily established according to this embodiment.

The invention thus particularly relates to a medium voltage encapsulated switchgear. The term "medium voltage" as used herein refers to a voltage in the range of 1 kV to

- 13 -

72 kV. However, applications in the high voltage range (more than 72 kV) and in the low voltage range (below 1 kV) are feasible, as well.

Medium voltage encapsulated switchgears, for which the present invention is particularly well suited, are known to the skilled person. As examples, medium voltage switchgears of the ZX-family (ABB AG), of the GHA type (AREVA T&D), or of the type NXPLUS C (Siemens AG), are hereby cited.

10 The present invention is further described in detail by way of the following examples in connection with Figure 1, which shows schematically a medium voltage encapsulated switchgear according to the present invention.

According to Fig. 1, the switchgear 2 comprises a housing 15 4 defining an insulating space 6 and an electrical active part 8 arranged in the insulating space 6. In the embodiment shown, the electrical active part 8 comprises a switch element 9 and three bus bars 11a, 11b, 11c connected to the switch element 9. The insulating space 6 20 comprises an insulation medium comprising an insulation gas. Said insulation gas comprises a gaseous part of a dielectric compound which is in equilibrium with a liquid part of the dielectric compound.

Droplets 10 of the liquid part condensed on the walls 12 25 of the housing 4 flow or fall downwards in direction to the bottom wall 12' (as indicated by an arrow). In the embodiment given in Figure 1, the bottom wall 12' has a stepwise configuration, wherein segments 12'a inclined, in particular weakly inclined, downwards alternate with 30 strongly inclined, in particular vertical, segments 12'b,

- 14 -

and leads to a receptacle 14. Thus, the liquid collected on the bottom of the housing flows down the inner surface of the bottom wall 12' and is discharged into a receptacle 14. The inner surface of the bottom wall 12' thus
5 functions as a collecting means 15 for collecting the liquid part of the dielectric medium.

From the receptacle 14, a channel 16, preferably in the form of a tube, leads to an indicator 18, which in the embodiment shown in the Figure is comprised in a
10 compartment 20 arranged in the panel front 21 and is thus separate from the insulating space 6.

In the embodiment shown, the indicator 18 is formed by the part of the channel 16 extending into the compartment 20, said part being transparent. Also, the outer wall 20' of
15 the compartment 20 is transparent, thus forming a watchglass.

As the compartment 20 comprising the indicator 18 is arranged corresponding to the height of the receptacle 14, direct metering of the filling level of the receptacle 14
20 is possible by watching through the outer wall 20' of the compartment 20.

Alternatively, the watchglass might also be formed by a transparent part of the housing itself. In this embodiment, the watchglass is arranged such that the
25 receptacle in the insulating space can be viewed from the outside. As a special solution the watchglas itself can be the receptacle.

- 15 -

List of reference numbers

	2	switchgear
	4	housing
5	6	insulating space
	8	electrical active part
	9	switch element
	11a, 11b, 11c	bus bars
	12	housing wall
10	12'	bottom wall of the housing
	12'a	inclined segment of the bottom wall
	12'b	vertical segment of the bottom wall
	14	receptacle
	15	collecting means
15	16	channel
	18	indicator
	20	compartment
	20'	outer wall of the compartment
	21	panel front

- 16 -

Claims

1. Encapsulated switchgear comprising a housing (4) defining an insulating space (6) and an electrical active part (8; 9, 11a, 11b, 11c) arranged in the insulating space (6), said insulating space (6) comprising an insulation medium, characterized in that the insulation medium comprises a dielectric compound having a boiling point of above -25°C .
2. Encapsulated switchgear according to claim 1, the dielectric compound having a boiling point of above -20°C , preferably above -5°C .
3. Encapsulated switchgear according to claim 1 or 2, characterized in that the dielectric compound is a fluoroketone having from 4 to 12 carbon atoms.
4. Encapsulated switchgear according to claim 3, characterized in that the fluoroketone has 6 carbon atoms.
5. Encapsulated switchgear according 4, characterized in that the fluoroketone is dodecafluoro-2-methylpentan-3-one.
6. Encapsulated switchgear according to any of the preceding claims, characterized in that at operational conditions the insulation medium comprises an insulation gas comprising a gaseous part of the dielectric compound, said gaseous part being in equilibrium with a liquid part of the dielectric compound.

- 17 -

7. Encapsulated switchgear according to claim 6, characterized in that the insulation gas is a gas mixture, which further comprises a carrier gas.
8. Encapsulated switchgear according to claim 7,
5 characterized in that the carrier gas comprises air or at least comprises one air component, in particular selected from the group consisting of carbon dioxide, oxygen and nitrogen.
9. Encapsulated switchgear according to any of the
10 claims 6 to 8, characterized in that it comprises a receptacle (14) determined for comprising at least a portion of the liquid part of the dielectric compound comprised in the housing (4).
10. Encapsulated switchgear according to claim 9,
15 characterized in that it further comprises collecting means (15; 12', 12a', 12b') for collecting at least a portion of the liquid part of the dielectric compound and transferring it to the receptacle (14).
11. Encapsulated switchgear according to any of claims 6
20 to 10, characterized in that it further comprises an indicator (18) for determining the amount of the liquid part of the dielectric compound in the insulating space (6), said indicator (18) being arranged in a space separate from the insulating
25 space (6) and being connected with the receptacle (14).
12. Encapsulated switchgear according to any of claims 9
30 to 11, the housing (4) comprising a transparent area allowing the receptacle (14) and/or the indicator (18), respectively, to be viewed from the outside.

- 18 -

13. Encapsulated switchgear according to any of the preceding claims, the switchgear being a metal-encapsulated switchgear.
14. Encapsulated switchgear according to any of the preceding claims, the switchgear being a medium voltage encapsulated switchgear.
15. Process for providing an encapsulated switchgear according to any of claims 6 to 14 by introducing a dielectric compound into the insulating space (6) of the switchgear, wherein the amount of the dielectric compound introduced is such that at operational conditions the insulation medium comprises an insulation gas comprising a gaseous part of the dielectric compound, said gaseous part being in equilibrium with a liquid part of the dielectric compound.
16. Process according to claim 15, wherein the dielectric compound is introduced in liquid form, whereupon only a part of the dielectric compound evaporates into the insulating space (6).
17. Process according to claim 16, wherein the dielectric compound is introduced into the bottom part of the insulating space (6).
18. Use of a dielectric compound having a boiling point of above -25°C in an insulation medium for an encapsulated switchgear, in particular for a medium voltage encapsulated switchgear.

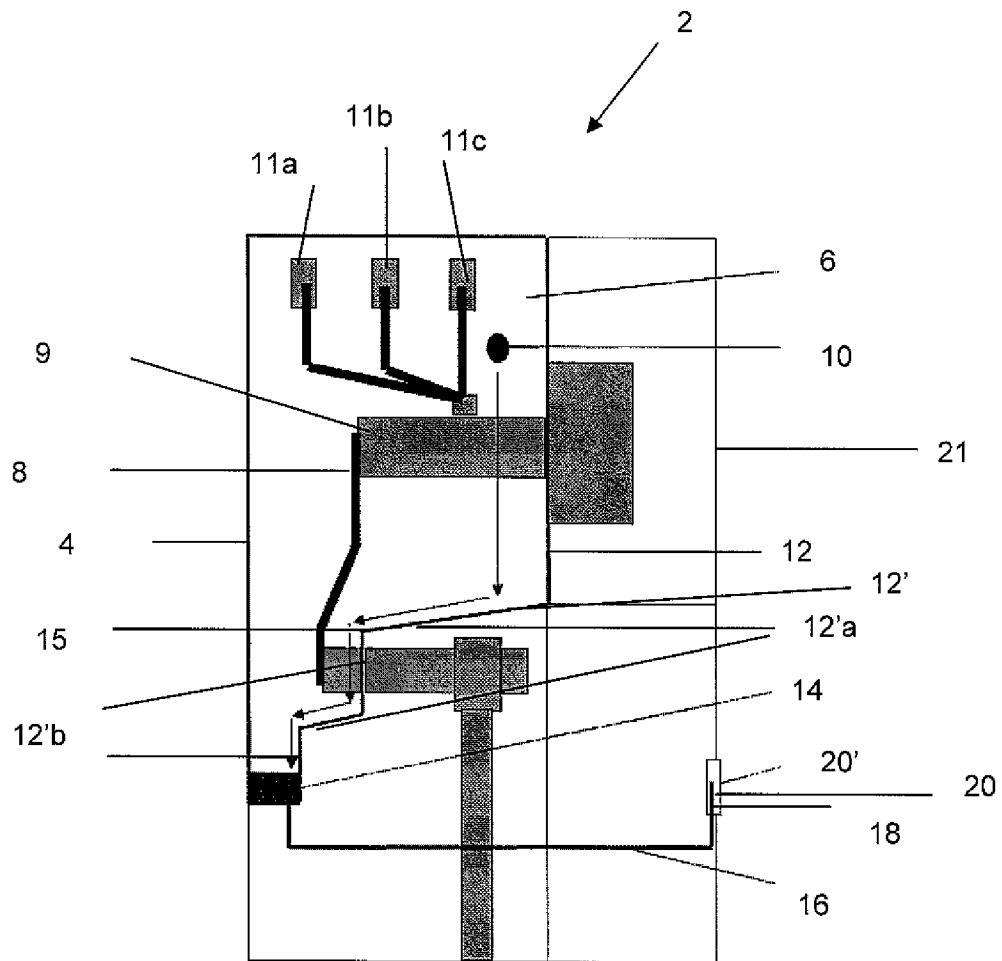


Fig. 1

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2009/062640

A. CLASSIFICATION OF SUBJECT MATTER

INV. H01B3/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, CHEM ABS Data, COMPENDEX, INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2008/073790 A2 (HONEYWELL INT INC [US]; LULY MATTHEW H [US]; RICHARD ROBERT G [US]) 19 June 2008 (2008-06-19) cited in the application page 7, line 7; claims 1-11; table 2 page 10, line 18 page 19, line 28 - page 20, line 15 page 18, line 1 - page 19, line 26 table 1	1-2,6, 15-16,18
A	US 3 185 734 A (FAWCETT FRANK S; SMITH RONALD D) 25 May 1965 (1965-05-25) column 5, line 46 - line 49	1-18
A	WO 01/05468 A2 (3M INNOVATIVE PROPERTIES CO [US]) 25 January 2001 (2001-01-25) page 11, line 21 - line 24; claims 1,7	1-18
	----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

18 February 2010

Date of mailing of the international search report

26/02/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Lehnert, Andreas

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2009/062640

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2006/210711 A1 (HAYASHI MASAKI [JP]; YOSHIZAWA HIDEKAZU [JP]) 21 September 2006 (2006-09-21) paragraph [0047] -----	1-18
A	WO 2004/090177 A1 (3M INNOVATIVE PROPERTIES CO [US]) 21 October 2004 (2004-10-21) claim 1 -----	1-18
A	WO 02/086191 A1 (3M INNOVATIVE PROPERTIES CO [US]) 31 October 2002 (2002-10-31) claim 1 -----	1-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2009/062640

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 2008073790	A2	19-06-2008	CN 101601103 A	09-12-2009
			EP 2097909 A2	09-09-2009
			KR 20090088423 A	19-08-2009
			US 2008135817 A1	12-06-2008
US 3185734	A	25-05-1965	NONE	
WO 0105468	A2	25-01-2001	AU 6223600 A	05-02-2001
			DE 60014443 D1	04-11-2004
			DE 60014443 T2	17-11-2005
			EP 1261398 A2	04-12-2002
			ES 2230125 T3	01-05-2005
			ES 2329025 T3	20-11-2009
			JP 2003520065 T	02-07-2003
			MX PA02000676 A	30-08-2002
US 2006210711	A1	21-09-2006	DE 102006012438 A1	21-09-2006
			JP 2006255606 A	28-09-2006
			KR 20060101310 A	22-09-2006
WO 2004090177	A1	21-10-2004	CA 2519832 A1	21-10-2004
			EP 1606423 A1	21-12-2005
			JP 2006520853 T	14-09-2006
WO 02086191	A1	31-10-2002	CN 1505693 A	16-06-2004
			EP 1381709 A1	21-01-2004
			JP 4160403 B2	01-10-2008
			JP 2005507954 T	24-03-2005
			US 6394107 B1	28-05-2002