(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
16 November 2023 (16.11.2023)

WIPO | PCT

(10) International Publication Number
WO 2023/219652 A1

(51) International Patent Classification:
E21B 29/00 (2006.01) *E21B 23/00* (2006.01)

(21) International Application Number:
PCT/US2022/072301

(22) International Filing Date:
13 May 2022 (13.05.2022)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
17/663,041 12 May 2022 (12.05.2022) US

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 3000 North Sam Houston Parkway East, Houston, TX 77032-3219 (US).

(72) Inventor: **WAI, Simon, Whye Kwong**; 315 Jalan Ahmad Ibrahim, Singapore, 639940 (SG).

(74) Agent: **HIGGINS, Sheri, L.**; Sheri Higgins Law, PLLC, 131 Lake Haven Drive, Gray, TN 37615 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(54) Title: CUTTING TOOL WITH SPIRAL CUTOUTS FOR METAL CUTTINGS REMOVAL

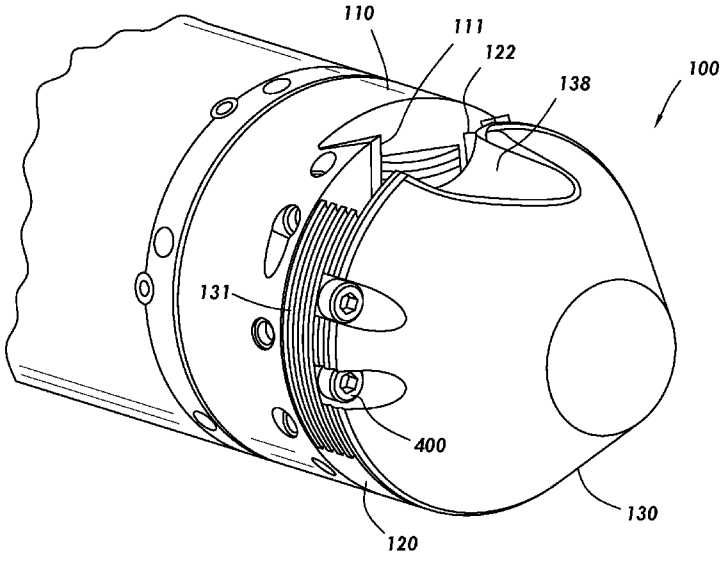


FIG. 6

(57) Abstract: A cutting tool can be used to cut through a tubing string in a wellbore. Metal cuttings are formed during the cutting process. The cutting tool can include a cutting insert with a blade that is rotated around a longitudinal axis of the tool. A nose can include a spiral cutout adjacent to the blade. The spiral cutout can force the metal cuttings down past the outside of the nose and down into the tubing string. The nose can also include a guide on the outside underneath the blade. The guide can also provide a pathway for the metal cuttings to fall past the outside of the nose and down into the tubing string. The spiral cutout and the optional guide can be used to prevent metal cuttings from lodging within the cutting tool and preventing the tool from rotating and cutting.

WO 2023/219652 A1

[Continued on next page]

(84) **Designated States** *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

— *with international search report (Art. 21(3))*

CUTTING TOOL WITH SPIRAL CUTOUTS FOR METAL CUTTINGS REMOVAL

Technical Field

[0001] A cutting tool can be used to cut through a tubing string in a wellbore. Metal cuttings can be formed during the cutting process. The cutting tool can include spiral cutouts that remove the metal cuttings from the tool. A guide can also be included that aids in guiding the metal cuttings downhole past the tool.

Brief Description of the Figures

[0002] The features and advantages of the various embodiments will be more readily appreciated when considered in conjunction with the accompanying figures. The figures are not to be construed as limiting any of the embodiments.

[0003] **Fig. 1A** is a cross-sectional view of a cutting tool prior to cutting through a tubing string according to certain embodiments.

[0004] **Fig. 1B** is a cross-sectional view of the cutting tool of **Fig. 1A** after cutting through the tubing string.

[0005] **Fig. 2** is front perspective view of the cutting tool showing the spiral cutouts and guide according to certain embodiments.

[0006] **Fig. 3** is a bottom perspective view of an interface sub-assembly according to certain embodiments.

[0007] **Fig. 4** is a bottom perspective view of a slide sub-assembly according to certain embodiments.

[0008] **Fig. 5** is a bottom perspective view of a nose showing the spiral cutouts and guide according to certain embodiments.

[0009] **Fig. 6** is a bottom, side perspective view of the cutting tool according to certain embodiments.

[0010] **Figs. 7A and 7B** are photographs showing the cutting tool removing metal cuttings according to certain embodiments.

Detailed Description

[0011] Oil and gas hydrocarbons are naturally occurring in some subterranean formations. In the oil and gas industry, a subterranean formation containing oil and/or gas is referred to as a reservoir. A reservoir can be located under land or offshore. Reservoirs are typically located in the range of a few hundred feet (shallow reservoirs) to a few tens of thousands of feet (ultra-deep reservoirs). In order to produce oil or gas, a wellbore is drilled into a reservoir or adjacent to a reservoir. The oil, gas, or water produced from a reservoir is called a reservoir fluid.

[0012] A well can include, without limitation, an oil, gas, or water production well, an injection well, or a geothermal well. As used herein, a "well" includes at least one wellbore. A wellbore can include vertical, inclined, and horizontal portions, and it can be straight, curved, or branched. As used herein, the term "wellbore" includes any cased, and any uncased, open-hole portion of the wellbore. As used herein, "into a wellbore" means and includes into any portion of the well.

[0013] A tubing string or casing string (collectively called "tubing string") can be used in wellbore operations. The tubing string can be used to run in downhole tools, introduce fluids into the wellbore, and produce formation fluids from the subterranean formation. There are some situations where a tubing string located within a wellbore needs to be cut. By way of example, a downhole tool or component can become stuck within the tubing string. By way of another example, during well abandonment operations, sections of a tubing string can be cut so the cut section falls to the bottom of the wellbore so cement can be placed in the wellbore.

[0014] A cutting tool can be used to cut through the tubing string. Cutting tools can be installed within the tubing string and a cutting blade is rotated around an axis of the tool. The blade cuts through the tubing string. However, during the cutting process, a large volume of metal cuttings is formed as the blade cuts deeper into the tubing string. The metal cuttings can become lodged or jammed within the cutting tool adjacent to the cutting blade. When the metal cuttings jam up within the cutting tool, the cutting operation cannot continue, and the cutting tool must be removed from the tubing string and the cuttings must be removed from the tool before the tool can be re-installed within the tubing string to complete the cut.

[0015] In order to prevent jamming, metal cuttings breakers, also referred to as a chip breaker, can be used to assist in the curling up and breaking of the chips into smaller and more

manageable sizes. However, the formation of long, continuous metal cuttings when cutting ductile materials have led to tool jams during cutting even with the use of chip breakers. Buildup of the metal cuttings near the cutting blade can lead to practical problems such as stalling of the cutter insert during rotation and obstruction which does not allow the cutting blade to fully retract. The inability to retract the blade, as well as the large volume of metal chips jammed near the cutter insert can lead to over-pulls when the tool is being pulled out of the tubing string – essentially the cutting blade is lodged within the tubing string and more force is required to remove the cutting tool from the tubing string to clear the jam. Over-pulls can lead to irreversible damage to both the cutting tool and the tubing string. Thus, there is a long-felt need for a cutting tool whereby the metal cuttings do not build upon each other and jam the cutting tool.

[0016] It has been discovered that a cutting tool can include spiral cutouts located on a nose of the cutting tool adjacent to a cutting insert of the tool. The spiral cutouts can direct the formed metal cuttings away from the cutting insert, past the nose, and down into the tubing string. The nose can also include a guide that also assists in directing the metal cuttings away from the cutting insert and down into the tubing string. It is to be understood that the use of the words "top," "bottom," "up," and "down" are for orientation purposes and do not mean vertical orientations only as horizontal wellbores do not have a vertical orientation. Accordingly, top and up mean at a location closer to a wellhead, and bottom and down mean at a location farther away from the wellhead.

[0017] According to any of the embodiments, a cutting tool for cutting a tubing string in a wellbore comprises a cutting insert; a blade located at an end of the cutting insert; and a nose comprising a spiral cutout located adjacent to the cutting insert.

[0018] According to any of the embodiments, a method of cutting through a tubing string within a wellbore comprises introducing the cutting tool into the wellbore; rotating the cutting insert and the nose around a longitudinal axis of the cutting tool; and allowing the blade to cut through the tubing string.

[0019] The various disclosed embodiments apply to the systems, methods, and apparatuses without the need to repeat the various embodiments throughout.

[0020] Turning to the Figures, **Figs. 1A and 1B** are cross-sectional views of a cutting tool **100**. The cutting tool **100** can be installed within a tubing string **200**. The cutting tool **100**

includes a body and a longitudinal axis **101** (shown in **Fig. 2**). The cutting tool **100** includes an interface sub-assembly **110**. The cutting tool **100** also includes a slide sub-assembly **120** that is slidably connected to the interface sub-assembly **110**. The slide sub-assembly **120** includes a cutting insert **122**. The cutting tool **100** also includes a nose **130**.

[0021] The interface sub-assembly **110**, slide sub-assembly **120**, cutting insert **122**, and nose **130** are rotated around the longitudinal axis **101** of the cutting tool **100**. The rotation can be clockwise or counterclockwise around the longitudinal axis **101** of the cutting tool **100**. As shown in **Fig. 1A**, the cutting insert **122** is in a retracted position and a blade **123** is not in contact with an inner diameter of the tubing string **200**. As the components of the cutting tool **100** are rotated, the cutting insert **122** can protract, come in contact with the inner diameter of the tubing string **200**, and begin cutting through the tubing string. The cutting insert **122** can continue to protract with each revolution of the cutting insert **122** until the tubing string has been cut through. The number of revolutions and length of time to cut through the tubing string **200** can vary, in part depending on the thickness of the tubing string as defined as the difference between an outer diameter and inner diameter of the tubing string. By way of example, it may take up to 2 minutes to cut through a ¼ inch thick tubing string. As shown in **Fig. 1B**, the cutting insert **122** is in a fully protracted position and has cut through the tubing string **200**.

[0022] As shown in **Fig. 3**, the interface sub-assembly **110** can include tracks **111** and threaded holes **112**. As shown in **Fig. 4**, the slide sub-assembly **120** can include a slider rack **124**. The slider rack **124** of the slide sub-assembly **120** fits within and is slidably connected to the interface sub-assembly **110** via the tracks **111**. As the cutting tool **100** is rotated about the longitudinal axis **101**, the slide sub-assembly **120** slides within the interface sub-assembly **110** along the tracks **111** to convert the cutting insert **122** from a retracted position to a protracted position, for example as shown in **Fig. 1B**.

[0023] With continued reference to **Fig. 4**, the slide sub-assembly **120** can also include a blade grip **121** that houses the blade **123** of the cutting insert **122** within the slide sub-assembly **120**. The blade **123** can be angled and can cut through the tubing string **200** during rotation of the cutting tool **100** and protraction of the cutting insert **122**. Protraction of the cutting insert **122** occurs via sliding movement of the slide sub-assembly **120** within the tracks **111** of the interface sub-assembly **110**.

[0024] **Fig. 5** is a front perspective view of the nose **130**. As can be seen, the nose **130** can include threaded holes **134**. The nose **130** can be removably attached to the interface sub-assembly **110** by threading nose screws **400** through the threaded holes **134** of the nose **130** and the threaded holes **112** of the interface sub-assembly **110**, for example as shown in **Fig. 6**.

[0025] With reference to **Fig. 2**, the nose **130** includes a spiral cutout **131** located adjacent to the cutting insert **122**. The spiral cutout **131** can resemble threads of a screw. The spiral cutout **131** can have a length **L**. The length **L** of the spiral cutout **131** can be selected based on the anticipated volume of metal cuttings to be produced and can range from ½ inch to 1.5 inches. The spiral cutout **131** includes a plurality of crests **132** and roots **133**. The crests **132** can be in-line with the outer diameter of a portion of the nose **130** and a portion of the interface sub-assembly **110**. The pitch is defined as the distance between two crests **132**. The pitch can range from 0.1 to 0.5 inch. The depth of thread of the spiral cutout **131** as defined as the distance between the crests **132** and the roots **133** can range from 0.02 to 0.05 inch.

[0026] With reference to **Fig. 2**, the spiral cutout **131** can form a right-hand spiral or a left-hand spiral. According to any of the embodiments, the spiral cutout **131** has an opposite spiral from the direction of rotation of the cutting tool **100**. By way of a first example, if the cutting tool **100** rotates in a clockwise direction about the longitudinal axis **101** as viewed from the top of the cutting tool **100** as shown in **Fig. 2**, then the spiral cutout **131** has a left-hand spiral. By way of a second example, if the cutting tool **100** rotates in a counterclockwise direction about the longitudinal axis **101**, then the spiral cutout **131** has a right-hand spiral. In this manner, the spiral cutout **131** can force the metal cuttings **300** around the outside of the nose **130** in a direction **D** away from the cutting insert **122** and down into the tubing string.

[0027] The length **L** of the spiral cutout **131**, the number of crests **132**, the pitch, depth of the thread, and the type of spiral can each be selected such that the metal cuttings **300** are forced past the nose **130** and down into the tubing string. By way of example, for a tubing string made of a ductile material, such as stainless steel, alloy steel, carbon steel, or superalloys, which is likely to produce long, continuous metal cuttings **300**, then the depth of the thread can be increased in order to accommodate the larger metal cuttings produced without jamming.

[0028] As shown in **Figs. 2, 5, and 6**, the cutting tool **100** can also include a guide **138**. The guide **138** can be a recessed portion on the nose **130** located underneath the blade **123** of the cutting insert **122**. The guide **138** can have a recessed depth that is greater at a first end

directly underneath the blade **123**, wherein the depth of the recess becomes less at a second end farther away from the blade **123**. In other words, the depth of the recess of the guide **138** can taper from the first end to being flush with the outside of the nose **130** at the second end. As can also be seen, for example, in **Fig. 2**, the guide **138** can curve from the first end to the second end. The guide **138** can curve to the left or the right when viewing the nose **130** from the front (shown in **Fig. 2** with the guide **138** curving to the right). The curve direction can be selected based on the direction of rotation of the cutting tool **100**. By way of example, if the cutting tool **100** rotates in a clockwise direction about the longitudinal axis **101**, then the guide **138** can curve to the right as shown in **Fig. 2** and vice versa. The guide **138** can assist the metal cuttings **300** that are formed adjacent to the blade **123** during cutting to fall into the guide **138**. As the nose **130** rotates with the cutting insert **122**, the metal cuttings **300** can follow the curvature of the guide **138** and flow past the outside of the nose **130** and down into the tubing string **200**.

[0029] The dimensions of the guide **138** can vary and can be selected based in part on the anticipated size and/or volume of metal cuttings **300** that are to be produced during cutting. By way of example, the width of the first end of the recessed portion can range from 0.5 to 1.5 inches. Additionally, the length of the guide **138** from the first end to the second end can range from 1 to 3 inches. In this manner, the guide **138** can be used in conjunction with the spiral cutout **131** to remove the metal cuttings **300** from the areas around the cutting insert **122** and nose **130**.

[0030] The components of the cutting tool **100**, for example, the interface sub-assembly **110**, the slide sub-assembly **120**, the cutting insert **122**, and the nose **130** can be made from a variety of materials used for cutting tools to cut through a tubing string.

[0031] **Figs. 7A and 7B** are photographs of the cutting tool **100** used to remove metal cuttings. The cutting tool **100** was rotated clockwise about a longitudinal axis when viewed from the top of the tool, for example as shown in **Fig. 2**. The photographs show the tool when viewed facing the bottom of the tool and nose; thus, the rotation is counterclockwise about the axis in these views. As can be seen in **Fig. 7A**, a first chip or metal cutting is formed as the tool begins to rotate and cut into the tubing string. As the tool continues to rotate, the first chip is pushed through the guide at time t_1 and completely removed from the tool at t_2. A second chip is formed at time t_3 and removed from the tool at t_4. As can be seen in **Fig. 7B**, a chip or metal cutting is formed as the tool begins to rotate and cut into the tubing string and becomes trapped between

the top of the nose and the inside of the tubing string. As the tool continues to rotate, the chip is pushed through the guide by the spiral cutouts at time t_1 and completely removed from the tool at t_2. Accordingly, the spiral cutout **131** and the optional guide **138** are highly effective at removing metal cuttings from the tool and preventing the metal cuttings from becoming lodged around the outside of the cutting insert **122** and inside of the tubing string, which could jam the cutting tool and possibly prevent retraction of the cutting insert **122**.

[0032] The methods include introducing the cutting tool **100** within the tubing string **200**. The tubing string **200** can be located within a wellbore of a well. The well can be, without limitation, an oil, gas, or water production well, an injection well, or a geothermal well. The well can also be an offshore well. The methods can include rotating the cutting insert **122** and the nose **130** around a longitudinal axis **101** of the cutting tool **100**. As the components are rotated, the blade **123** of the cutting insert **122** can cut into the inside of the tubing string **200**. The methods can include allowing the blade to cut through the tubing string. The step of allowing can include continued rotation of the cutting insert and the nose for a desired amount of time. The desired amount of time can be a time greater than or equal to the anticipated time needed to cut entirely through the tubing string, for example, based on the thickness of the tubing string and the material making up the tubing string to be cut. The methods can also include retracting the cutting insert after the tubing string has been cut through. The methods can also include removing the cutting tool from the tubing string after the tubing string has been cut through and the cutting insert has been retracted.

[0033] An embodiment of the present disclosure is a cutting tool for cutting a tubing string in a wellbore comprising: a cutting insert; a blade located at an end of the cutting insert; and a nose comprising a spiral cutout located adjacent to the cutting insert. Optionally, the cutting tool further comprises a body, an interface sub-assembly, a slide sub-assembly, and a longitudinal axis. Optionally, the cutting tool further comprises wherein the interface sub-assembly, the slide sub-assembly, the cutting insert, and the nose are rotated around the longitudinal axis. Optionally, the cutting tool further comprises wherein the spiral cutout has a length ranging from 0.5 inch to 1.5 inches. Optionally, the cutting tool further comprises wherein the spiral cutout comprises a plurality of crests and roots. Optionally, the cutting tool further comprises wherein the spiral cutout has a pitch ranging from 0.1 to 0.5 inch. Optionally, the cutting tool further comprises wherein a depth of thread of the spiral cutout ranges from 0.02

to 0.05 inch. Optionally, the cutting tool further comprises wherein the spiral cutout forms a right-hand spiral or a left-hand spiral. Optionally, the cutting tool further comprises wherein the nose and the cutting insert are configured to rotate in a clockwise direction about a longitudinal axis of the cutting tool as viewed from the top of the cutting tool, and wherein the spiral cutout has a left-hand spiral. Optionally, the cutting tool further comprises wherein the nose and the cutting insert are configured to rotate in a counterclockwise direction about a longitudinal axis of the cutting tool as viewed from the top of the cutting tool, and wherein the spiral cutout has a right-hand spiral. Optionally, the cutting tool further comprises a guide, wherein the guide is a recessed portion on the nose that is located underneath the blade. Optionally, the cutting tool further comprises wherein the guide comprises a first end that is located directly underneath the blade and a second end that is located opposite from the first end, and wherein the guide has a recessed depth that is greater at a first end than the second end. Optionally, the cutting tool further comprises wherein the guide curves from the first end to the second end. Optionally, the cutting tool further comprises wherein the nose and the cutting insert are configured to rotate in a clockwise direction about a longitudinal axis of the cutting tool as viewed from the top of the cutting tool, and wherein the guide curves to the left from the first end to the second end as viewed from the top of the cutting tool. Optionally, the cutting tool further comprises wherein the nose and the cutting insert are configured to rotate in a counterclockwise direction about a longitudinal axis of the cutting tool as viewed from the top of the cutting tool, and wherein the guide curves to the right from the first end to the second end as viewed from the top of the cutting tool. Optionally, the cutting tool further comprises wherein a width of the first end ranges from 0.5 to 1.5 inches. Optionally, the cutting tool further comprises wherein a length of the guide from the first end to the second end ranges from 1 to 3 inches.

[0034] Another embodiment of the present disclosure is a method of cutting through a tubing string within a wellbore comprising: introducing a cutting tool into the wellbore, wherein the cutting tool comprises: a cutting insert; a blade located at an end of the cutting insert; and a nose comprising a spiral cutout located adjacent to the cutting insert; rotating the cutting insert and the nose around a longitudinal axis of the cutting tool; and allowing the blade to cut through the tubing string. Optionally, the method further comprises a body, an interface sub-assembly, a slide sub-assembly, and a longitudinal axis. Optionally, the method further comprises wherein the interface sub-assembly, the slide sub-assembly, the cutting insert, and the

nose are rotated around the longitudinal axis. Optionally, the method further comprises wherein the spiral cutout has a length ranging from 0.5 inch to 1.5 inches. Optionally, the method further comprises wherein the spiral cutout comprises a plurality of crests and roots. Optionally, the method further comprises wherein the spiral cutout has a pitch ranging from 0.1 to 0.5 inch. Optionally, the method further comprises wherein a depth of thread of the spiral cutout ranges from 0.02 to 0.05 inch. Optionally, the method further comprises wherein the spiral cutout forms a right-hand spiral or a left-hand spiral. Optionally, the method further comprises wherein the nose and the cutting insert are configured to rotate in a clockwise direction about a longitudinal axis of the cutting tool as viewed from the top of the cutting tool, and wherein the spiral cutout has a left-hand spiral. Optionally, the method further comprises wherein the nose and the cutting insert are configured to rotate in a counterclockwise direction about a longitudinal axis of the cutting tool as viewed from the top of the cutting tool, and wherein the spiral cutout has a right-hand spiral. Optionally, the method further comprises a guide, wherein the guide is a recessed portion on the nose that is located underneath the blade. Optionally, the method further comprises wherein the guide comprises a first end that is located directly underneath the blade and a second end that is located opposite from the first end, and wherein the guide has a recessed depth that is greater at a first end than the second end. Optionally, the method further comprises wherein the guide curves from the first end to the second end. Optionally, the method further comprises wherein the nose and the cutting insert are configured to rotate in a clockwise direction about a longitudinal axis of the cutting tool as viewed from the top of the cutting tool, and wherein the guide curves to the left from the first end to the second end as viewed from the top of the cutting tool. Optionally, the method further comprises wherein the nose and the cutting insert are configured to rotate in a counterclockwise direction about a longitudinal axis of the cutting tool as viewed from the top of the cutting tool, and wherein the guide curves to the right from the first end to the second end as viewed from the top of the cutting tool. Optionally, the method further comprises wherein a width of the first end ranges from 0.5 to 1.5 inches. Optionally, the method further comprises wherein a length of the guide from the first end to the second end ranges from 1 to 3 inches.

[0035] Therefore, the various embodiments are well adapted to attain the ends and advantages mentioned as well as those that are inherent therein. The particular embodiments disclosed above are illustrative only, as the various embodiments may be modified and practiced

in different but equivalent manners apparent to those skilled in the art having the benefit of the teachings herein. Furthermore, no limitations are intended to the details of construction or design herein shown, other than as described in the claims below. It is, therefore, evident that the particular illustrative embodiments disclosed above may be altered or modified and all such variations are considered within the scope and spirit of the present invention.

[0036] As used herein, the words "comprise," "have," "include," and all grammatical variations thereof are each intended to have an open, non-limiting meaning that does not exclude additional elements or steps. While compositions, systems, and methods are described in terms of "comprising," "containing," or "including" various components or steps, the compositions, systems, and methods also can "consist essentially of" or "consist of" the various components and steps. It should also be understood that, as used herein, "first," "second," and "third," are assigned arbitrarily and are merely intended to differentiate between two or more ends, metal cuttings, *etc.*, as the case may be, and do not indicate any sequence. Furthermore, it is to be understood that the mere use of the word "first" does not require that there be any "second," and the mere use of the word "second" does not require that there be any "third," *etc.*

[0037] Whenever a numerical range with a lower limit and an upper limit is disclosed, any number and any included range falling within the range is specifically disclosed. In particular, every range of values (of the form, "from about a to about b," or, equivalently, "from approximately a to b," or, equivalently, "from approximately a - b") disclosed herein is to be understood to set forth every number and range encompassed within the broader range of values. Also, the terms in the claims have their plain, ordinary meaning unless otherwise explicitly and clearly defined by the patentee. Moreover, the indefinite articles "a" or "an," as used in the claims, are defined herein to mean one or more than one of the elements that it introduces. If there is any conflict in the usages of a word or term in this specification and one or more patent(s) or other documents that may be incorporated herein by reference, the definitions that are consistent with this specification should be adopted.

What is claimed is:

1. A cutting tool for cutting a tubing string in a wellbore comprising:
a cutting insert;
a blade located at an end of the cutting insert; and
a nose comprising a spiral cutout located adjacent to the cutting insert.

2. The cutting tool according to Claim 1, further comprising a body, an interface sub-assembly, a slide sub-assembly, and a longitudinal axis.

3. The cutting tool according to Claim 2, wherein the interface sub-assembly, the slide sub-assembly, the cutting insert, and the nose are rotated around the longitudinal axis.

4. The cutting tool according to Claims 1 or 2, wherein the spiral cutout has a length ranging from 0.5 inch to 1.5 inches.

5. The cutting tool according to any one of Claims 1, 2, or 4, wherein the spiral cutout comprises a plurality of crests and roots.

6. The cutting tool according to any one of Claims 1, 2, 4, or 5, wherein the spiral cutout has a pitch ranging from 0.1 to 0.5 inch.

7. The cutting tool according to any one of Claims 1, 2, or 4 – 6, wherein a depth of thread of the spiral cutout ranges from 0.02 to 0.05 inch.

8. The cutting tool according to any one of Claims 1, 2, or 4 – 7, wherein the spiral cutout forms a right-hand spiral or a left-hand spiral.

9. The cutting tool according to Claim 8, wherein the nose and the cutting insert are configured to rotate in a clockwise direction about a longitudinal axis of the cutting tool as viewed from the top of the cutting tool, and wherein the spiral cutout has a left-hand spiral.

10. The cutting tool according to Claim 8, wherein the nose and the cutting insert are configured to rotate in a counterclockwise direction about a longitudinal axis of the cutting tool as viewed from the top of the cutting tool, and wherein the spiral cutout has a right-hand spiral.

11. The cutting tool according to any one of Claims 1, 2, or 4 – 8, further comprising a guide, wherein the guide is a recessed portion on the nose that is located underneath the blade.

12. The cutting tool according to Claim 11, wherein the guide comprises a first end that is located directly underneath the blade and a second end that is located opposite from the first end, and wherein the guide has a recessed depth that is greater at a first end than the second end.

13. The cutting tool according to Claim 12, wherein the guide curves from the first end to the second end.

14. The cutting tool according to Claim 13, wherein the nose and the cutting insert are configured to rotate in a clockwise direction about a longitudinal axis of the cutting tool as viewed from the top of the cutting tool, and wherein the guide curves to the left from the first end to the second end as viewed from the top of the cutting tool.

15. The cutting tool according to Claim 13, wherein the nose and the cutting insert are configured to rotate in a counterclockwise direction about a longitudinal axis of the cutting tool as viewed from the top of the cutting tool, and wherein the guide curves to the right from the first end to the second end as viewed from the top of the cutting tool.

16. The cutting tool according to Claim 12, wherein a width of the first end ranges from 0.5 to 1.5 inches.

17. The cutting tool according to Claim 12, wherein a length of the guide from the first end to the second end ranges from 1 to 3 inches.

18. A method of cutting through a tubing string within a wellbore comprising:

introducing a cutting tool into the wellbore, wherein the cutting tool comprises:

a cutting insert;

a blade located at an end of the cutting insert; and

a nose comprising a spiral cutout located adjacent to the cutting insert;

rotating the cutting insert and the nose around a longitudinal axis of the cutting tool; and

allowing the blade to cut through the tubing string.

19. The method according to Claim 18, wherein the nose and the cutting insert rotate in a clockwise direction about the longitudinal axis and the spiral cutout has a left-hand spiral, or wherein the nose and the cutting insert rotate in a counterclockwise direction about the longitudinal axis and the spiral cutout has a right-hand spiral.

20. The method according to Claims 18 or 19, wherein the cutting tool further comprises a guide, and wherein the guide is a recessed portion on the nose that is located underneath the blade.

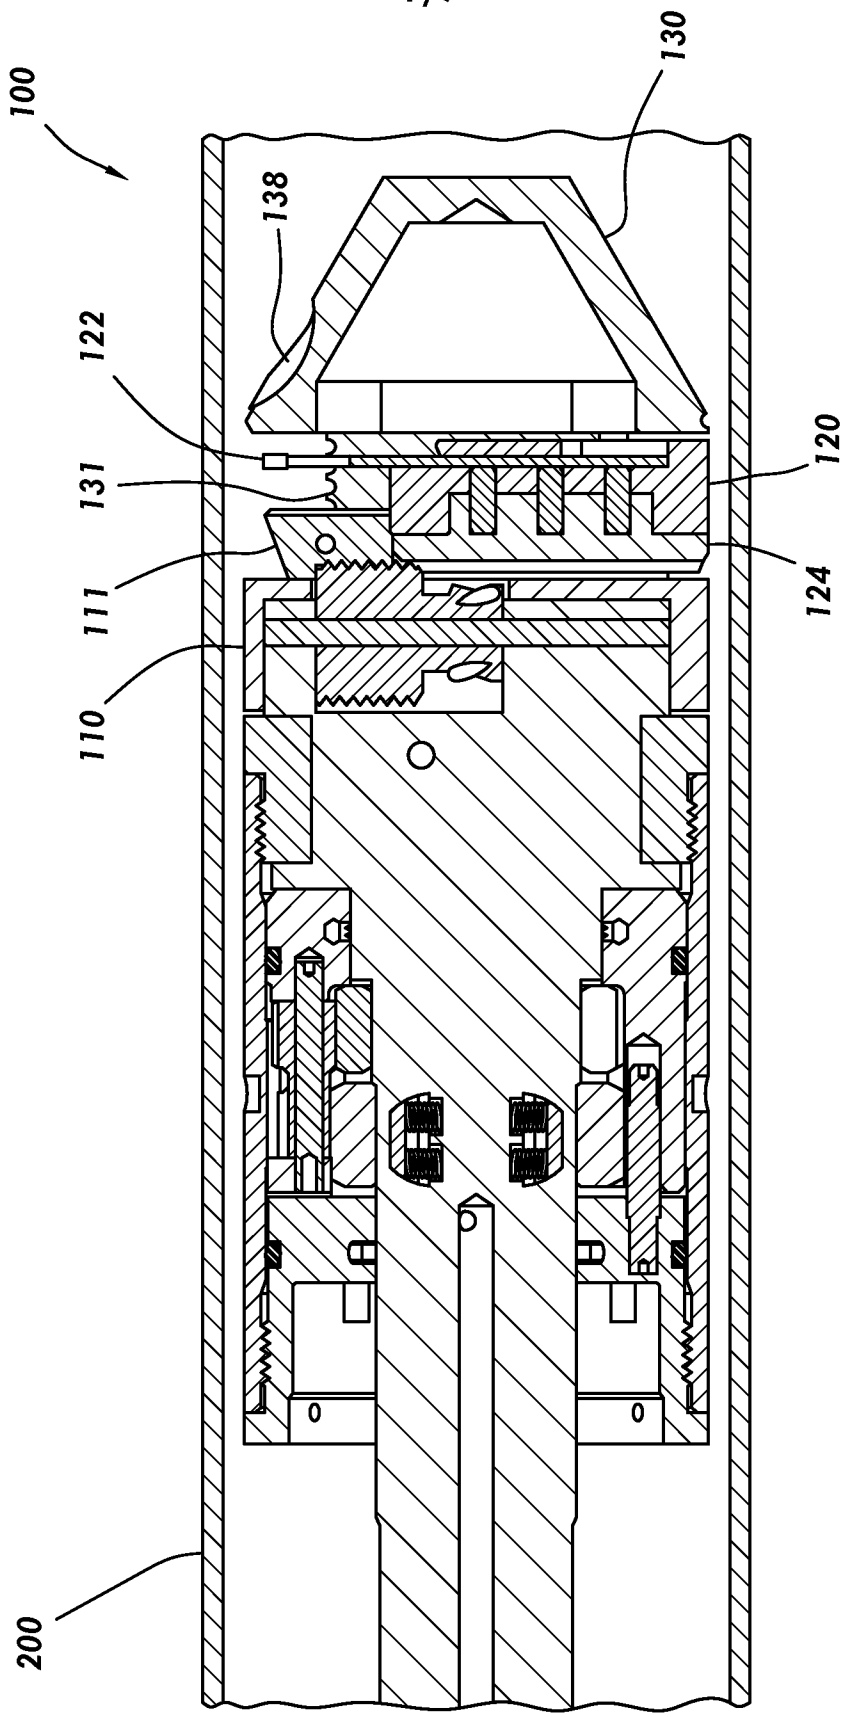


FIG. 1A

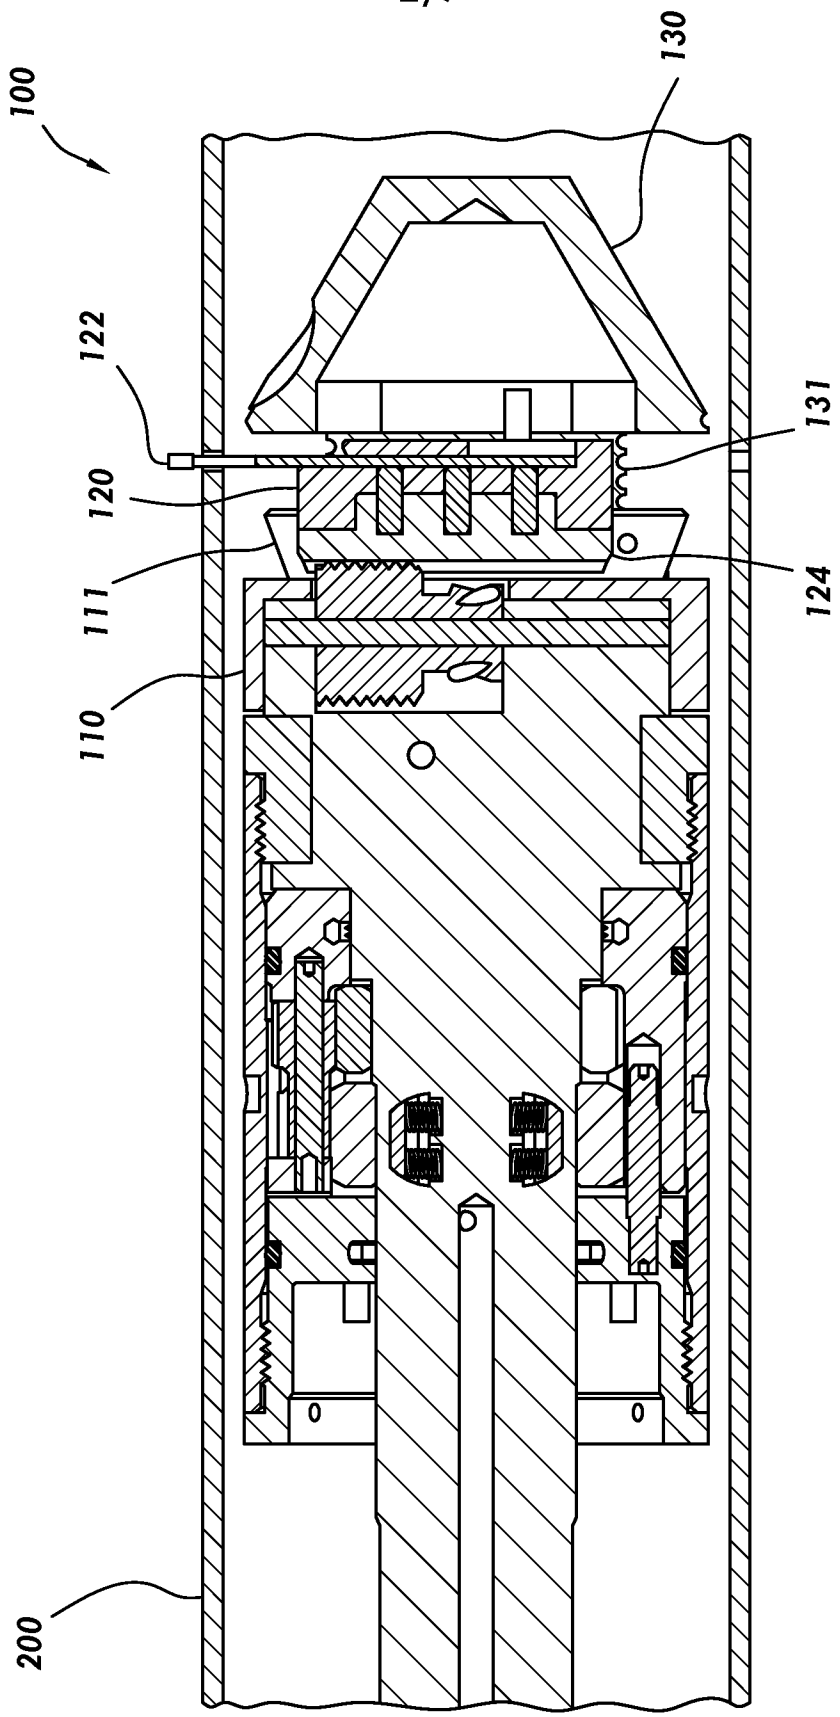


FIG. 1B

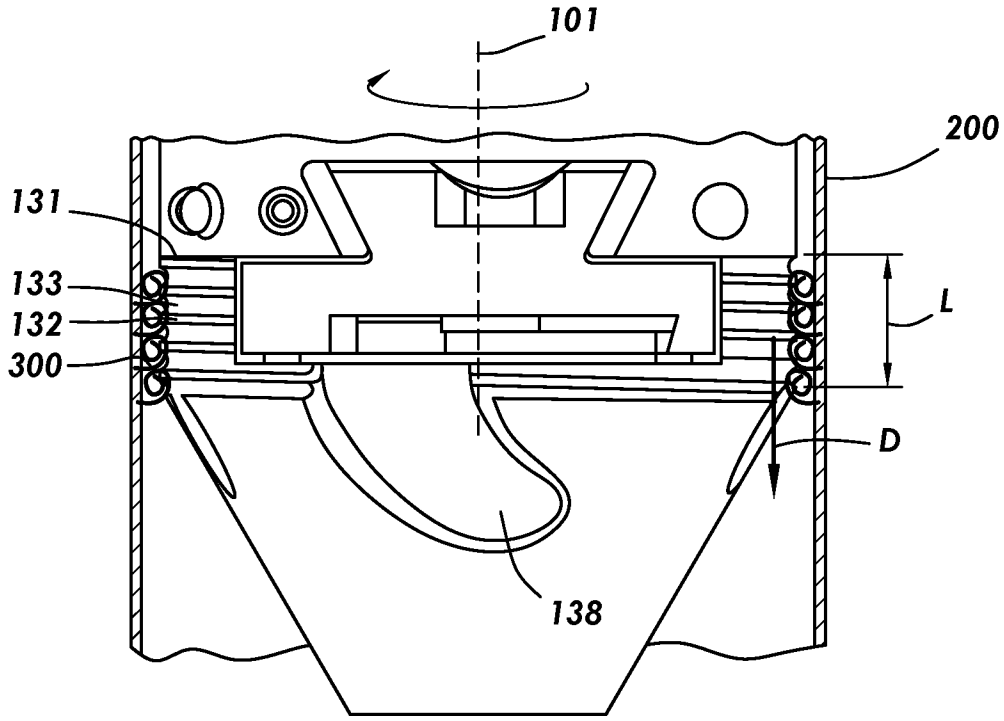


FIG. 2

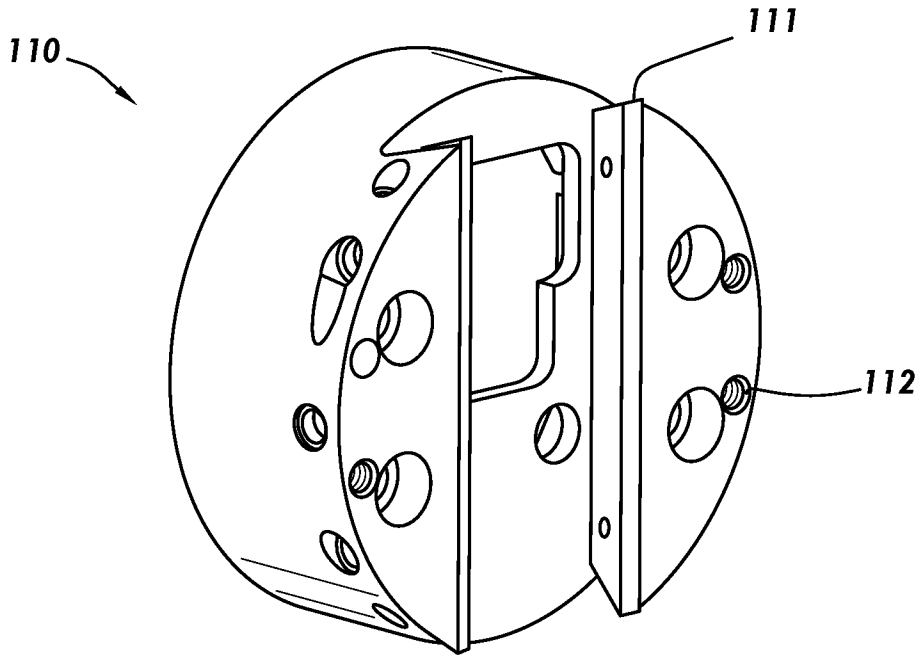


FIG. 3

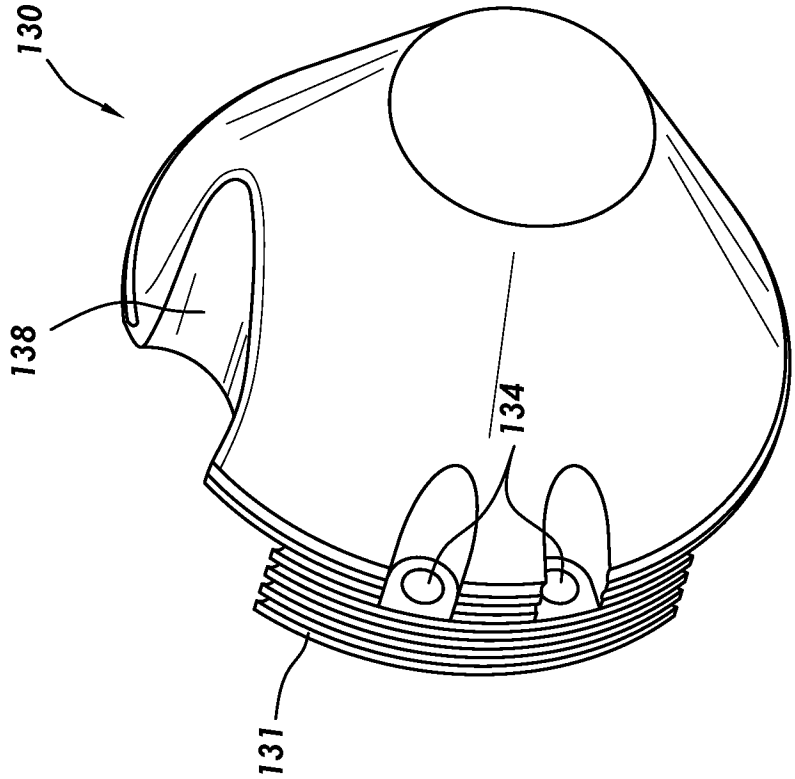


FIG. 5

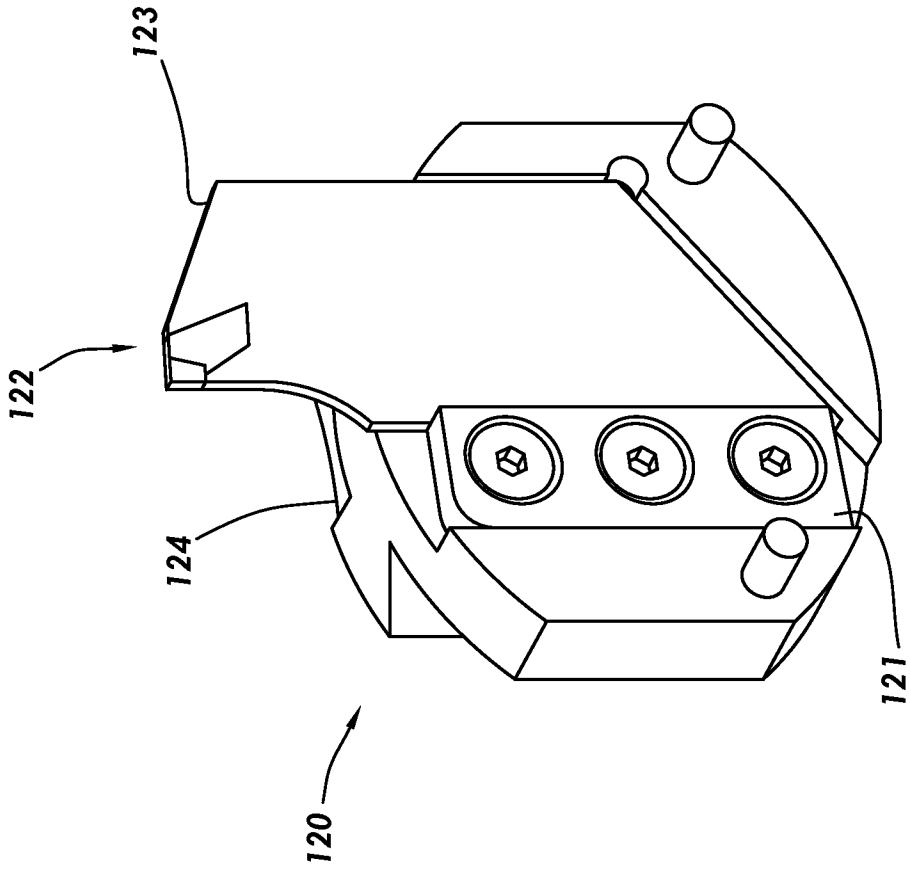


FIG. 4

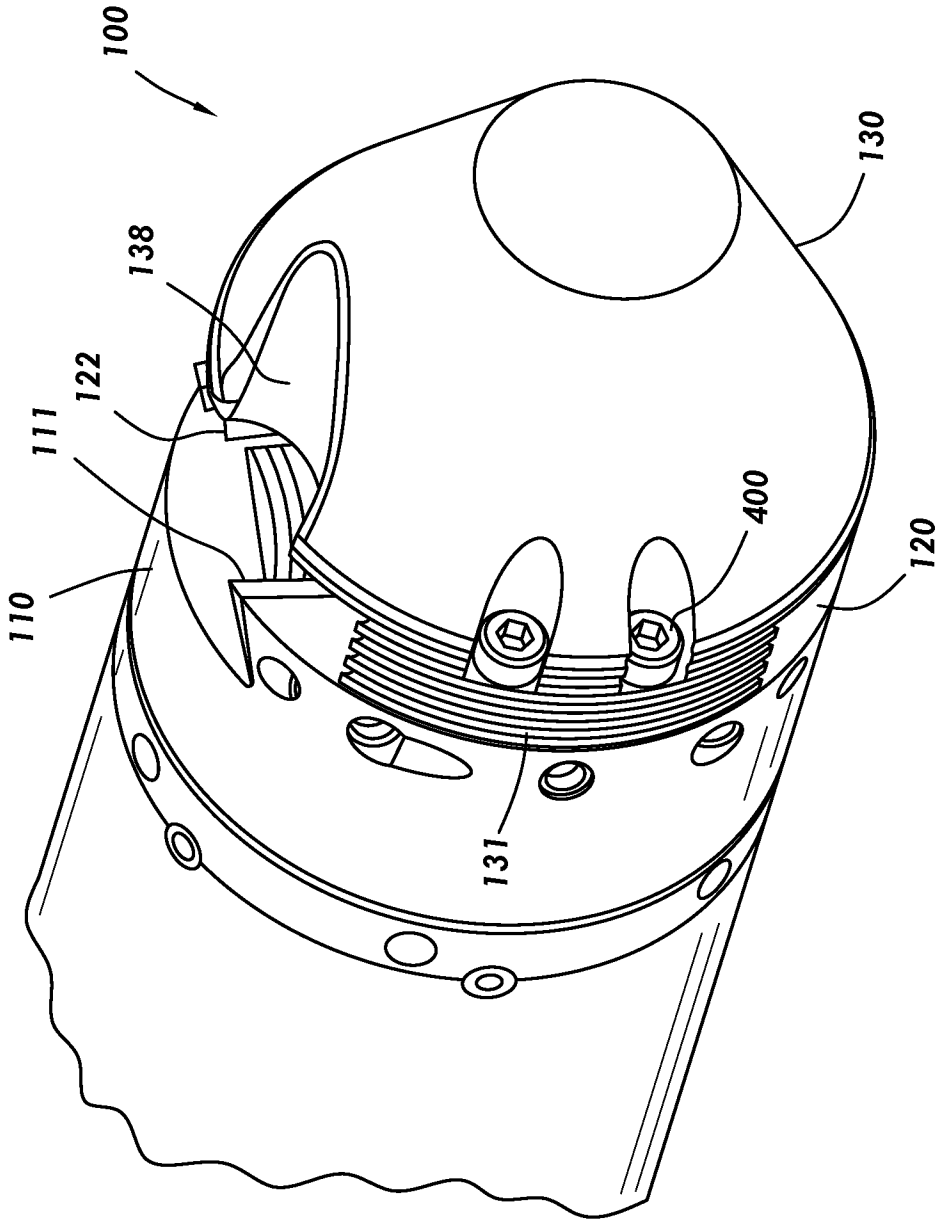


FIG. 6

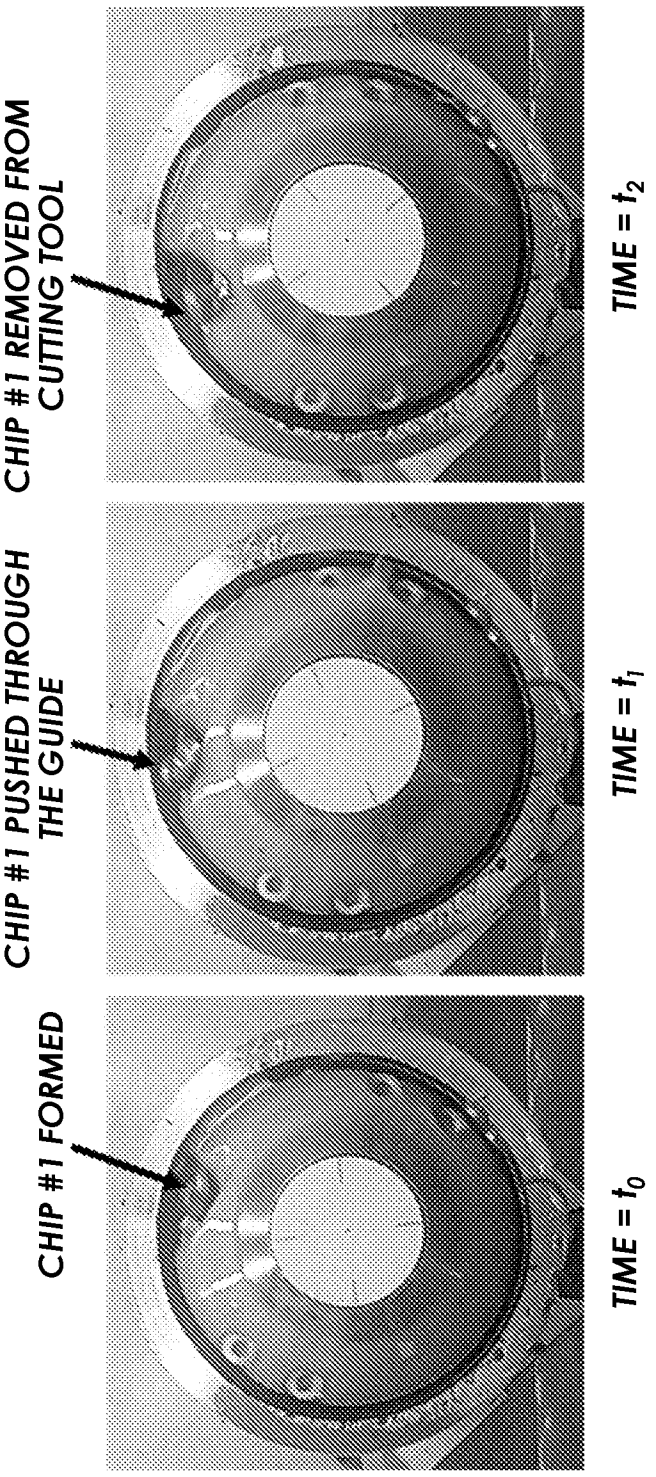

CHIP #1 FORMED
TIME = t_0
CHIP #1 PUSHED THROUGH THE GUIDE
TIME = t_1
CHIP #1 REMOVED FROM CUTTING TOOL
TIME = t_2
CHIP #1
CHIP #2 FORMED
TIME = t_3
CHIP #2 REMOVED FROM CUTTING TOOL
TIME = t_4

FIG. 7A

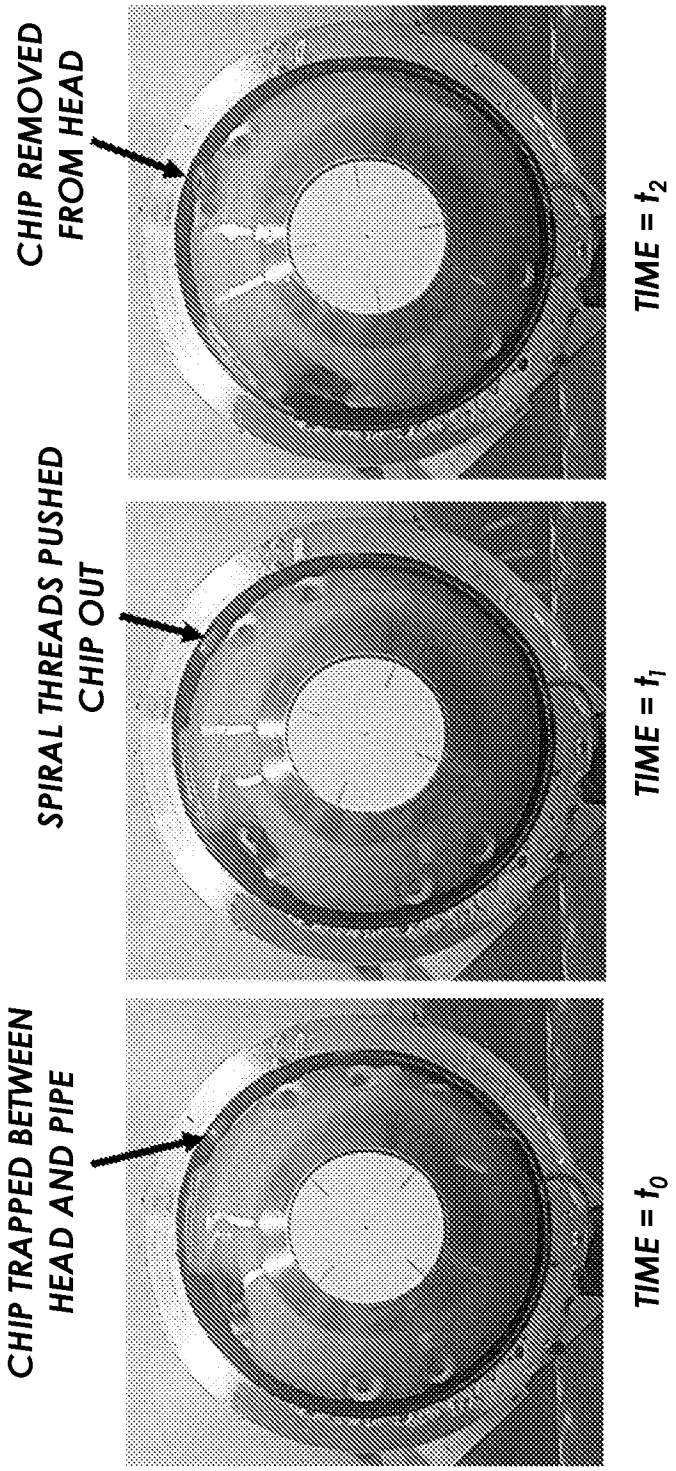

CHIP TRAPPED BETWEEN HEAD AND PIPE
SPIRAL THREADS PUSHED CHIP OUT
CHIP REMOVED FROM HEAD
TIME = t_0
TIME = t_1
TIME = t_2

FIG. 7B

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2022/072301

A. CLASSIFICATION OF SUBJECT MATTER

E21B 29/00(2006.01)i; **E21B 23/00**(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 29/00(2006.01); E21B 17/14(2006.01); E21B 23/00(2006.01); E21B 3/00(2006.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models
Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: cutting tool, blade, nose, spiral cutout, guide

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2020-0362655 A1 (ARDYNE HOLDINGS LIMITED) 19 November 2020 (2020-11-19) paragraphs [0035], [0044], [0061], [0074], [0085] and figures 2B, 4A-4B	1-10,18-19
Y		11-17,20
Y	US 2002-0112894 A1 (CARAWAY, DOUGLAS B.) 22 August 2002 (2002-08-22) paragraphs [0021]-[0022] and figure 1	11-17,20
A	WO 2018-182899 A1 (BAKER HUGHES, A GE COMPANY, LLC) 04 October 2018 (2018-10-04) paragraph [0009] and figure 2	1-20
A	WO 99-37881 A2 (DOWNHOLE PRODUCTS PLC) 29 July 1999 (1999-07-29) page 5, line 24 - page 6, line 10 and figures 1, 5	1-20
A	US 2011-0308813 A1 (BARRON et al.) 22 December 2011 (2011-12-22) paragraph [0063] and figure 3	1-20

☐ Further documents are listed in the continuation of Box C. ☑ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"D" document cited by the applicant in the international application
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
08 February 2023	**08 February 2023**

Name and mailing address of the ISA/KR	Authorized officer
Korean Intellectual Property Office **189 Cheongsa-ro, Seo-gu, Daejeon** **35208, Republic of Korea**	**PARK, Tae Wook**
Facsimile No. **+82-42-481-8578**	Telephone No. **+82-42-481-3405**

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/US2022/072301

Patent document cited in search report	Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
US 2020-0362655 A1	19 November 2020	EP 3673143 A1	01 July 2020
		GB 2565804 A	27 February 2019
		GB 2565804 B	18 November 2020
		WO 2019-038535 A1	28 February 2019
US 2002-0112894 A1	22 August 2002	None	
WO 2018-182899 A1	04 October 2018	AU 2018-243512 A1	07 November 2019
		AU 2018-243512 B2	01 October 2020
		CA 3058132 A1	04 October 2018
		CA 3058132 C	23 November 2021
		GB 2574992 A	25 December 2019
		GB 2574992 B	03 November 2021
		NO 20191207 A1	10 October 2019
		US 10450820 B2	22 October 2019
		US 2018-0283120 A1	04 October 2018
WO 99-37881 A2	29 July 1999	AU 2172699 A	09 August 1999
		DE 69929020 T2	24 August 2006
		DK 0995008 T3	08 May 2006
		DK 1632639 T3	05 December 2011
		EP 0995008 A2	26 April 2000
		EP 0995008 B1	21 December 2005
		EP 1632639 A2	08 March 2006
		EP 1632639 A3	10 December 2008
		EP 1632639 B1	17 August 2011
		GB 2333542 A	28 July 1999
		GB 2333542 B	11 December 2002
		GB 2339227 A	19 January 2000
		GB 2339227 B	20 November 2002
		US 2002-0096368 A1	25 July 2002
		US 6401820 B1	11 June 2002
		US 6659173 B2	09 December 2003
		WO 99-37881 A2	29 July 1999
		WO 99-37881 A3	07 October 1999
US 2011-0308813 A1	22 December 2011	AU 2010-205505 A1	28 July 2011
		AU 2010-205505 B2	11 September 2014
		CA 2748938 A1	22 July 2010
		CA 2748938 C	12 July 2016
		DK 2417326 T3	08 June 2015
		EP 2417326 A2	15 February 2012
		EP 2417326 B1	25 March 2015
		MY 157606 A	30 June 2016
		SG 172888 A1	29 August 2011
		US 8657036 B2	25 February 2014
		WO 2010-082051 A2	22 July 2010
		WO 2010-082051 A3	11 November 2010