

(51) International Patent Classification:
G02B 6/32 (2006.01)(21) International Application Number:
PCT/US20 11/041035(22) International Filing Date:
20 June 2011 (20.06.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/829,787 2 July 2010 (02.07.2010) US(71) Applicant (for all designated States except US): **ST. JUDE MEDICAL, INC.** [US/US]; One Lillehei Plaza, St. Paul, Minnesota 55117-9913 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LIU, Yu** [CA/US]; 66 Rockview Drive, Irvine, California 92612 (US).(74) Agents: **LEUNG, Chun-Pok** et al; Mattingly & Malur, PC, 1800 Diagonal Rd., Suite 370, Alexandria, Virginia 22314 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FIBEROPTIC DEVICE WITH LONG FOCAL LENGTH GRADIENT-INDEX OR GRIN FIBER LENS

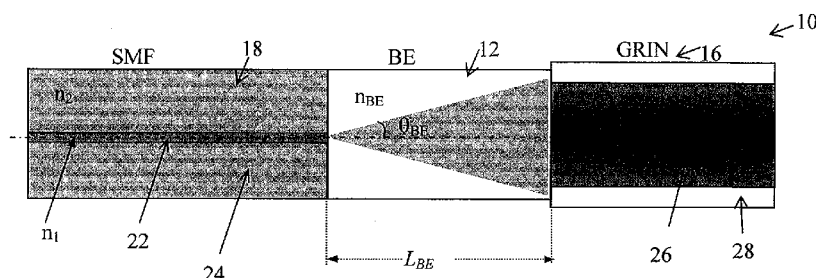**FIG. 1**

(57) **Abstract:** A fiberoptic device achieves a substantially longer focal length by placing a beam expander between the terminal end of an optical fiber and a gradient-index (GRIN) lens to simulate free space therebetween. In one embodiment, a fiberoptic device comprises an optical fiber having a fiber core and an end through which a light beam emits from the fiber core; a beam expander having a first end coupled to the end of the optical fiber and having a second end, the beam expander permitting the light beam emitting from the fiber core to pass from the first end to the second end and to expand from the first end to a larger size at the second end; and a gradient-index fiber lens coupled to the second end of the beam expander to receive the light beam from the beam expander and focus the light beam.



FIBEROPTIC DEVICE WITH LONG FOCAL LENGTH GRADIENT-INDEX OR GRIN FIBER LENS

BACKGROUND OF THE INVENTION

[0001] The present invention relates generally to fiberoptic devices and, more specifically, to fiberoptic devices with long focal length GRIN (gradient-index or graded refractive index) fiber lens.

[0002] A GRIN lens has a refractive index whose value varies with radial distance from the axis of the lens. The nontrivial variation in refractive index causes light refraction and gives the GRIN lens focusing capabilities. See, e.g., U.S. Patent No. 6,542,665, the entire disclosure of which is incorporated herein by reference. Many optical devices use lenses to focus, collimate, or expand light beams. When a GRIN fiber is cut into a specific length, the short length GRIN fiber can focus a light beam. For example, when a GRIN lens is fused to a terminal end of an optical fiber, it can focus the light beam emitted by the optical fiber. See, e.g., William A. Reed et al., "Gradient-index fiber-optic microprobes for minimally invasive in vivo low-coherence interferometry," Optics Letters, Vol. 27, No. 20, October 15, 2002, the entire disclosure of which is incorporated herein by reference. However, the focus length of the GRIN lens is very short (typically around 0.35 mm), which seriously restricts its applications.

BRIEF SUMMARY OF THE INVENTION

[0003] In various applications such as OCT (Optical Coherence Tomography) imaging for imaging biological tissue or the like, it is desirable to achieve a relatively long focal length that is longer than that provided by a GRIN lens.

[0004] Exemplary embodiments of the invention provide a fiberoptic device that uses a GRIN lens for focusing a light beam emitted by an optical fiber, but achieves a substantially longer focal length than that of a GRIN lens alone by placing a beam expander between the terminal end of the optical fiber and the GRIN lens to simulate free space therebetween.

[0005] In accordance with an aspect of the present invention, a fiberoptic device comprises an optical fiber having a fiber core and an end through which a light beam emits from the fiber core; a beam expander having a first end coupled to the end of the optical fiber and having a second end, the beam expander permitting the light beam emitting from the fiber core to pass from the first end to the second end and to expand from the first end to a larger size at the second end; and a gradient-index fiber lens coupled to the second end of the beam expander to receive the light beam from the beam expander and focus the light beam.

[0006] In some embodiments, the optical fiber is a single mode fiber. The beam expander comprises a solid piece of glass such as, for example, a no core fiber (NCF) or a piece of step-index multimode fiber (SI-MMF). The gradient-index fiber lens has a core surrounded by a cladding, the core having a refractive index that varies with a radial distance from an axis of the gradient-index fiber lens, decreasing radially outwardly toward the cladding. The gradient-index fiber lens has a refractive index profile expressed as

$$n(\rho) = \begin{cases} n_{1,grin} \sqrt{1 - 2(\rho/a)^2 \Delta} & (\rho \leq a) \\ n_{2,grin} & (\rho > a) \end{cases}$$

[0007] where a is a radius of the core of the gradient-index fiber lens, $n_{1,grin}$ is a refractive index of the core of the gradient-index fiber lens, and $n_{2,grin}$ is a refractive index of the cladding of the gradient-index fiber lens, $0 \leq p \leq a$ represents a radius of light trace, and a parameter Δ is expressed as

$$\Delta = \frac{n_{1,grin}^2 - n_{2,grin}^2}{2n_{2,grin}^2} = \frac{NA_{grin}^2}{2n_{2,grin}^2}$$

[0008] where NA_{grin} is a numerical aperture of the gradient-index fiber lens.

[0009] In specific embodiments, the core of the gradient-index fiber lens has a diameter D_{grin} , which is not larger than an outer diameter of the beam expander. The core of the gradient-index fiber lens has a diameter D_{grin} ; and the beam expander has a length between the first end and the second end, L_{BE} , which is determined by

$$D_1 = D_{core} + 2L_{BE} \tan(\theta_{BE})$$

[0010] where D_1 is a beam diameter which is approximately equal to the diameter D_{ginn} of the gradient-index fiber lens, the optical fiber has a cladding and a core with a core diameter of D_{core} , and θ_{BE} is a divergent angle of the light beam exiting the optical fiber. Furthermore,

$$\theta_{BE} = \text{asin}(NA/n_{BE})$$

[0011] where n_{BE} is a refractive index of the beam expander, and NA is a numerical aperture of the optical fiber, $NA = \sqrt{n_1^2 - n_2^2}$, n_1 is a refractive index of the core of the optical fiber, and n_2 is a refractive index of the cladding of the optical

fiber. The gradient-index fiber lens focuses the light beam with a range of focal length/which is approximated by an expression

$$f < \left(1 - \frac{1}{e^2}\right)^2 \frac{1}{2.44A} \left[\frac{NA}{n_0 \sqrt{2}A} D_{grin} + D_{core} \right]^2$$

$$\Delta = \frac{n_{1,grin}^2 - n_{2,grin}^2}{2n_{1,grin}^2} = \frac{NA_{grin}^2}{2n_{1,grin}^2}$$

[0012] where $n_{1,grin}$ is a refractive index of the core of the gradient-index fiber lens, and $n_{2,grin}$ is a refractive index of the cladding of the gradient-index fiber lens, NA_{grin} is a numerical aperture of the gradient-index fiber lens, λ is a wavelength of the light beam in vacuum, and $A = 1 - \frac{1}{e^2} \approx 86.5\%$. For a given focal length/and a given D_{core} , the expression is used to estimate D_{grin} .

[0013] In accordance with another aspect of the invention, a device for focusing a light beam emitting from an end of an optical fiber comprises a beam expander having a first end to be coupled to the end of the optical fiber and having a second end, the beam expander permitting the light beam emitting from the optical fiber to pass from the first end to the second end and to expand from the first end to a larger size at the second end; and a gradient-index fiber lens coupled to the second end of the beam expander to receive the light beam from the beam expander and focus the light beam.

[0014] In accordance with another aspect of the invention, a fiberoptic device comprises an optical fiber having a fiber core and an end through which a light beam emits from the fiber core; means coupled to the end of the optical fiber for emulating

free space thereby allowing the light beam to expand from the fiber core at the end of the optical fiber to a larger size; and a gradient-index fiber lens coupled to the means for emulating free space to receive the larger size light beam and focus the light beam.

[0015] In accordance with another aspect of the invention, a fiberoptic device comprises an optical fiber having a fiber core and an end through which a light beam emits from the fiber core; a beam expander having a first end coupled to the end of the optical fiber and having a second end, the beam expander permitting the light beam emitting from the fiber core to pass from the first end to the second end and to expand from the first end to a larger size at the second end, the beam expander comprising a step-index multimode fiber; and a gradient-index fiber lens coupled to the second end of the beam expander to receive the light beam from the beam expander and focus the light beam.

[0016] These and other features and advantages of the present invention will become apparent to those of ordinary skill in the art in view of the following detailed description of the specific embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] FIG. 1 is a cross-sectional view of a fiberoptic device in which a beam expander and a GRIN lens are placed at the end of an optical fiber.

[0018] FIG. 2 illustrates an optical schematic of a parallel beam focused by a lens.

[0019] FIG. 3 illustrates an optical schematic of a light emitting from a single mode fiber.

[0020] FIG. 4 is a table showing the divergent angles of a light beam emitting from a single mode fiber passing through different materials.

[0021] FIG. 5 illustrates an optical schematic of lights propagation along a GRIN fiber, showing periodical beam focusing.

[0022] FIG. 6 illustrates an optical schematic of lights propagating along a GRIN fiber, showing that a quarter period length could collimate a beam into a parallel beam if the diffraction could be ignored.

[0023] FIG. 7 is a table showing experimental results of the focal length for a GRIN fiber spliced onto a single mode fiber and the focal length for a GRIN fiber having a no core fiber as a beam expander spliced between the GRIN fiber and a single mode fiber.

[0024] FIG. 8 is a schematic illustration of an example of a fiberoptic device in which the dimensions of a no core fiber as a beam expander and a GRIN lens that are placed at the end of an optical fiber are selected to achieve a certain long focal length.

[0025] FIG. 9 is a schematic illustration of another example of a fiberoptic device in which the dimensions of a no core fiber as beam expander and a GRIN lens that are placed at the end of an optical fiber are selected to achieve a different long focal length.

[0026] FIG. 10(a) is a diagram of measurement setup for power reflection, and FIG. 10(b) illustrates the measured power reflection with respect to the distance between a mirror and the GRIN fiber lens for three different configurations, including the fiberoptic device of FIG. 9.

[0027] FIG. 11 is a schematic illustration of an example of a fiberoptic device in which the dimensions of a large core step-index multimode fiber and a GRIN lens that are placed at the end of an optical fiber are selected to achieve a very long focal length.

DETAILED DESCRIPTION OF THE INVENTION

[0028] In the following detailed description of the invention, reference is made to the accompanying drawings which form a part of the disclosure, and in which are shown by way of illustration, and not of limitation, exemplary embodiments by which the invention may be practiced. In the drawings, like numerals describe substantially similar components throughout the several views. Further, it should be noted that while the detailed description provides various exemplary embodiments, as described below and as illustrated in the drawings, the present invention is not limited to the embodiments described and illustrated herein, but can extend to other embodiments, as would be known or as would become known to those skilled in the art. Reference in the specification to "one embodiment," "this embodiment," or "these embodiments" means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention, and the appearances of these phrases in various places in the specification are not necessarily all referring to the same embodiment. Additionally, in the following detailed description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. However, it will be apparent to one of ordinary skill in the art that these specific details may not all be needed to practice the present invention. In other circumstances, well-known structures, materials, circuits, processes and interfaces have not been described in detail, and/or may be illustrated in block diagram form, so as to not unnecessarily obscure the present invention.

[0029] In the following description, relative orientation and placement terminology, such as the terms horizontal, vertical, left, right, top and bottom, is used.

It will be appreciated that these terms refer to relative directions and placement in a two dimensional layout with respect to a given orientation of the layout. For a different orientation of the layout, different relative orientation and placement terms may be used to describe the same objects or operations.

[0030] Exemplary embodiments of the invention, as will be described in greater detail below, provide apparatuses and methods for using a GRIN lens to focus a light beam emitted by an optical fiber with the help of a beam expander between the terminal end of the optical fiber and the GRIN lens to achieve a substantially longer focal length than that of a GRIN lens alone.

[0031] FIG. 1 is a cross-sectional view of a fiberoptic device 10 in which a beam expander 12 and a GRIN lens 16 are coupled to the end of an optical fiber 18. In specific embodiments, the beam expander 12 is spliced between the end of the optical fiber 18 and the GRIN lens 16. Of course, any suitable way of coupling the beam expander 12 with the optical fiber 18 on one side and the GRIN lens 16 on the other side may be employed. In FIG. 1, the beam expander 12, GRIN lens 16, and optical fiber 18 are co-axial when they are fused together by using a fusion splicer. In the embodiment shown, they have similar or equal outer diameters. In other embodiments, they may have different outer diameters, as discussed below. The length of the beam expander 12 and the length of the GRIN lens 16 are selected to achieve the desired focal length, as described in detail below.

[0032] The optical fiber 18 has a fiber core 22 surrounded by a cladding 24. The core size of the fiber core 22 is selected in part based on a single mode operation for the wavelength of the light beam. Standard telecommunication optical fibers which have core diameters of $\sim 9 \mu\text{m}$ may be used. The cladding 24 is typically made of pure silicon and the fiber core 22 typically is made largely of silicon doped with a

germanium concentration to raise the refractive index to form a waveguide. In specific embodiments, the optical fiber 18 is a single mode fiber with a core diameter of about 8-10 μm and a cladding diameter of about $125 \pm 2 \mu\text{m}$.

[0033] The beam expander 12 is a solid fiber with preferably uniform and constant properties to emulate free space. Examples of a beam expander include no core fiber (NCF) and step-index multimode fiber (SI-MMF). A NCF has no doped core and is typically a solid piece of glass or pure silica fiber. A SI-MMF has a core with a constant refractive index and a cladding of slightly lower refractive index surrounding the core, and the core is used as a beam expander. The beam expander 12 allows the light beam to expand or diverge to a desirable size before the light beam reaches the GRIN lens 16. The length of the beam expander 12 determines the amount of expansion of the light beam for a given divergent angle $\Theta_b E$, and is selected to achieve the desired expansion. Advantageously, because the beam expander-12 (e.g., NCF or SI-MMF) is spliced to both the optical fiber 18 and the GRIN lens 16, it is automatically aligned and no mechanical fitting is required to align the beam expander 12 axially with the optical fiber 18 and the GRIN lens 16. Besides a solid piece of glass, other examples of emulating free space include the placement of another medium or material with preferably uniform and constant properties between the optical fiber 18 and the GRIN fiber lens 16. To provide an actual free space occupied by air, a mechanical fixture is needed to align the optical fiber 18 and the GRIN fiber lens 16 and to fix their relative positions. The use of a solid beam expander 12 is more desirable than air for several reasons. The solid beam expander 12 provides better temperature stability, there is no need to provide wavelength related coating on the optical fiber 18 and the GRIN fiber lens 16 to reduce surface reflections since splicing a solid beam expander 12 between the two automatically

reduces surface reflection by better than 60 dB for all wavelength, which is difficult to achieve by antireflection coating, and the solid beam expander 12 (e.g., NCF or SI-MMF) is automatically aligned with both the optical fiber 18 and the GRIN lens 16 during manufacturing. Nonetheless, it is understood that a variety of other materials and mediums may be used to emulate free space between the optical fiber 18 and the GRIN lens 16 to achieve a longer focal length in accordance with the present invention.

[0034] The GRIN lens 16 has a circular cylindrical core 26 and an annular cladding 28. In the core 26, the refractive index varies with the radial distance from the axis of the GRIN lens 16. Typically, the core refractive index decreases almost parabolically and radially outwardly toward the cladding 28. In the cladding 28, the refractive index is constant and has a lower value than in the core 26. For beam focusing, the GRIN lens 16 is referred to as an axial GRIN lens with flat surfaces that can focus light just as a normal lens with curved surfaces does.

[0035] 1. Focal Length

[0036] FIG. 2 illustrates an optical schematic of a parallel beam focused by a lens. A parallel beam can be focused by a lens and the size of the focal point is normally determined by the aberration of lenses. For a no aberration ideal lens, the light diffraction plays the main role and needs to be considered. The well-known Rayleigh diffraction angle is expressed as

$$\Delta\delta \approx \frac{1.22\lambda}{A \cdot D} \quad (1)$$

[0037] The full divergent angle is then $2\Delta\delta$, where D is the light beam diameter, $A = 1 - \frac{1}{e} \sim 86.5\%$ is used to count the effective beam diameter when the

intensity reduces to 13.5% of the maximum intensity, and λ is the light wavelength in vacuum. The geometry convergent angle of the focused beam is simply calculated as

$$A\Theta \approx \frac{A-D/2}{f} \quad (2)$$

[0038] In Eq. (2), f is the focal length, the distance between focal point and the main plane of lenses. Clearly, the convergent angle must be larger than the divergent Rayleigh angle ($A\Theta > A\delta$). The range of the focal length is then obtained as

$$f < \left(1 - \frac{1}{e^2}\right)^2 \frac{D^2}{2AA\lambda} \quad (3)$$

[0039] 2. Divergent Angle of Single Mode Fiber

[0040] FIG. 3 illustrates an optical schematic of a light emitting from a single mode fiber, which is a step-index single mode fiber. The core and cladding indexes are n_1 and n_2 , respectively. When a light beam is emitting from a fiber core at an angle of θ_{BE} , and the diffraction light is incident onto the boundary of fiber core and cladding at a critical angle, the two reflection equations are expressed as

$$\begin{cases} n_{BE} \sin(\theta_{BE}) = n_1 \sin(\alpha) \\ n_1 \cos(\alpha) = n_2 \end{cases} \quad (4)$$

[0041] Simplifying the above equations produces the following

$$\sqrt{n_1^2 - n_2^2} = n_{BE} \sin(\theta_{BE}) \quad (5)$$

[0042] $NA = \sqrt{n_1^2 - n_2^2}$ is defined as the single mode fiber (SMF) numerical aperture, and the divergent angle of the emitting beam is obtained as

$$\theta_{BE} = \arcsin\{NA/n_{BE}\} \quad (6)$$

[0043] For a standard telecommunication fiber, this angle is listed in the table shown in FIG. 4, which lists the divergent angles of a light beam emitting from a single mode fiber passing through different materials. Note that the numerical for fiber Corning SM28 is 0.14 when the intensity reduces to 1%, while it is only 0.09 at $1Ie^2$. When the single mode fiber is spliced onto a short length beam expander, the beam diameter D_1 at the end face of the beam expander, as shown in FIG. 3, is calculated as

$$D_1 = D_{core} + 2L_{BE} \tan\{\theta_{BE}\} \quad (7)$$

wherein D_{core} is the core diameter of the single mode optical fiber 18, and L_{BE} is the length of the beam expander.

[0044] 3. Gradient-Index (GRIN) Lens

[0045] FIG. 5 illustrates an optical schematic of lights propagation along a GRIN fiber, showing periodical beam focusing. FIG. 6 illustrates an optical schematic of lights propagating along a GRIN fiber, showing that a quarter or three quarters period length can collimate a beam into a parallel beam if the diffraction can be ignored. If the incident beam is a point size, the $\left(\frac{k}{2} + \frac{1}{4}\right)\Lambda$ length is theoretically the best length for the GRIN lens to collimator a beam, where $k = 0, 1, 2, \dots$. Λ is the period of the GRIN fiber. Because an actual incident beam has a significant beam diameter rather than a point source, the actual length to use for the GRIN fiber will be shorter than the quarter period. It is worth to note that since the period (Λ) is related to the incident angle, a large number k will significantly degrade the performance of the focusing. When the incident beam is close in size to the diameter of GRIN fibers,

simulations and experiments show that the length of the GRIN fiber to use will be much shorter than the quarter period length ($k = 0$).

[0046] The index profile of a GRIN fiber is usually expressed as

$$n(\rho) = \begin{cases} n_{1,grin} \sqrt{1 - 2(\rho/a)^2 \Delta} & (\rho \leq a) \\ n_{2,grin} & (\rho > a) \end{cases} \quad (8)$$

[0047] where a , $n_{1,grin}$ and $n_{2,grin}$ are the radius of the fiber, and indexes of core and cladding, respectively. $0 \leq \rho \leq a$ represents the radius of light trace. The parameter Δ is expressed as

$$\Delta = \frac{n_{1,grin}^2 - n_{2,grin}^2}{2n_{1,grin}^2} = \frac{NA_{grin}^2}{2n_{1,grin}^2} \quad (9)$$

[0048] where NA_{grin} is the numerical aperture of the GRIN fiber. When a light is incident into the core of the GRIN fiber at an angle of θ_0 , this light will turn its direction ($\Theta = 0$) at the maximum radius and light equation is expressed as

$$n_{1,grin} \cos(\theta_0) = n_{1,grin} \sqrt{1 - 2(\rho_{max}/a)^2 \Delta} \quad (10)$$

[0049] In general, the radius of the light incident at an angle of Θ with respect to the axial position (z) can be expressed as

$$\rho(z) = \frac{a \sin(\theta)}{\sqrt{2\Delta}} \sin \left[2\pi - \zeta / \frac{2m \cos(\theta)}{\sqrt{2\Delta}} \right] \quad (11)$$

[0050] where, $-\theta_0 \leq \theta \leq \theta_0$ describes the range of the incident angle. Clearly,

Eq. (11) shows that the GRIN fiber can periodically focus the incident beam. The period is expressed as

$$\Lambda = \frac{2\pi a \cos(\theta)}{\sqrt{2\Delta}} \quad (-\theta_0 \leq \theta \leq \theta_0) \quad (12)$$

[0051] Since the period is related to the incident angle, the self focusing effect will wash out by averaging $(-\theta_0 \leq \theta \leq \theta_0)$ when the length of GRIN fiber is longer than $L_{\max}$ as

$$I_{\max} = \frac{\pi \cdot n_{1,grin}}{NA_{grin}} \frac{\cos \theta_0}{1 - \cos \theta_0} D_{GRIN} \quad (13)$$

[0052] For typical parameters of $D_{GRIN} = 100 \mu m$, $\theta_0 = 8^\circ$, $NA_{grin} = 0.29$, $n_{1,grin} = 1.47$, Eq. (13) gives $L_{\max} \sim 160$ mm. Considering a Gaussian profile power distribution with respect to the incident angle, the real maximum length is slightly longer than this value.

[0053] When $z = \left(\frac{k}{2} + \frac{1}{4} \right) \Lambda$, the maximum radius is obtained from Eq. (11) as

$$\rho_{\max} = \frac{a \sin(\theta_0)}{\sqrt{2\Delta}} \quad (14)$$

[0054] Eq. (14) agrees with the value given by Eq. (10).

[0055] Considering the fiber diameter D_{core} , and substituting Eq. (5) into Eq.

(14), the maximum diameter $D_{\max} = 2\rho_{\max} + D_{core}$ is then obtained as

$$(15)$$

$$D_{\max} = \frac{NA}{n_0 \sqrt{2\Delta}} D_{grin} + D_{core}$$

[0056] where D_{grin} is the GRIN fiber core diameter. Substituting Eq. (6) and Eq. (15) into Eq. (3), the focal length of GRIN lenses without the beam expander is obtained as

$$f < \left(1 - \frac{1}{e^2}\right)^2 \frac{1}{2.44\lambda} \left(\frac{NA}{n_0 \sqrt{2\Delta}} D_{grin} + D_{core} \right)^2 \quad (16)$$

[0057] FIG. 7 is a table showing experimental results of the focal length for a GRIN fiber spliced onto a single mode fiber and the focal length for a GRIN fiber having a beam expander spliced between the GRIN fiber and a single mode fiber. For the fibers with parameters of $NA = 0.09$, $NA_{grin} = 0.29$, $n_{1,grin} = 1.487$,

$D_{grin} = 100\mu m$, the maximum beam diameter is about $40\mu m$ when a single mode fiber is spliced onto a GRIN fiber. The focal length is obtained from Eq. (16) as 0.38 mm, which explains why the longest focal length is always around 0.35 mm in experiments. Experiments also show that the focal length is slightly longer for a single mode fiber with slightly larger NA, which agrees with Eq. (16).

[0058] In order to obtain a long focal length, the effective way as shown in Eq. (3) is to expand the beam diameter by splicing a short piece of beam expander (e.g., NCF or SI-MMF) between the single mode fiber and the GRIN fiber as a free space. When a 0.65 mm long no core fiber is spliced between the GRIN fiber and the single mode fiber, the beam diameter is given by Eq. (7) as $87\mu m$, and Eq. (3) gives a theoretical focal length of 1.78 mm. A focal length of 1.76 mm is obtained in experiment, which agrees with theoretical calculation, is the longest experimental

focal length achieved to the inventor's knowledge and which is substantially longer than the experimental focal length of 0.35 mm obtained without the no core fiber.

[0059] FIG. 8 is a schematic illustration of an example of a fiberoptic device in which the dimensions of a no core fiber and a GRIN lens that are placed at the end of an optical fiber are selected to achieve a certain long focal length. FIG. 9 is a schematic illustration of another example of a fiberoptic device in which the dimensions of a no core fiber and a GRIN lens that are placed at the end of an optical fiber are selected to achieve a different long focal length. In the configuration of FIG. 9, the length of the no core fiber, L_{NCF} , is 0.65 mm and the length of the GRIN fiber is 0.17 mm. This produces the experimental result shown in FIG. 10(b) of a long focal length equal to 1.76 mm. In the configuration of FIG. 8, the length of the no core fiber is 0.3 mm instead of 0.65 mm, while the length of the GRIN fiber is 0.26 mm instead of 0.17 mm. The measured focal length for the configuration of FIG. 8 is 0.62 mm, which is smaller than the focal length of 1.76 mm for the configuration of FIG. 9 because the beam diameter is smaller for the shorter no core fiber in FIG. 8. When the length of the no core fiber, the diameters of the GRIN fiber, and the no core fiber are doubled, the theoretical focal length would be increased by four times, could be a few millimeters long. For large dimension fibers, a special designed fusion splicer rather than the regular one may have to be used.

[0060] FIG. 10 (a) illustrates the measurement setup for power reflection, and FIG. 10(b) shows the measured power reflection with respect to the distance between a mirror and the GRIN fiber lens for three different configurations, including the fiberoptic devices of FIG. 8 and FIG. 9. As seen in FIG. 10(b), the maximum power reflection is measured. The 1.76 mm focal length has been achieved when the lengths of no core fiber and GRIN fiber are 0.65 mm and 0.17 mm, respectively. The

measured power reflection with respect to the distance between a mirror and the GRIN fiber lens is shown for: (1) $f=0.62$ mm for $L_{BE}=0.3$ mm, $L_{GRIN}=0.26$ mm; (2) $f=1.21$ mm for $L_{BE}=0.6$ mm, $L_{GRIN}=0.19$ mm; (3) $f=1.76$ mm for $L_{BE}=0.65$ mm, $L_{GRIN}=0.17$ mm.

[0061] The manufacturing process of the fiberoptic device may employ a mechanical system that renders it repeatable. After splicing a no core fiber onto the optical fiber, the mechanical system cuts the no core fiber to the required length and then splices a GRIN fiber onto the no core fiber. Finally, the mechanical system cuts the GRIN fiber to the specified length. The mechanical system may be employed a computer-controlled motor and a digital microscope to accurately determine the length.

[0062] For a given focal length/and a given core diameter D_{core} of the optical fiber, Eq. (3) can be used to estimate the GRIN fiber core diameter D_{grin} . It is a theoretical estimate that has been shown to be within about 20% of the actual experimental value. Eq. (7) can then be used to estimate the length L_{BE} (in this case L_{NCF}) of the no core fiber by assuming that the beam diameter D_i is approximately equal to the GRIN core diameter D_{grin} . For OCT imaging, a focal length of about 3 mm may be desirable. The above procedure can be used to estimate the dimensions of the no core fiber and GRIN fiber lens.

[0063] FIG. 11 is a schematic illustration of an example of a fiberoptic device in which the dimensions of a large core step-index multimode fiber and a GRIN lens that are placed at the end of an optical fiber are selected to achieve a very long focal length. Either a no core fiber (NCF) or a step-index multimode fiber (SI-MMF) can be used as beam expander to expand the beam size before the GRIN lens. The NCF has a diameter that is equal to or larger than (typically slightly larger than) the GRIN

core diameter. Likewise, the SI-MMF has a core diameter that is equal to or larger than (typically slightly larger than) the GRIN core diameter. When a typical core/cladding diameters of 200/220 μm SI-MMF is used to expand the beam and a core diameter of 200 μm GRIN fiber is used to fabricate GRIN lenses, the focal length could be a few millimeters long (e.g., about 7 mm).

[0064] In the description, numerous details are set forth for purposes of explanation in order to provide a thorough understanding of the present invention. However, it will be apparent to one skilled in the art that not all of these specific details are required in order to practice the present invention. Additionally, while specific embodiments have been illustrated and described in this specification, those of ordinary skill in the art appreciate that any arrangement that is calculated to achieve the same purpose may be substituted for the specific embodiments disclosed. This disclosure is intended to cover any and all adaptations or variations of the present invention, and it is to be understood that the terms used in the following claims should not be construed to limit the invention to the specific embodiments disclosed in the specification. Rather, the scope of the invention is to be determined entirely by the following claims, which are to be construed in accordance with the established doctrines of claim interpretation, along with the full range of equivalents to which such claims are entitled.

WHAT IS CLAIMED IS:**1.** A fiberoptic device comprising:

an optical fiber having a fiber core and an end through which a light beam emits from the fiber core;

a beam expander having a first end coupled to the end of the optical fiber and having a second end, the beam expander permitting the light beam emitting from the fiber core to pass from the first end to the second end and to expand from the first end to a larger size at the second end; and

a gradient-index fiber lens coupled to the second end of the beam expander to receive the light beam from the beam expander and focus the light beam;

wherein the core of the gradient-index fiber lens has a diameter D_{gdn} ;

wherein the beam expander has a length between the first end and the second end, L_{BE} , which is determined by

$$D_1 = D_{\text{core}} + 2L_{\text{BE}} \tan(\theta_{\text{BE}})$$

where D_1 is a beam diameter which is approximately equal to the diameter D_{grin} of the gradient-index fiber lens, the optical fiber has a cladding and a core with a core diameter of D_{core} , and θ_{BE} is a divergent angle of the light beam exiting the optical fiber; and

wherein

$$\theta_{\text{BE}} = \text{asin}\{NA/n_{\text{BE}}\}$$

where n_{BE} is a refractive index of the beam expander, and NA is a numerical aperture of the optical fiber, $NA = \sqrt{n_1^2 - n_2^2}$, n_1 is a refractive index of the core of the optical fiber, and n_2 is a refractive index of the cladding of the optical fiber.

2. The fiberoptic device of claim 1,
wherein the optical fiber is a single mode fiber.
3. The fiberoptic device of claim 1,
wherein the beam expander comprises a no core fiber or a step-index multimode fiber.
4. The fiberoptic device of claim 1,
wherein the gradient-index fiber lens has a core surrounded by a cladding, the core having a refractive index that varies with a radial distance from an axis of the gradient-index fiber lens, decreasing radially outwardly toward the cladding.
5. The fiberoptic device of claim 4, wherein the gradient-index fiber lens has a refractive index profile expressed as

$$n(\rho) = \begin{cases} n_{1,grin} \sqrt{1 - 2(\rho/a)^2 \Delta} & (\rho \leq a) \\ n_{2,grin} & (\rho > a) \end{cases}$$

where a is a radius of the core of the gradient-index fiber lens, $n_{1,grin}$ is a refractive index of the core of the gradient-index fiber lens, and $n_{2,grin}$ is a refractive index of

the cladding of the gradient-index fiber lens, $0 \leq p \leq a$ represents a radius of light trace, and a parameter Δ is expressed as

$$\Delta = \frac{n_{1,grin}^2 - n_{2,grin}^2}{2n_{1,grin}^2} = \frac{NA_{grin}^2}{2n_{1,grin}^2}$$

where NA_{grin} is a numerical aperture of the gradient-index fiber lens.

6. The fiberoptic device of claim 1,

wherein the core of the gradient-index fiber lens has a diameter D_{grin} , which is not larger than an outer diameter of the beam expander.

7. The fiberoptic device of claim 1,

wherein the gradient-index fiber lens focuses the light beam with a range of focal length/ which is approximated by an expression

$$f < \left(1 - \frac{1}{e^2}\right)^2 \frac{1}{2.44\lambda} \left[\frac{NA}{n_0 \sqrt{2\Delta}} D_{grin} + D_{core} \right]^2$$

$$\Delta = \frac{n_{1,grin}^2 - n_{2,grin}^2}{2n_{1,grin}^2} = \frac{NA_{grin}^2}{2n_{1,grin}^2}$$

where $n_{1,grin}$ is a refractive index of the core of the gradient-index fiber lens, and

$n_{2,grin}$ is a refractive index of the cladding of the gradient-index fiber lens, NA_{grin} is a

numerical aperture of the gradient-index fiber lens, λ is a wavelength of the light

beam in vacuum, and $A = 1 - \frac{1}{e^2} \approx 86.5\%$; and

wherein for a given focal length/ and a given D_{core} , the expression is used to estimate D_{grin} .

8. A device for focusing a light beam emitting from an end of an optical fiber, the device comprising:

a beam expander having a first end to be coupled to the end of the optical fiber and having a second end, the beam expander permitting the light beam emitting from the optical fiber to pass from the first end to the second end and to expand from the first end to a larger size at the second end; and

a gradient-index fiber lens coupled to the second end of the beam expander to receive the light beam from the beam expander and focus the light beam;

wherein the core of the gradient-index fiber lens has a diameter D_{grin} ;

wherein the beam expander has a length between the first end and the second end, L_{BE} , which is determined by

$$D_1 = D_{core} + 2L_{BE} \sin(\theta_{BE})$$

where D_1 is a beam diameter which is approximately equal to the diameter D_{grin} of the gradient-index fiber lens, the optical fiber has a cladding and a core with a core diameter of D_{core} , and θ_{BE} is a divergent angle of the light beam exiting the optical fiber; and

wherein

$$\theta_{BE} = \text{asin}(NA/n_{BE})$$

where n_{BE} is a refractive index of the beam expander), and NA is a numerical aperture of the optical fiber, $NA = \sqrt{n_1^2 - n_2^2}$, n_1 is a refractive index of the core of the optical fiber, and n_2 is a refractive index of the cladding of the optical fiber.

9. The device of claim 8,

wherein the beam expander comprises a no core fiber or a step-index multimode fiber.

10. The device of claim 8,

wherein the gradient-index fiber lens has a core surrounded by a cladding, the core having a refractive index that varies with a radial distance from an axis of the gradient-index fiber lens, decreasing radially outwardly toward the cladding.

11. The device of claim 10, wherein the gradient-index fiber lens has a refractive index profile expressed as

$$n(\rho) = \begin{cases} n_{1,grin} \sqrt{1 - 2(\rho/a)^2 \Delta} & (\rho \leq a) \\ n_{2,grin} & (\rho > a) \end{cases}$$

where a is a radius of the core of the gradient-index fiber lens, $n_{1,grin}$ is a refractive index of the core of the gradient-index fiber lens, and $n_{2,grin}$ is a refractive index of the cladding of the gradient-index fiber lens, $0 \leq \rho \leq a$ represents a radius of light, and a parameter Δ is expressed as

$$\Delta = \frac{n_{1,grin}^2 - n_{2,grin}^2}{2n_{1,grin}^2} = \frac{NA_{grin}^2}{2n_{1,grin}^2}$$

where NA_{grin} is a numerical aperture of the gradient-index fiber lens.

12. The device of claim 8,

wherein the core of the gradient-index fiber lens has a diameter D_{grin} , which is not larger than an outer diameter of the beam expander.

13. The device of claim 8,

wherein the gradient-index fiber lens focuses the light beam with a range of focal length/which is approximated by an expression

$$f < \left(1 - \frac{1}{e^2}\right)^2 \frac{1}{2.44\lambda} \left[\frac{NA}{n_0 \sqrt{2\Delta}} D_{grin} + D_{core} \right]^2$$

$$\Delta = \frac{n_{1,grin}^2 - n_{2,grin}^2}{2n_{1,grin}^2} = \frac{NA_{grin}^2}{2n_{1,grin}^2}$$

where $n_{1,grin}$ is a refractive index of the core of the gradient-index fiber lens, and

$n_{2,grin}$ is a refractive index of the cladding of the gradient-index fiber lens, NA_{grin} is a

numerical aperture of the gradient-index fiber lens, λ is a wavelength of the light

beam in vacuum, and $A = 1 - \frac{1}{e^2} \approx 86.5\%$; and

wherein for a given focal length/ and a given D_{core} , the expression is used to estimate D_{grin} -

14. A fiberoptic device comprising:

an optical fiber having a fiber core and an end through which a light beam emits from the fiber core;

means coupled to the end of the optical fiber for emulating free space thereby allowing the light beam to expand from the fiber core at the end of the optical fiber to a larger size; and

a gradient-index fiber lens coupled to the means for emulating free space to receive the larger size light beam and focus the light beam;

wherein the core of the gradient-index fiber lens has a diameter D_{gri_n} ;

wherein the means for emulating free space has a length between a first end coupled to the end of the optical fiber and a second end coupled to the gradient-index fiber lens, L_{BE} , which is determined by

$$D_1 = D_{core} + 2L_{BE} \tan(\theta_{BE})$$

where D_j is a beam diameter which is approximately equal to the diameter D_{gri_n} of the gradient-index fiber lens, the optical fiber has a cladding and a core with a core diameter of D_{core} , and θ_{BE} is a divergent angle of the light beam exiting the optical fiber; and

wherein

$$\theta_{BE} = \arcsin(NA / n_{BE})$$

where n_{BE} is a refractive index of the means for emulating free space as beam

expander, and NA is a numerical aperture of the optical fiber, $NA = \sqrt{n_1^2 - n_2^2}$, n_1 is

a refractive index of the core of the optical fiber, and n_2 is a refractive index of the cladding of the optical fiber.

15. The fiberoptic device of claim 14,

wherein the optical fiber is a single mode fiber.

16. The fiberoptic device of claim 14,

wherein the gradient-index fiber lens has a core surrounded by a cladding, the core having a refractive index that varies with a radial distance from an axis of the gradient-index fiber lens, decreasing radially outwardly toward the cladding; and

wherein the gradient-index fiber lens has a refractive index profile expressed

as

$$n(\rho) = \begin{cases} n_{1,grin} \sqrt{1 - 2(\rho/a)^2 \Delta} & (\rho \leq a) \\ n_{2,grin} & (\rho > a) \end{cases}$$

where a is a radius of the core of the gradient-index fiber lens, " $n_{1,grin}$ " is a refractive index of the core of the gradient-index fiber lens, and $n_{2,grin}$ is a refractive index of the cladding of the gradient-index fiber lens, $0 \leq \rho \leq a$ represents a radius of light trace, and a parameter Δ is expressed as

$$\Delta = \frac{n_{1,grin}^2 - n_{2,grin}^2}{2n_{1,grin}^2} = \frac{NA_{grin}^2}{2n_{1,grin}^2}$$

where NA_{grin} is a numerical aperture of the gradient-index fiber lens.

17. The fiberoptic device of claim 14,

wherein the gradient-index fiber lens focuses the light beam with a range of focal length/which is approximated by an expression

$$f < \left(1 - \frac{1}{e^2}\right)^2 \frac{1}{2.44\lambda} \left[\frac{NA}{n_0 \sqrt{2\Delta}} D_{grin} + D_{core} \right]^2$$

$$\Delta = \frac{n_{1,grin}^2 - n_{2,grin}^2}{2n_{1,grin}^2} = \frac{NA_{grin}^2}{2n_{1,grin}^2}$$

where $n_{1,grin}$ is a refractive index of the core of the gradient-index fiber lens, and $n_{2,grin}$ is a refractive index of the cladding of the gradient-index fiber lens, NA_{grin} is a numerical aperture of the gradient-index fiber lens, λ is a wavelength of the light beam in vacuum, and $A = 1 - \frac{1}{e^2} \approx 86.5\%$; and

wherein for a given focal length/ and a given D_{core} , the expression is used to estimate D_{grin} -

18. A fiberoptic device comprising:

an optical fiber having a fiber core and an end through which a light beam emits from the fiber core;

a beam expander having a first end coupled to the end of the optical fiber and having a second end, the beam expander permitting the light beam emitting from the fiber core to pass from the first end to the second end and to expand from the first end to a larger size at the second end, the beam expander comprising a step-index multimode fiber (SI-MMF); and

a gradient-index fiber lens coupled to the second end of the beam expander to receive the light beam from the beam expander and focus the light beam.

19. The fiberoptic device of claim 18,

wherein the gradient-index fiber lens has a core surrounded by a cladding, the core having a refractive index that varies with a radial distance from an axis of the gradient-index fiber lens, decreasing radially outwardly toward the cladding; and

wherein the gradient-index fiber lens has a refractive index profile expressed as

$$n(\rho) = \begin{cases} n_{1,grin} \sqrt{1 - 2(\rho/a)^2 \Delta} & (\rho \leq a) \\ n_{2,grin} & (\rho > a) \end{cases}$$

where a is a radius of the core of the gradient-index fiber lens, $n_{1,grin}$ is a refractive index of the core of the gradient-index fiber lens, and $n_{2,grin}$ is a refractive index of the cladding of the gradient-index fiber lens, $0 \leq \rho \leq a$ represents a radius of light trace, and a parameter Δ is expressed as

$$A = \frac{n_{1,grin}^2 - n_{2,grin}^2}{2n_{1,grin}^2} = \frac{NA_{grin}^2}{2n_{1,grin}^2}$$

where NA_{grin} is a numerical aperture of the gradient-index fiber lens.

20. The fiberoptic device of claim 18,

wherein the core of the gradient-index fiber lens has a diameter D_{grin} ;

wherein the beam expander has a length between the first end and the second end, L_{BE} , which is determined by

$$D_1 = D_{core} + 2L_{BE} \tan(\theta_{BE})$$

where D_1 is a beam diameter which is approximately equal to the diameter D_{grin} of the gradient-index fiber lens, the optical fiber has a cladding and a core with a core diameter of D_{core} , and θ_{BE} is a divergent angle of the light beam exiting the optical fiber;

wherein

$$\theta_{BE} = \arcsin\{NA/n_{BE}\}$$

where n_{BE} is a refractive index of the beam expander, and NA is a numerical aperture of the optical fiber, $NA = \sqrt{n_1^2 - n_2^2}$, n_1 is a refractive index of the core of the optical fiber, and n_2 is a refractive index of the cladding of the optical fiber;

wherein the gradient-index fiber lens focuses the light beam with a range of focal length/which is approximated by an expression

$$f < \left(1 - \frac{1}{e^2}\right)^2 \frac{1}{2.44\lambda} \left[\frac{NA}{n_0 \sqrt{2\Delta}} D_{grin} + D_{core} \right]^2$$

$$\Delta = \frac{n_{1,grin}^2 - n_{2,grin}^2}{2n_{1,grin}^2} = \frac{NA_{grin}^2}{2n_{1,grin}^2}$$

where $n_{1,grin}$ is a refractive index of the core of the gradient-index fiber lens, and

$n_{2,grin}$ is a refractive index of the cladding of the gradient-index fiber lens, NA_{grin} is a

numerical aperture of the gradient-index fiber lens, λ is a wavelength of the light

beam in vacuum, and $A = 1 - \frac{1}{e^2} \sim 86.5\%$; and

wherein for a given focal length/ and a given D_{core} , the expression is used to estimate D_{grin} .

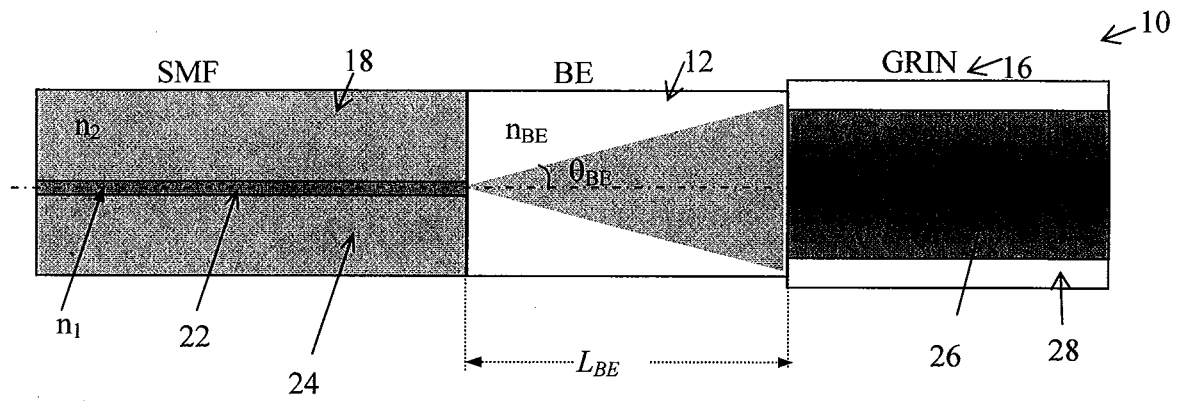


FIG. 1

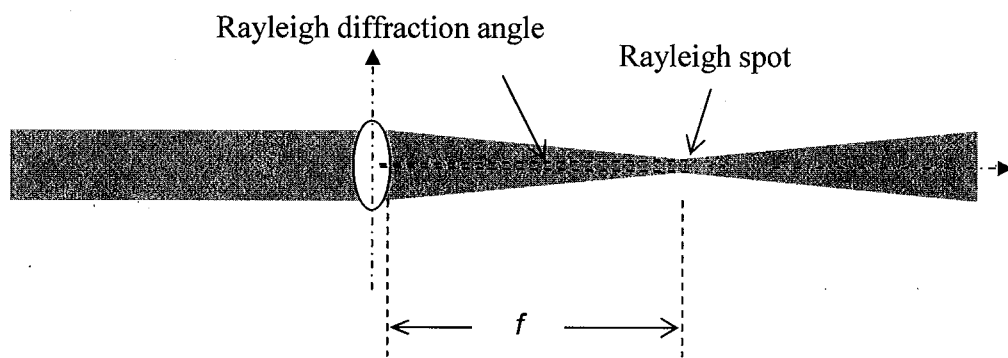


FIG. 2

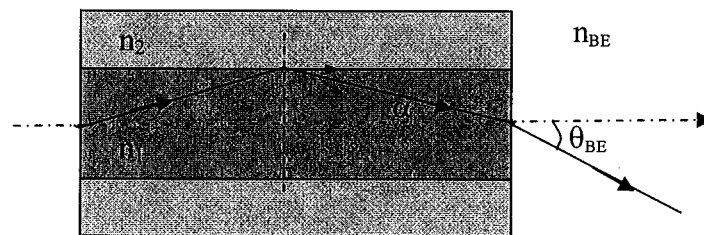


FIG. 3

	index	NA at 1/e ²	Angle (Degree)	Full angle (Degree)	NA at 1%	Angle (Degree)	Full angle (Degree)
in air	1	0.09	5.16	10.33	0.14	8.05	16.10
in water	1.33	0.09	3.88	7.76	0.14	6.05	12.09
in glass	1.467	0.09	3.52	7.03	0.14	5.48	10.96

FIG. 4

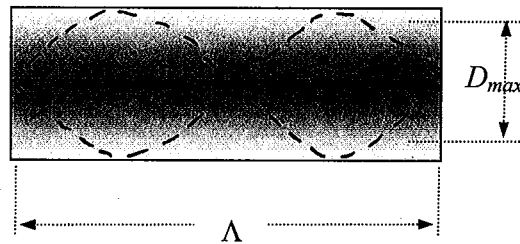


FIG. 5

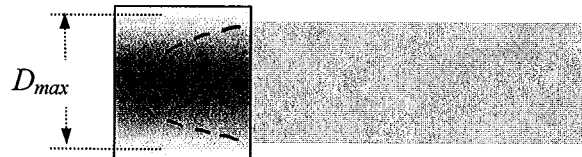


FIG. 6

LBE (mm)	um	n0	NA	n1	NA2	D(um)	delta	Diameter (um)	f (mm)	experiment (mm)
0	8.5	1.467	0.09	1.487	0.29	100	0.019017	39.96	0.38	0.35
0.65								87.00	1.78	1.5

FIG. 7

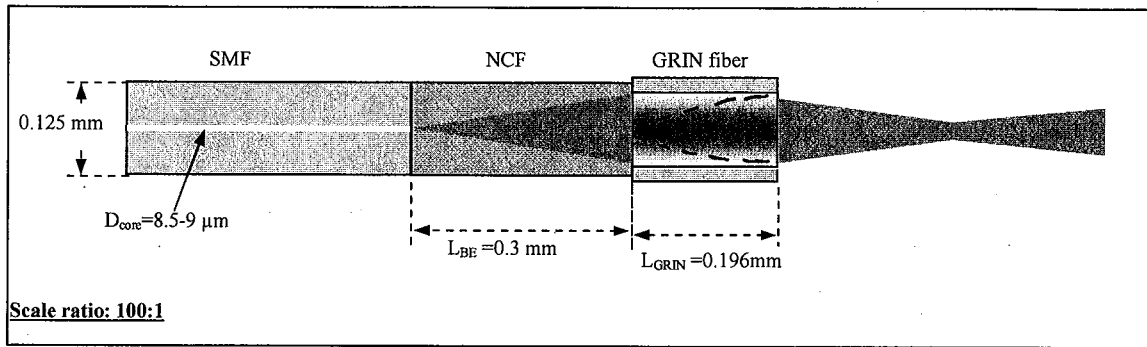


FIG. 8


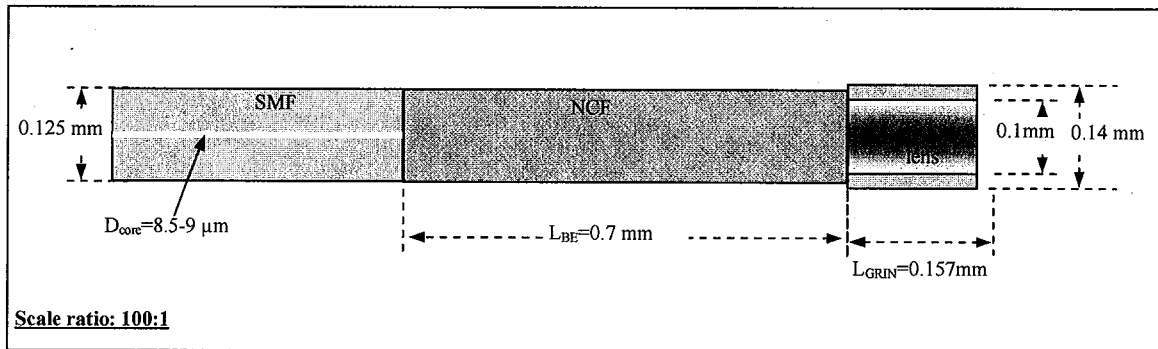


FIG. 9

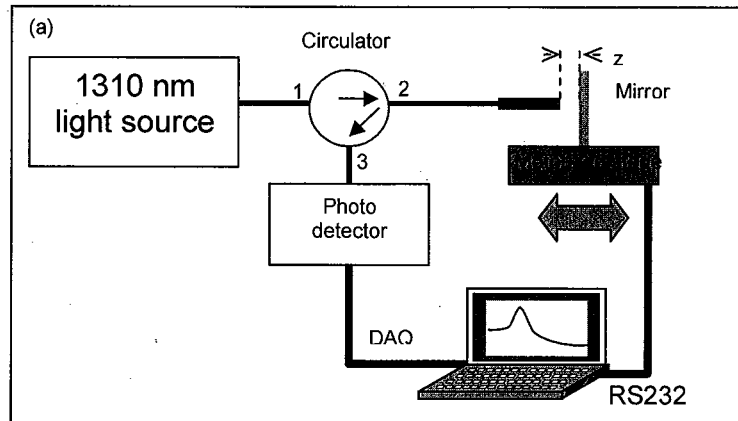

(b)

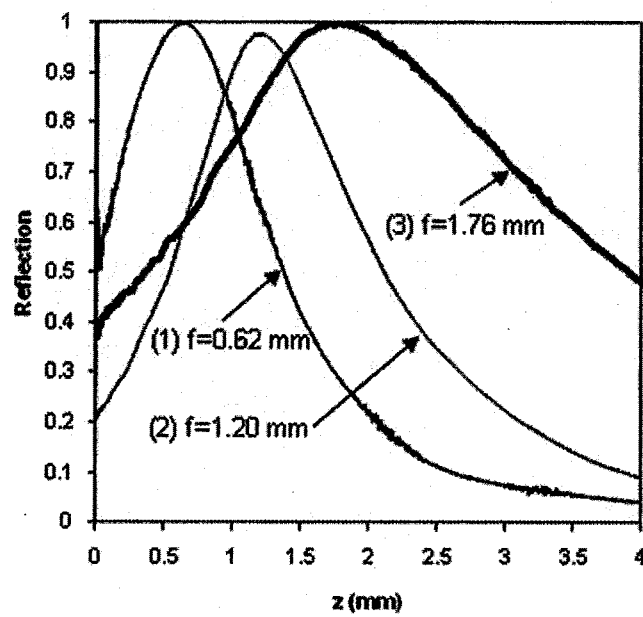


FIG. 10

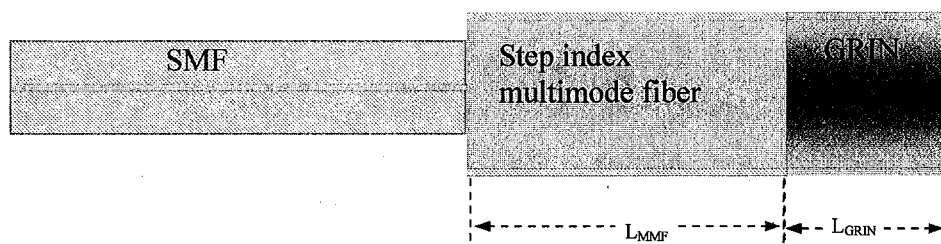


FIG. 11

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2011/041035

A. CLASSIFICATION OF SUBJECT MATTER

INV. G02B6/32

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/165292 AI (BHAGAVATULA VENKATA A [US] ET AL) 4 September 2003 (2003-09-04)	1-17
Y	abstract; figures 3a, 3b paragraph [0060] - paragraph [0061]	18-20
A	EMKEY W L ET AL: "ANALYSIS AND EVALUATION OF GRADED-INDEX FIBER-LENSES", JOURNAL OF LIGHTWAVE TECHNOLOGY, IEEE SERVICE CENTER, NEW YORK, NY, US, vol . LT-05 , no. 9, 1 September 1987 (1987-09-01) , pages 1156-1164, XP000601806, ISSN : 0733-8724 the whole document ----- -/- .	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

16 September 2011

Date of mailing of the international search report

26/09/2011

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Jakober, Frangois

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2011/041035

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	wo 2005/114284 AI (SERCALO MICROTECHNOLOGY LTD [LI] ; MARXER CORNEL [CH] ; ZICKAR MICHAEL []) 1 December 2005 (2005-12-01) abstract; figure 1 page 6, line 7 - line 11 -----	1-20
A	DE 10 2007 045570 AI (BOSCH GMBH ROBERT [DE]) 2 April 2009 (2009-04-02) abstract; figures 1, 2 paragraph [0022] -----	1-20
Y	EP 1 380 864 AI (FITEL USA CORP [US]) 14 January 2004 (2004-01-14) abstract; figure 1 paragraph [0018] -----	18-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2011/041035

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003165292 A l	04-09-2003	AU 2003217951 A l	22-09-2003
		CN 1646959 A	27-07-2005
		JP 2005519343 A	30-06-2005
		TW 1230812 B	11-04-2005
		WO 03076994 A l	18-09-2003

WO 2005114284 A l	01-12-2005	NONE	

DE 102007045570 A l	02-04-2009	WO 2009040158 A l	02-04-2009

EP 1380864 A l	14-01-2004	CN 1465991 A	07-01-2004
		US 2004005128 A l	08-01-2004
