



(51) International Patent Classification:

G06F 3/01 (2006.01) G06T 19/00 (2011.01)
G06F 3/02 (2006.01) A63F 13/245 (2014.01)
G06F 3/03 (2006.01)

CHEN, Yi-Yaun; c/o Oculus VR, LLC, 1601 Willow Road, Menlo Park, CA 94025 (US). TOMPKINS, Glen, Jason; c/o Oculus VR, LLC, 1601 Willow Road, Menlo Park, CA 94025 (US).

(21) International Application Number:

PCT/US2017/037608

(74) Agent: HULSE, Robert, A. et al.; Fenwick & West LLP, Silicon Valley Center, 801 California Street, Mountain View, CA 94041 (US).

(22) International Filing Date:

15 June 2017 (15.06.2017)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/498,402 26 April 2017 (26.04.2017) US

(71) Applicant: FACEBOOK TECHNOLOGIES, LLC
[US/US]; 1601 Willow Road, Menlo Park, CA 94025 (US).

(72) Inventors: BRISTOL, Peter, Wesley; c/o Oculus VR, LLC, 1601 Willow Road, Menlo Park, CA 94025 (US).

(54) Title: HAND-HELD CONTROLLER USING LED TRACKING RING

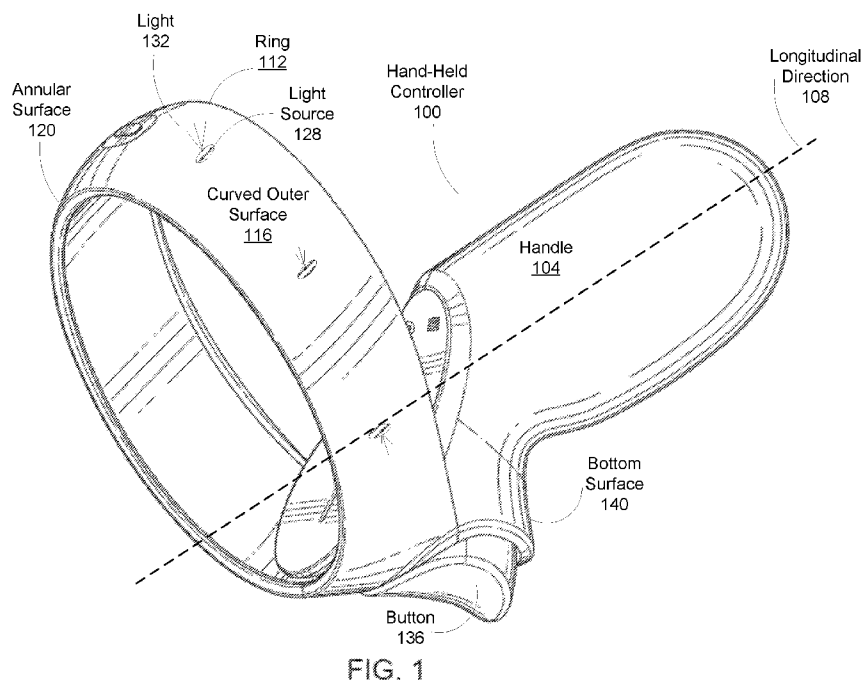


FIG. 1

(57) Abstract: A hand-held controller includes a handle extending in a longitudinal direction. The handle is shaped and dimensioned to be grasped by a user's hand. A ring is attached to an end of the handle and surrounds a thumb of the user when the handle is grasped by the user's hand. The ring has an annular surface that defines a plane that forms a predetermined angle with respect to the longitudinal direction, and a curved outer surface. Light sources are mounted on the curved outer surface and configured to emit light to be captured by an imaging device for tracking a position or orientation of the hand-held controller. The light is emitted in a direction normal to the curved outer surface.



(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

HAND-HELD CONTROLLER USING LED TRACKING RING

BACKGROUND

Field of the Disclosure

[0001] The present disclosure generally relates to virtual reality (VR) controllers, and specifically to a hand-held controller using an LED tracking ring.

Description of the Related Arts

[0002] VR systems may include a controller to translate movement of the user's body into tangible action in a virtual world. Some controllers provide vibration feedback to Android or iOS VR headsets for motion-based gaming. A controller may be equipped with a gyroscope, an accelerometer, or terrestrial magnetic field sensor to trace motion back to a game, allowing intuitive gameplay as if the player is within the game.

SUMMARY

[0003] Embodiments relate to a hand-held controller to track a user's hand motion, position, natural gestures, and finger movement to create a sense of hand presence for more realistic and tactile VR. The controller may let the user make social gestures like point, wave, and give a thumbs-up or manipulate objects in the virtual space, pick up toys or fire laser guns with intuitive, natural hand movement.

[0004] In one embodiment, the hand-held controller includes a handle extending in a longitudinal direction. The handle is shaped and dimensioned to be grasped by a user's hand. A ring is attached to an end of the handle and surrounds a thumb of the user when the handle is grasped by the user's hand. The ring has an annular surface that defines a plane that forms a predetermined angle with respect to the longitudinal direction, and a curved outer surface. Light sources are mounted on the curved outer surface and configured to emit light to be captured by an imaging device for tracking a position or orientation of the hand-held controller. The light is emitted in a direction normal to the curved outer surface.

[0005] In one embodiment, the handle has a cylindrical shape.

[0006] In one embodiment, the hand-held controller includes a button located on a bottom surface of the handle. The button may be pressed by an index or middle finger of the user's hand.

[0007] In one embodiment, the button has a symmetrical shape.

[0008] In one embodiment, the predetermined angle is between 45° to 135°.

[0009] In one embodiment, a preferred ratio of a diameter of the ring to a length of the handle is 9:10.

[0010] In one embodiment, the light sources are light-emitting diodes.

- [0011] In one embodiment, the handle is made of engineering plastic.
- [0012] In one embodiment, the ring is made of engineering plastic.
- [0013] In one embodiment, the hand-held controller includes a sensor interface circuit to receive sensor signals from a button located on a bottom surface of the handle. The button generates the sensor signals responsive to being pressed by an index or a middle finger of the user's hand.
- [0014] In one embodiment, the hand-held controller includes a circuit to provide electrical signals to the light sources.
- [0015] In one embodiment, the hand-held controller includes a wireless communication interface to transmit wireless signals indicating user input received from the user's hand.
- [0016] Embodiments according to the invention are in particular disclosed in the attached claims directed to a hand-held controller/a system, wherein any feature mentioned in one claim category, e.g. system, can be claimed in another claim category, e.g. a method, a storage medium, a computer program product, as well. The dependencies or references back in the attached claims are chosen for formal reasons only. However any subject matter resulting from a deliberate reference back to any previous claims (in particular multiple dependencies) can be claimed as well, so that any combination of claims and the features thereof is disclosed and can be claimed regardless of the dependencies chosen in the attached claims. The subject-matter which can be claimed comprises not only the combinations of features as set out in the attached claims but also any other combination of features in the claims, wherein each feature mentioned in the claims can be combined with any other feature or combination of other features in the claims. Furthermore, any of the embodiments and features described or depicted herein can be claimed in a separate claim and/or in any combination with any embodiment or feature described or depicted herein or with any of the features of the attached claims.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0017] The teachings of the embodiments can be readily understood by considering the following detailed description in conjunction with the accompanying drawings.
- [0018] Figure (FIG.) 1 is an example schematic perspective view of a hand-held controller, in accordance with an embodiment.
- [0019] FIG. 2 is an example schematic side view of the hand-held controller, in accordance with an embodiment.
- [0020] FIG. 3 is an example schematic block diagram of the hand-held controller, in accordance with an embodiment.

[0021] The figures depict various embodiments for purposes of illustration only.

DETAILED DESCRIPTION

[0022] In the following description of embodiments, numerous specific details are set forth in order to provide more thorough understanding. However, note that the embodiments may be practiced without one or more of these specific details. In other instances, well-known features have not been described in detail to avoid unnecessarily complicating the description.

[0023] Embodiments are described herein with reference to the figures where like reference numbers indicate identical or functionally similar elements. Also in the figures, the left most digits of each reference number corresponds to the figure in which the reference number is first used.

[0024] Embodiments relate to a hand-held VR controller to track a user's hand motion and position. The hand-held controller includes a handle extending in a longitudinal direction. A ring is attached to an end of the handle and has a curved outer surface. Light sources are mounted on the curved outer surface and configured to emit light to be captured by an imaging device for tracking a position or orientation of the hand-held controller.

Example Schematic Perspective View of Hand-Held Controller

[0025] FIG. 1 is an example schematic perspective view of a hand-held controller 100, in accordance with an embodiment. The hand-held controller 100 may be included in a VR system as a stand-alone controller or as part of a pair of tracked controllers that give a user "hand presence"—the feeling that the user's virtual hands are actually his own. The hand-held controller 100 may enable the user to manipulate objects in a virtual space with precision and intuitive, natural hand movement.

[0026] The hand-held controller 100 includes a handle 104 extending in a longitudinal direction 108. In one embodiment, the handle 104 may be made of an engineering plastic, such as injection-molded polycarbonate (PC)/acrylonitrile butadiene styrene (ABS) or polyamide (nylon). In other embodiments, the handle 104 may be made of wood or metal. The handle 104 may be resistant to impact and abrasion. The material of the handle 104 may exhibit heat resistance, mechanical strength, or rigidity.

[0027] The handle 104 is shaped and dimensioned to be grasped by a user's hand for tracking natural gestures and finger movements to create more realistic and tactile VR. For example, the handle may have a cylindrical shape. The handle 104 of the hand-held controller 100 may bend or curve to balance the weight of the controller 100, such that it rests naturally in the top of the palm of the user or the crook of the user's fingers. The user may

therefore comfortably hold the hand-held controller 100 without dropping it. Even if the user tries to open his hand completely when holding the hand-held controller 100 normally, the user's fingers may catch on the ring 112 and support the hand-held controller 100's weight. The ring 112 is attached to an end of the handle 104 and has an annular surface 120. The ring may be made of engineering plastic. In one embodiment, the ring is made of infrared-transparent polycarbonate. The ring 112 may surround a thumb of the user when the handle 104 is grasped by the user's hand.

[0028] The ring 112 has a curved outer surface 116, as illustrated in FIG. 1. Light sources 128 are mounted on the curved outer surface 116 to emit light 132 to be captured by an imaging device for tracking a position or orientation of the hand-held controller 100. The light 132 is emitted in a direction normal to the curved outer surface 116. The light sources 128 may be light-emitting diodes. A light-emitting diode 128 is a two-lead semiconductor light source, such as a p-n junction diode, which emits light 132 when receiving an electrical signal. A VR system may include a camera to track a position or orientation of the hand-held controller 100 by capturing the emitted light 132. For example, a camera may be mounted on a computer monitor covering a field of view including the hand-held controller 100.

[0029] The hand-held controller 100 may include a trigger button 136 located on a bottom surface 140 of the handle 104. The trigger button 136 may be pressed by an index or middle finger of the user's hand. The trigger button 136 may provide a signal for grasping, lifting, etc., of virtual objects in a VR space. The trigger button 136 may have a symmetrical shape, such as rectangular, elliptical or circular. The trigger button 136 may be made of rubber or plastic.

Example Schematic Side View of Hand-Held Controller

[0030] FIG. 2 is an example schematic side view of the hand-held controller 100, in accordance with an embodiment. The annular surface 120 of the ring 112, illustrated and described above with reference to FIG. 1, defines a plane 224 that forms a predetermined angle 216 with respect to the longitudinal direction 108 in which the handle 104 extends. The predetermined angle 216 may be between 45° to 135°. With the ring geometry illustrated in FIG. 2, if the predetermined angle 216 is more than 45°, this avoids interference with the thumb movement of the user. If the predetermined angle 216 is less than 135°, this avoids any affects to the inside-out tracking visibility to a camera mounted on an HMD.

[0031] In embodiments, a preferred ratio of a diameter 204 of the ring 112 to a length 208 of the handle 104 is 9:10. The preferred ratio of the diameter 204 of the ring 112 to a length 208 of the handle 104 reduces the ring size while allowing thumb clearance for a 95th

percentile male user. The handle 104 grip is sized such that it may be used by a 5th percentile female user.

Example Schematic Block Diagram of Hand-Held Controller

[0032] FIG. 3 is an example schematic block diagram of the hand-held controller 100, in accordance with an embodiment. The hand-held controller 100 includes the trigger button 136, a sensor interface circuit 304, light source 128, a circuit 308, a wireless communication interface 312, and a bus 324. In alternative configurations, different and/or additional components may be included in the hand-held controller 100, such as a memory, central processing unit, battery, Bluetooth component, USB input, etc.

[0033] The sensor interface circuit 304 is a digital, analog, or mixed-signal circuit to receive sensor signals 316 in the form of voltage or current from the trigger button 136 when the trigger button 136 is pressed by the user. The button 136 generates the sensor signals 316 responsive to being pressed by an index or a middle finger of the user's hand. The trigger button 136 may be connected to a transducer that converts the mechanical motion of the trigger button 136 into the sensor signals 316. The hand-held controller 100 may include a circuit 308 to provide electrical signals 320, such as voltage, to the light sources 128. The circuit 308 may be powered by a battery on the hand-held controller 100 to generate the electrical signals 320. The light sources emit the light 132 responsive to receiving the electrical signals 320.

[0034] The hand-held controller 100 may include a wireless communication interface 312, which may be a digital, analog, or mixed-signal circuit to transmit wireless signals 328 indicating user input 332 received from the user's hand. The wireless signals 328 may be transmitted to a head-mounted display, a computer, a VR system, etc. The wireless communication interface 312 may send and receive data via a wireless network without the need for connecting cables to the hand-held controller 100. In one embodiment, the wireless communication interface 312 may support the USB 1.1 and 802.11b wireless network standards up to 11 Mbps data transfer rates. In one embodiment, the wireless communication interface 312 may support the USB 2.0 and 802.11g standards up to 54 Mbps data transfer rates. In one embodiment, the wireless communication interface 312 may be a Compact Flash (CF) wireless network adapter use infrared technology for data exchanges between the hand-held controller 100 and a computer, etc. The wireless communication interface 412, the sensor interface circuit 304, and the circuit 308 may communicate via the bus 324.

[0035] The foregoing description of the embodiments has been presented for the purpose of illustration; it is not intended to be exhaustive or to limit the embodiments to the precise

forms disclosed. Persons skilled in the relevant art can appreciate that many modifications and variations are possible in light of the above disclosure.

[0036] Finally, the language used in the specification has been principally selected for readability and instructional purposes, and it may not have been selected to delineate or circumscribe the inventive subject matter. It is therefore intended that the scope be limited not by this detailed description, but rather by any claims that issue on an application based hereon. Accordingly, the disclosure of the embodiments is intended to be illustrative, but not limiting, of the scope, which is set forth in the following claims.

CLAIMS

What is claimed is:

1. A hand-held controller comprising:
a handle extending in a longitudinal direction, the handle shaped and dimensioned to be grasped by a user's hand;
a ring attached to an end of the handle and surrounding a thumb of the user when the handle is grasped by the user's hand, the ring having:
an annular surface defining a plane that forms a predetermined angle with respect to the longitudinal direction, and
a curved outer surface; and
a plurality of light sources mounted on the curved outer surface and configured to emit light to be captured by an imaging device for tracking a position or orientation of the hand-held controller, the light emitted in a direction normal to the curved outer surface.
2. The hand-held controller of claim 1, wherein the handle has a cylindrical shape.
3. The hand-held controller of claim 1, further comprising a button located on a bottom surface of the handle, the button configured for pressing by an index or middle finger of the user's hand.
4. The hand-held controller of claim 1, wherein the button has a symmetrical shape.
5. The hand-held controller of claim 1, wherein the predetermined angle is between 45° to 135°.
6. The hand-held controller of claim 1, wherein a preferred ratio of a diameter of the ring to a length of the handle is 9:10.
7. The hand-held controller of claim 1, wherein the light sources are light-emitting diodes.
8. The hand-held controller of claim 1, wherein the handle is made of engineering plastic.
9. The hand-held controller of claim 1, wherein the ring is made of engineering plastic.
10. The hand-held controller of claim 1, further comprising a sensor interface circuit configured to receive sensor signals from a button located on a bottom surface of the handle, the button configured to generate the sensor signals responsive to being pressed by an index or a middle finger of the user's hand.

11. The hand-held controller of claim 1, further comprising a circuit configured to provide electrical signals to the plurality of light sources.
12. The hand-held controller of claim 1, further comprising a wireless communication interface configured to transmit wireless signals indicating user input received from the user's hand.
13. A hand-held controller comprising:
 - a handle extending in a longitudinal direction, the handle shaped and dimensioned to be grasped by a user's hand;
 - a ring attached to an end of the handle and having an annular surface, the annular surface defining a plane that forms a predetermined angle with respect to the longitudinal direction, the ring surrounding a thumb of the user when the handle is grasped by the user's hand; and
 - a plurality of light sources mounted on the annular surface and configured to emit light to be captured by an imaging device for tracking a position or orientation of the hand-held controller.
14. The hand-held controller of claim 13, wherein the handle has a cylindrical shape.
15. The hand-held controller of claim 13 or 14, further comprising a button located on a bottom surface of the handle, the button configured for pressing by an index or middle finger of the user's hand.
16. The hand-held controller of any of claims 13 to 15, wherein the button has a symmetrical shape.
17. The hand-held controller of any of claims 13 to 16, wherein the predetermined angle is between 45° to 135°.
18. The hand-held controller of any of claims 13 to 17, wherein a preferred ratio of a diameter of the ring to a length of the handle is 9:10.
19. The hand-held controller of any of claims 13 to 18, wherein the light sources are light-emitting diodes.
20. The hand-held controller of any of claims 13 to 19, wherein the handle is made of engineering plastic.
21. The hand-held controller of any of claims 13 to 20, wherein the ring is made of engineering plastic.
22. The hand-held controller of any of claims 13 to 21, further comprising a sensor interface circuit configured to receive sensor signals from a button located on a bottom

surface of the handle, the button configured to generate the sensor signals responsive to being pressed by an index or a middle finger of the user's hand.

23. The hand-held controller of any of claims 13 to 22, further comprising a circuit configured to provide electrical signals to the plurality of light sources.

24. The hand-held controller of any of claims 13 to 23, further comprising a wireless communication interface configured to transmit wireless signals indicating user input received from the user's hand.

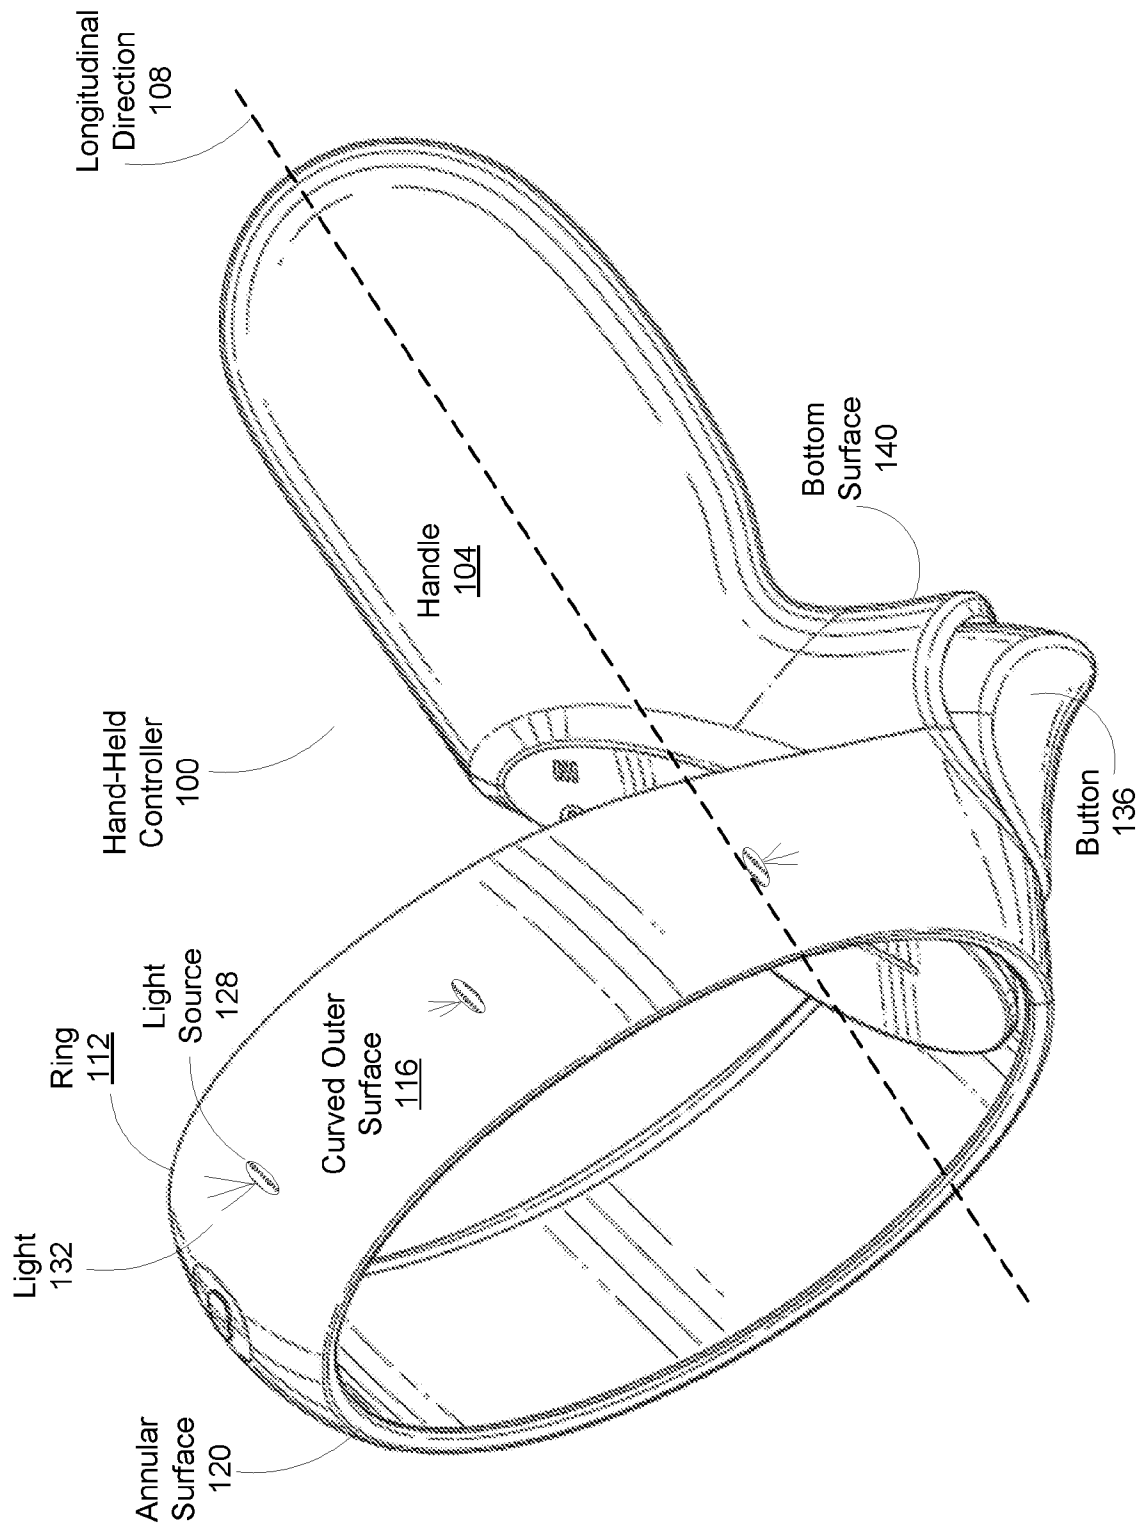
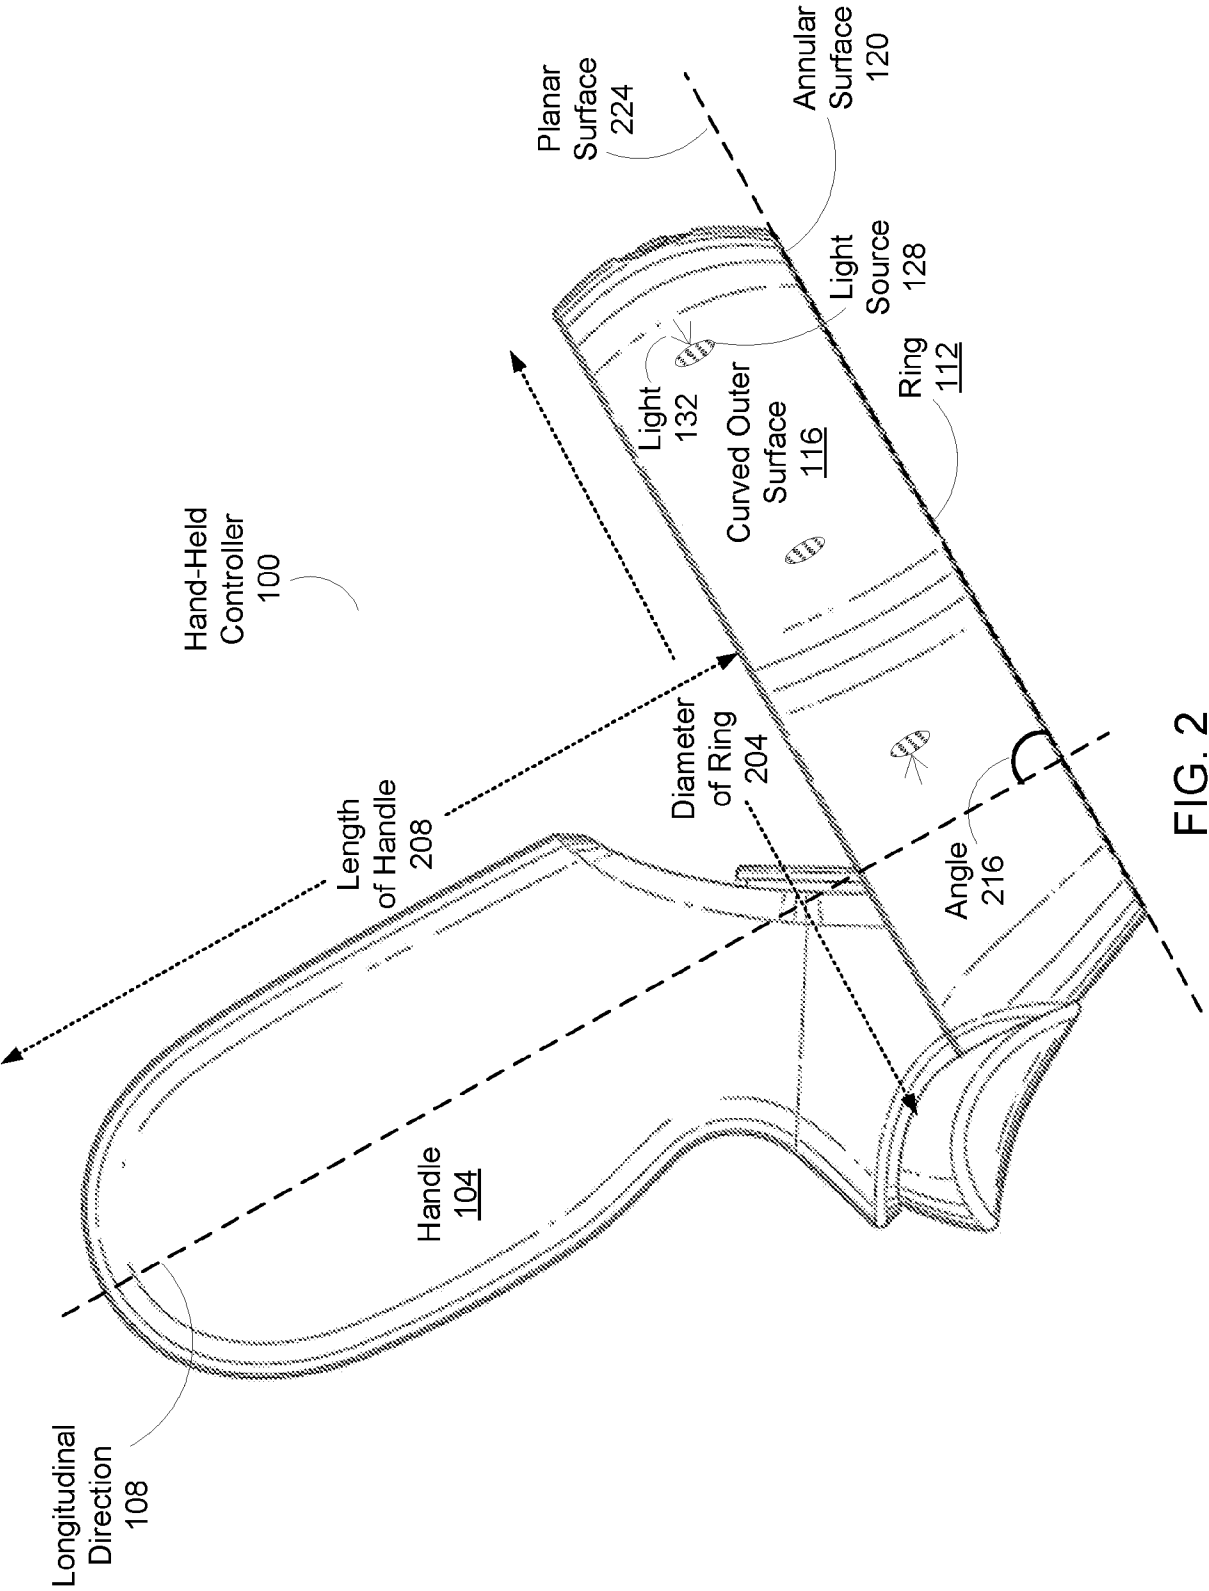


FIG. 1



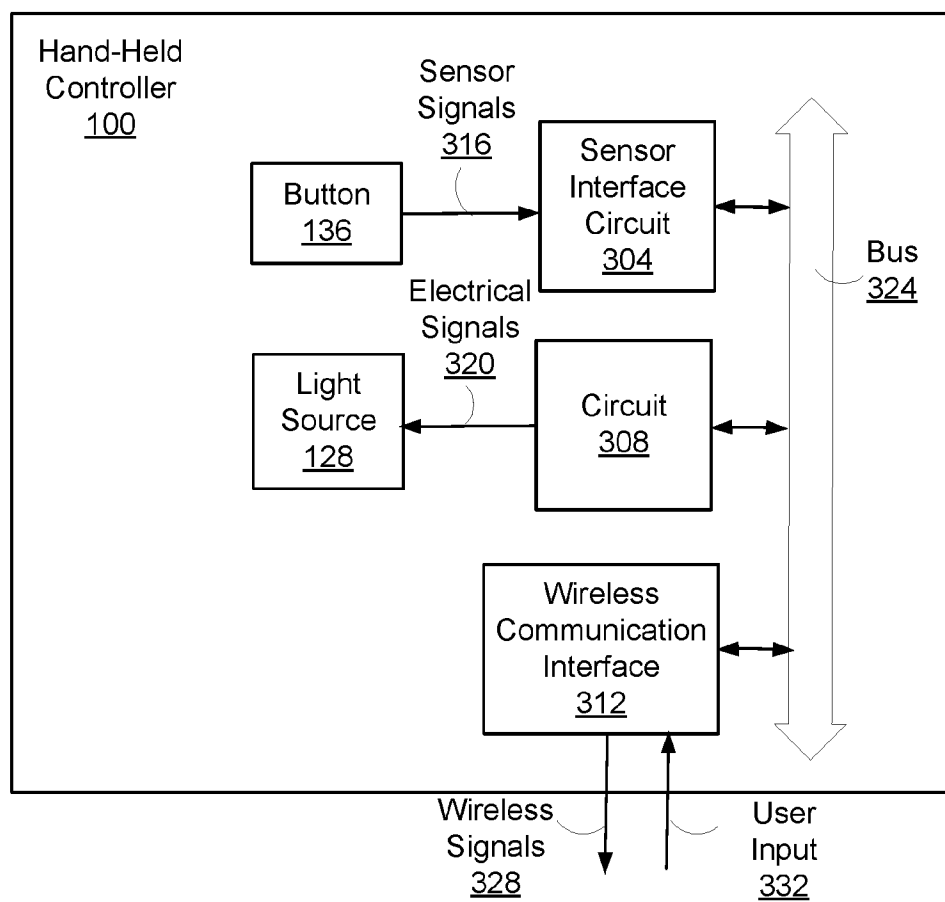


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2017/037608**A. CLASSIFICATION OF SUBJECT MATTER****G06F 3/01(2006.01)i, G06F 3/02(2006.01)i, G06F 3/03(2006.01)i, G06T 19/00(2011.01)i, A63F 13/245(2014.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06F 3/01; H04M 1/60; G06F 3/03; G06F 3/042; H04W 12/06; G06F 3/041; A63B 53/04; G06F 3/02; G06T 19/00; A63F 13/245

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: handle, ring, light, sensor, grasp, controller, detect, position

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2015-0065090 A1 (HUNG-YAO YEH) 05 March 2015 See paragraphs [0002], [0012], [0022], [0025], [0030], [0035]; and figure 2B.	1-24
Y	US 2015-0100204 A1 (SUZUKI MOTOR CORPORATION) 09 April 2015 See paragraphs [0029], [0032]; and figure 1.	1-24
Y	US 2005-0197205 A1 (MARVIN J. HALE JR.) 08 September 2005 See paragraphs [0024], [0032]; and figure 1.	5, 17
A	US 2008-0042995 A1 (ZHONGQING LI et al.) 21 February 2008 See paragraphs [0012], [0049]; and figure 3.	1-24
A	WO 2016-140924 A1 (TACTICAL HAPTICS) 09 September 2016 See paragraphs [0056], [0065]; and figure 1.	1-24



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 January 2018 (24.01.2018)

Date of mailing of the international search report

25 January 2018 (25.01.2018)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea



Facsimile No. +82-42-481-8578

Authorized officer

BYUN, Sung Cheal

Telephone No. +82-42-481-8262



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/037608

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2015-0065090 A1	05/03/2015	TW 201508550 A	01/03/2015
US 2015-0100204 A1	09/04/2015	CN 104516642 A	15/04/2015
		DE 102014014623 A1	09/04/2015
		IN 2795DE2014 A	26/06/2015
		JP 2015-071364 A	16/04/2015
		US 9483133 B2	01/11/2016
US 2005-0197205 A1	08/09/2005	US 7244201 B2	17/07/2007
US 2008-0042995 A1	21/02/2008	CN 100419652 C	17/09/2008
		CN 1740957 A	01/03/2006
		DE 112005001922 T5	12/07/2007
		JP 2008-509488 A	27/03/2008
		US 7839383 B2	23/11/2010
		WO 2006-021135 A1	02/03/2006
WO 2016-140924 A1	09/09/2016	None	