




(72) LADEROUTE, MICHAEL J., US  
(71) KIDDE-FENWAL, INC., US  
(51) Int.Cl.<sup>6</sup> A62C 13/76, B67D 5/08  
(30) 1998/02/24 (09/030,577) US  
(54) **BEC D'EXTINCTEUR**  
(54) **FIRE-EXTINGUISHER NOZZLE**

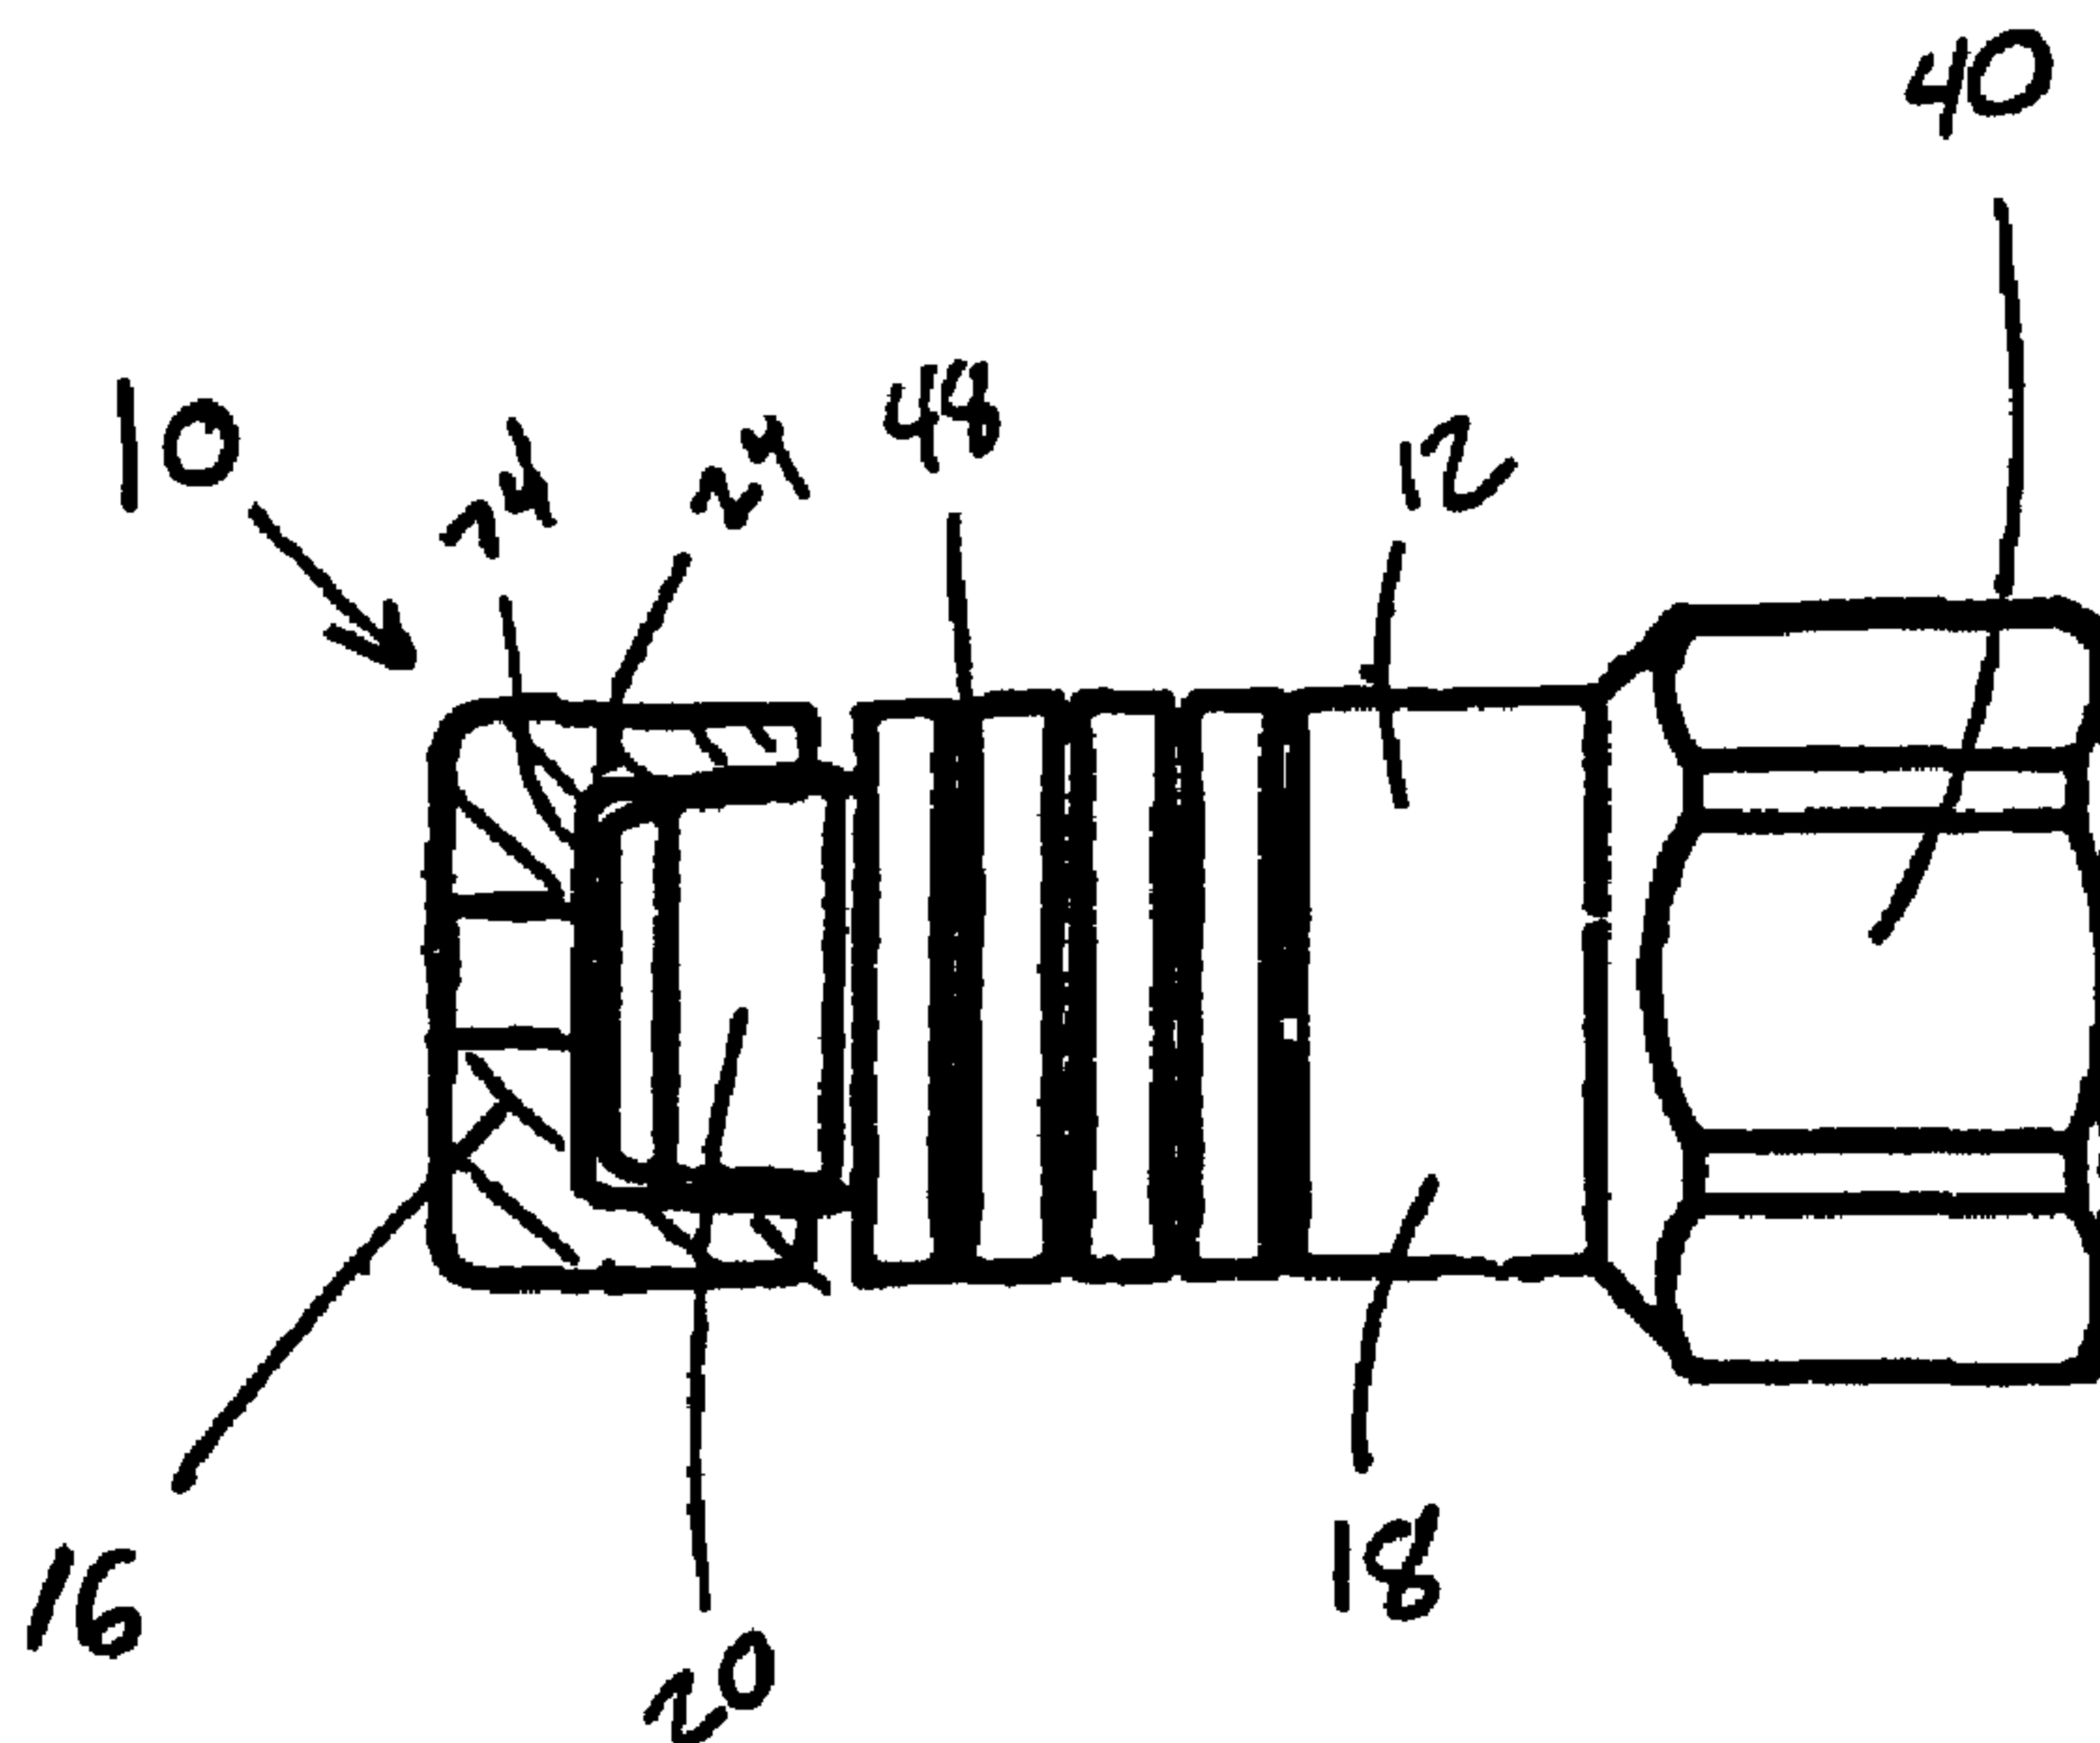

(57) L'invention concerne un bec qui comprend une enveloppe définissant un passage (26) de fluide. Un élément (14) est disposé de manière à obstruer le passage de fluide lorsque le bec ne pulvérise pas de fluide. Un dispositif de retenue (16) fixé à l'enveloppe retient l'élément en position fermée. La surface de l'enveloppe présente une ou plusieurs marques (48). Le nombre de marques indique le type de pulvérisation produit par le bec. L'élément d'obstruction est disposé dans le passage de fluide et éclate sous l'effet de l'écoulement du fluide.


(57) A nozzle includes a housing defining a fluid passage (26). A member (14) is disposed in a position to block the fluid passage when the nozzle is not spraying fluid. A retainer (16) attached to the housing retains the member in the disposed position. The surface of the housing has one or more marks (48). The number of marks indicates the spray profile produced by the nozzle. The member is disposed within the fluid passage and bursts under the flow of fluid.

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification<sup>6</sup> : <b>A62C 13/76, B67D 5/08</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 99/42181</b> (43) International Publication Date: 26 August 1999 (26.08.99)</p>
<p>(21) International Application Number: PCT/US99/04027 (22) International Filing Date: 24 February 1999 (24.02.99) (30) Priority Data: 09/030,577 24 February 1998 (24.02.98) US (63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application US 09/030,577 (CON) Filed on 24 February 1998 (24.02.98) (71) Applicant (for all designated States except US): KIDDE-FENWAL, INC. [US/US]; 400 Main Street, Ashland, MA 01721 (US). (72) Inventor; and (75) Inventor/Applicant (for US only): LADEROUTE, Michael, J. [US/US]; 192 Blackthorn Lane, Charlottesville, VA 22902 (US). (74) Agent: BOOTH, William, E.; Fish &amp; Richardson P.C., 225 Franklin Street, Boston, MA 02110-2804 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> With international search report.</p>

(54) Title: FIRE-EXTINGUISHER NOZZLE

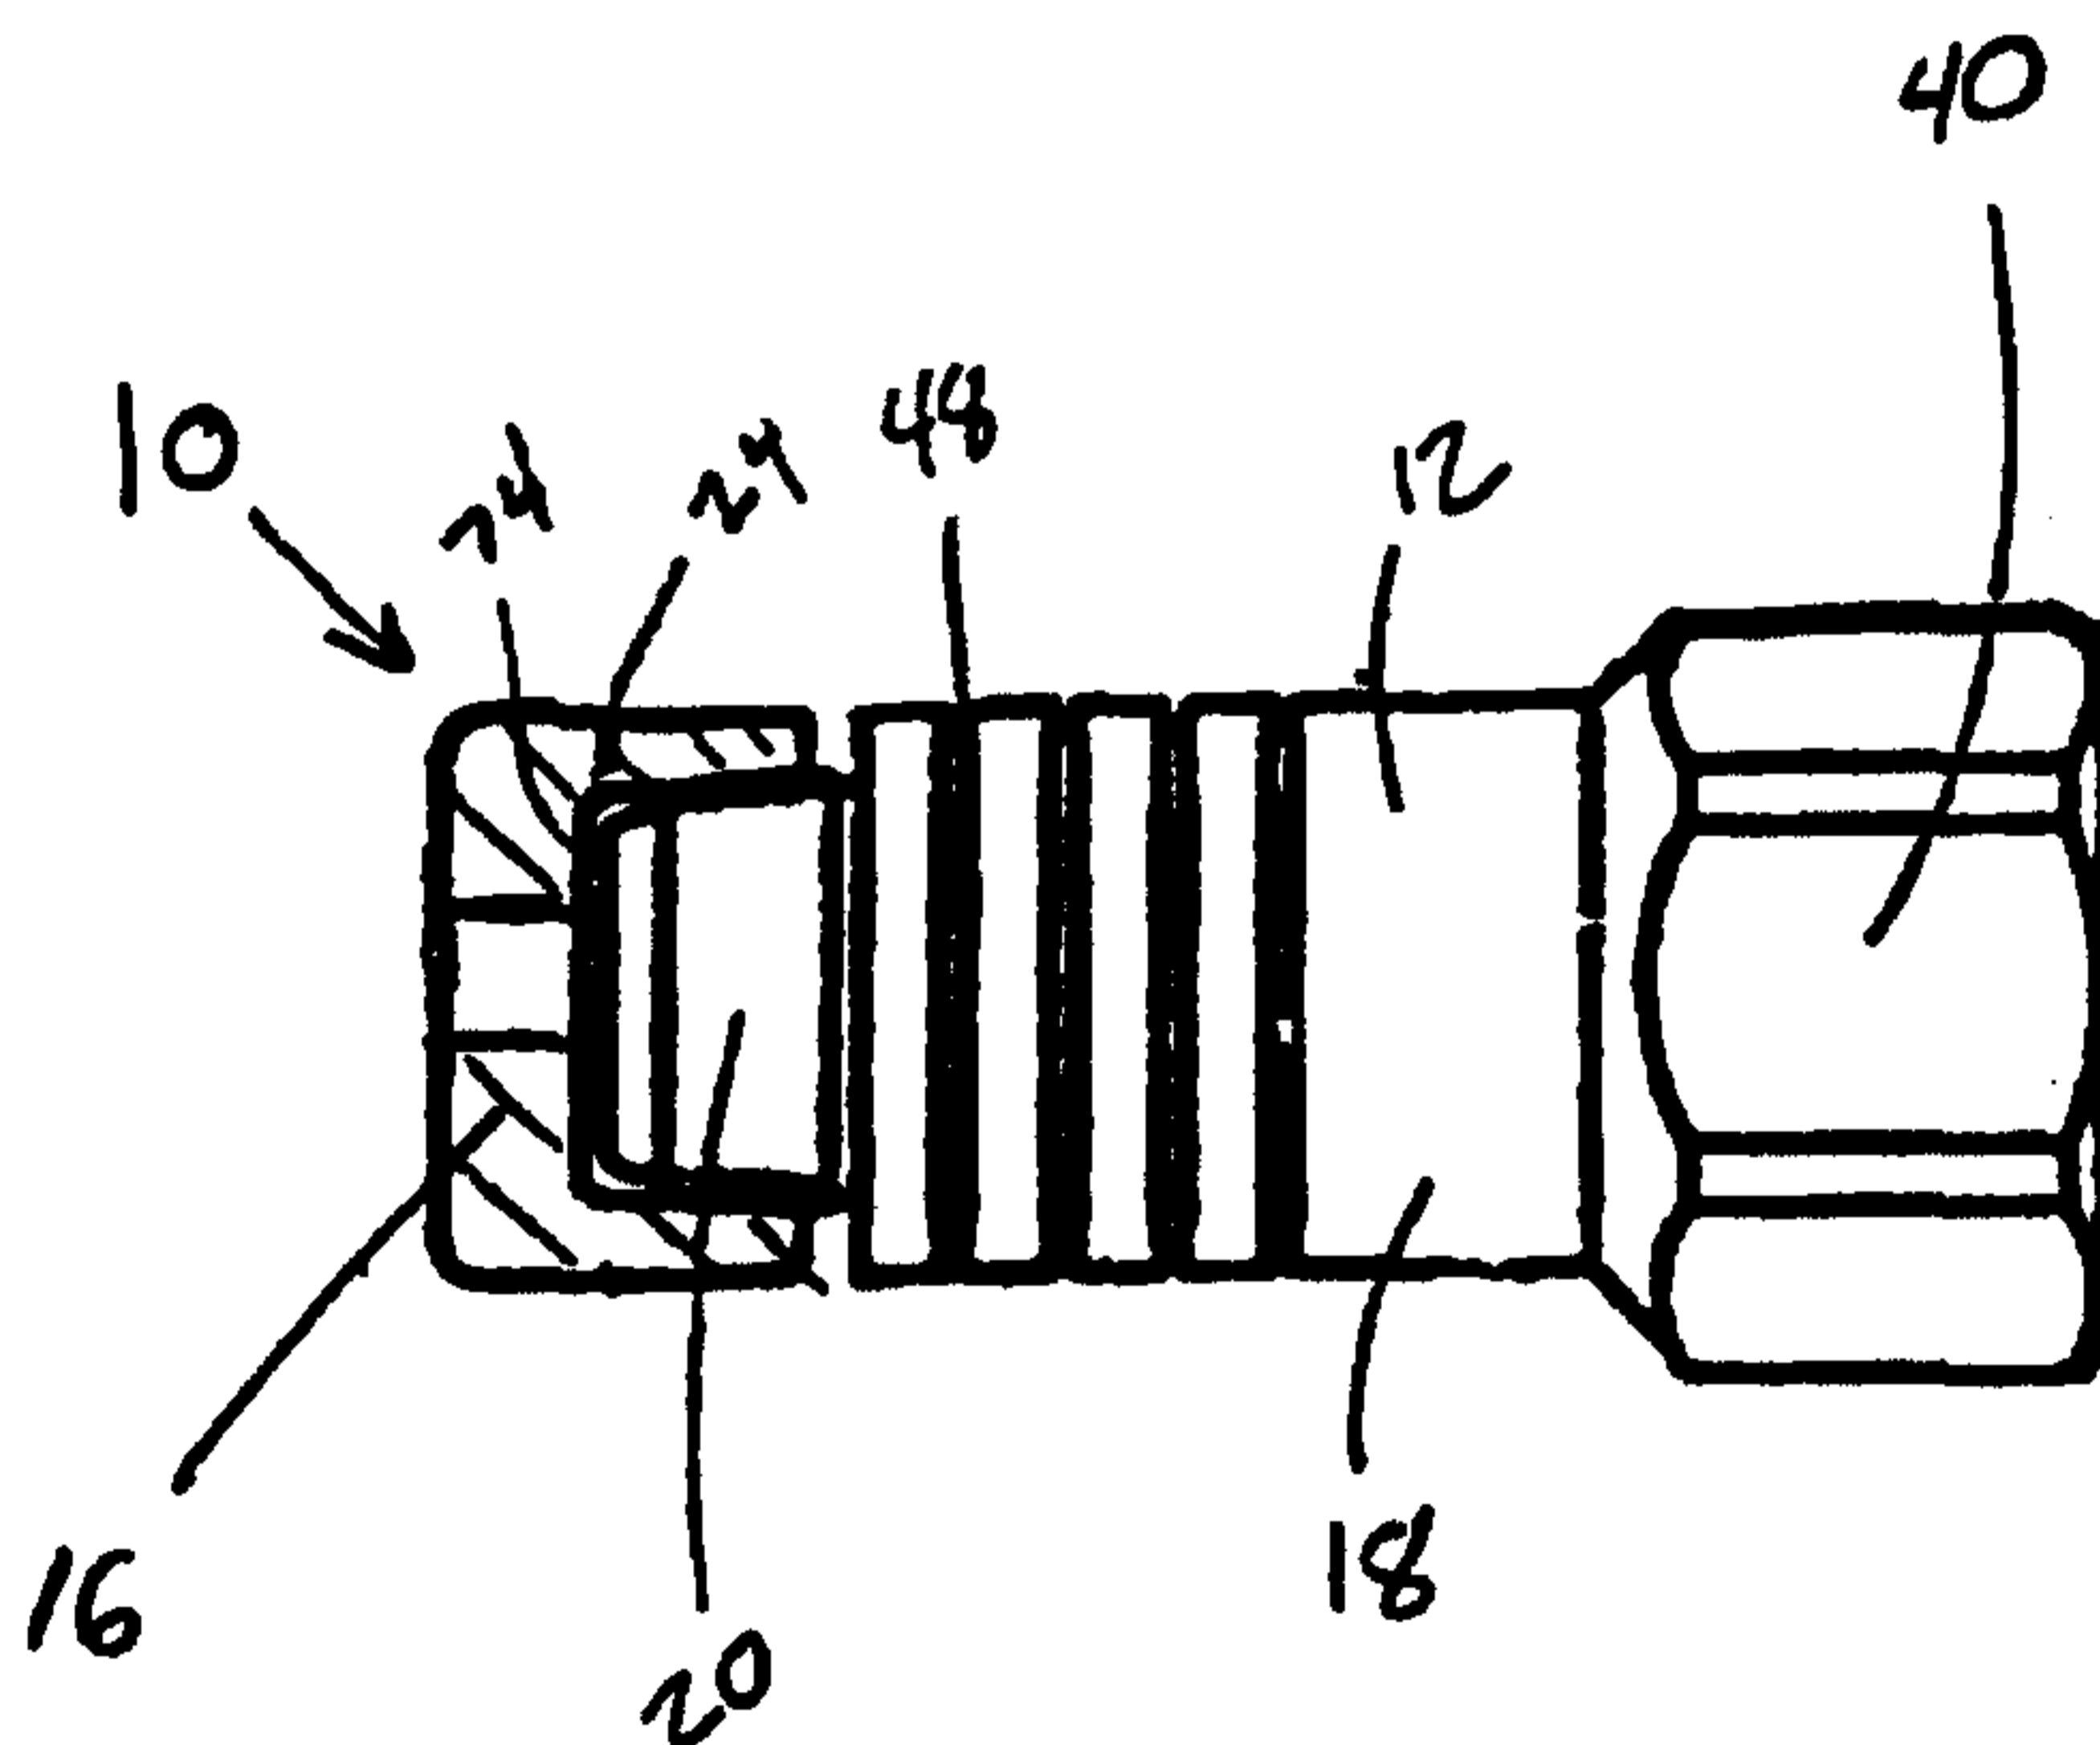

## (57) Abstract

A nozzle includes a housing defining a fluid passage (26). A member (14) is positioned to block the fluid passage when the nozzle is not spraying fluid. A retainer (16) attached to the housing retains the member in the closed position. The surface of the housing has one or more marks (48). The number of marks indicates the spray profile produced by the nozzle. The member is disposed within the fluid passage and bursts under the flow of fluid.

- 1 -

FIRE-EXTINGUISHER NOZZLEBackground of the Invention

5           The invention relates to nozzles used to dispense fluid from fire-extinguisher systems. Fire-extinguisher systems are commonly installed in commercial settings such as in commercial kitchens or restaurants. These systems dispense extinguishing fluid according to design  
10 specifications. Nozzles are attached to the system that will spray fluid in a pattern, known as a spray profile, that is consistent with the specification. When not in use, the nozzles are exposed to debris, such as dirt and grease, that can obstruct the flow passage of the nozzle.

15           It is known to place a plastic cap over the tip of the nozzle to prevent debris from entering the nozzle. When the system is activated, pressure builds from within the nozzle and pushes the cap off the tip of the nozzle allowing fluid to be dispensed.

20                           Summary of the Invention

          According to the invention a nozzle includes a housing defining a fluid passage. A member, e.g., a foil, is positioned to block the fluid passage when the nozzle is not spraying fluid. A retainer attached to the  
25 housing retains the member in the disposed position.

          Preferred embodiments of this aspect of the invention may include one or more of the following features. The foil bursts under the flow of fluid. The retainer is threaded onto the housing. The housing is  
30 formed as a single piece.

          In another aspect of the invention, a surface of the housing of the nozzle contains one or more identifying marks, e.g., circumferential grooves. The number of marks indicates a spray profile of the nozzle.

35           According to another aspect of the invention, a nozzle includes a housing defining a fluid passage, and a

- 2 -

member disposed in the fluid passage for blocking the fluid passage when the nozzle is not spraying fluid. The member is constructed to burst under the flow of fluid.

According to another aspect of the invention, a method of preventing debris from entering a nozzle includes placing a member within a fluid passage of the nozzle to block the fluid passage when the nozzle is not spraying fluid. The member is burst by flowing fluid into the nozzle to allow delivery of fluid through the nozzle.

Among other advantages, the member prevents debris, especially kitchen grease, from clogging the fluid passage of the nozzle when the nozzle is not spraying fluid. The member is capable of quickly bursting when the nozzle is activated and fluid begins to flow. However, the member is retained against the nozzle and will not separate from the tip of the nozzle over time. The marks on the nozzle allow an operator to easily identify the type of spray profile that will be produced by the nozzle.

#### Brief Description of the Drawings

FIG. 1 is a partial cross-sectional view of a fire-extinguisher nozzle.

FIG. 2 is an exploded cross-sectional view of the fire-extinguisher nozzle shown in FIG. 1.

FIG. 3 is a partial cross-sectional view of an additional embodiment of a fire-extinguisher nozzle.

#### Description of the Preferred Embodiments

Referring to FIGS. 1 and 2, a fire-extinguisher nozzle 10 suitable for dispensing fluid, especially water, from a fire extinguishing system includes a housing 12, a foil 14, and a foil retainer 16. Foil 14 prevents debris from entering the nozzle and bursts under the flow of extinguisher fluid. Housing 12 is a generally cylindrical structure constructed from a single

- 3 -

piece of material and has openings 30, 32 at a proximal end 22 and a distal end 24, respectively. Housing 12 has two distinct regions: a nozzle body 18 that lies toward the proximal end 22 of housing 12, and a nozzle tip 20  
5 that lies toward the distal end 24 of housing 12.

Housing 12 has an internal passageway 26 extending through nozzle body 18 and nozzle tip 20, and terminating at proximal end opening 30 and distal end opening 32.

Nozzle body 18 houses a vane 34 and a cup strainer  
10 36 positioned within internal passageway 26. Vane 34 spans across internal passageway 26 and affects the flow of fluid through internal passageway 26. Cup strainer 36 is a porous mesh that lies closer to proximal end 22 than vane 34 and completely covers internal passageway 26.

15 Cup strainer 36 is held in place by, e.g., a retaining ring 38. Nozzle body 18 has a hexagonal head 40 at proximal end 22 that can accommodate a wrench or other tool for attaching nozzle 10 to an extinguisher system. Hexagonal head 40 has an internal thread 46.

20 A set of rings 48 are engraved into the outer surface of nozzle body 18 to a depth of, e.g., 0.795 mm (0.031"). The number of rings informs the operator of the particular spray profile (described below) produced by nozzle 10.

25 Nozzle tip 20 has a constricted region 50 where the diameter of internal passageway 26 is reduced. Moving in a direction from proximal end 22 to distal end 24, the diameter of passageway 26 first decreases in a proximal section 51 of constricted region 50 and then  
30 increases in a distal section 53 of constricted region 50.

Nozzle tip 20 includes an external thread 60. Retainer 16 has a first section 65 including an internal thread 64 for attaching retainer 16 to nozzle tip 20. A  
35 second section of retainer 16 has a passage 78. A lip 74

- 4 -

is defined by section 67. Lip 74 abuts distal end 24 of housing 12 when retainer 16 is attached to nozzle tip 20 as shown in FIG. 1: When retainer 16 is attached to nozzle tip 20, passage 78 and internal passageway 26  
5 combine to form a fluid passage 82.

Foil 14 lies against lip 74 and within fluid passage 82. A mounting disk 76, e.g. a washer, positioned between foil 14 and distal end 24 of housing 12 supports the foil. When retainer 16 is attached to  
10 nozzle tip 20, foil 14 completely covers opening 32 at distal end 24. This configuration prevents debris such as kitchen grease, which collects on nozzle 10 when the extinguisher system is idle, from clogging internal passageway 26.

15 As an example, nozzle 10 is constructed in the following configuration. Housing 12 has a length of 45.67 mm (1.781") and is constructed of brass with nickel-chrome plating. Vane 34 is constructed of brass. Cup strainer 36 is constructed of a stainless steel mesh.  
20 Retaining ring 38 is also constructed of stainless steel. Retainer 16 is constructed of brass with a nickel-chrome plating. Foil 14 is composed of a thin, pliable metal such as tin, and mounting disk 76 is brass.

In operation, with nozzle 10 attached to a fire-  
25 extinguishing system, e.g., a system installed in a commercial kitchen, when a fire is sensed, a extinguishing fluid flows through fluid passage 82 and is dispensed from distal end 24 of housing 12. Foil 14 is a thin, pliable material which bursts quickly under the  
30 pressure formed when the extinguisher system is activated and fluid begins to flow through internal passageway 26. However, because foil 14 is retained against housing 12 by retainer 16, foil 14 will not separate from housing 12 prior to or during activation of the extinguishing  
35 system.

- 5 -

As fluid flows through internal passageway 26, cup strainer 36, which lies upstream of vane 34, filters out debris in the fluid, e.g., rust or minerals, that may lodge against vane 34 or constricted region 50. Vane 34  
5 disrupts the continuous fluid flow to create a flow of fluid droplets. The fluid droplets pass through constricted region 50 which causes the droplets to be dispensed in a spray profile. It is known to configure vane 34 to provide a particular droplet size that, when  
10 coupled with the configuration of constricted region 50, determines the spray profile.

Rings 48 are engraved in patterns which correspond to the particular spray profile of the nozzle. Rings 48 allow a nozzle 10 having a particular spray profile to be  
15 easily identified, e.g., for installation or replacement in an extinguishing system according to the design specifications. For example, as shown in FIG. 1, four rings 48 correspond to a "full cone" spray profile of  $90.0^\circ$  ( $\pm 10^\circ$ ) at 100 pounds/square inch (psi) in nozzle  
20 10 having a narrow diameter 56 of 1.667 mm (0.065") and a flow capacity of 1.00 gallon/minute (gpm) ( $\pm 5\%$ ); as shown in FIG. 3, three rings 48 correspond to a "full cone" spray profile of  $46.0^\circ$  ( $\pm 10^\circ$ ) at 100 psi in nozzle 10 having a narrow diameter 56 of 1.590 mm  
25 (0.062") and a flow capacity of 0.92 gpm ( $\pm 5\%$ ); two rings 48 correspond to a "full cone" spray profile of  $30.0^\circ$  ( $\pm 10^\circ$ ) at 100 psi in nozzle 10 having a narrow diameter 56 of 2.487 mm (0.097") and a flow capacity of 2.20 gpm ( $\pm 5\%$ ); one ring 48 corresponds to a "full  
30 cone" spray profile of  $46.0^\circ$  ( $\pm 10^\circ$ ) at 100 psi in nozzle 10 having a narrow diameter 56 of 1.667 mm (0.065") and a flow capacity of 1.00 gpm ( $\pm 5\%$ ); no rings 48 correspond to a "full cone" spray profile of  $61.0^\circ$  ( $\pm 10^\circ$ ) at 100 psi in nozzle 10 having a narrow

- 6 -

diameter 56 of 2.897 mm (0.113") and a flow capacity of 3.00 gpm (+/- 5%).

Other embodiments are within the scope of the following claims.

5           For example, other conventions may be chosen to correlate a particular ring pattern to a particular spray profile. Other visual marks, such as a number of painted lines, may be used to signify a particular spray pattern. In addition, the marks may signify more than the spray  
10 profile, e.g., capacity or size. The foil and retainer may also take on additional configurations. For example, the foil may be a plastic membrane, or the retainer may be an adhesive substance.

- 7 -

What is claimed is:

1. A nozzle comprising,  
a housing defining a fluid passage,  
a member disposed in a position for blocking the  
5 fluid passage when the nozzle is not spraying fluid, and  
a retainer attached to the housing for retaining  
the member in the disposed position.
2. The nozzle of claim 1 wherein the member  
comprises a foil.
- 10 3. The nozzle of claim 2 wherein the foil is  
constructed to burst under the flow of fluid.
4. The nozzle of claim 1 wherein the retainer is  
threadedly attached to the housing.
5. The nozzle of claim 4 wherein the member is  
15 positioned in the fluid passage.
6. The nozzle of claim 1 wherein the housing is  
formed as a single piece.
7. A nozzle comprising:  
a housing defining a fluid passage, a surface of  
20 the housing having one or more identifying marks, the  
number of marks indicating a spray profile of the nozzle.
8. The nozzle of claim 7 wherein the mark is a  
circumferential groove.
9. A nozzle comprising:  
25 a housing defining a fluid passage, and  
a member disposed in the fluid passage for  
blocking the fluid passage when the nozzle is not

- 8 -

spraying fluid, the member being constructed to burst under the flow of fluid.

10. A method of preventing debris from entering a nozzle, comprising

5 placing a member within a fluid passage of the nozzle to block the fluid passage when the nozzle is not spraying fluid, and

bursting the member by flowing fluid into the nozzle to allow delivery of fluid through the nozzle.

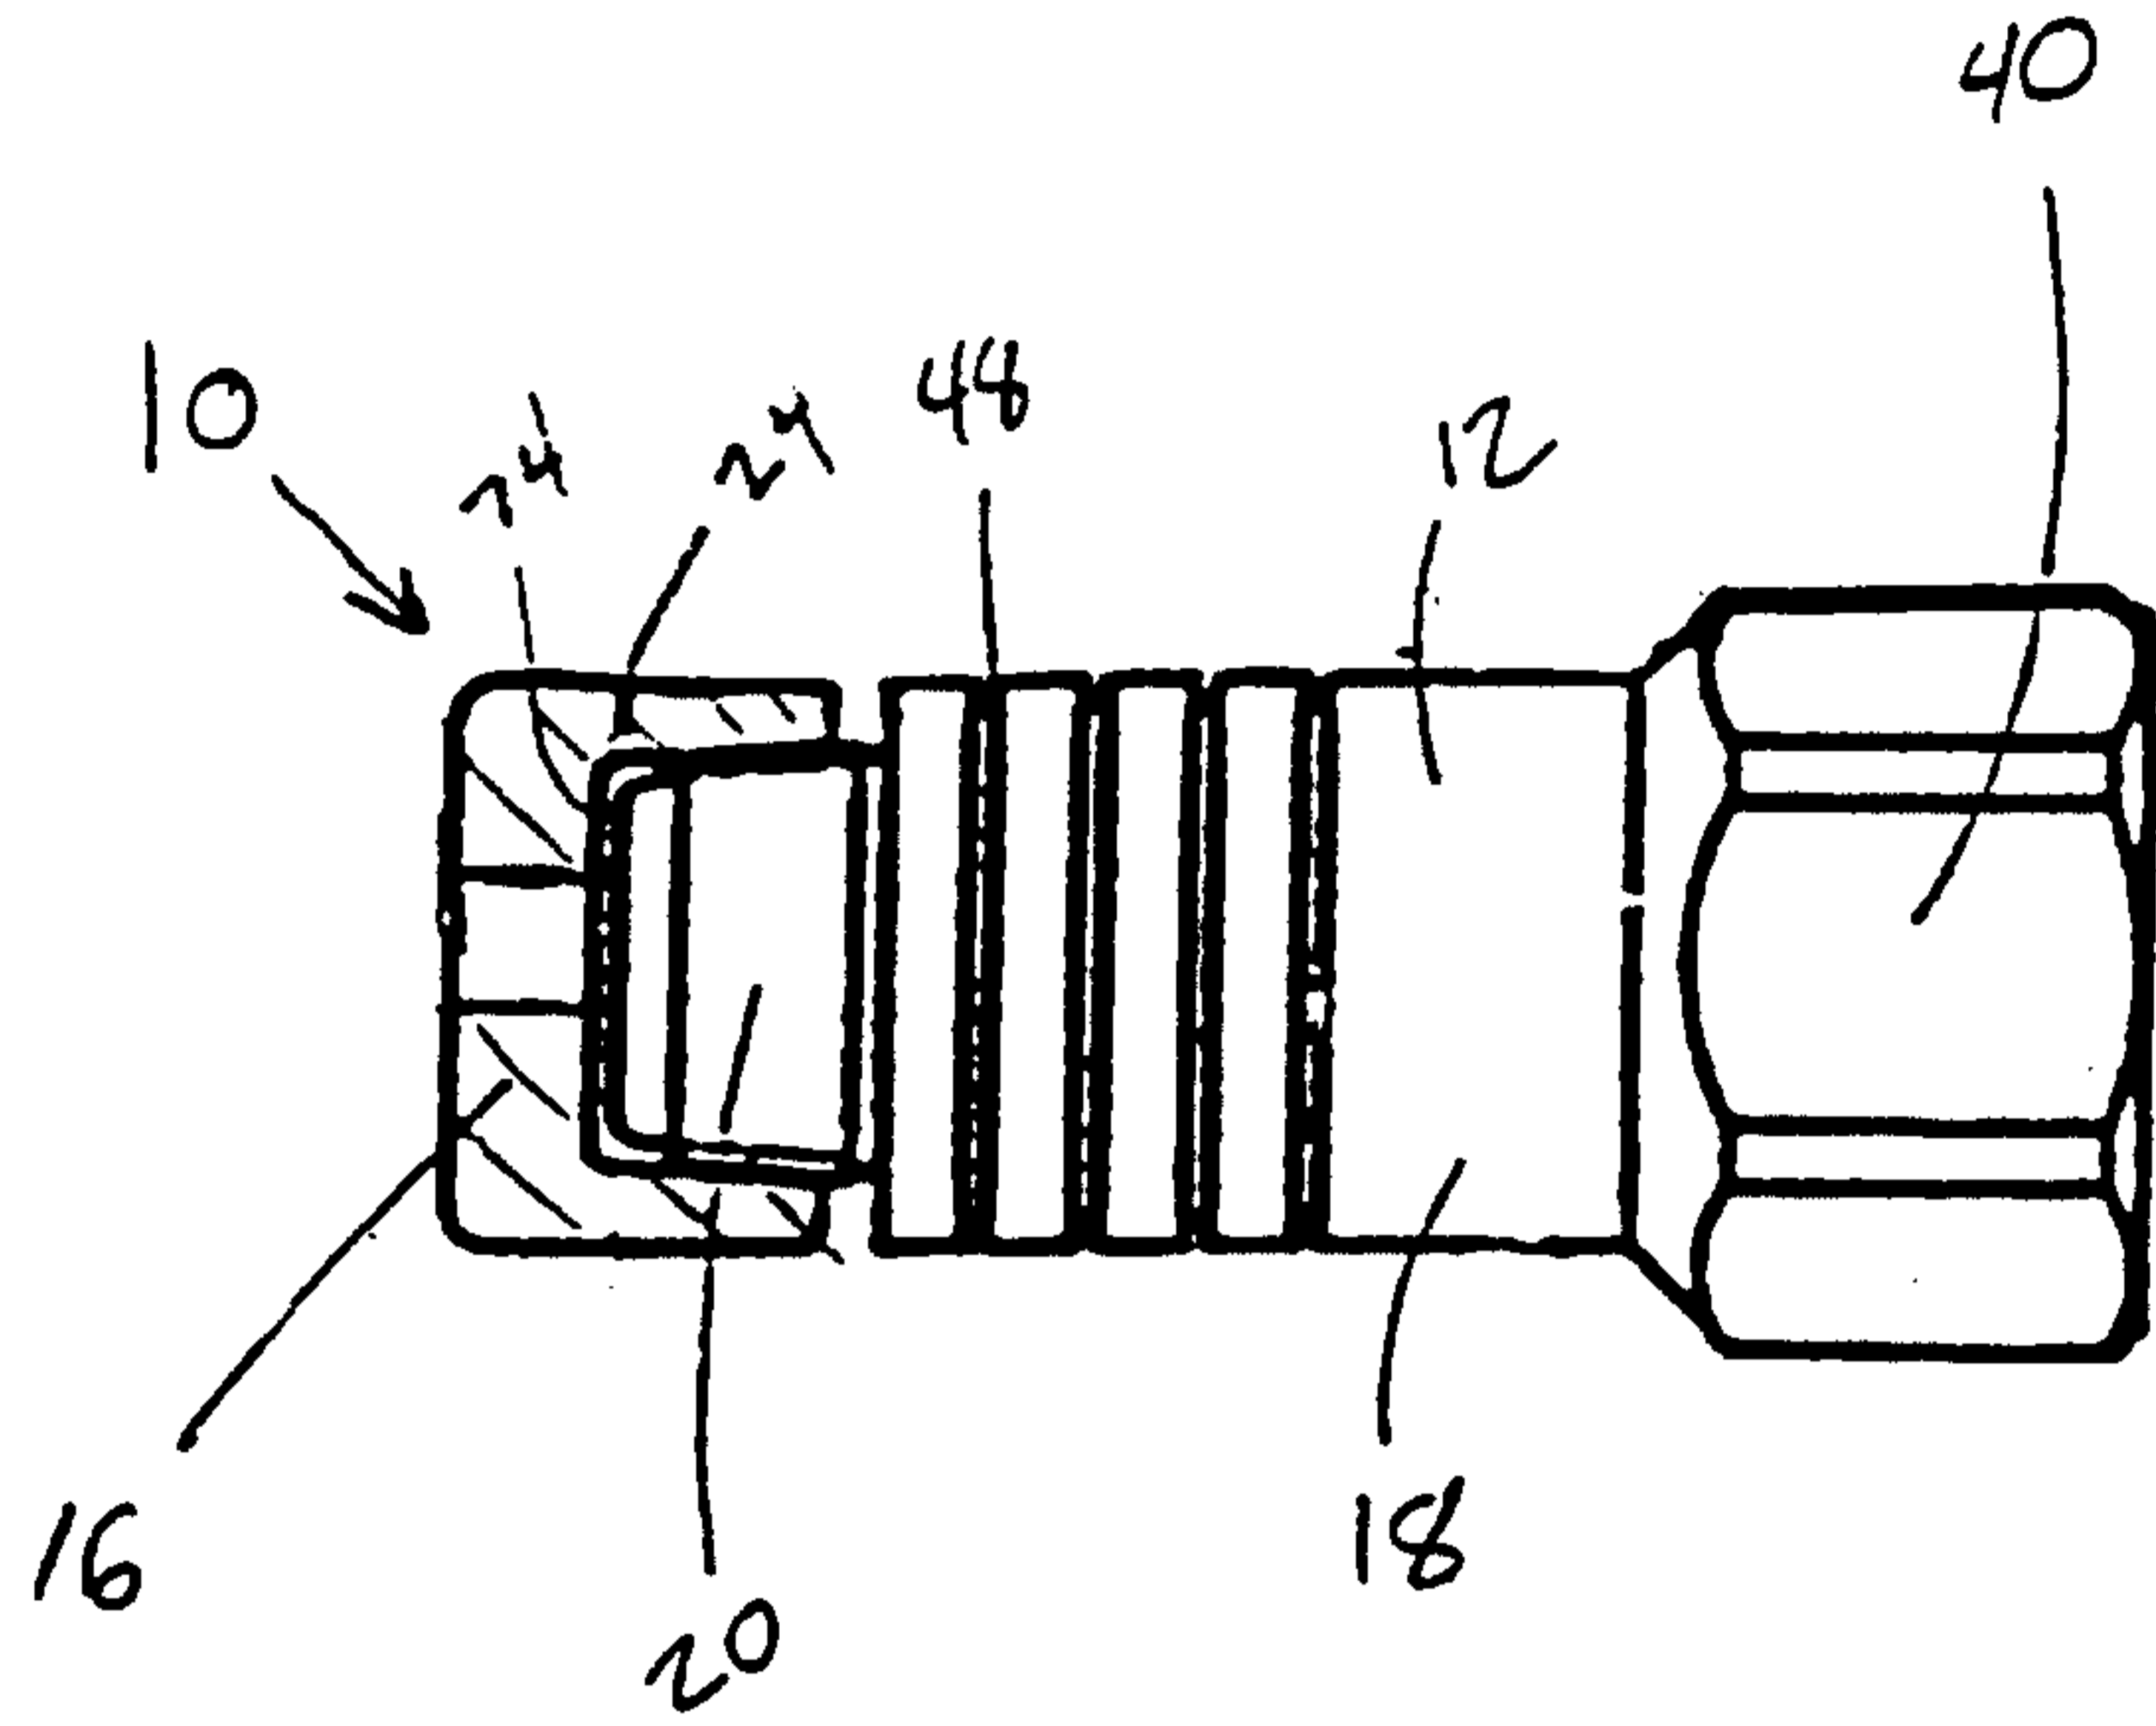


FIG. 1

Marks & Clerk

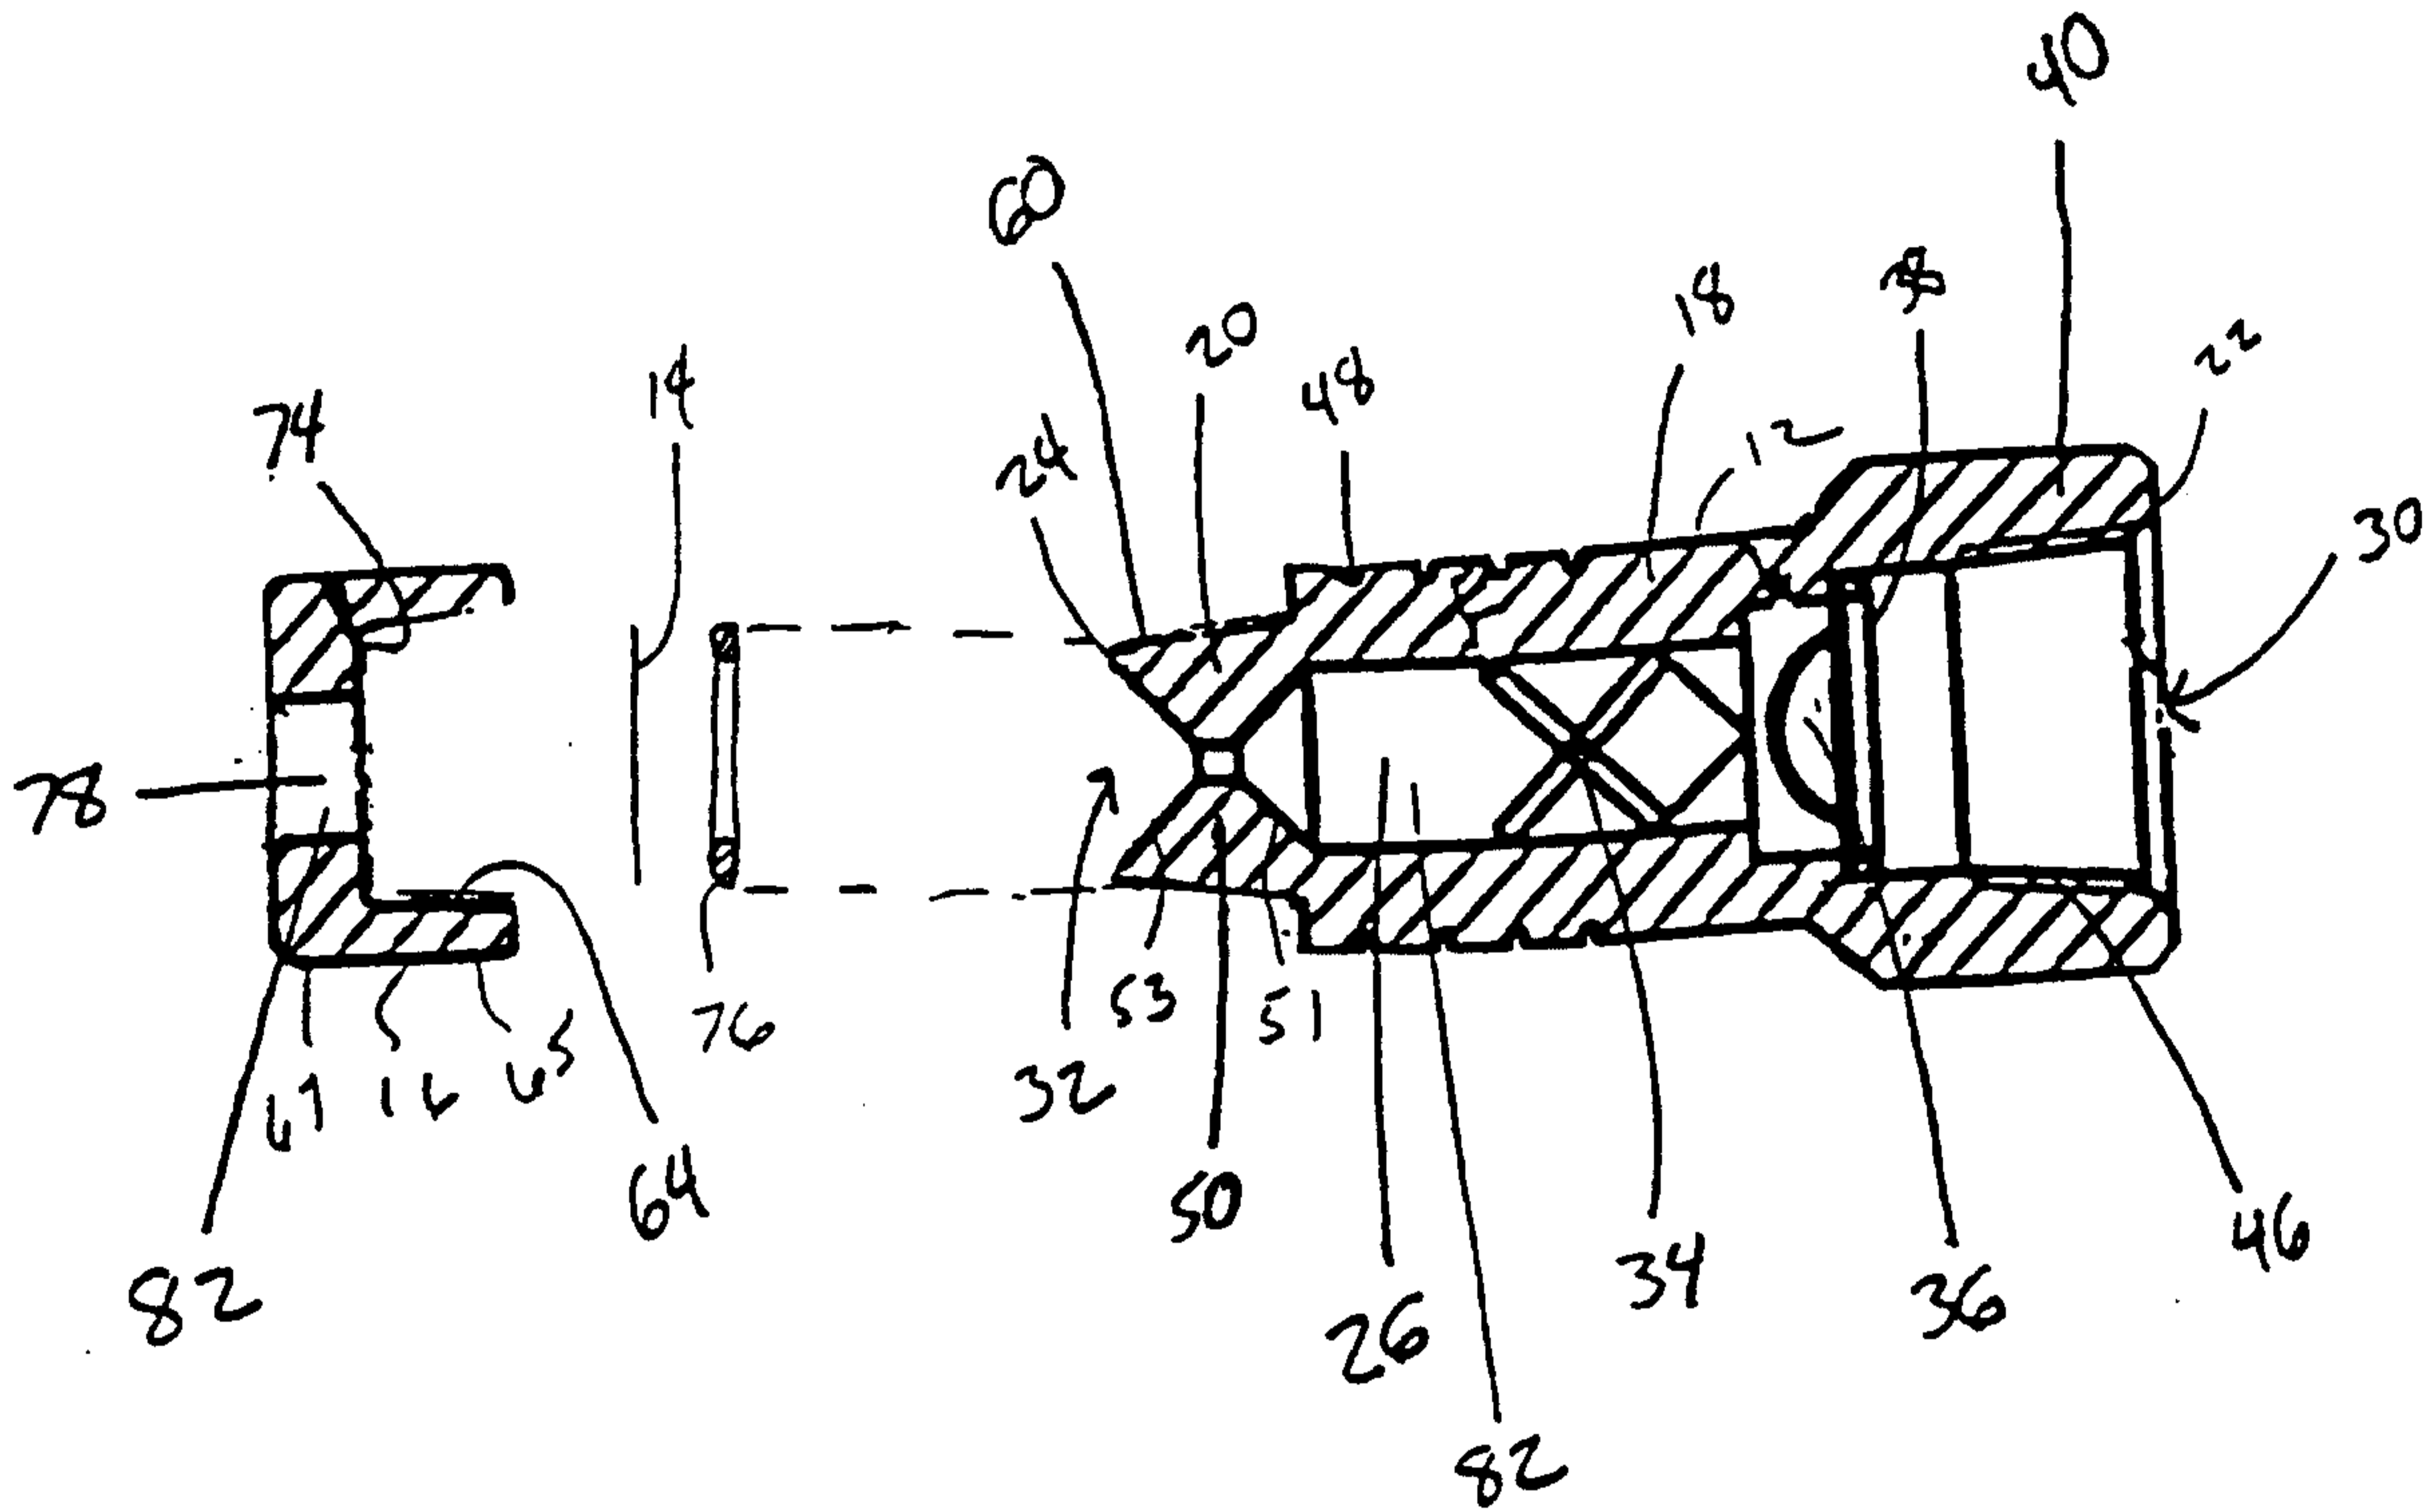


FIG. 2

Mark Clerk

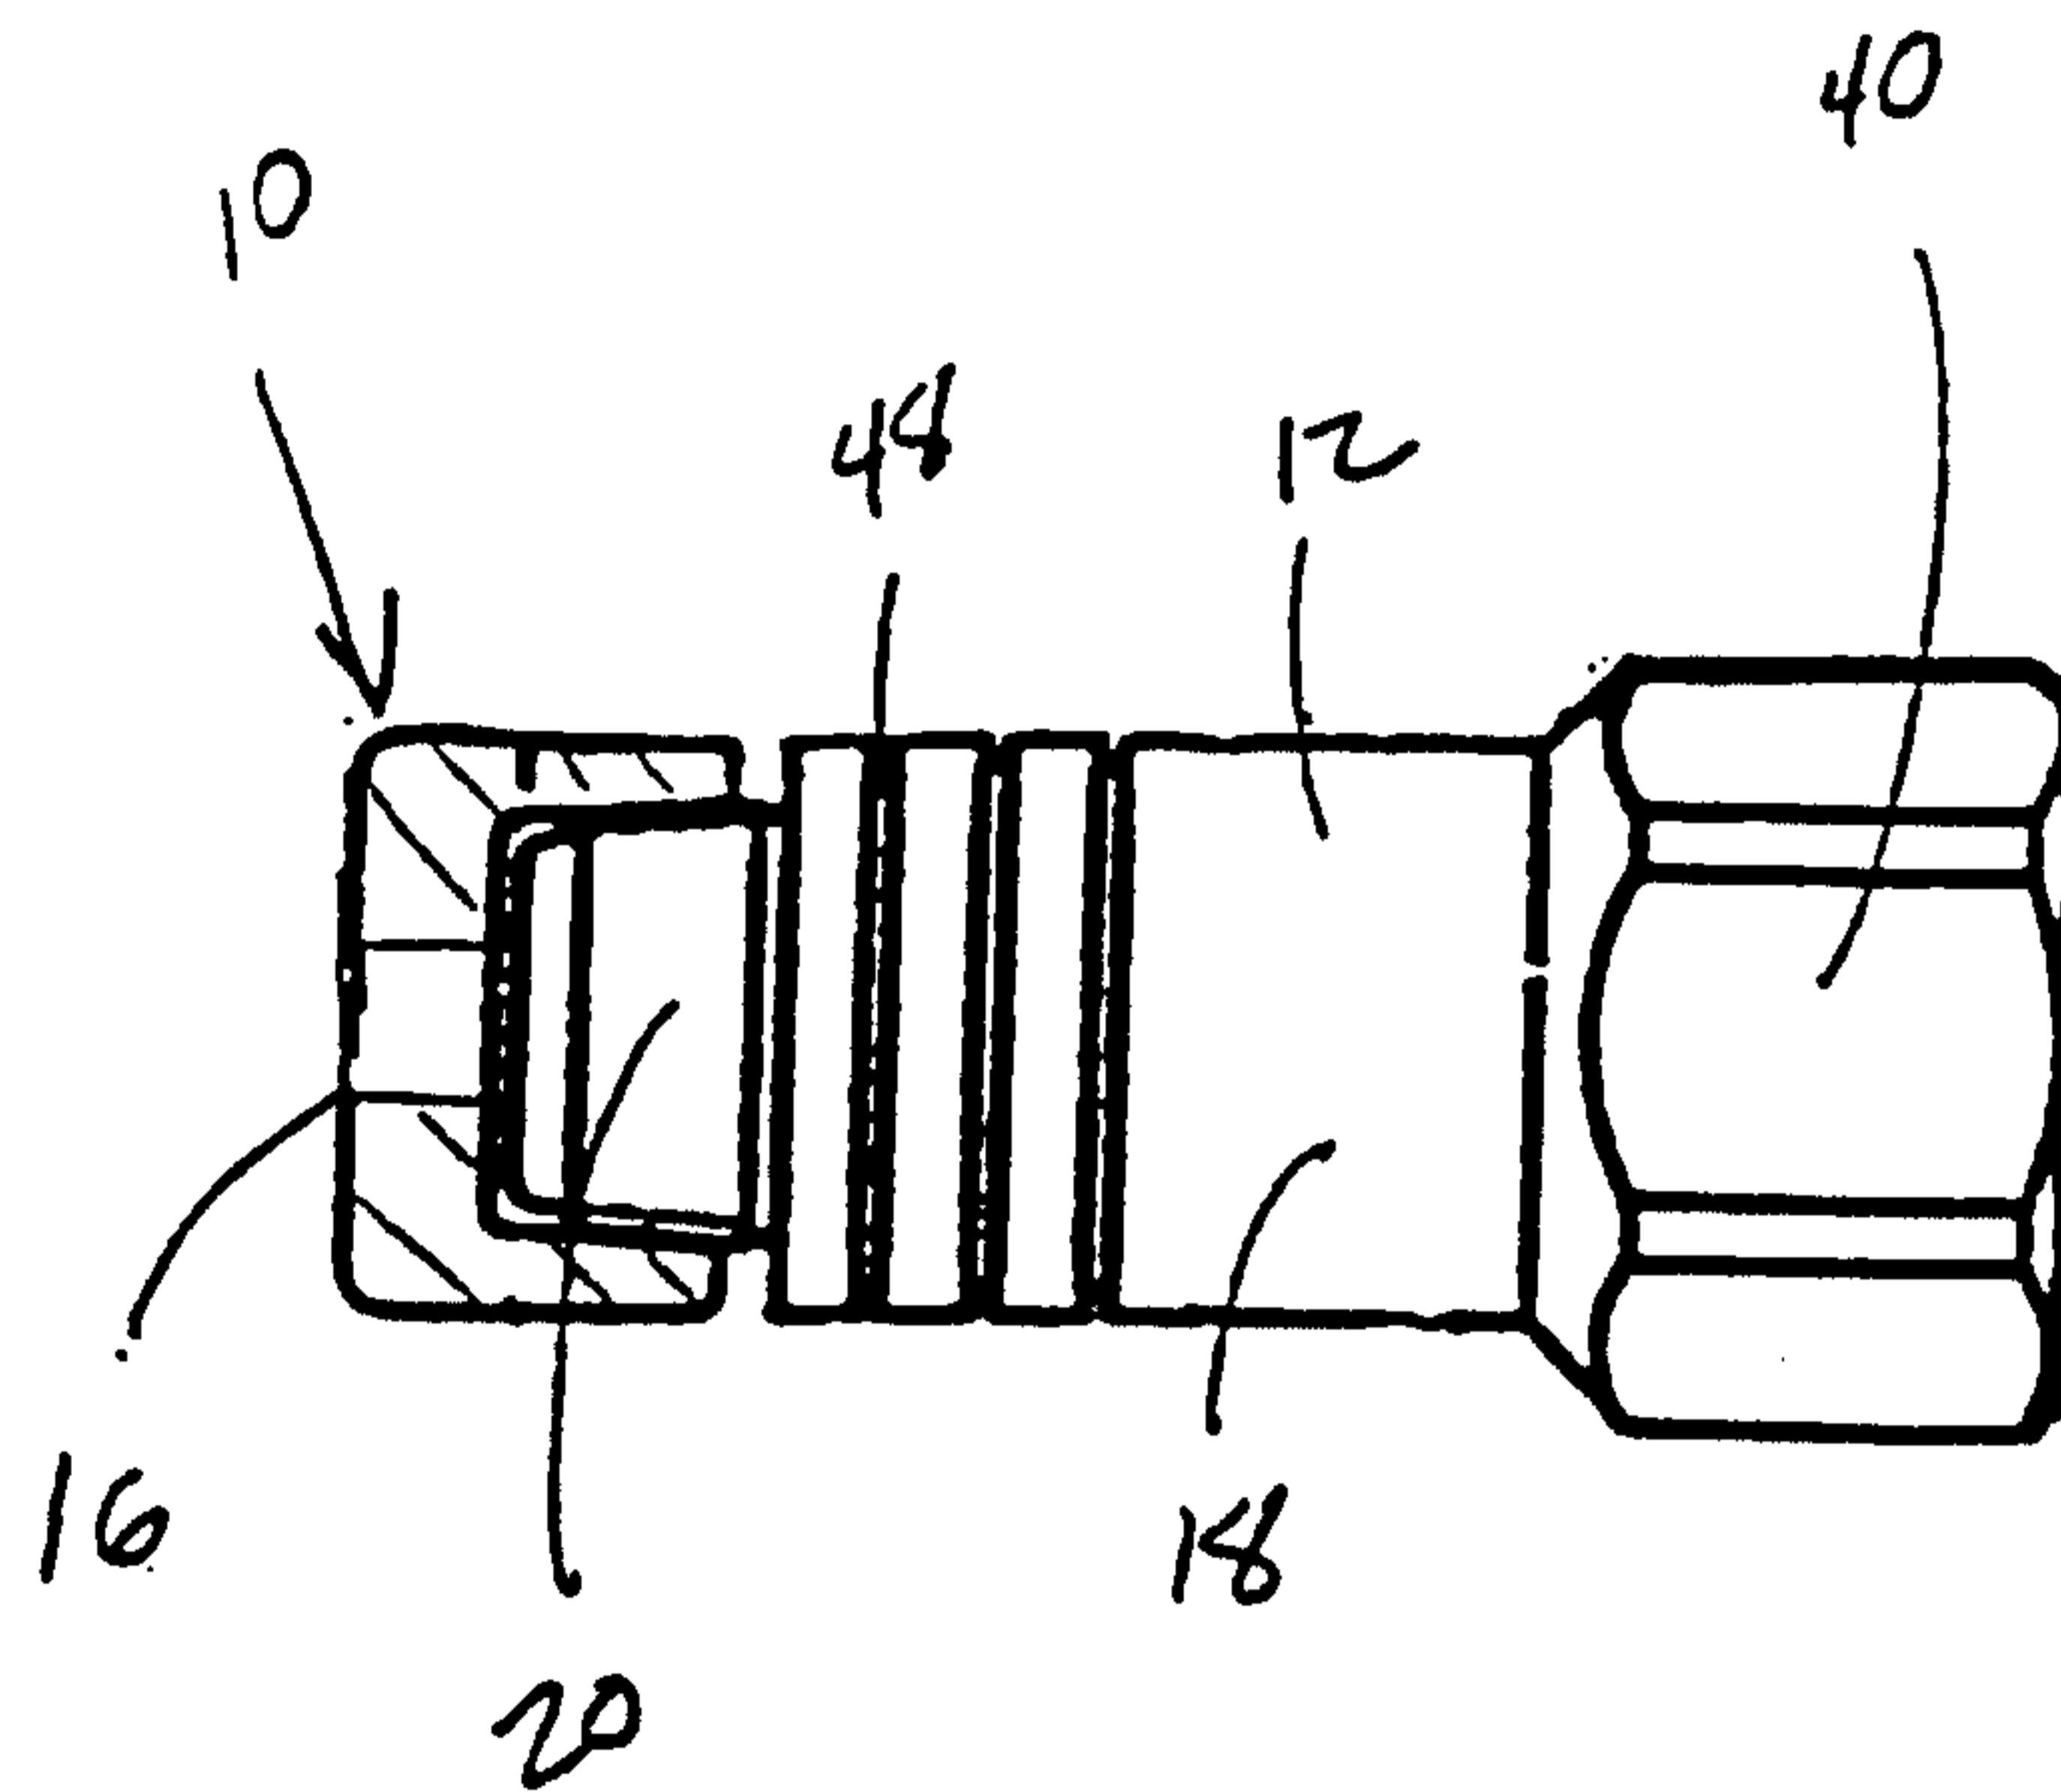


FIG. 3

Marks - Check