

(19) **DANMARK**

(10) **DK/EP 3000570 T3**



(12) **Oversættelse af
europæisk patentskrift**

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: **B 28 B 19/00 (2006.01)** **B 28 B 17/00 (2006.01)** **G 01 N 27/20 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2018-01-22**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2017-11-22**
- (86) Europæisk ansøgning nr.: **14800996.2**
- (86) Europæisk indleveringsdag: **2014-03-24**
- (87) Den europæiske ansøgnings publiceringsdag: **2016-03-30**
- (86) International ansøgning nr.: **JP2014057964**
- (87) Internationalt publikationsnr.: **WO2014188772**
- (30) Prioritet: **2013-05-22 JP 2013108116**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **Yoshino Gypsum Co., Ltd., Shin-Tokyo Bldg., 3-1, Marunouchi 3-chome, Chiyoda-ku, Tokyo, 100-0005, Japan**
- (72) Opfinder: **YOSHIDA Tsuyoshi, c/o YOSHINO GYPSUM Co., Ltd., Shin-Tokyo Bldg., 3-1 Marunouchi 3-chome, Chiyoda-ku, Tokyo 100-0005, Japan**
HIMENO Akira, c/o YOSHINO GYPSUM Co., Ltd., Shin-Tokyo Bldg., 3-1 Marunouchi 3-chome, Chiyoda-ku, Tokyo 100-0005, Japan
NOGUCHI Tomohiro, c/o YOSHINO GYPSUM Co., Ltd., Shin-Tokyo Bldg., 3-1 Marunouchi 3-chome, Chiyoda-ku, Tokyo 100-0005, Japan
- (74) Fuldmægtig i Danmark: **Zacco Denmark A/S, Arne Jacobsens Allé 15, 2300 København S, Danmark**
- (54) Benævnelse: **Fremgangsmåde og indretning til fremstilling af gipsplade**
- (56) Fremdragne publikationer:
EP-A1- 1 116 562
JP-A- S6 048 306
JP-A- H01 159 204
JP-A- 2000 071 218
JP-A- 2003 266 414
JP-A- 2003 334 809

DESCRIPTION

Technical Field

[0001] The present invention relates to a method and an apparatus for producing a gypsum board.

Background Art

[0002] A gypsum board is a sheet-like body having a structure in which an upper face, a lower face, and left and right side faces of a gypsum slab are covered by lining paper sheets, and is widely used as building materials such as ceiling materials, wall materials, and flooring materials.

[0003] As a method for producing a gypsum board, the following production method for example is known. First of all, a laminated material in which a gypsum slurry is continuously injected into a gap between a pair of lining paper sheets are formed while continuously supplying the pair of lining paper sheets. In forming the laminated material, the lower lining paper sheet is held upward along a marked line formed in the edge portions of both sides thereof. Thereby, the upper face of the gypsum slurry is covered by the upper lining paper sheet, and the lower side face and left and right side faces of the gypsum slurry are covered by the lower lining paper sheet. The laminated material formed in this way is allowed to pass between a pair of upper and lower forming plates, thereby obtaining a molded body having a thickness depending on a space between plates. A gypsum board is obtained as a final product by drying the molded body.

[0004] However, in such a production method, there has been a problem that when, for example, the gypsum slurry is contaminated by foreign bodies (such as a lump of gypsum), the foreign bodies are caught between a pair of upper and lower forming plates and the lining paper sheet is cut by the foreign bodies. The problem is brought about because the foreign bodies larger than the space between a pair of upper and lower forming plates are caught between the pair of upper and lower forming plates when the gypsum slurry containing the foreign bodies enters there, and therefore the progress of the lining paper sheet is inhibited at the portion where the foreign bodies are caught while the progress of the lining paper sheet continues to progress at the other portions. When the production is continued with the situation where the foreign bodies are caught left unchanged, the lining paper sheet continuously supplied is continued to be cut, resulting in continuous production of defective gypsum board products. Moreover, when such a situation is continued, the lining paper sheet is finally torn completely, and therefore not only supply of the lining paper sheet but also production of the gypsum board cannot be continued. In such a case, complicated operation in which the foreign bodies are immediately removed, then the lining paper sheets are supplied again between the

pair of upper and lower forming plates, and the gypsum slurry is injected into the gap of the pair of upper and lower lining paper sheets to restart the production has had to be conducted.

[0005] In order to solve the problems as described previously, the present applicant has proposed an apparatus for producing a gypsum board constituted so that a space between a pair of upper and lower forming plates is expanded when the cut of the lining paper sheet is detected (Patent Literature 1). The apparatus includes, for example, as shown in an apparatus 100 for producing a gypsum board as illustrated in Figure 4, a roll 136, an upper side forming plate 124, a lower side forming plate 108, an electrode (lower side external electrode 138) arranged on the downstream side of the lower side forming plate 108 apart from the lower side forming plate 108, an electric current detector 120, and an air cylinder 122. And a circuit 140 is constituted by electrically connecting the lower side external electrode 138 and the lower side forming plate 108, and the electric current detector 120 and a power source D are electrically connected to the circuit 140.

[0006] The apparatus 100 for producing a gypsum board makes it possible to detect the cut of the lining paper sheet by making use of the fact that the lining paper sheet is an insulator and the gypsum slurry is a good conductor of electricity. That is to say, in the apparatus 100 for producing a gypsum board, when the lower lining paper sheet 116 that is an insulator is cut, the gypsum slurry that is a good conductor makes contact with the lower side forming plate 108 and the lower side external electrode 138 and an electric current flows in the circuit 140, and therefore the cut of the lower lining paper sheet 116 can be detected by the electric current detector 120. Next, the air cylinder 122 lifts the upper side forming plate 124 depending on a signal from the electric current detector 120, thereby expanding the space between the upper side forming plate 124 and the lower side forming plate 108. Thereby, foreign bodies caught between the upper side forming plate 124 and the lower side forming plate 108 pass between the pair of forming plates. Thereafter, when the position of the upper side forming plate 124 is restored to the original position, production can be restarted. According to the production apparatus, the gypsum board can be produced continuously without stopping production and continuous production of a large amount of defective products can be avoided. Moreover, in addition to the detection of the cut of the lining paper sheet attributable to contamination of foreign bodies, the existence of defects can be detected because the gypsum slurry leaks out also in the case where defects (holes) are originally open in the lining paper sheet which makes an electric current to flow in the circuit 140.

Citation List

Patent Literature

[0007] Patent Literature 1: Japanese Patent No. 3315935

Summary of Invention

Technical Problem

[0008] However, the cases where the lining paper sheet is torn immediately after the foreign bodies in the gypsum slurry are caught between the forming plates and the production of a gypsum board is stopped have been increasing attributable to the following reasons: (1) the production speed of gypsum boards is becoming higher due to the technological innovation of gypsum board production technology in recent years, and therefore the tension applied on the lining paper sheet is increased;

(2) reducing the weight and thickness of the lining paper sheets is facilitated from pressure to reduce costs, and therefore the lining paper sheets are becoming easier to cut; and so on.

[0009] Accordingly, a production method has earnestly been desired that makes it possible to continuously produce a gypsum board, the method being applicable to: high speed production of gypsum boards; production in which tension applied on the lining paper sheets is increasing; and production with a lining paper sheet having reduced weight and thickness, without stopping the production.

[0010] The present invention has been completed for solving the problems of the conventional technologies, and provides a method and an apparatus for producing a gypsum board making it possible to continuously produce a gypsum board, the method and apparatus being applicable to: high speed production of gypsum boards; production in which tension applied on the lining paper sheets is increasing; and production with a lining paper sheet having reduced weight and thickness, without stopping the production.

Solution to Problem

[0011] The present inventors have conducted diligent studies on the above-described problems to find that the problems of the conventional technologies can be solved by embedding inside the forming plate an electrode for detecting paper cut which have conventionally been arranged on the downstream side of the end of the forming plate, and have completed the present invention.

[0012] That is to say, according to the present invention, there is provided a method for producing a gypsum board, the method comprising a step of continuously injecting a gypsum slurry into a gap between a pair of upper and lower lining paper sheets while continuously supplying the pair of upper and lower lining paper sheets to form a laminated material and allowing the laminated material to pass between a pair of upper and lower forming plates to obtain a molded body having a thickness depending on a space between the plates, wherein a forming plate comprising: a plate main body constituted from an electrically conductive

material; and an embedded electrode embedded in the plate main body, the embedded electrode being electrically insulated from the plate main body by an insulator and being embedded so as for a portion thereof to be exposed on a surface of the plate main body making contact with the lining paper sheet is used as at least one of the pair of upper and lower forming plates, a circuit is constituted by electrically connecting the plate main body and the embedded electrode embedded in the plate main body, and voltage is applied to the circuit, and when the lining paper sheet is cut to bring the plate main body and the embedded electrode into contact with the gypsum slurry and an electric current flows in the circuit, the space between the pair of upper and lower forming plates is expanded to remove a cause of conduction, and thereafter the space between the pair of upper and lower forming plates is restored to the original space.

[0013] In the production method of the present invention, it is preferable that the embedded electrode is embedded at a portion on the downstream side of the following starting position of forming in the plate main body.

[Starting Position of Forming]

[0014] A position on the most downstream side of the following (1) and the following (2):

1. (1) a position of an upstream end of either one of the pair of upper and lower forming plates; and
2. (2) a position of a downstream end of a taper portion in an embodiment wherein the taper portion whose plate thickness at a position in the taper portion becomes thinner as the position approaches upstream ends of the forming plates is formed in at least one of the pair of upper and lower forming plates, and a space between the pair of the forming plates at a position in the taper portion becomes larger, due to the taper portion, as the position approaches the upstream ends of the forming plates.

[0015] Moreover, in the production method of the present invention, it is preferable that: the embedded electrode is embedded, in the plate main body, at a portion within a range from the starting position of forming to a position on a downstream side of the starting position of forming by 50 mm; at least one material selected from the group consisting of phenol resin laminated plates with a cloth base material, phenol resin laminated plates with a paper base material, epoxy resin-impregnated glass fiber cloth, and epoxy resin-impregnated paper is used as the insulator; and at least one material selected from the group consisting of iron materials, stainless steel materials, and aluminum materials, or a material obtained by applying hard chromium plating thereon is used as the electrically conductive material.

[0016] Furthermore, according to the present invention, there is provided an apparatus for producing a gypsum board comprising a pair of upper and lower forming plates for forming a

laminated material obtained by injecting a gypsum slurry into a gap between a pair of upper and lower lining paper sheets, the laminated material having a thickness depending on a space between the plates, wherein at least one of the pair of upper and lower forming plates comprises: a plate main body constituted from an electrically conductive material; and an embedded electrode embedded in the plate main body, the embedded electrode being electrically insulated from the plate main body by an insulator and being embedded so as for a portion thereof to be exposed on a surface of the plate main body making contact with the lining paper sheet, a circuit is constituted by electrically connecting the plate main body and the embedded electrode embedded in the plate main body, and the apparatus further comprises: an electric current detector electrically connected to the circuit; and an actuator moving at least one of the forming plates up and down in response to an electric signal from the electric current detector.

[0017] In the production apparatus of the present invention, it is preferable that the embedded electrode is embedded at a portion on a downstream side of the following starting position of forming in the plate main body.

[Starting Position of Forming]

[0018] A position on the most downstream side of the following (1) and the following (2):

1. (1) a position of an upstream end of either one of the pair of upper and lower forming plates; and
2. (2) a position of a downstream end of a taper portion in an embodiment wherein the taper portion whose plate thickness at a position in the taper portion becomes thinner as the position approaches upstream ends of the forming plates is formed in at least one of the pair of upper and lower forming plates, and a space between the pair of the forming plates at a position in the taper portion becomes larger, due to the taper portion, as the position approaches the upstream ends of the forming plates.

[0019] Further, in the production apparatus of the present invention, it is preferable that: the embedded electrode is embedded, in the plate main body, at a portion within a range from the starting position of forming to a position on a downstream side of the starting position of forming by 50 mm; the insulator is constituted from at least one material selected from the group consisting of phenol resin laminated plates with a cloth base material, phenol resin laminated plates with a paper base material, epoxy resin-impregnated glass fiber cloth, and epoxy resin-impregnated paper; and the electrically conductive material is at least one material selected from the group consisting of iron materials, stainless steel materials, and aluminum materials, or a material obtained by applying hard chromium plating thereon.

Advantageous Effects of Invention

[0020] According to the method or apparatus for producing a gypsum board, it becomes possible to continuously produce a gypsum board by the method and apparatus being applicable to high speed production of gypsum boards, production in which tension applied on the lining paper sheets is increasing, and production with a lining paper sheet having reduced weight and thickness, without stopping the production.

Brief Description of Drawing

[0021]

[Figure 1] Figure 1 is a schematic side view schematically illustrating an embodiment of an apparatus for producing a gypsum board of the present invention.

[Figure 2] Figure 2 is a schematic side view schematically illustrating another embodiment of an apparatus for producing a gypsum board of the present invention.

[Figure 3] Figure 3 is a schematic side view schematically illustrating yet another embodiment of an apparatus for producing a gypsum board of the present invention.

[Figure 4] Figure 4 is a schematic side view schematically illustrating an example of a conventional apparatus for producing a gypsum board.

[Figure 5] Figure 5 is a schematic side view schematically illustrating a still another embodiment of an apparatus for producing a gypsum board of the present invention

[Figure 6A] Figure 6A is a conceptual diagram schematically explaining a starting position of forming in an apparatus for producing a gypsum board of the present invention.

[Figure 6B] Figure 6B is a conceptual diagram schematically explaining a starting position of forming in an apparatus for producing a gypsum board of the present invention.

[Figure 6C] Figure 6C is a conceptual diagram schematically explaining a starting position of forming in an apparatus for producing a gypsum board of the present invention.

[Figure 6D] Figure 6D is a conceptual diagram schematically explaining a starting position of forming in an apparatus for producing a gypsum board of the present invention.

[Figure 6E] Figure 6E is a conceptual diagram schematically explaining a starting position of forming in an apparatus for producing a gypsum board of the present invention.

Description of Embodiments

[0022] Hereinafter, the present invention will be explained in detail. However, the present invention is not limited to the following embodiments and includes all the objects containing matters used to specify the present invention.

[1] Method for Producing Gypsum Board:

[0023] The method for producing a gypsum board relates to a method for producing a gypsum board, the method comprising a step of continuously injecting a gypsum slurry into a gap between a pair of upper and lower lining paper sheets while continuously supplying the pair of upper and lower lining paper sheets to form a laminated material and allowing the laminated material to pass between a pair of upper and lower forming plates to obtain a molded body having a thickness depending on a space between the plates.

[0024] For example, any of a production apparatus 1 as illustrated in Figure 1, a production apparatus 1A as illustrated in Figure 2, a production apparatus 1B as illustrated in Figure 3, and a production apparatus 1C as illustrated in Figure 5 is a production apparatus capable of conducting the production method of the present invention, and with the production apparatuses, the step of continuously injecting the gypsum slurry 4 into the gap between a pair of upper and lower lining paper sheets 2 while continuously supplying the pair of upper and lower lining paper sheets 2 to form a laminated material and allowing the laminated material to pass between the pair of upper and lower forming plates 6 to obtain a molded body having a thickness depending on the space between the plates.

[0025] The gypsum slurry is a slurry containing calcined gypsum (β -type hemihydrate gypsum and α -type hemihydrate gypsum) and water as main components. In the present invention, the gypsum slurry includes a slurry using type III anhydrous gypsum in place of part or the whole of the calcined gypsum. The gypsum slurry may contain an additive such as an adhesion improver, a curing accelerator, or an admixture ingredient in addition to calcined gypsum and water.

[0026] The lining paper sheet is a lining paper sheet for producing a gypsum board. In the present invention, the lining paper sheet includes a glass fiber mat for producing a gypsum board. A sizing agent is mixed in the lining paper sheet for the purpose of suppressing water absorption and securing insulation properties during forming. Accordingly, water in the gypsum slurry does not penetrate into a surface layer of the lining paper sheet (a layer on the side not making contact with the gypsum slurry) immediately after the lining paper sheet makes contact with the gypsum slurry, and the lining paper sheet functions as an insulator. The thickness of the lining paper sheet is not particularly limited, however lining paper sheets having a thickness of 0.2 to 1.0 mm are usually used.

[0027] The production method of the present invention can suitably be used when gypsum boards are produced at a high speed. Specifically, the production method of the present

invention can suitably be used when gypsum boards are produced at a production speed of 60 m/min or more.

[1-1] Forming Plates:

[0028] In the production method of the present invention, a forming plate having: a plate main body constituted from an electrically conductive material; and an embedded electrode embedded in the plate main body, the embedded electrode being electrically insulated from the plate main body by an insulator and being embedded so as for a portion thereof to be exposed on a surface of the plate main body making contact with the lining paper sheet is used as at least one of the pair of upper and lower forming plates. By embedding the electrode for detecting the cut of the lining paper sheet in the plate main body, it becomes possible to detect the cut of the lining paper sheet earlier than in the case where the electrode is arranged on the downstream side of the end of the plate main body.

[0029] For example, when it is necessary to detect the cut of the lower lining paper sheet, a forming plate having: the lower plate main body 10 constituted from an electrically conductive material; and the lower embedded electrode 12 embedded in the lower plate main body 10, the lower embedded electrode 12 being electrically insulated from the lower plate main body 10 by the insulator 14 and being embedded so as for a portion thereof to be exposed on the surface of the lower plate main body 10 making contact with the lower lining paper sheet 16 is used as the lower forming plate 8, as shown in the production apparatus 1 as illustrated in Figure 1.

[0030] Based on the similar idea, when it is necessary to detect the cut of the upper lining paper sheet, a forming plate having: the upper plate main body 26 constituted from an electrically conductive material; and the upper embedded electrode 28 embedded in the upper plate main body 26, the upper embedded electrode 28 being electrically insulated from the upper plate main body 26 by the insulator 30 and being embedded so as for a portion thereof to be exposed on the surface of the upper plate main body 26 making contact with the upper lining paper sheet 32 may be used as the upper forming plate 24, as shown in the production apparatus 1A as illustrated in Figure 2.

[0031] Further, when it is necessary to detect the cut of both the lower lining paper sheet and the upper lining paper sheet, the lower forming plate 8 as illustrated in Figure 1 and the upper forming plate 24 as illustrated in Figure 2 can be used together. That is to say, a forming plate having the lower embedded electrode 12 and the forming plate having an upper embedded electrode 28 are used as the lower forming plate 8 and the upper forming plate 24 respectively as illustrated in the production apparatus 1B in Figure 3.

[0032] Furthermore, an external electrode for detecting the cut of paper can be installed outside of the forming plate in addition to the embedded electrode for the purpose of backing up the embedded electrode. In the production apparatus 1C as illustrated in Figure 5 for

example, a forming plate having the embedded electrode 12 is used as the lower forming plate 8, and a lower external electrode 38 for detecting the cut of paper is further installed outside of the lower forming plate 8. The lower external electrode 38 is arranged on the downstream side of the lower forming plate 8 apart from the lower forming plate 8. Moreover, the lower external electrode 38 is arranged so as to make contact with the lower lining paper sheet 16. In such constitution, a circuit 40 that includes the lower external electrode 38, the lower plate main body 10, and a power source D3 backs up a circuit 18, thereby making it possible to detect the cut of paper in case the cut of paper cannot be detected by the circuit 18 including the embedded electrode 12, the lower plate main body 10, and the power source D1.

[0033] In addition, the lower external electrode 38 as illustrated in Figure 5 can also be installed in the production apparatus 1A as illustrated in Figure 2 or the production apparatus 1B as illustrated in Figure 3. In such cases, the effect of backing up a circuit including an embedded electrode (lower embedded electrode 12 or upper embedded electrode 28) such as the circuit 34 illustrated in Figure 2, and the circuits 18 and 34 illustrated in Figure 3 can also be obtained by the circuit 40 including the lower external electrode 38, the lower plate main body 10, and the power source D3.

[0034] An upper external electrode (not illustrated in figures) can also be used as the external electrode for backup. The upper external electrode is an electrode that is arranged on the downstream side of the upper forming plate apart from the upper forming plate, and is arranged so as to make contact with the upper lining paper sheet. The circuit for backup that consists of the upper external electrode, the upper plate main body, and the power source can detect the cut of paper in the same manner as in the circuit 40 including the lower external electrode 38 as illustrated in Figure 5, thereby making it possible to obtain the effect of backing up the circuit including the embedded electrode. Accordingly, the circuit including the upper external electrode can be used in place of or together with the circuit 40 including the lower external electrode 38.

[0035] In the method for producing a gypsum board of the present invention, the constitution of the lower forming plate and upper forming plate is particularly important. Specifically, the position where the upper embedded electrode or lower embedded electrode is arranged, the material quality of the insulator, the material quality of the electrically conductive material that constitutes the upper plate main body or lower plate main body, and so on become important. These will be explained specifically in the section of Apparatus for Producing Gypsum Board.

[1-2] Circuit:

[0036] In the production method of the present invention, the circuit is constituted by electrically connecting the plate main body and the embedded electrode embedded in the plate main body, and voltage is applied to the circuit. Thereby, it becomes possible to detect the cut of the lining paper sheet when the plate main body and the embedded electrode make contact with the gypsum slurry and an electric current flows.

[0037] For example, when it is necessary to detect the cut of the lower lining paper sheet, the circuit 18 may be constituted by electrically connecting the lower embedded electrode 12 and the lower plate main body 10 to apply voltage to the circuit 18 as illustrated in Figure 1. On the other hand, when it is necessary to detect the cut of the upper lining paper sheet, the circuit 34 may be constituted by electrically connecting the upper embedded electrode 28 and the upper plate main body 26 to apply voltage to the circuit 34 as illustrated in Figure 2. Further, when it is necessary to detect the cut of both the lower lining paper sheet and the upper lining paper sheet, the circuit 18 may be constituted by electrically connecting the lower embedded electrode 12 and the lower plate main body 10 and the circuit 34 may also be constituted by electrically connecting the upper embedded electrode 28 and the upper plate main body 26 to apply voltage to both the circuit 18 and the circuit 34 as illustrated in Figure 3.

[0038] The voltage applied to the circuit may be an alternating current or a direct current, and it is preferable that the voltage is a low voltage that is not dangerous to an operator when the operator makes contact with the circuit. It is preferable that the voltage is set to, for example, about AC 8V. Further, it is preferable that the lower plate main body 10 and/or the upper plate main body 26 are connected to a ground C as illustrated in Figure 1 to Figure 3. Even a small electric potential difference can be detected by connecting these plate main bodies to the ground.

[1-3] Expansion of Space between Plates:

[0039] In the production method of the present invention, the space between a pair of forming plates is expanded when an electric current flows in the circuit (namely, the cut of the lining paper sheet or the like is detected). Thereby, the foreign bodies that have been caught between the pair of upper and lower forming plates easily pass between the forming plates. Accordingly, the lining paper sheet does not continue to be cut due to the foreign bodies, and it never occurs that the lining paper sheet is completely torn and the production is stopped.

[0040] In the case where the production apparatus 1 as illustrated in Figure 1 is used for example, the space between a pair of the forming plates 6 can be expanded when an electric current flows in the circuit 18 (namely, when the cut of the lower lining paper sheet 16, or the like is detected). On the other hand, in the case where the production apparatus 1A as illustrated in Figure 2 is used, the space between a pair of the forming plates 6 can be expanded when an electric current flows in the circuit 34 (namely, when the cut of the upper lining paper sheet 32, or the like is detected). Further, in the case where the production apparatus 1B as illustrated in Figure 3 is used, the space between a pair of forming plates 6 can be expanded when an electric current flows in either the circuit 18 or the circuit 34 (namely, when the cut of either the lower lining paper sheet 16 or the upper lining paper sheet 32 is detected).

[0041] Examples of the method for expanding the space between forming plates include: (i) a

method in which the upper forming plate is lifted while maintaining a state where the lower forming plate is fixed; (ii) a method in which the lower forming plate is brought down while maintaining a state where the upper forming plate is fixed; and (iii) a method in which the upper forming plate is lifted and the lower forming plate is brought down, and so on. The method (i) in which the upper forming plate 24 is lifted while maintaining a state where the lower forming plate 8 is fixed is adopted in any of the production apparatus 1 as illustrated in Figure 1, the production apparatus 1A as illustrated in Figure 2, and the production apparatus 1B as illustrated in Figure 3. That is to say, the upper forming plate 24 is lifted to a position shown by broken lines in Figure 1 to Figure 3. Such method is more preferable than the method (ii) and the method (iii) in terms of easiness of flow of the lower lining paper sheet when the space between the forming plates 6 is expanded. However, the method (ii) or the method (iii) may be adopted for the purpose of making the cleaning of an apparatus easy, or other purposes.

[0042] The space between the forming plates may be expanded to such an extent that the foreign bodies pass between a pair of forming plates. The specific space is not particularly limited, however it is preferable to expand the space by 2 to 4 cm wider than the original space from the reason that the time for expanding the space is made short to allow the foreign bodies to pass, and it is further preferably to expand the space by 2 cm wider. Moreover, it is more preferable that the speed of expanding the space between the forming plates is faster because the cut of the lining paper sheet is reduced more.

[0043] The means for expanding and restoring the space between the forming plates is not particularly limited. For example, an actuator can be used that moves up and down at least one of a pair of upper and lower forming plates in response to an electric signal when an electric current is detected. The actuator will be explained specifically in the section of Apparatus for Producing Gypsum Board.

[1-4] Restoration of Space between Plates:

[0044] In the production method of the present invention, the space between a pair of the forming plates is restored to the original space after the cause of conduction is removed. The expression "after the cause of conduction is removed" means "after the foreign bodies that arise the cause of conduction (namely, the cut of the lining paper sheet, or the like) pass between the forming plates". The situation where the foreign bodies are caught between the forming plates again and the lining paper sheet is cut can be prevented by restoring the space between the forming plates to the original space after the foreign bodies pass between the forming plates. And, the production of the gypsum board (the step of obtaining a molded body depending on the space between the forming plates) is restarted. When such a method is adopted, it never occurs that the lining paper sheet is completely torn and the production is stopped. That is to say, it is not necessary to conduct complicated operation in which the foreign bodies are removed, then the lining paper sheet is supplied again between a pair of upper and lower forming plates, and the gypsum slurry is injected into the gap of the pair of

upper and lower lining paper sheets to restart the production.

[0045] Whether the cause of conduction is removed or not is evaluated by both the fact that the electric current has stopped flowing and the fact that the foreign bodies have passed between the forming plates. The fact that the electric current has stopped flowing can be detected by the electric current detector or the like which is electrically connected to the circuit. Examples of the method for restoring the space between the plates to the original space after the foreign bodies pass between the plates include a method in which the passing time required for the foreign objects to pass between the plates is determined from the feeding speed of the laminated body consisting of lining paper sheets and a gypsum slurry and the length of the forming plates, and the space between the plates is restored to the original space after the elapse of the passing time. Further, the examples also include a method in which the number of revolutions of the roll of a belt conveyor for feeding the laminated body is counted by a measuring roll, then the number of revolutions of the roll that corresponds to the time required for the foreign bodies to pass between the plates is determined from the relation between the number of revolutions of the roll and the feeding distance of the belt conveyor, and the space between plates is restored to the original space after the number of revolutions of the roll thus determined is counted.

[0046] The speed of restoring the space between the forming plates is not specifically limited. However, it is preferable to set the speed so that there is not a risk that the upper or lower lining paper sheet is not cut or the gypsum slurry on the lower lining paper sheet overflows and leaks outside.

[2]Apparatus for Producing Gypsum Board:

[0047] The method for producing a gypsum board of the present invention can be conducted, for example, with the apparatus for producing a gypsum board of the present invention explained below. The apparatus for producing a gypsum board of the present invention includes: a pair of upper and lower forming plates; an electric current detector; and an actuator as constituent members. Hereinafter, explanation will be made for each constituent member separately.

[2-1] Forming Plates:

[0048] The production apparatus of the present invention includes a pair of upper and lower forming plates for forming a laminated material obtained by injecting a gypsum slurry into a gap between a pair of upper and lower lining paper sheets so that the laminated material has a thickness depending on the space between the plates. For example, any of the production apparatus 1 as illustrated in Figure 1, the production apparatus 1A as illustrated in Figure 2, and the production apparatus 1B as illustrated in Figure 3 includes a pair of upper and lower

forming plates 6 (lower forming plate 8 and upper forming plate 24) for forming a laminated material obtained by injecting the gypsum slurry 4 into the gap between a pair of upper and lower lining paper sheets 2 so that the laminated material has a thickness depending on the space between the plates.

[0049] At least one of a pair of upper and lower forming plates in the production apparatus of the present invention has : a plate main body constituted from an electrically conductive material; and an embedded electrode embedded in the plate main body. With the embedded electrode, it becomes possible to detect the cut of the lining paper sheet early.

[0050] For example, in the production apparatus 1 as illustrated in Figure 1, the lower forming plate 8 has : the lower plate main body 10; and the lower embedded electrode 12 embedded in the lower plate main body 10 for the purpose of detecting the cut of the lower lining paper sheet 16. On the other hand, in the production apparatus 1A as illustrated in Figure 2, the upper forming plate 24 has: the upper plate main body 26; and the upper embedded electrode 28 embedded in the upper plate main body 26 for the purpose of detecting the cut of the upper lining paper sheet 32. In order to detect the cut of both the lower lining paper sheet and the upper lining paper sheet, a structure may be made in which the lower forming plate 8 has: the lower plate main body 10; and the lower embedded electrode 12 embedded in in the lower plate main body 10 and the upper forming plate 24 has: the upper plate main body 26; and the upper embedded electrode 28 embedded in the upper plate main body 26, as shown in the production apparatus 1B as illustrated in Figure 3.

[0051] The plate main body is a member that constitutes a circuit by being electrically connected to the embedded electrode, and therefore it is necessary that the plate main body be constituted from an electrically conductive material. The kind of the electrically conductive material is not particularly limited. However, since the plate main body is an important member that determines the thickness of a molded body, it is necessary to avoid a change in shape attributable to wear as much as possible. Accordingly, it is preferable that the electrically conductive material that constitutes the plate main body is at least one material selected from the group consisting of iron materials, stainless steel materials, and aluminum materials, or a material obtained by applying hard chromium plating thereon. These materials are preferable in that these materials have a high rigidity and excellent wear resistance and size accuracy in addition to electric conductivity.

[0052] It is preferable that a material that constitutes the embedded electrode is also at least one material selected from the group consisting of iron materials, stainless steel materials, and aluminum materials, or a material obtained by applying hard chromium plating thereon from the similar reason to that in the plate main body. The shape of the embedded electrode is not particularly limited and may be used as long as the shape has a width to cover the entire width of a gypsum board to be produced. The embedded electrodes having various kinds of shapes such as, for example, round rod-like, square rod-like, and sheet-like shapes can be used.

[0053] The embedded electrode is electrically insulated by an insulator from the plate main

body in which the embedded electrode is embedded. Thereby, it is possible to prevent a short circuit between the embedded electrode and the plain main body, and it is also possible to surely detect an electric current that flows between the embedded electrode and the plate main body.

[0054] For example, in the production apparatus as illustrated in Figure 1, the lower embedded electrode 12 and the lower plate main body 10 are electrically insulated by the insulator 14. On the other hand, in the production apparatus 1A as illustrated in Figure 2, the upper embedded electrode 28 and the upper plate main body 26 are electrically insulated by the insulator 30. Further, in the production apparatus 1B as illustrated in Figure 3, the lower embedded electrode 12 and the lower plate main body 10 are insulated by the insulator 14 and the upper embedded electrode 28 and the upper plate main body 26 are also insulated by the insulator 30.

[0055] In the production apparatus of the present invention, not only the embedded electrode but also the insulator is embedded in the plate main body. Since the plate main body is an important member that determines the thickness of a molded body, it is necessary to avoid a change in shape attributable to wear also in the insulator that forms part of the plate main body as much as possible. Moreover, it is not preferable that the exchanging work of members becomes complicated as a result that the wear resistance between the insulator and the plate main body or the like is different to bring about, for example, a different exchange period for each member. Accordingly, a favorable wear resistance in addition to the insulation performance is required for the insulator. Moreover, since the insulator is a member that is embedded in the plate main body, it is preferable, for the purpose of preventing voids or level difference between the insulator and the plate main body or embedded electrode from occurring, that: (1) the insulator is constituted from a material which has a good processability and which can be processed with a high size accuracy; and (2) the insulator is constituted from a material with which the void or level difference is hard to occur due to a change in size over time.

[0056] Conventionally, since it has been difficult to design an insulating material that satisfies the above-described requirements, it has been common general technical knowledge that a molded plate is constituted from a single material, and an idea of embedding an detection electrode inside the molded plate has not existed. For this reason, it is considered that a lower external electrode 138 for detecting the cut of paper has been arranged on a further downstream side of the downstream end of the forming plate (lower forming plate 108) as shown in the production apparatus 100 as illustrated in Figure 4. In order to solve the above-described problem of the insulating material, it is preferable that the insulator is constituted from at least one material selected from the group consisting of phenol resin laminated plates with a cloth base material (also referred to as "cloth-containing bakelite"), phenol resin laminated plates with a paper base material (also referred to as "paper-containing bakelite"), epoxy resin-impregnated glass fiber cloth (also referred to as "glass-epoxy resins"), and epoxy resin-impregnated paper (also referred to as "paper-epoxy resins"). These materials can suitably be used because of favorable wear resistance, processability, and size accuracy in

addition to insulation performance. It is particularly preferable to use the phenol resin laminated plate with a cloth base material that is excellent in wear resistance, processability, and size accuracy among the above-described materials.

[0057] In the production apparatus of the present invention, the embedded electrode is embedded so as for a portion thereof to be exposed on the surface of the plate main body making contact with the lining paper sheet. In this case, it is preferable that the embedded electrode is arranged so that there is no level difference between the surface of the plate main body making contact with the lining paper sheet and the surface of the embedded electrode, and is arranged so that there is no gap between the embedded electrode and the insulator that will be mentioned later.

[0058] For example, in the production apparatus 1 as illustrated in Figure 1, the rod-like lower embedded electrode 12 is filled in the groove portion of the insulator 14 having an approximately U-shaped section, and is embedded so as for a portion thereof (upper face) to be exposed on the surface of the lower plate main body 10. On the other hand, in the production apparatus 1A as illustrated in Figure 2, the rod-like upper embedded electrode 28 is filled in the groove portion of the insulator 30 having an approximately U-shaped section, and is embedded so as for a portion thereof (bottom face) to be exposed on the surface of the upper plate main body 26. Further, in the production apparatus 1B as illustrated in Figure 3, the rod-like lower embedded electrode 12 is filled in the groove portion of the insulator 14 having an approximately U-shaped section, and is embedded so as for a portion thereof (upper face) to be exposed on the surface of the lower plate main body 10. Furthermore, the rod-like upper embedded electrode 28 is filled in the groove portion of the insulator 30 having an approximately U-shaped section, and is embedded so as for a portion thereof (bottom face) to be exposed on the surface of the upper plate main body 26.

[0059] It is preferable that the forming plates have an embodiment in which a taper portion whose plate thickness at a position in the taper portion becomes thinner as the position approaches upstream ends of the forming plates is formed in at least one of the pair of upper and lower forming plates, and a space between the pair of the forming plates at a position in the taper portion becomes larger, due to the taper portion, as the position approaches the upstream ends of the forming plates. When such an embodiment is made, the holdup of the gypsum slurry is prepared immediately before the starting position of forming, thereby making it possible to keep the holdup volume of the gypsum slurry always constant. Accordingly, the gypsum slurry is molded while keeping a state in which the air is trapped therein, making it possible to effectively prevent a situation where gypsum boards in which internal voids are formed are produced. Thereby, it is possible to solve the problems of gypsum boards, such as bulging and denting, lowering of the smoothness, and dropping out of nails and screws (fixing failure of boards) when the gypsum boards are fixed, attributable to the above-described internal voids.

[0060] For example, in the production apparatus 1 as illustrated in Figure 1, the production apparatus 1A as illustrated in Figure 2, the production apparatus 1B as illustrated in Figure 3,

and the production apparatus 1C as illustrated in Fig 5, the embodiment is the one in which a taper portion whose plate thickness at a position in the taper portion becomes thinner as the position approaches the upstream end (edge on the upstream side of the plate) of the lower forming plate 8 is formed in the lower forming plate 8, and a space between the pair of the forming plates 6 at a position in the taper portion becomes larger, due to the taper portion, as the position approaches the upstream end. However, a taper portion whose plate thickness at a position in the taper portion becomes thinner as the position approaches upstream end of a forming plate may be formed in the upper forming plate, or the taper portions may be formed in both the lower forming plate and the upper forming plate (not shown in the figures).

[0061] In the production apparatus of the present invention, it is preferable that the embedded electrode is embedded at a portion on a downstream side of the starting position of forming in the plate main body, and it is further preferable that the embedded electrode is embedded, in the plate main body, at a portion within a range from the starting position of forming to a position on the downstream side of the starting position of forming by 50 mm. The space between plates at the starting position of forming is narrower than the space between plates on the upstream side of the starting position of forming for the purpose of forming a laminated material obtained by injecting a gypsum slurry into a gap between a pair of upper and lower lining paper sheets so as to form the thickness of the laminated material depending on the space between plates. Therefore, the starting position of forming is a region where foreign bodies are liable to be caught and where there is a high possibility that the cut of the lining paper sheet is liable to occur. Accordingly, in order to detect the cut of the lining paper sheet early, it can be said that it is preferable to arrange the embedded electrode at a position near the starting position of forming. Specifically, it is particularly preferable that the embedded electrode is embedded at a portion within a range from the starting position of forming to a position on the downstream side of the starting position of forming by 25 mm.

[0062] On the other hand, there is a time lag from the time when the lining paper sheet is cut to the time when the gypsum slurry begins to leak out. Accordingly, it is more preferable that the embedded electrode is embedded at a position somewhat downstream side of the starting position of forming in the plate main body than that the embedded electrode is embedded at the starting position of forming in the plate main body. Moreover, when the production speed of the gypsum board becomes high, the position where the leak out of the gypsum slurry can be detected after the lining paper sheet is cut recedes from the starting position of forming. Accordingly, in the case where high speed production is conducted, it is preferable that the embedding electrode is embedded at a portion on further downstream side in the plate main body than in the case where low speed production is conducted. Specifically, it is preferable that the embedded electrode is embedded, in the plate main body, at a portion on further downstream side of a position on the downstream side of the starting position of forming by 15 mm.

[0063] As described above, it is necessary that an appropriate embedding position of the embedded electrode be determined, in the plate main body, within a portion on the downstream side of the starting position of forming (particularly, a portion within a range from

the starting position of forming to a position on the downstream side of the starting position of forming by 50 mm) considering the production speed.

[0064] In addition, the "starting position of forming" means a position where forming of the laminated material obtained by injecting a gypsum slurry into a gap between a pair of lining paper sheets is started, and specifically means a position on the most downstream side of the following (1) and the following (2). Hereinafter, explanation will be made on the starting position of forming with reference to Figure 6A to Figure 6E. In addition, the embedded electrode, the insulator, and so on are omitted, and only the shape of the forming plates are illustrated in Figure 6A to Figure 6E for the convenience of drawing. Moreover, the thick arrow in Figure 6A to Figure 6E shows a transportation direction (namely, downstream direction) of the laminated material.

1. (1) a position of an upstream end of either one of the pair of upper and lower forming plates; and
2. (2) a position of a downstream end of a taper portion in an embodiment wherein the taper portion whose plate thickness at a position in the taper portion becomes thinner as the position approaches upstream ends of the forming plates is formed in at least one of the pair of upper and lower forming plates, and a space between the pair of the forming plates at a position in the taper portion becomes larger, due to the taper portion, as the position approaches the upstream ends of the forming plates.

[0065] The production apparatus of the present invention is a production apparatus for obtaining a molded body having a thickness depending on the space between plates by allowing the laminated material to pass between a pair of upper and lower forming plates. Accordingly, in forming the laminated body, a pair of upper and lower forming plates are arranged so as to face each other, and forming is started at a position where the space of the plates is sufficiently narrowed to such an extent that forming is possible. In the case of an embodiment where the taper portion is not formed on the upstream side of any of the pair of upper and lower forming plates (upper forming plate and lower forming plate), a position of the upstream end of any one of the pair of upper and lower forming plates becomes the starting position of forming.

[0066] In the example as illustrated in Figure 6A for example, the position of the upstream end 24a of the upper forming plate 24 and the position of the upstream end 8a of the lower forming plate 8 are located on one straight line. That is to say, on the downstream side of the upstream ends 24a and 8a, a pair of upper and lower forming plates 6 are arranged so as to face each other, and the space between plates are sufficiently narrowed to such an extent that forming is possible. Accordingly, the position of the upstream end 24a of the upper forming plate 24 (or the position of the upstream end 8a of the lower forming plate 8) becomes the starting position of forming P.

[0067] Moreover, in the example as illustrated in Figure 6B, the pair of upper and lower

forming plates are arranged so that the upstream end 8a of the lower forming plate 8 protrudes on the upstream side of the upstream end 24a of the upper forming plate 24. In the case of such an embodiment, the pair of upper and lower forming plates 6 are arranged so as to face each other on the downstream side of the upstream end 24a of the upper forming plate 24, and the space between the plates is sufficiently narrowed to such an extent that forming is possible. Accordingly, the position of the upstream end 24a of the upper forming plate 24 becomes the starting position of forming P.

[0068] In the case of an embodiment in which a taper portion whose plate thickness at a position in the taper portion becomes thinner as the position approaches upstream ends of the forming plates is formed in at least one of the pair of upper and lower forming plates, and a space between the pair of the forming plates at a position in the taper portion becomes larger, due to the taper portion, as the position approaches the upstream ends of the forming plates, the position of the downstream end of the taper portion can also become the starting position of forming in addition to the position of the upstream ends of the pair of upper and lower forming plates. Here, "the space between the pair of upper and lower forming plates at a position in the taper portion becomes larger, due to the taper portion, as the position approaches the upstream end" means, in other words, that the slope face of the taper portion is formed on the side of a face that makes contact with the lining paper sheet in the forming plate.

[0069] In the example as illustrated in Figure 6C for example, the position of the upstream end 24a of the upper forming plate 24 and the position of the upstream end 8a of the lower forming plate 8 are located on one straight line. That is to say, a pair of upper and lower forming plates 6 are arranged so as to face each other on the downstream side of the upstream ends 24a and 8a. However, the space between the pair of upper and lower forming plates 6 becomes larger at the position of the upstream end 8a of the lower forming plate 8 due to the taper portion 8b, and the space is not sufficiently narrowed to such an extent that forming is possible. Accordingly, the position of the downstream end 8c of the taper portion 8b where space between the pair of upper and lower forming plates 6 is sufficiently narrowed becomes the starting position of forming P.

[0070] Moreover, also in the example as illustrated in Figure 6D, the position of the upstream end 24a of the upper forming plate 24 and the position of the upstream end 8a of the lower forming plate 8 are located on one straight line, and a pair of upper and lower forming plates 6 are arranged so as to face each other on the downstream side of the upstream ends 24a and 8a. However, the space between the pair of upper and lower forming plates 6 becomes larger at the position of the upstream end 24a of the upper forming plate 24 due to the taper portion 24b, and the space is not sufficiently narrowed to such an extent that forming is possible. Accordingly, the position of the downstream end 24c of the taper portion 24b where space between the pair of upper and lower forming plates 6 is sufficiently narrowed becomes the starting position of forming P.

[0071] Further in the example as shown in Figure 6E, it can be said that the upper and lower

forming plates are arranged so that the upstream end 8a of the lower forming plate 8 protrudes on the upstream side of the upstream end 24a of the upper forming plate 24 and a pair of upper and lower forming plates 6 are arranged so as to face each other on the downstream side of the upstream end 24a of the upper forming plate 24. However, the space between the pair of forming plates 6 becomes larger due to the taper portion 24b of the upper forming plate 24 and the taper portion 8b of the lower forming plate 8 at the position of the upstream end 24a of the upper forming plate 24, and the space is not sufficiently narrowed to such an extent that forming is possible. Accordingly, the position of the downstream end 24c of the taper portion 24b where the space between the pair of upper and lower forming plates 6 is sufficiently narrowed becomes the starting point of forming P.

[2-2] Circuit:

[0072] In the apparatus for producing a gypsum board of the present invention, a circuit is constituted by electrically connecting the embedded electrode and the plate main body in which the embedded electrode is embedded.

[0073] For example, the production apparatus 1 as illustrated in Figure 1 is an example in which the circuit 18 is constituted by electrically connecting the lower embedded electrode 12, the lower plate main body 10, and the pour source D1. On the other hand, the production apparatus 1A as illustrated in Figure 2 is an example in which the circuit 34 is constituted by electrically connecting the upper embedded electrode 28 and the upper plate main body 26. Further, as in the production apparatus 1B as illustrated in Figure 3, the circuit 34 may be constituted by electrically connecting the upper embedded electrode 28 and the upper plate main body 26 in addition to the circuit 18 constituted by electrically connecting the lower embedded electrode 12 and the lower plate main body 10.

[0074] Furthermore, as illustrated in Figure 5, the circuit 40 including the lower external electrode 38, the lower plate main body 10, and the power source D3 may be constituted in addition to the circuit 18. In addition, the circuit 40 including the lower external electrode 38 may be formed together with the circuit 34 including the upper embedded electrode 28 as illustrated in Figure 2 (not shown in the figure). Moreover, the circuit 40 may be formed together with the circuit 18 including the lower embedded electrode 12 as illustrated in Figure 3 and the circuit 34 including the upper embedded electrode 28 (not shown in the figure).

[2-3] Electric Current Detector:

[0075] The apparatus for producing a gypsum board of the present invention includes an electric current detector electrically connected to the circuit that connects the embedded electrode and the plate main body. With the electric current detector, the cut of the lining paper sheet, or the like can be detected.

[0076] For example, the production apparatus 1 as illustrated in Figure 1 includes an electric current detector 20 that is electrically connected to the circuit 18, and makes it possible to detect a current that flows between the lower embedded electrode 12 and the lower plate main body 10. On the other hand, the production apparatus 1A as illustrated in Figure 2 includes an electric current detector 20 that is electrically connected to the circuit 34, and makes it possible to detect a current that flows between the upper embedded electrode 28 and the upper plate main body 26. Further, the production apparatus 1B as illustrated in Figure 3 includes an electric current detector 20 that is electrically connected to both the circuit 18 and the circuit 34. Thereby, it becomes possible to detect both the current that flows between the lower embedded electrode 12 and the lower plate main body 10 and the current that flows between the upper embedded electrode 28 and the upper plate main body 26. In the case where a plurality of circuits exist, a plurality of circuits 18 and 34 may share the electric current detector 20 as illustrated in Figure 3.

[2-4]Actuator:

[0077] The apparatus for producing a gypsum board of the present invention includes an actuator that moves at least one of forming plates up and down in response to an electric signal from the electric current detector.

[0078] For example, the production apparatus 1 as illustrated in Figure 1, the production apparatus 1A as illustrated in Figure 2, the production apparatus 1B as illustrated in Figure 3, and the production apparatus 1C as illustrated in Figure 5 include an actuator 22 that moves the upper forming plate 24 up and down in response to an electric signal from the electric current detector 20. However, the production apparatus of the present invention may be a production apparatus including an actuator that moves the lower forming plate up and down, or may be a production apparatus including an actuator that moves both the upper forming plate and the lower forming plate up and down (not shown in the figure) .

[0079] The actuator may be a device that drives the forming plate up and down depending on the electric current detector. Specific examples of the kind of the device include, but not particularly limited to, an air cylinder, an oil cylinder, a servomotor, and so on.

EXAMPLES

[0080] Hereinafter, the present invention will be explained in more specifically by Examples and Comparative Examples. However, the present invention is not limited to only the constitution of the following Examples.

(Example 1)

[0081] As a production apparatus of Example 1, the production apparatus 1 as illustrated in Figure 1 was manufactured. A gypsum board to be produced was determined to be a gypsum board having a width of 910 mm and a thickness of 9.5 mm. In the production apparatus 1, the lining paper sheet 2 (upper lining paper sheet 32 and lower lining paper sheet 16) is transferred from the right-hand side to the left-hand side in the figure. The production apparatus is constituted so that the gypsum slurry 4 is continuously supplied on the lower lining paper sheet 16. The roll 36 is a roll for changing the supplying direction of the upper lining paper sheet 32.

[1-1] Forming Plates:

[0082] The production apparatus including a pair of upper and lower forming plates 6 (the lower forming plate 8 and upper forming plate 24) was used. The lower forming plate 8 having: the lower plate main body 10; and the lower embedded electrode embedded in the lower plate main body 10 was used. The upper plate main body 26 and the lower plate main body 10 were constituted from a material obtained by applying hard chromium plating on an iron material. The lower embedded electrode 12 was made of a stainless material, and had a square section of 6 mm × 6 mm and a square rod-like shape having a length of 1200 mm.

[0083] The lower embedded electrode 12 and the lower plate main body 10 were electrically insulated by the insulator 14. The insulator 14 was constituted from a phenol resin laminated plate with a cloth base material. The insulator had an approximately U-shaped section and an approximately square rod-like shape in which a groove portion was formed. The lower embedded electrode 12 was filled in the groove portion of the insulator 14 and was embedded so that a portion thereof (upper face) was exposed on the surface of the lower plate main body 10. The insulator 14 was arranged on the front and behind sides of the lower embedded electrode 12 with a width of 5 mm to electrically insulate the lower embedded electrode 12. The lower embedded electrode 12 was embedded at a portion ranging from a position on the downstream side of the starting position of forming by 15 mm to a position on the downstream side of the starting position of forming by 21 mm in the lower plate main body 10. That is to say, the lower embedded electrode 12 was exposed on the surface of the lower plate main body 10 over a width of 6 mm.

[0084] The taper portion was formed on the upstream end side of the lower forming plate 8. The length of the taper portion was determined to be 50 mm, and the height of the taper portion was determined to be 4 mm. On the downstream side of the taper portion, the lower forming plate 8 and the upper forming plate 24 are arranged so as to face each other, and the forming space is formed so that the space between plates is sufficiently narrowed to such an extent that forming is possible. The forming space is formed from the starting position of forming to a position on the downstream side of the starting position of forming by 300 mm.

[1-2] Circuit:

[0085] The lower embedded electrode 12, the lower plate main body 10, and the power source D1 were electrically connected to constitute the circuit 18.

[1-3] Electric Current Detector:

[0086] The electric current detector 20 was electrically connected to the circuit 18.

[1-4] Actuator:

[0087] The actuator 22 moving the upper forming plate 24 up and down in response to an electric signal from the electric current detector 20 was installed. An air cylinder was used as the actuator.

[1-5] Production of Gypsum Boards:

[0088] Gypsum boards were produced using the above-described production apparatus. The production speed of the gypsum board was determined to be 150 m/min. The production apparatus was operated for 20 days under the condition of continuously operating the production apparatus for 24 hours per day to find that the number of the cases where the lining paper sheet was completely torn to stop continuous production was only one.

(Example 2)

[0089] As a production apparatus of Example 2, the production apparatus 1A as illustrated in Figure 2 was manufactured. The production apparatus was manufactured in the same manner as in the production apparatus of Example 1 except the matters described below.

[2-1]Forming Plates:

[0090] The production apparatus including a pair of upper and lower forming plates 6 (lower forming plate 8 and upper forming plate 24) was used. The upper plate main body 26 and the lower plate main body 10 were constituted from a material obtained by applying hard chromium plating on an iron material. The lower embedded electrode was not arranged in the lower forming plate 8, and the upper embedded electrode 28 was arranged in the upper forming plate 24. The upper embedded electrode 28 was made of a stainless material, and

had a square section of 6 mm × 6 mm and a square rod-like shape having a length of 1200 mm.

[0091] The upper embedded electrode 28 and the upper plate main body 26 were electrically insulated by the insulator 30. The insulator 30 was constituted from a phenol resin laminated plate with a cloth base material. The insulator had an approximately U-shaped section and an approximately square rod-like shape in which a groove portion was formed. The upper embedded electrode 28 was filled in the groove portion of the insulator 30, and was embedded so that a portion (bottom face) thereof was exposed on the surface of the upper plate main body 26. The insulator 30 was arranged on the front and behind sides of the upper embedded electrode 28 with a width of 5 mm to electrically insulate the upper embedded electrode 28. The upper embedded electrode 28 was embedded at a portion ranging from a position on the downstream side of the forming by 15 mm to a position on the downstream side of the starting position of forming by 21mm in the upper plate main body 26. That is to say, the upper embedded electrode 28 was exposed on the surface of the upper plate main body 26 over a width of 6 mm.

[2-2] Circuit:

[0092] The upper embedded electrode 28, the upper plate main body 26, and the power source D2 were electrically connected to constitute the circuit 34.

[2-3] Electric Current Detector:

[0093] The electric current detector 20 was connected to the circuit 34.

[2-4] Production of Gypsum Boards:

[0094] Gypsum boards were produced using the above-described production apparatus. The production speed of the gypsum board was determined to be 150 m/min. The production apparatus was operated for 20 days under the condition of continuously operating the production apparatus for 24 hours per day to find that the number of the cases where the lining paper sheet was completely torn to stop continuous production was only two.

(Example 3)

[0095] As a production apparatus of Example 3, the production apparatus 1B as illustrated in Figure 3 was manufactured. The production apparatus was manufactured in the same manner as in the production apparatus of Example 1 except the matters described below.

[3-1] Forming Plates:

[0096] The lower forming plate 8 was constituted in the same manner as in the production apparatus of Example 1. The lower embedded electrode 12 was embedded at a portion ranging from a position on the downstream side of the starting position of forming by 15 mm to a position on the downstream side of the starting position of forming by 21 mm in the lower plate main body 10. The upper forming plate 24 was constituted in the same manner as in the production apparatus of Example 2.

[3-2] Circuit:

[0097] The lower embedded electrode 12, the lower plate main body 10, and the power source D1 were electrically connected to constitute the circuit 18, and the upper embedded electrode 28, the upper plate main body 26, and the power source D2 were electrically connected to constitute the circuit 34.

[3-3] Electric Current Detector:

[0098] The electric current detector 20 was electrically connected to the circuit 18 and the circuit 34.

[3-4] Production of Gypsum Boards:

[0099] Gypsum boards were produced using the above-described production apparatus. The production speed of the gypsum board was determined to be 150 m/min. The production apparatus was operated for 20 days under the condition of continuously operating the production apparatus for 24 hours per day to find that the number of the cases where the lining paper sheet was completely torn to stop continuous production was only one.

(Example 4)

[0100] As a production apparatus of Example 4, the production apparatus 1B as illustrated in Figure 3 was manufactured. The production apparatus was manufactured in the same manner as in the production apparatus of Example 1 except the matters described below.

[4-1]Forming Plates:

[0101] The lower forming plate 8 was constituted in the same manner as in the production apparatus of Example 1 except the position of the lower embedded electrode 12. The lower embedded electrode 12 was embedded at a portion ranging from a position on the downstream side of the starting position of forming by 25 mm to a position on the downstream side of the starting position of forming by 31 mm in the lower main plate main body 10. The upper forming plate 24 was constituted in the same manner as in the production apparatus of Example 2.

[4-2] Circuit:

[0102] The lower embedded electrode 12, the lower plate main body 10, and the power source D1 were electrically connected to constitute the circuit 18, and the upper embedded electrode 28, the upper plate main body 26, and the power source D2 were electrically connected to constitute the circuit 34.

[4-3] Electric Current Detector:

[0103] The electric current detector 20 was electrically connected to the circuit 18 and the circuit 34.

[4-4] Production of Gypsum boards:

[0104] Gypsum boards were produced using the above-described production apparatus. The production speed of the gypsum board was determined to be 150 m/min. The production apparatus was operated for 20 days under the condition of continuously operating the production apparatus for 24 hours per day to find that there were no cases where the lining paper sheet was completely torn and there were also no cases where the continuous production was stopped.

(Comparative Example 1)

[0105] As a production apparatus of Comparative Example 1, the production apparatus 100 as illustrated in Figure 4 was manufactured. The production apparatus was manufactured in the same manner as in the production apparatus of Example 1 except the matters described below.

[5-1] Forming Plates:

[0106] The lower embedded electrode was not arranged in the lower forming plate 108. Instead, the lower external electrode 138 was arranged at a position apart from the end (downstream end) of the lower forming plate 108 by 10 mm on the downstream side. The lower external electrode 138 was arranged in a state where the lower external electrode was electrically isolated from the surroundings. The lower external electrode 138 was made of an iron material obtained by applying hard chromium plating thereon, and had a square section of 24 mm × 24 mm and a square rod-like shape having a length of 1200 mm. The upper forming plate 124 was constituted in the same manner as in the upper forming plate 24 of the production apparatus of Example 1.

[5-2] Circuit:

[0107] The lower external electrode 138, the lower forming plate 108, and the power source D3 were electrically connected to constitute the circuit 140.

[5-3] Electric Current Detector:

[0108] The electric current detector 120 was electrically connected to the circuit 140.

[5-4] Production of Gypsum Boards:

[0109] Gypsum boards were produced using the above-described production apparatus. The production speed of the gypsum board was determined to be 150 m/min. The production apparatus was operated for 20 days under the condition of continuously operating the production apparatus for 24 hours per day to find that the number of the cases where the lining paper sheet was completely torn to stop continuous production reached 10.

Industrial Applicability

[0110] The method and apparatus for producing a gypsum board of the present invention can suitably be used for producing gypsum boards useful as building materials such as ceiling materials, wall materials, flooring materials.

Reference Signs List

[0111]

- 1, 1A, 1B and 1C
(Gypsum board) Production apparatus
- 2
Lining paper sheet
- 4
Gypsum slurry
- 6
Forming plate
- 8
Lower forming plate
- 8a
Upstream end
- 8b
Taper portion
- 8c
Downstream end
- 10
Lower plate main body
- 12
Lower embedded electrode
- 14
Insulator
- 16
Lower lining paper sheet
- 18
Circuit
- 20
Electric current detector
- 22
Actuator
- 24
Upper forming plate
- 24a
Upstream end
- 24b
Taper portion
- 24c
Downstream end
- 26
Upper plate main body
- 28
Upper embedded electrode

30	Insulator
32	Upper lining paper sheet
34	Circuit
36	Roll
38	Lower external electrode
40	Circuit
100	(Gypsum board) Production Apparatus
104	Gypsum slurry
108	Lower forming plate
116	Lower lining paper sheet
120	Electric current detector
122	Air cylinder
124	Upper forming plate
132	Upper lining paper sheet
136	Roll
138	Lower external electrode
140	Circuit
C	Ground
D, D1, D2, and D3	Power source
P	Starting position of forming

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP3315935B [0007]

Patentkrav

1. Fremgangsmåde til fremstilling af en gipsplade, hvilken fremgangsmåde omfatter et trin med kontinuerlig indsprøjtning af en gipsopslæmning i et mellemrum mellem et par af øvre og nedre beklædningspapirark, mens parret af øvre og nedre beklædningspapirark tilføres kontinuerligt til dannelse af et lamineret materiale og for at gøre det muligt for det laminerede materiale at passere mellem et par af øvre og nedre formgivningsplader til opnåelse af et støbt legeme med en tykkelse, der afhænger af en afstand mellem pladerne, **kendetegnet ved, at** en formgivningsplade omfatter: et hovedpladelegeme, der består af et elektrisk ledende materiale; og en indlejret elektrode, der er indlejret i hovedpladelegemet, hvor den indlejrede elektrode er elektrisk isoleret fra hovedpladelegemet af et isolationsmateriale og er indlejret således, at en del deraf, der er blottet på en overflade af hovedpladelegemet, der kommer i kontakt med beklædningspapirarket, anvendes som mindst et af parret af øvre og nedre formgivningsplader, et kredsløb dannes ved elektrisk at forbinde hovedpladelegemet og den indlejrede elektrode, der er indlejret i hovedpladelegemet, og der tilføres spænding til kredsløbet, og når beklædningspapirarket opskæres for at bringe hovedpladelegemet og den indlejrede elektrode i kontakt med gipsopslæmningen, og en elektrisk strøm strømmer i kredsløbet, udvides afstanden mellem parret af øvre og nedre formgivningsplader for at fjerne en årsag til ledning, og derefter genskabes afstanden mellem parret af øvre og nedre formgivningsplader til den oprindelige afstand.
2. Fremgangsmåde til fremstilling af en gipsplade ifølge krav 1, hvor den indlejrede elektrode er indlejret ved en del på en nedstrømsside af en startposition for formgivning i hovedpladelegemet, hvor startpositionen for formgivning er en position på den side af følgende A og B, der er mest nedstrøms, hvor: A er en position af en opstrømsende af et af parret af øvre og nedre formgivningsplader; og B er en position af en nedstrømsende af en tilspidsende del i en udførelsesform, hvor den tilspidsende del, hvis pladetykkelse i en position i den tilspidsende del bliver tyndere, i takt med at positionen nærmer sig opstrømsender af formgivningspladerne, er dannet i mindst et af parret af øvre og nedre

formgivningsplader, og en afstand mellem parret af formgivningspladerne i en position i den tilspidsende del bliver større, på grund af den tilspidsende del, i takt med at positionen nærmer sig formgivningspladernes opstrømsender.

5

3. Fremgangsmåde til fremstilling af en gipsplade ifølge krav 2, hvor den indlejrede elektrode er indlejret i hovedpladelegemet ved en del i et område fra startpositionen for formgivning til en position på en nedstrømside af startpositionen for formgivning med 50 mm.

10

4. Fremgangsmåde til fremstilling af en gipsplade ifølge et af kravene 1 til 3, hvor mindst et materiale, der er valgt fra gruppen bestående af phenolharpikslaminerede plader med et vævbasismateriale, phenolharpikslaminerede plader med et papirbasismateriale, epoxyharpiks-imprægneret glasfibervæv og epoxyharpiks-imprægneret papir, anvendes som isolationsmaterialet.

15

5. Fremgangsmåde til fremstilling af en gipsplade ifølge et af kravene 1 til 4, hvor mindst et materiale, der er valgt fra gruppen bestående af jernmaterialer, materialer af rustfrit stål og aluminiummaterialer eller et materiale, der er opnået ved at påføre hård forkromning derpå, anvendes som det elektrisk ledende materiale.

20

6. Indretning til fremstilling af en gipsplade, omfattende et par af øvre og nedre formgivningsplader (24, 8) til dannelse af et lamineret materiale, der opnås ved at indsprøjte en gipsopslæmning (4) i et mellemrum mellem et par af øvre og nedre beklædningspapirark (32, 16), hvor det laminerede materiale har en tykkelse, der afhænger af en afstand mellem pladerne (24, 16), **kendetegnet ved, at** mindst et af parret af øvre og nedre formgivningsplader (24, 8) omfatter: et hovedpladelegeme (26, 10), der består af et elektrisk ledende materiale; og en indlejret elektrode (28, 12), der er indlejret i hovedpladelegemet, hvor den indlejrede elektrode er elektrisk isoleret fra hovedpladelegemet af et isolationsmateriale (30, 14) og er indlejret således, at en del deraf, der er blottet på en overflade af hovedpladelegemet, der kommer i kontakt med beklædningspapirarket,

25

30

35

et kredsløb (18, 34, 40) dannes ved elektrisk at forbinde hovedpladelegemet

og den indlejrede elektrode, der er indlejret i hovedpladelegemet, og indretningen endvidere omfatter:

en detektor (20) for elektrisk strøm, der er elektrisk forbundet med kredsløbet; og

5 en aktuator (22), der bevæger mindst en af formgivningspladerne op og ned som reaktion på et elektrisk signal fra detektoren for elektrisk strøm.

10 **7.** Indretning til fremstilling af en gipsplade ifølge krav 6, hvor den indlejrede elektrode (28, 12) er indlejret ved en del på en nedstrømsside af en startposition for formgivning i hovedpladelegemet (26, 10), hvor startpositionen for formgivning er en position på den side af følgende A og B, der er mest nedstrøms, hvor:

A er en position af en opstrømsende (24a, 8a) af et af parret af øvre og nedre formgivningsplader (24, 8); og

15 B er en position af en nedstrømsende (24c, 8c) af en tilspidsende del (24b, 8b) i en udførelsesform, hvor den tilspidsende del, hvis pladetykkelse i en position i den tilspidsende del bliver tyndere, i takt med at positionen nærmer sig opstrømsender af formgivningspladerne, er dannet i mindst et af parret af øvre og nedre formgivningsplader, og en afstand mellem parret af formgivningspladerne i en position i den tilspidsende del bliver større, på grund af
20 den tilspidsende del, i takt med at positionen nærmer sig formgivningspladernes opstrømsender.

25 **8.** Indretning til fremstilling af en gipsplade ifølge krav 7, hvor den indlejrede elektrode (28, 12) er indlejret i hovedpladelegemet (26, 10) ved en del i et område fra startpositionen for formgivning til en position på en nedstrømsside af startpositionen for formgivning med 50 mm.


30 **9.** Indretning til fremstilling af en gipsplade ifølge et af kravene 6 til 8, hvor isolationsmaterialet (30, 14) består af mindst et materiale, der er valgt fra gruppen bestående af phenolharpikslaminerede plader med et vævbasismateriale, phenolharpikslaminerede plader med et papirbasmateriale, epoxyharpiks-imprægneret glasfibervæv og epoxyharpiks-imprægneret papir.

35 **10.** Indretning til fremstilling af en gipsplade ifølge et af kravene 6 til 9, hvor det elektrisk ledende materiale er mindst et materiale, der er valgt fra grup-


pen bestående af jernmaterialer, materialer af rustfrit stål og aluminiummaterialer eller et materiale, der er opnået ved at påføre hård forkromning derpå.

DRAWINGS


[Figure 1]

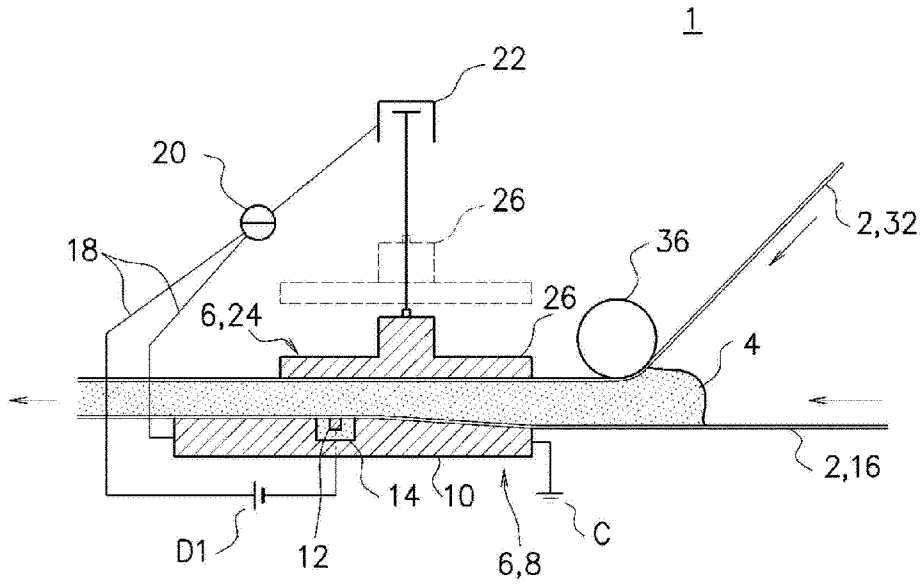


[Figure 2]

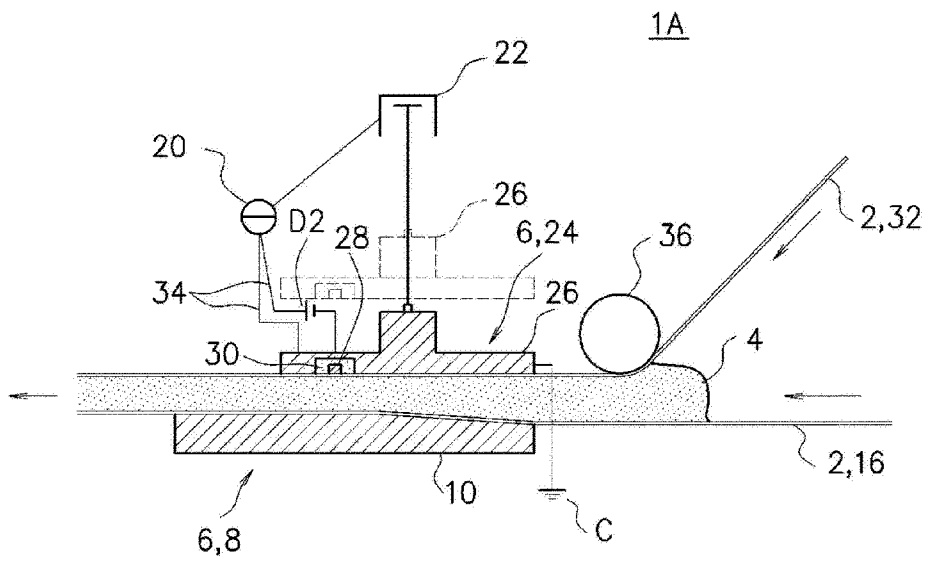


[Figure 6B]

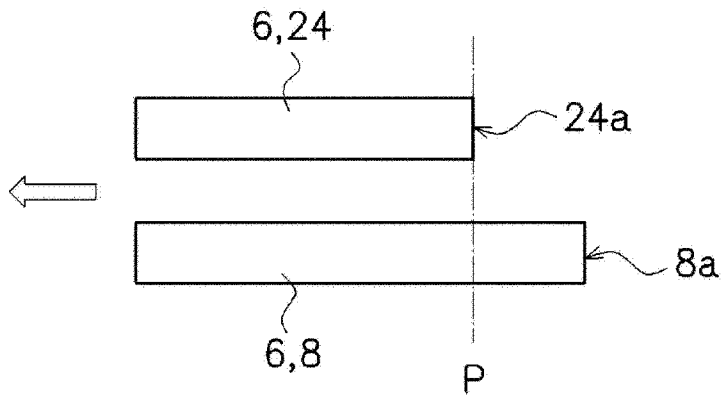

[Figure 6C]

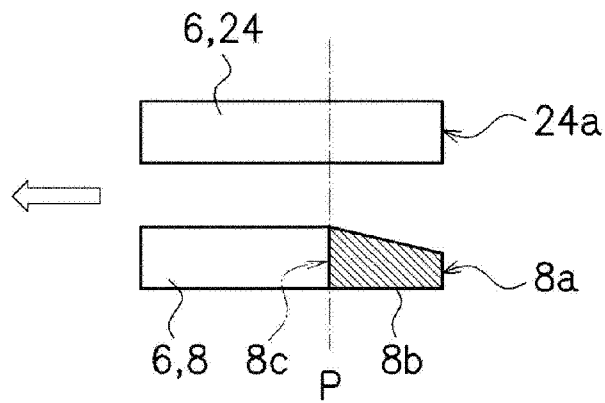

[Figure 6D]

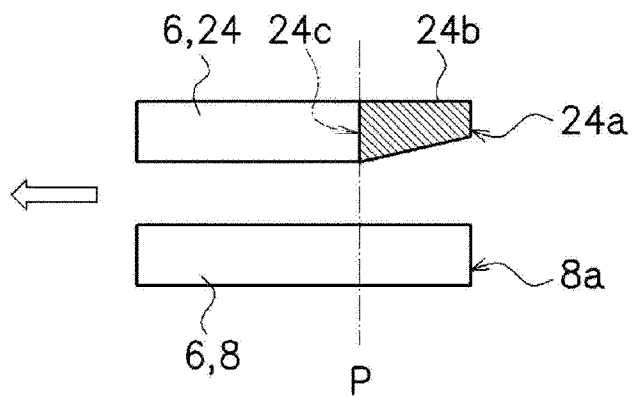

[Figure 6E]

