




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B01J 23/04, 37/02, C07C 5/25	A1	(11) International Publication Number: WO 95/13136 (43) International Publication Date: 18 May 1995 (18.05.95)
(21) International Application Number: PCT/US94/13045 (22) International Filing Date: 14 November 1994 (14.11.94) (30) Priority Data: 08/150,950 12 November 1993 (12.11.93) US (71) Applicant: EXXON CHEMICAL PATENTS INC. [US/US]; 5200 Bayway Drive, Baytown, TX 77520 (US). (72) Inventors: SMITH, Robert, Scott; 1018 Buoy, Houston, TX 77062 (US). McMAHON, Steven, Lynn; 848 Amy Lea, Sevierville, TN 37862 (US). (74) Agents: RUSSELL, Linda, K. et al.; Exxon Chemical Com- pany, P.O. Box 2149, Baytown, TX 77522-2149 (US).		(81) Designated States: AU, CA, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i>

(54) Title: METHOD OF PREPARING ISOMERIZATION CATALYST**(57) Abstract**

This invention provides a method of preparing an isomerization catalyst by contacting an alkali metal with catalyst support particles in a fluidized bed. After the alkali metal is uniformly dispersed on the support particles, oxygen is added to the fluidizing gas to oxidize a portion of the alkali metal.

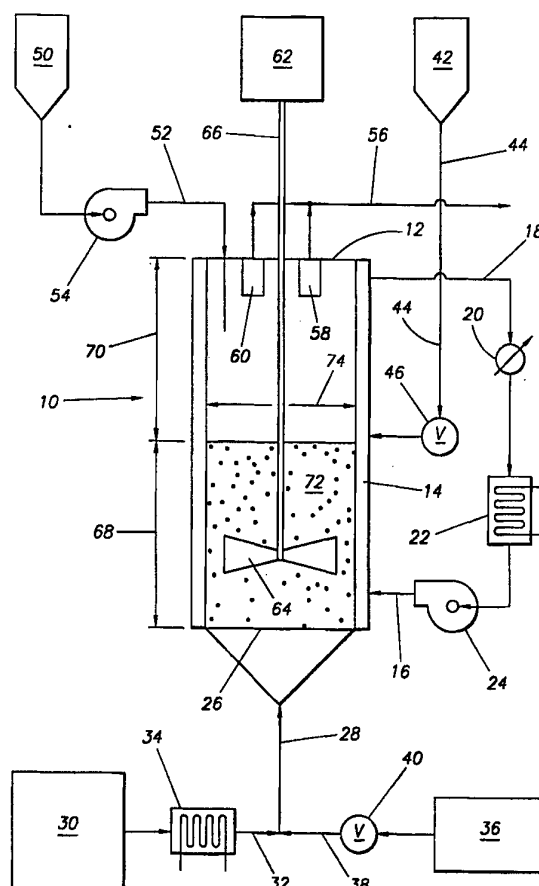

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

METHOD OF PREPARING ISOMERIZATION CATALYST

The present invention relates to a method of preparing an isomerization catalyst comprising an alkali metal on a support. The isomerization catalyst so prepared is useful in isomerizing 5-vinyl-2-norbornene ("VNB") to 5-ethylidene-2-norbornene ("ENB"). ENB is used commercially in the production of elastomeric polymers and synthetic rubber.

An isomerization catalyst prepared by contacting an alkali metal with a high surface area support material such as alumina is described in US-A-3,405,196. The contacting is accomplished by agitation under an atmosphere of inert gas. The agitation to disperse alkali metal on the support material described by the patent is stirring. A fluidized bed is used to treat that catalyst with oxygen. US-A-3,793,382 describes dissolving an alkali metal in a solvent, for example a liquid ammonia, and spraying the solvent/alkali metal onto a carrier, for example alumina. The prior art does not describe dispersion of alkali metal onto supports utilizing a fluidized bed.

US-A-2,818,350 teaches a method to prepare a high surface alkali metal by using high velocity and turbulent flow, so that the alkali metal particles impinge themselves onto the solid particles of the carrier, such as alumina, which results in coating the alumina particles with a thin layer of the metal (column 1, lines 31-35). US-A-2,818,350 accomplishes impingement of particles by using the sodium in either the molten or solid state, in a slurry, wherein the carrier liquid is heated, and then vaporized such that a high velocity turbulence is developed in the slurry. High velocities in excess of 25 feet per second, and preferably greater than 100 feet per second are necessary (column 2, lines 17-22) to cause the metal impingement. If a gas carrier is used "enough gas volume to provide the necessary high velocity and turbulence to cause the solid sodium to rub off onto the alumina carrier particles" is required (column 4, lines 6-9).

Most importantly, US-A-2,818,350 teaches that the alumina particles may also disintegrate into a finer size and by starting with coarse materials, such as coarser than 200 mesh, will disintegrate to 10 microns or less (column 2, lines 29-36). Further, this reference teaches that the particles are generally reduced considerably in size during the process and the final sodium coated particles may average as little as 10 microns (column 3, lines 12-16). This is desirable for US-A-2,818,350's purpose since it provides an extremely large sodium surface for chemical reactions (column 3, lines 16-19), such as the

-2-

reactions mentioned at column 1, lines 14-20. This is in distinct contrast to the objectives of the current invention, which is to provide a catalyst suitable for liquid slurry isomerization reactions, where it is desirable to have the sodium metal applied to the carrier without the breakdown of the support particles which accompanies US-A-2,818,350's method of harsh, abrasive, and turbulent approach of applying the sodium to the carrier.

In general, the prior art methods of mechanically mixing alkali metal with supports and mixing using liquid solvents and/or slurries suffer from several disadvantages, including relatively long mixing times, uneven distribution of alkali metal on the support, breakage of the alumina particles (attrition), batches of catalyst that are relatively small and an inability to convert to a continuous process. These and other disadvantages of the prior art are overcome by the present invention.

15

SUMMARY OF THE INVENTION

The present invention relates to a method of preparing an isomerization catalyst by dispersing a molten alkali metal on a support within a fluidized bed environment. The fluidized bed can be established by introducing support particles to a vessel having an inlet and outlet through which an inert gas is respectively introduced and withdrawn in a manner that suspends the support particles in the inert gas. Alkali metal may be introduced to the fluidized bed and the temperature of the fluidized bed maintained above the melting point of the alkali metal so that the movement of the support particles that occurs in the fluidized bed disperses the alkali metal onto the support particles. Optimizing the operating conditions in the fluidized bed provides for more uniform and quicker dispersion of alkali metal, resulting in a superior isomerization catalyst when compared to catalysts prepared by prior art methods.

In one aspect the invention comprises a method of preparing an isomerization catalyst comprising introducing an alkali metal into a fluidized bed of support particles wherein said fluidized bed is maintained at a temperature above the melting point of the alkali metal and the support particles are maintained in a fluidized state for a time sufficient to evenly disperse the alkali metal on the support particles. In another aspect the invention comprises a method of preparing an isomerization catalyst which comprises: (a) introducing support particles into a fluidization zone,

-3-

(b) introducing a flow of fluidizing gas to said fluidization zone at a rate sufficient to suspend said support particles as a dense fluidized bed maintained in said fluidization zone, (c) maintaining the temperature in the fluidization zone at a premixing temperature, (d) introducing an amount of
5 alkali metal into said fluidization zone at a rate of 0.01 to 0.45 lb alkali metal per hour per lb of support particles, (e) maintaining said flow of fluidizing gas for a mixing period to disperse said alkali metal on said support particles to form an isomerization catalyst, and (f) withdrawing said isomerization catalyst from said fluidization zone.

10 Another aspect of this invention comprises isomerizing VNB to ENB using an isomerization catalyst prepared in accordance with the methods set forth herein. Contacting VNB with the isomerization catalyst under isomerization conditions will produce ENB.

A feature of this invention is that the isomerization catalyst produced
15 in accordance with this method shows improved properties in comparison to prior art isomerization catalysts. Another feature of this invention is the improved uniformity of dispersion of the alkali metal on the support. These and other features of the invention will be apparent from the following detailed description of the invention wherein reference is made to the Figure
20 in the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic drawing of one embodiment of a fluidized bed
25 apparatus that can be used to practice the process of preparing an isomerization catalyst in accordance with this invention.

THE INVENTION

30 This invention relates to an isomerization catalyst that is prepared by contacting an alkali metal with a particulate support material. In a preferred but optional embodiment, the isomerization catalyst is contacted with oxygen after the alkali metal has been dispersed upon the support particles. The support particles useful in preparing the isomerization catalyst according to
35 this invention include alumina, silica, aluminosilicates (including zeolites and molecular sieves), hydrotalcites, carbon (including charcoal and graphite) oxides of metals of Groups 2A, 3B and 4B of the Periodic Table of Elements,

clays and combinations thereof. References to the Periodic Table in this application are to CRC Handbook of Chemistry and Physics, CRC Press, Cleveland, OH, 53rd Edition, 1972-1973. A preferred support particle is alumina including alpha, eta, chi, theta, kappa, gamma, delta, aluminas. Gamma alumina is particularly preferred. Descriptions of alumina characteristics in this specification also apply to support particles in general.

The water content of alumina that may be used as a support material will depend partly on the type of alumina and will generally be in the range of 0 to 10% by weight (water/alumina + water). The water content of alumina referred to here is the total amount of water contained by the alumina, including adsorbed water. Optionally the alumina may be dried, as discussed further herein, to reduce the water content to a preferable range. The surface area of the alumina, measured by the B.E.T. Nitrogen Adsorption method will generally range from 5 to 300 m²/g, and more preferably from 140 to 300 m²/g. Presently, gamma alumina having a surface area of 140 to 180 m²/g is most preferred. Although not critical to the invention, the pore volume of the alumina, measured by the B.E.T. Nitrogen Adsorption method, is generally in the range of 0.1 to 1.0 ml/g.

Suitable alumina is available commercially from a number of suppliers. Alumina is generally available in various shapes and particle sizes. The shape of alumina particles useful in this invention is not critical, but spherical shaped particles are preferred because attrition losses are smaller. The size of the alumina particles should be selected to permit fluidization of the alumina particles in the fluidized bed apparatus. An apparatus having a capacity for a relatively strong flow of fluidizing gas will be able to fluidize larger alumina particles than an apparatus having a weaker flow of fluidizing gas. In this invention, the diameter of the alumina particles in microns should range from 10 to 500, preferably 10 to 400 and most preferably 10 to 200. Most fluidized bed systems having adjustable fluidizing gas flow rates will be capable of fluidizing alumina support particles of this size.

The alumina particles are introduced to a fluidized bed apparatus. The initial introduction of alumina may occur before fluidization gas begins to flow or, alternatively, the alumina particles may be introduced while the fluidization gas is flowing. Alumina particles may be introduced to the fluidized bed by means known to those skilled in fluidized bed technology, including without limitation conveyor belts, screw feeders, and gravity feed from a storage hopper. The process may be operated in batch, semi-

continuous or continuous modes. In continuous operation, alumina will be introduced to the fluidized bed at a predetermined usually constant rate selected to provide appropriate residence time for the alumina in the fluidized bed as further described herein. At the same time, alumina
5 particles coated with alkali metal will be withdrawn from the fluidization zone.

Parameters to be determined for successful operation of a fluidized bed are described in the literature, e.g. Chemical Engineer's Handbook, Fifth Edition, Perry & Chilton, McGraw-Hill, 1973, which is incorporated herein
10 by reference, especially pp. 5-54 and 20-65 to 20-75, M. Leva, *Fluidization*, McGraw-Hill, New York, 1959, and G. F. Froment and K. B. Bischoff, *Chemical Reaction Analysis and Design*, p. 667, John-Wiley & Sons, New York, 1979. A fluidized bed may be established in a vessel having a gas inlet located below the fluidization zone and a gas outlet located above the
15 fluidization zone. During operation of the fluidized bed apparatus, fluidization gas flows into the fluidization zone from the gas inlet upward through the fluidized bed and then out of the fluidization zone through the gas outlet. As the downward force of the earth's gravity on the alumina particles is counterbalanced by the opposing flow of fluidizing gas, the
20 alumina particles are suspended in the fluidization zone. Preferably the fluidization zone is vertical, having a fluidizing gas inlet at the bottom and a fluidizing gas outlet at the top of the fluidization vessel.

The flow of fluidizing gas should be maintained at a rate sufficient to suspend the alumina particles in the fluidization zone and below a rate where
25 gas slugging occurs. Gas slugging is an undesirable condition in a fluidized bed where large pockets of fluidization gas travel upward through the bed. Proper suspension of alumina particles in the fluidization zone will not occur unless the flow rate of the fluidization gas is maintained within certain ranges. Several variables will affect the flow rate that is optimum, as
30 described in the Chemical Engineers Handbook, including without limitation the density, shape and amount of alumina particles in the fluidization zone, and the density of the fluidizing gas. The flow rate should be just above the minimum fluidization velocity and below the terminal fluidization velocity. Terminal fluidization velocity can be calculated by Stokes law or other
35 similar methods. The object of fluidization in this invention is to achieve agitation and mixing without causing attrition of support particles.

Ideally the conditions are such that no more than 15 wt.%, preferably no more than 10 wt.%, and most preferably no more than 5 wt.%, of the support particles after preparation of the catalyst are smaller than the minimum particle size of those support particles before the preparation method is begun. Alternatively stated, the wt.% of particles below a desired minimum particle size of support particles prior to performing the preparation method, preferably does not rise by more than 10 percentage points. For example, if the starting material contains 7 wt.% particles being less than 10 microns in size, then the finished catalyst will contain preferably no more than 17 wt.% of particles being less than 10 microns in size.

Generally, the optimum flow rate for the fluidization gas can be easily determined by testing at various fluidization gas flow rates to determine which rate provides the best fluidization under the particular circumstances. Usually the flow rate (superficial velocity) of the fluidizing gas will be maintained from 0.15 to 6.1 meters per minute (0.5 to 20 linear feet per minute), preferably 0.61 to 6.1 m/minute (2 to 20 ft/min), more preferably 1.2 to 3.7 meters per minute (4 to 12 linear feet per minute), calculated based on the apparent flow rate of fluidization gas through the fluidization zone while empty, i.e., without support particles present. This flow rate is customarily referred to as the superficial velocity of the fluidization gas. At these flow rates the fluidized bed is referred to as a dense fluidized bed.

The fluidization gas that should be used during the dispersion phase of this invention is one that is inert to reaction with an alkali metal. Inert gasses such as nitrogen, helium, neon, argon, natural gas (methane) ethane, krypton, xenon, radon and mixtures of any two or more of these are suitable. Nitrogen is preferred. During the time alkali metal is introduced to the fluidized bed and dispersed (evenly distributed) on the support particles, the entire fluidized bed should be maintained in an inert atmosphere. Utilizing a fluidizing gas consisting essentially of the inert gasses listed above will maintain an acceptably inert atmosphere.

The fluidization gas should be relatively dry since water vapor is reactive with alkali metals. Generally the fluidization gas will be sufficiently dry if the water content of the fluidization gas is below 10 ppm. If necessary, the fluidizing gas may be dried prior to contact with alkali metal. Means for drying a gas are known in the art, including passing the fluidization gas through a bed of molecular sieves, anhydrous alumina or anhydrous calcium sulfate.

Optionally, the fluidized bed may be utilized to pretreat the alumina. The pretreatment of alumina will prepare the alumina to receive the alkali metal, and adjust the water content of the alumina to appropriate levels. This pretreatment step is a type of preparation generally described in the art as calcination. The alumina pretreatment is accomplished by introducing alumina to the fluidized bed apparatus and then beginning fluidization without adding alkali metal to the alumina. Preferably the fluidizing gas is heated to promote removal of water from the alumina during pretreatment. Due to the good heat transfer between fluidizing gas and alumina that is inherent with a fluidized bed, the alumina particles will be maintained at the same temperature as the fluidizing gas. The temperature of the fluidizing gas during the pretreatment step should be maintained from 100° to 400° C, preferably 200° to 400° C, most preferably 300° to 400° C. The residence time of alumina particles in the fluidization zone during the pretreatment step should range from 0.5 to 5, preferably 1 to 4 and most preferably 1 to 2 hours. If the water content of alumina is to be reduced during the pretreatment step, the residence time may need to be adjusted to accommodate removal of the appropriate amount of water. If more water is to be removed, increasing the residence time and/or temperature of the fluidizing gas will facilitate the appropriate water removal. If relatively large amounts of water are to be removed, pretreatment may be extended beyond 4 hours. After the pretreatment step and before alkali metal is contacted with the alumina particles, the temperature of the fluidizing gas can be reduced to the appropriate temperature for contact between alumina and the alkali metal. Continued fluidization at the lower temperature will cool the alumina to a temperature that is appropriate for contact between alkali metal and alumina.

Any alkali metal or combination of alkali metals may be contacted with the alumina particles to produce the isomerization catalyst of this invention. In this application, the term alkali metal means such individual alkali metals and/or combinations of alkali metals unless the context in which the term is used expressly indicates a contrary intention. Specific alkali metals include lithium, sodium, potassium, rubidium and cesium. Sodium and potassium are preferred, and of the two, sodium is preferred. The alkali metal should be contacted with alumina particles at a temperature that is above the melting point of the particular alkali metal. For sodium the preferred contact temperature is 100° to 200° C.

Pure alkali metal may be introduced to the fluidization apparatus in either a solid or molten liquid form. Once the alkali metal is introduced, the temperature in the fluidization zone will melt any solid alkali metal introduced and maintain any molten alkali metal in the molten liquid state.

5 Preferably, the alkali metal is introduced to the fluidization zone in a molten (liquid) state. The alkali metal is preferably introduced to the fluidization zone at a constant rate, continuously over a period of 1 to 3 hours. Preferably the temperature at which sodium is added ranges from 110° to 200° C.

The amount of alkali metal that should be added to make the

10 isomerization catalyst of the invention is generally in the range of 5 to 20 parts based upon 100 parts of alumina by weight (a ratio in the range of 1:20 to 1:5), preferably 5 to 15 and most preferably 10 to 15 parts of alkali metal to 100 parts of alumina. In a preferred embodiment of the invention, the alkali metal is added to the fluidized bed at a certain optimum rate ranging

15 from 0.01 to 0.45 kg/hr per kg (0.01 to 0.45 lb/hr per lb) of alumina support particles, preferably 0.05 to 0.20, while maintaining the temperature in the fluidization zone within the range of 110° to 200° C. Optionally, during the addition of alkali metal, mechanical agitation of the fluidized bed at low speeds with a turbine agitator at a tip speed of 0.003 m/s to 0.61 m/s (0.01 to

20 2 ft/s tip speed) may help break up larger agglomerates of alkali metal and support particles that may otherwise form in the bed.

Suspension of the alumina particles in the fluidization zone should continue during the addition of alkali metal and usually for a time thereafter. The period of time after substantially all the alkali metal has been added

25 during which fluidization continues at a temperature above the melting point of the alkali metal is referred to herein as the mixing period, and is preferably at least 30 minutes in duration. The continued fluidization of the alumina particles during the mixing period breaks larger alkali metal/support particle agglomerates into smaller individual particles of support material

30 coated with alkali metal and provides for uniform dispersion of the alkali metal onto the alumina particles, and may optionally be continued for 1 to 4 hours. Generally, continued fluidization of the alumina for a mixing period of 1 to 2 hours after all of the alkali metal has been introduced to the fluidization zone will provide sufficient time for the alkali metal to be evenly

35 dispersed on the alumina particles. The degree of uniformity of the dispersion of alkali metal can be determined by measuring the conversion of alkali metal when contacted with oxygen.

Another optional feature provided by this invention is the ability to produce an oxidized alkali metal isomerization catalyst. In accordance with this feature of the invention, oxygen or an oxygen containing gas is mixed with the fluidizing gas in certain proportions. As the fluidizing gas supports the alkali metal/alumina particles, the oxygen in the fluidizing gas reacts with the alkali metal in an exothermic reaction that liberates 50 kcal of heat per g-atom of alkali metal reacted. Oxygen or oxygen containing gas is introduced to the fluidized bed at a relatively constant rate that is determined by heat transfer characteristics of the fluidized bed system. The temperature of the particles in the fluidized bed during oxidation is maintained below 250°C, and preferably below 200°C. The total amount of oxygen (O₂) added should range from 0.001 to 0.2 moles based upon each mole of alkali metal dispersed on the support particles. The oxygen is preferably added to the fluidizing gas prior to the gas distributor in the fluidizing apparatus. The temperature of the fluidized bed is preferably maintained from 150° to 200°C. The optimum molar oxidation level is from 0.15 to 0.20:1 (O₂:Alkali metal). The rate at which oxygen is introduced to the fluidization zone is preferably in the range from 0.01 to 2 moles O₂ per hour per mole of alkali metal, more preferably 0.01 to 0.2 and most preferably 0.01 to 0.1 moles/hr per mole of alkali metal on the support particles.

Optionally, a helical, paddle type or turbine agitator may be used to provide supplemental agitation to the alumina particles. The fluidized bed apparatus is constructed so the agitator is deployed in the fluidized bed portion of the support particles. The agitation velocity should be low to avoid attrition.

The invention may be further understood by reference to Figure 1 which shows a fluidizing apparatus 10. The fluidizing apparatus 10 comprises a vessel 12, an alkali metal reservoir 50, a support particle reservoir 42 and a gas supply 30. Support particles may be charged to vessel 12 from support particle reservoir 42 through feed conduit 44 which connects support particle reservoir 42 with vessel 12. The flow of support particles into vessel 12 may be controlled or restricted by control valve 46. Control valve 46 may be a slide valve, star valve, table feeder, screw feeder, cone valve or any other similar device used to control flow of solid particles.

Support particles may be charged to vessel 12 either continuously during fluidization or support particles may be charged as a batch all at once to vessel 12 prior to or during fluidization. After support particles have been

-10-

charged to vessel 12, they may be fluidized with a fluidizing gas. In Figure 1, gas supply 30 provides the fluidizing gas to gas inlet 28 which is in communication with the bottom of vessel 12. Gas inlet 28 is connected with gas supply conduit 32 through which fluidizing gas flows from gas supply 30.
5 If necessary, the fluidizing gas may be heated by passing it through gas pre-heater 34.

Fluidizing gas enters vessel 12 through gas inlet 28 and then passes through gas distributor plate 26 which is positioned near the bottom of vessel 12. Support particles are maintained in fluidized bed 72 in the space above gas distributor plate 26. Fluidizing gas travels up through gas distributor plate 26 through fluidized bed 72 and out of vessel 12 through gas outlet 56. Gas outlet 56 is connected to the upper portion of vessel 12 to avoid removing support particles that are entrained in the flow of fluidizing gas through vessel 12. Optionally, filters 58 and 60 allow for passage of the fluidizing gas therethrough but filter out entrained support particles so that they stay within vessel 12. The fluidizing gas may be discharged from the system or recycled back to gas supply 30.
10
15

The fluidized bed depth is the distance between gas distribution plate 26 and the top of fluidized bed 72 and is represented in Figure 1 by line 68. Preferably, vessel 12 provides for disengaging space above the fluidized bed 72. The disengaging space is the volume above the top of fluidized bed 72 and below the top of vessel 12, and the disengaging space depth is represented by reference character 70. The disengaging space provides for separation of support particles (which fall back down into fluidized bed 72) from the flowing fluidized gas which is withdrawn through gas outlet 56.
20
25

Alkali metal is added to fluidized bed 72 from alkali metal reservoir 50 through feed conduit 52. Feed pump 54 may be used to meter the proper amounts of alkali metal into vessel 12.

Optionally, vessel 12 may be equipped with a turbine agitator 64 connected to motor 62 by shaft 66. In operation, turbine agitator 64 rotates to provide an agitation in the fluidized bed in addition to that provided by fluidization.
30

After all of the alkali metal that is to be added to the support particles has been added, and the alkali metal has been uniformly distributed upon the support particles, oxygen may be added to vessel 12 to react with the alkali metal. Oxygen from oxygen supply 36 is introduced to vessel 12 through supply conduit 38 which is connected to gas inlet 28. The flow of oxygen
35

through supply conduit 38 may be controlled by control valve 40. Addition of oxygen should be controlled at a rate so that the temperature of fluidized bed 72 does not exceed temperature limits as described in this specification.

In order to provide for better temperature control of vessel 12, it may be necessary to install a heat exchanger 14 around vessel 12. In Figure 1, heat exchanger 14 is an oil jacket having an oil inlet 16 and an oil outlet 18. In operation, oil circulates through heat exchanger 14 to add or remove heat from fluidized bed 72 as needed. Circulation of the oil may be provided by means of oil pump 24. The temperature of the oil may be adjusted using alternatively oil cooler 20 or oil heater 22 as needed. During the pretreatment step and also during the mixing period, oil heater 22 may be used to maintain fluidized bed 72 at the desired temperature. Alternatively or in conjunction therewith, gas preheater 34 may be used. During the addition of alkali metal, it may be necessary to use oil heater 22 to keep the system at temperatures to maintain the alkali metal in a molten form. During oxygen addition, because of the exothermic oxidation reaction, it may be necessary to use oil cooler 20 to maintain the temperature of fluidized bed 72 within appropriate limits.

As discussed in the specification, the superficial velocity of the fluidizing gas is calculated with reference to vessel 12 in an empty condition. If vessel 12 is circular in cross section, the fluidizing gas flow superficial velocity may be calculated by determining the cross sectional area from diameter 74, measuring the fluidization gas flow rate and pressure and calculating the gas flux across the cross section of vessel 12.

The invention may be more fully understood by reference to the following examples.

EXAMPLES

Example 1 - Comparative

This example describes a catalyst preparation where sodium metal and alumina are mixed with a stir paddle at 250 rpm in a 300 cc reactor. The tip speed of the paddle was 0.79m/s (2.6 ft/s). First, gamma-alumina (30 g), with a surface area of 150 m²/g is dried in a nitrogen flow at 400°C for 1 hour and then cooled to room temperature under nitrogen. Then, small pieces of metallic sodium (4.5 g) and the alumina are placed in the nitrogen

-12-

blanketed reactor and heated under nitrogen to 150°C. At the point when metallic sodium starts to melt, stirring is started and continued throughout the preparation. The mixture is stirred for 30 minutes at 150°C and then the temperature is raised to 300°C where stirring is continued for 60 minutes.

5 Then the mixture is cooled to room temperature and a mixture of 5% O₂ in N₂ is added at 126 mL/minutes for 123 minutes. Total stirring time was 213 minutes. Measurement of particle size showed 25 wt% of the finished catalyst had a diameter less than 10 microns. The starting alumina had 7 wt% of particles with less than 10 micron diameter.

10 Particles with diameters less than 10 microns in diameter cause problems when the catalyst is used in a liquid slurry isomerization processes because the rate at which these particles will settle is too slow for efficient catalyst/liquid-product separation.

15 Example 2 - Comparative

This example shows catalyst preparation in a commercial double cone rotating mixer. Gamma-alumina powder (11.3 kg) (25 lb) having a surface area of 170 m²/g was dried at 400°C in a flow of nitrogen. The powder is
20 then heated to 150°C under a N₂ blanket and molten sodium (1.7 kg) (3.75 lb) is added over a period of 30-60 minutes while rotating the equipment to provide agitation. Mixing and heating at 150°C are continued for 120 minutes. Next, a mixture of 5% O₂ in N₂ is added over a period of 120-240 minutes while maintaining mixing action and temperature between 150-
25 200°C. The total agitation time is between 270 and 420 minutes. Catalyst prepared in this manner was found to have 2 wt% of particles with diameters greater than 600 microns compared to the starting alumina which had none. There was no change in the amount of particles with diameters less than 10 microns. Particles with diameters greater than 600 microns cause processing
30 problems because they tend to plug transfer lines that handle catalyst or liquid slurries in commercial isomerization plants.

Example 3 - The Invention

35 This example shows catalyst preparation in a fluidized bed reactor with auxiliary mechanical mixing. Gamma-alumina powder (36.3 kg) (80 lb) with a surface area of 170 m²/g was added to the reactor and then fluidized

with N₂ at a linear superficial velocity of 9 ft/min and stirred with a helical turbine at a tip speed of (0.23 m/s) (0.75 ft/s). The fluidization and stirring was maintained throughout the remainder of the preparation. The alumina was heated to 350°C for 60 minutes, and then cooled to 150°C over a period of 120 minutes. Then, molten sodium (5.4 kg) (12 lb) was added at a constant rate over 120 minutes at 150°C. Next, 0.954 m³ (33.7 ft³) of oxygen was added over a 370 minute period while maintaining the temperature between 150° and 200°C. Total mixing time was 670 minutes. Compared to the starting alumina, there was no increase in amounts of particles with diameters greater than 600 microns or less than 10 microns.

Example 4 - Comparative

This example describes a catalyst preparation similar to example 1 except the alumina and reaction temperatures were chosen to match those in example 3. Sodium metal and alumina are mixed with a stir paddle at 250 rpm in a 300 cc reactor. The tip speed of the paddle was 0.79 m/s (2.6 ft/s). First, gamma-alumina (21.8 g), with a surface area of 170 m²/g is dried in a nitrogen flow at 400°C for 1 hour and then cooled to room temperature under nitrogen. Then, small pieces of metallic sodium (3.3 g) and the alumina are placed in the nitrogen blanketed reactor and heated under nitrogen to 150°C. At the point when metallic sodium starts to melt, stirring is started and continued throughout the preparation. The mixture is stirred for 150 minutes at 150°C. Then, a mixture of 5% O₂ is added at 126 mL/min for 82 minutes at 150°C.

Example 5 - Compares Example 3 (Invention) with Example 4 (Comparative) With Respect to the Degree of Sodium Dispersion

One skilled in the art knows that the degree to which the amount of metal can be exhaustively oxidized on a catalyst indicates the degree to which the metal is dispersed on the catalyst. The greater the degree of sodium dispersion on the catalyst, the lower the amount of sodium which remains after oxidization. The catalysts in examples 3 and 4 were subjected to exhaustive oxidation by adding 5% O₂ in N₂ so that the theoretical stoichiometric ratio for Na₂O of 0.25/1 (moles O₂: moles Na) was achieved. The amounts of metallic sodium remaining on the catalysts after exhaustive

oxidation were determined by H₂ evolution after hydrolysis. Catalyst from example 3 after exhaustive oxidization had 0.9 wt% metallic sodium remaining and catalyst from example 4 had 4.6 wt% metallic sodium remaining. This example demonstrates that the use of gas fluidization as a mixing technique
5 of the present invention results in a higher degree of sodium dispersability.

Example 6 - Compares Example 3 (Invention) with Example 4 (Comparative) With Respect to Conversion of VNB Feed

10 The catalysts in examples 3 and 4 were measured for activity to isomerize 5-vinyl-2-norbornene (VNB) to 5-ethylidene-2-norbornene (ENB) using VNB that contained various impurities that might be expected in commercial practice. The impurities (and their level in the VNB) were vinylacetylene-cyclopentadiene adducts (720 ppm), tetrahydroindene
15 (570 ppm), cyclooctadiene (300 ppm), and alkyl-vinylcyclohexenes (600 ppm). The vinylacetylene-cyclopentadiene adducts are known to be catalyst poisons. The isomerizations were run by stirring 25 g of VNB with 0.35 g catalyst for 2 hours at ambient temperature. Products were analyzed by gas chromatography. The VNB conversions were 98.5% for the example 3
20 catalyst and 24% for the example 4 catalyst. The gas fluidization technique for mixing results in a catalyst with greater activity.

Example 7 - Compares Example 3 (Invention) with Example 2 (Comparative) With Respect to Conversion of Impure VNB Feed

25 The catalysts in examples 2 and 3 were measured for activity to isomerize VNB to ENB using VNB that contained 1250 ppm indene as a poisoning agent. The isomerizations were run by stirring 25 g of VNB with 0.35 g catalyst for 2 hours at ambient temperature. Products were analyzed
30 by gas chromatography. The VNB conversions were 98% for the example 3 catalyst and 30% for the example 2 catalyst. This again shows the gas fluidization technique for mixing results in a catalyst with greater activity.

CLAIMS

1. A method of preparing an isomerization catalyst comprising introducing an amount of alkali metal into a fluidized bed of support particles wherein the fluidized bed of support particles is maintained at a temperature above the melting point of the alkali metal and in a fluidized bed state for a time sufficient to evenly disperse the alkali metal on the support particles without substantial breakdown of the support particles.
2. A method in accordance with Claim 1, wherein the weight ratio of the amount of alkali metal introduced to the fluidized bed of support particles in relation to the weight of support particles in the fluidized bed is within the range of 1:20 to 1:5.
3. A method in accordance with Claims 1 or 2, wherein the fluidized bed of support particles is maintained in a fluidized state utilizing a fluidizing gas selected from the group consisting of helium, neon, argon, krypton, xenon, radon, nitrogen, methane, ethane and mixtures thereof.
4. A method in accordance with any of the preceding claims, wherein the fluidized bed of support particles is maintained in a fluidized state utilizing a fluidizing gas flowing at a superficial velocity of from 0.61 to 6.1 linear meters per minute, preferably from 1.2 to 3.7 linear meters per minute.
5. A method in accordance with any of the preceding claims, wherein the alkali metal comprises lithium, sodium, potassium, rubidium or cesium, preferably sodium.
6. A method in accordance with any of the preceding claims, wherein the fluidized bed of support particles is mechanically mixed with an agitator.
7. A method in accordance with any of the preceding claims, wherein after the alkali metal is evenly dispersed on the support particles,

oxygen is introduced to the fluidized bed, preferably wherein the mole ratio of oxygen introduced to the fluidized bed in relation to alkali metal dispersed on the support particles is in the range from 0.001:1 to 0.2:1.

- 5
8. A method in accordance with any of the preceding claims, wherein the support particles consist essentially of alumina.
9. A method in accordance with any of the preceding claims, wherein
10 diameter of the support particles is in the range from 10 to 500 microns, preferably from 10 to 400 microns, most preferably from 10 to 200 microns.
10. A method of preparing an isomerization catalyst which comprises:
- 15 (a) introducing alumina particles having a particle diameter in the range of 10 to 500 microns, preferably from 10 to 400 microns, into a vertical fluidization zone;
- (b) introducing an upward flow of fluidizing gas, preferably
20 helium, neon, argon, krypton, xenon, radon, nitrogen, methane or ethane, most preferably nitrogen, to the fluidization zone at a rate sufficient to suspend the alumina in a fluidized bed maintained in the fluidization zone without incurring substantial breakdown of alumina particles;
- 25 (c) maintaining the temperature in the fluidization zone at a premixing temperature;
- (d) introducing an amount of alkali metal comprising lithium, sodium, potassium, rubidium or cesium, preferably sodium, into the fluidization zone at a rate of
30 0.01 to 0.45, preferably from 0.05 to 0.20, kg alkali metal/hr per kg alumina while maintaining the temperature in the fluidization zone within the range of 100° to 200° C;
- (e) maintaining the flow of fluidizing gas, preferably at a
35 superficial velocity within the range of 1.2 to 3.7 linear meters per minute, for a mixing period of at least 30 minutes, preferably from 1 to 3 hours, after the amount

-17-

of alkali metal has been introduced to the fluidization zone to disperse the alkali metal on the alumina to form an isomerization catalyst, and

- (f) withdrawing the isomerization catalyst from the fluidization zone.

5

11. A method in accordance with Claim 10 which further comprises drying the alumina in the fluidization zone in step (c) by maintaining the premixing temperature within the range of 100° to 400° C for at least 1 hour.

10

12. A method in accordance with Claim 10 or 11, which further comprises maintaining the flow of fluidizing gas after the mixing period and introducing an amount of oxygen to the fluidization zone before the isomerization catalyst is withdrawn from the fluidization zone.

15

13. A method in accordance with Claim 12, wherein the amount of oxygen is within the range of 0.001:1 to 0.2:1 based on the moles of oxygen introduced to the fluidization zone to the moles of the amount of alkali metal.

20

14. A method in accordance with Claim 12 or 13, wherein the rate at which the amount of oxygen is introduced to the fluidized bed is in the range of 0.01 to 0.1 moles/hr per mole of alkali metal.

25

15. A method of isomerizing 5-vinyl-2-norbornene (VNB) to 5-ethylidene-2-norbornene comprising contacting VNB with an isomerization catalyst at a temperature of 0° to 80° C and a contact time in the range of 1 to 12 hours wherein the isomerization catalyst is prepared by:

30

- (a) introducing alumina particles having a particle diameter in the range of 10 to 500 microns into a vertical fluidization zone;


- (b) introducing an upward flow of fluidizing nitrogen gas to the fluidization zone at a rate sufficient to suspend the alumina in a fluidized bed maintained in the fluidization zone at a rate sufficient to suspend the alumina in a fluidized bed maintained in the fluidization zone

35

-18-

without incurring substantial breakdown of alumina particles;

- 5 (c) maintaining the temperature in the fluidization zone at a premixing temperature in the range of 150° to 400° C to dry the alumina, and thereafter;
- 10 (d) introducing an amount of sodium, wherein the amount of sodium is within the range of 1:20 to 1:5 based upon the weight of alumina particles, into the fluidization zone at a rate of 0.01 to 0.45 kg sodium/hr per kg alumina while maintaining the temperature in the fluidization zone within the range of 100° to 200° C;
- 15 (e) maintaining the flow of fluidizing gas for a mixing period of at least 30 minutes after the amount of sodium has been introduced to the fluidization zone to disperse the sodium on the alumina to form an isomerization catalyst, and thereafter;
- 20 (f) introducing an amount of oxygen to the fluidization zone at a rate in the range of 0.01 to 1 moles/hr per mole of sodium wherein the amount of oxygen is within the range of 0.001:1 to 0.2:1 based on the moles of oxygen introduced to the fluidization zone to the moles of the amount of sodium to form an isomerization catalyst; and
- 25 (g) withdrawing the isomerization catalyst from the fluidization zone.

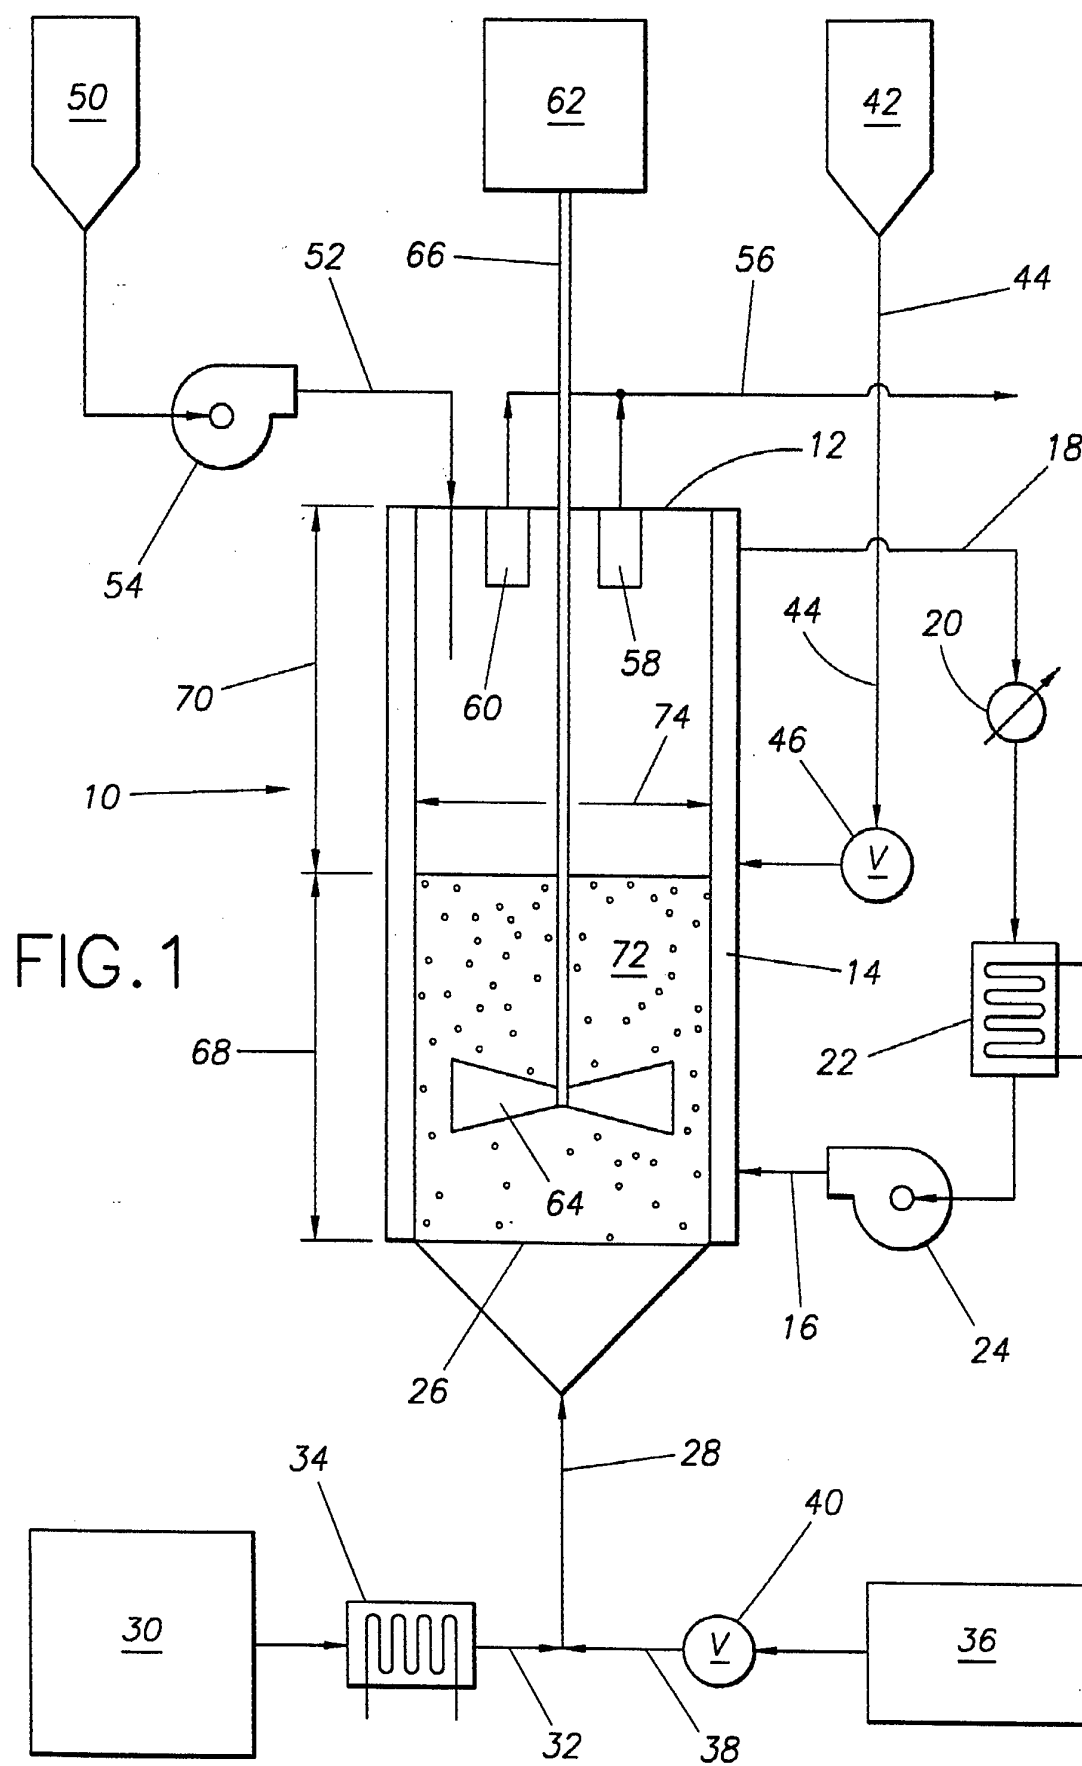

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 94/13045

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B01J23/04 B01J37/02 C07C5/25

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B01J C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP,A,0 083 083 (MITSUI PETROCHEMICAL INDUSTRIES, LTD.) 6 July 1983 ---	
A	WO,A,92 20639 (EXXON CHEMICAL PATENTS INC.) 26 November 1992 ---	
A	EP,A,0 190 352 (MITSUI PETROCHEMICAL INDUSTRIES, LTD.) 13 August 1986 ---	
A	DE,A,20 29 118 (THE LUMMUS CO.) 2 September 1971 ESPECIALLY EXAMPLE 2, PAGE 6 -----	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search 28 February 1995	Date of mailing of the international search report 15.03.95
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer Devisme, F

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 94/13045

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0083083	06-07-83	JP-C- 1264496	16-05-85
		JP-A- 58114737	08-07-83
		JP-B- 59040504	01-10-84
		JP-C- 1264498	16-05-85
		JP-A- 58114739	08-07-83
		JP-B- 59040506	01-10-84
		CA-A- 1198409	24-12-85
		US-A- 4520126	28-05-85

WO-A-9220639	26-11-92	AU-A- 2029492	30-12-92
		CA-A- 2103063	15-11-92
		EP-A- 0587716	23-03-94
		JP-T- 6502119	10-03-94

EP-A-0190352	13-08-86	JP-C- 1633620	20-01-92
		JP-B- 2061296	19-12-90
		JP-A- 60251933	12-12-85
		JP-B- 1048819	20-10-89
		JP-C- 1653901	13-04-92
		JP-A- 61004531	10-01-86
		WO-A- 8505562	19-12-85
		US-A- 4675307	23-06-87

DE-A-2029118	02-09-71	DE-A- 2008648	17-09-70
		FR-A- 2032465	27-11-70
		GB-A- 1265786	08-03-72
		US-A- 3963645	15-06-76
