United States Patent [19]

Baker et al.

[11] **3,746,420**

[45] **July 17, 1973**

[54] **MANUFACTURE AND OPERATION OF GAS DISCHARGE PANEL**

[75] Inventors: **Theodore C. Baker**, Toledo; **Wolfgang W. Bode**, Sylvania; **Richard G. Mathias**, Toledo; **James F. Nolan**, Sylvania; **Lawrence V. Pfaender**, Toledo, all of Ohio

[73] Assignee: **Owens-Illinois, Inc.**, Toledo, Ohio

[22] Filed: **July 15, 1971**

[21] Appl. No.: **163,043**

Related U.S. Application Data

[62] Division of Ser. Nos. 783, Jan. 5, 1970, Pat. No. 3,614,511, and Ser. No. 686,384, Nov. 24, 1967, Pat. No. 3,499,167.

[52] **U.S. Cl.** **316/20**

[51] **Int. Cl.** **H01j 9/38**

[58] **Field of Search** ..... 316/20; 315/165, 315/169 TV; 313/169 R, 201; 29/25.13

[56] **References Cited**

UNITED STATES PATENTS

2,859,385	11/1958	Bentley	315/169 TV
2,933,648	4/1960	Bentley	315/169 R
3,042,823	7/1962	Willard	315/169 TV
3,096,516	7/1963	Pendleton et al.	315/169 R

Primary Examiner—Charles W. Lanham
Assistant Examiner—J. W. Davie
Attorney—Donald Keith Wedding et al.

[57] **ABSTRACT**

There is disclosed the manufacture and operation of a gas discharge display/memory panel having a pair of opposed support members carrying conductor arrays with an inorganic dielectric coating on the conductor arrays, and an ionizable gas confined between the opposed dielectric surfaces of the substrate.

2 Claims, 6 Drawing Figures

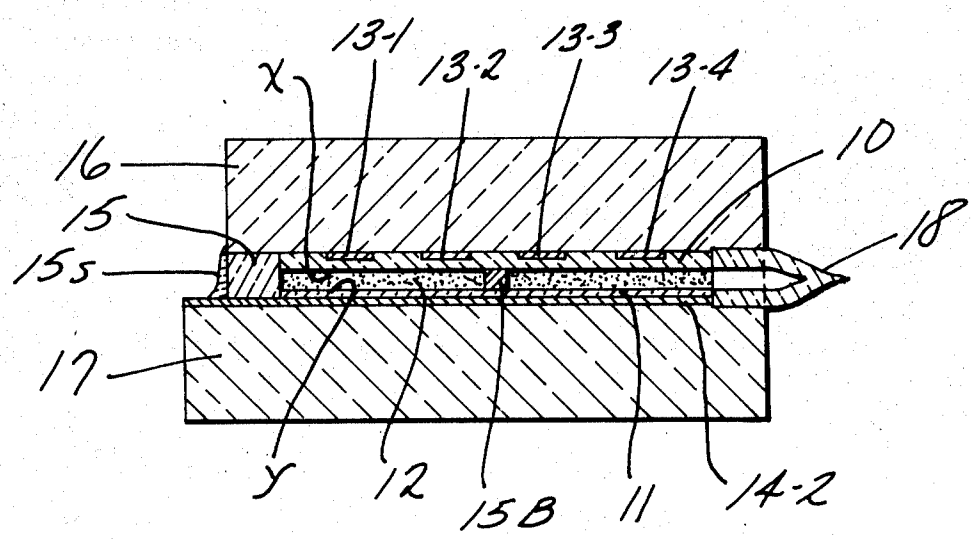


FIG. 2

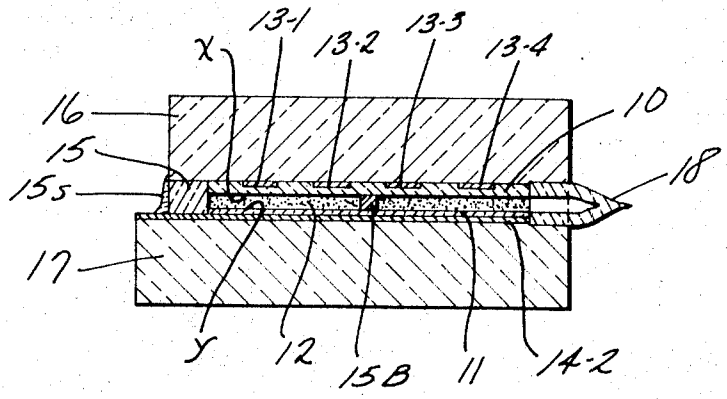

X
13-1
13-2
13-3
13-4
16
10
15
18
15s
17
Y
12
15B
11
14-2

FIG. 1

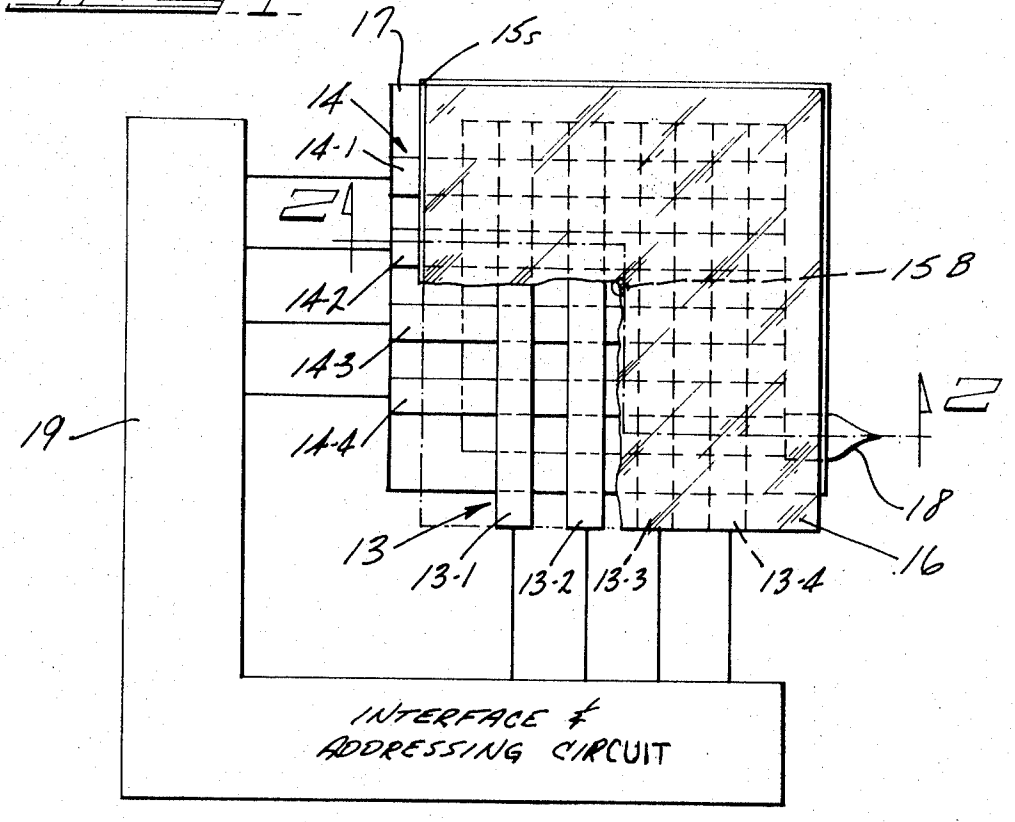

17
15s
14
14-1
Z
14-2
14-3
14-4
15B
Z
19
18
13
13-1
13-2
13-3
13-4
16
INTERFACE & ADDRESSING CIRCUIT

FIG. 2

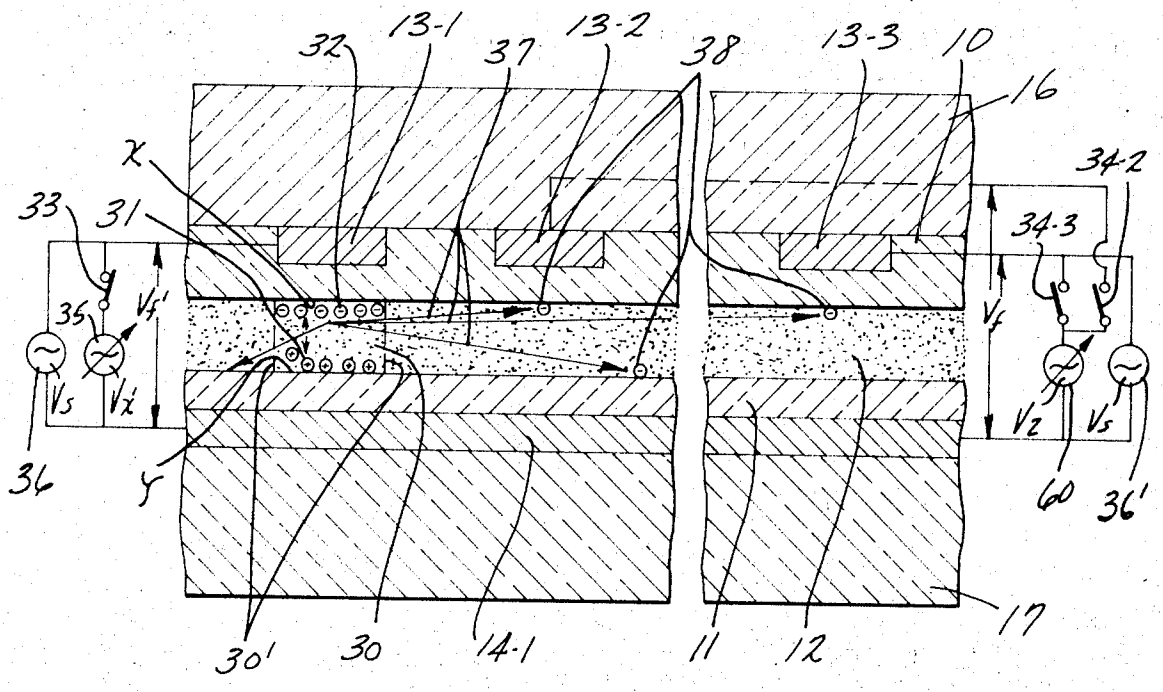
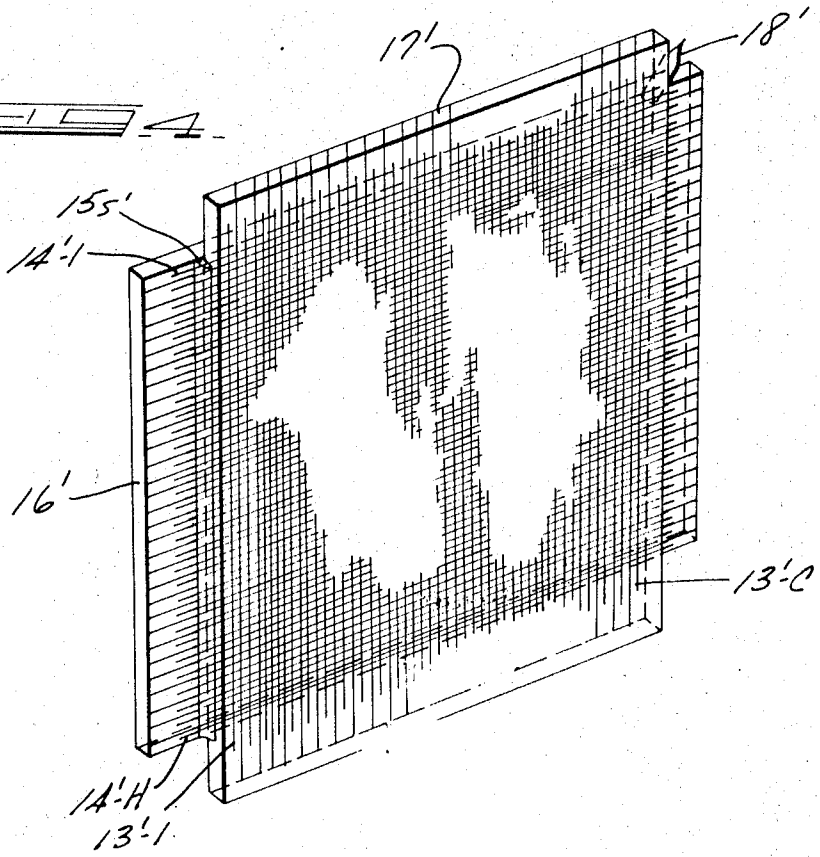

32
13-1
37
13-2
38
13-3
10
16
X
34-2
33
31
34-3
35
V_f'
V_f
V_s
V_x
V_2
V_s
36
Y
60
36'
30'
30
14-1
11
12
17

FIG. 4


17'
18'
15'
14'-1
16'
13'-C
14'-H
13'-1

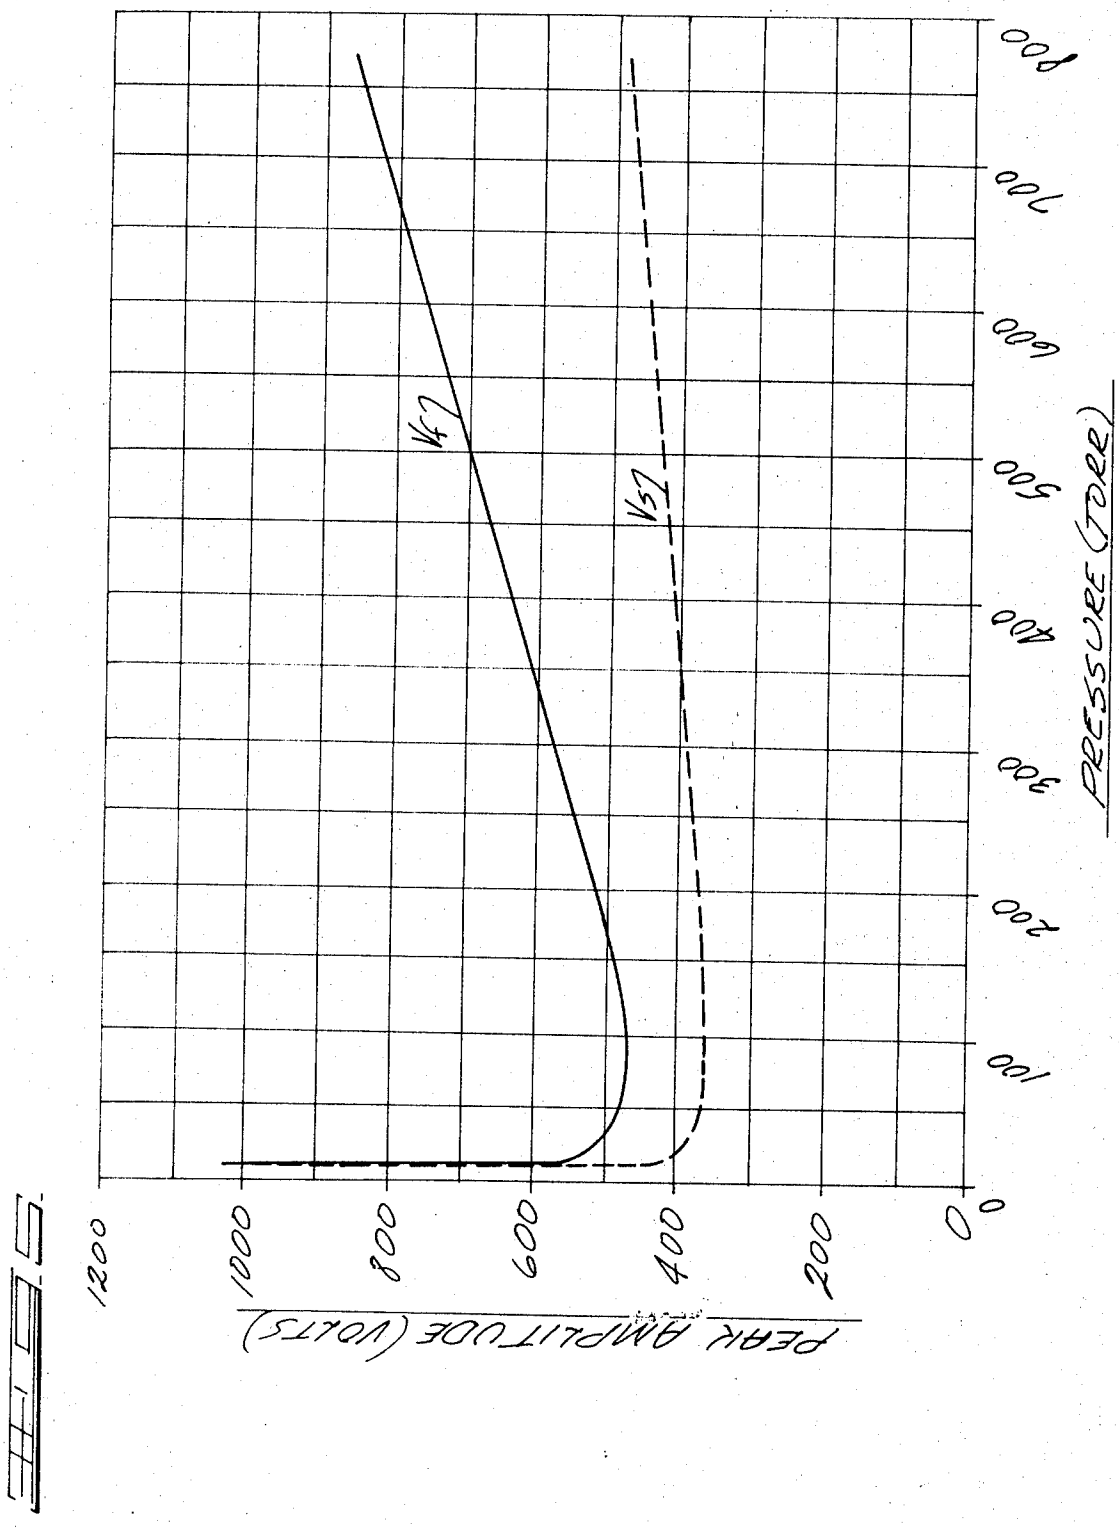
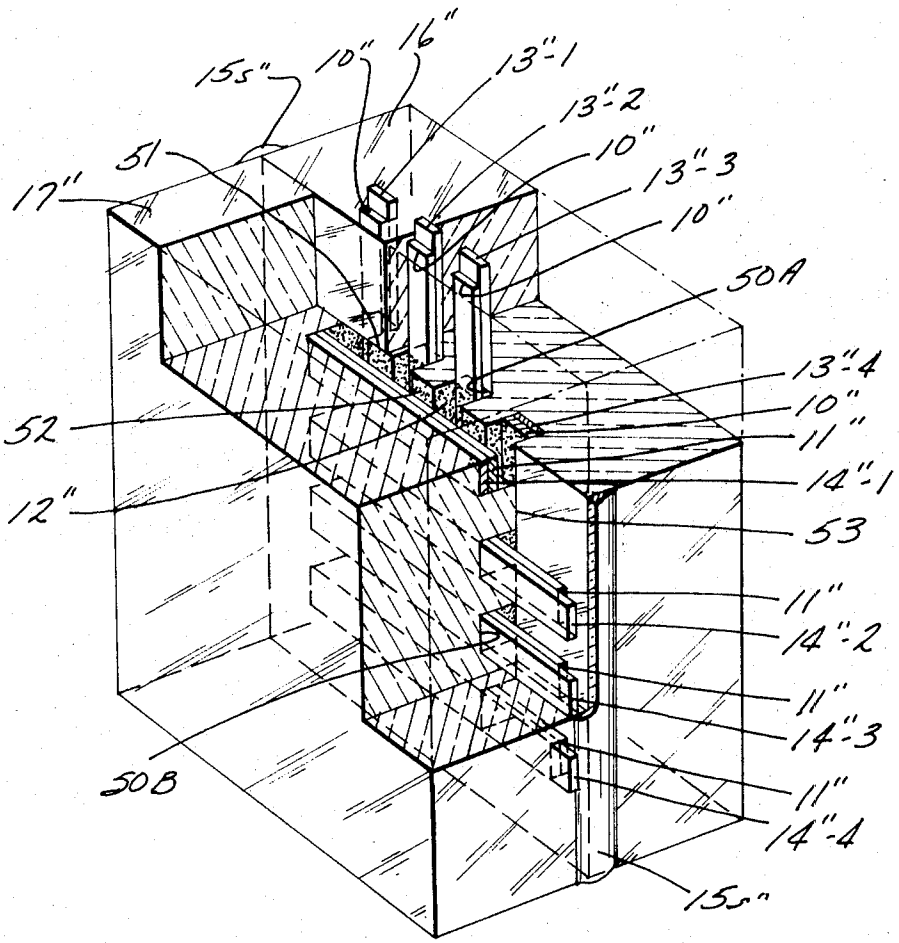

PEAK AMPLITUDE (VOLTS)
1200
1000
800
600
400
200
0
PRESSURE (TORR)
0
100
200
300
400
500
600
700
800
Vf
Vs

FIG. 5

FIG. 6


15s"
10"
16"
13"-1
13"-2
10"
13"-3
10"
50A
13"-4
10"
11"
14"-1
53
11"
14"-2
11"
14"-3
11"
14"-4
15s"
51
17"
52
12"
50B

MANUFACTURE AND OPERATION OF GAS DISCHARGE PANEL

This application is a divisional application of copending U.S. Pat. application Ser. No. 783, filed Jan. 5, 1970, now U.S. Pat. No. 3,614,511 issued Oct. 19, 1971 and earlier filed Ser. No. 686,384, filed Nov. 24, 1967, now U.S. letters Pat. No. 3,499,167.

This invention relates to gaseous discharge display and/or memory devices which have an electrical memory as well as being capable of producing a visual display or representation of data such as numerals, letters, television displays, radar displays, binary words, etc.

Gaseous discharge devices in accordance with the present invention are distinguished from prior discharge devices using internal electrodes in that the dielectric layers prevent any conduction current from actually passing therethrough, the dielectric layers being necessary to serve as collecting surfaces for charges (electrons, ions) during alternate half cycles of the alternating operating potentials, such charges collecting first on one elemental or discrete dielectric surface area and then on an opposing elemental or discrete dielectric surface area on alternate half cycles.

Known gaseous display and/or memory systems, such as the one disclosed in the article entitled "The Plasma Display Panel — A Digitally Addressable Display with Inherent Memory," IEEE Procceding — Fall Joint Computer Conference — 1966 pages 541–547, require physical and/or optical isolation of each individual discharge cell, each such individualized cell being energized by a conductor matrix of orthogonally related conductor arrays. Such isolation is usually provided in the form of a relatively fragile plate or seperate center structure having perforations or cells which must be in registry with matrix cross points. An important feature and object of the present invention is to provide a gaseous discharge panel and method in which physical and optical isolation structures for each discharge point is eliminated.

It is known (e.g., "Electrical Breakdown of Argon in Glass cells with External Electrodes at Constant and at 60-Cycle Alternating Potential" — Journal of Applied Physics Volume 33, No. 4, pages 1,567 et seq., April, 1962) that the cross-sectional area of a gas discharge is a function, inter alia, of the pressure of the gas. An object and feature of the present invention is the elimination of the requirement for physical localization of discharges by utilization of this phenomena to provide improvement in image resolution in a multiple discharge gas display device by placing the gas at a pressure sufficient to confine substantially all charges produced by the discharge to a well defined, discrete, elemental cross-sectional area within a large unconfined gas volume. It has been found that as a result of the increase in pressure, the memory margin, as defined herein, imporves (approaches unity) as the pressure is increased. However, an upper limit on the gas pressure has not been determined but from a practical point of view appears limited in most cases to the ability of the confining structure to withstand forces caused by pressure differentials between internal pressure and ambient environmental pressures. For example, at high elevations and in aircraft or spacecraft, the forces on the confining structure would appear to be quite large so the supporting structure must be capable of withstanding the resultant stresses without significant deflection or distortion.

While the higher operating gas pressures mean an increase in the magnitude of operating potential such increase is compensated for at least in part by the reduction in potential achieved through use of thin dielectric charge storage material having a low potential drop.

Another problem encountered in known gaseous display-memory devices is the high level of incident radiation required to initiate and maintain normal operation of the panel. A further feature and object of the present invention is the reduction or elimination of the incident or quiescent radiation required to initiate and maintain operation of a gaseous display-memory panel.

Where physical and optical isolation of individual discharges have been deemed necessary in the prior art, relatively complex and difficult manufacturing procedures are necessary in order to insure precise registration of the isolation device (e.g., perforated structure) and each of the matrix conductors. Furthermore, the art recognized that although physically isolated, individualized cells should have relatively free gas passage between all cells so as to assure at least uniform gas pressure throughout the panel and each individual cell because the discharge and memory functions are known to be related to gas pressure. A feature and object of the present invention is the elimination of any requirement for precise registration of electrode assemblies with a perforated isolation member resulting in a simplified rugged display-memory panel.

As a rule, the gaseous discharges generate a substantial amount of heat which, when present in integral multiple discharge panels, can affect uniformity of operation of individual discharge area, particularly where selected discharge points are energized more frequently than discharge points in another area of the panel causing a temperature differential across the panel and possible variation in dimensions of elemental or discrete discharge volumes. Accordingly, a further feature and object of the invention is a multiple gas discharge display-memory panel in which the effect of temperature on the operation of the panel is minimized.

In accordance with the invention, a continuous volume of ionizable gas is confined between a pair of photoemissive dielectric surfaces backed by conductor arrays forming matrix elements. The cross conductor arrays may be orthogonally related (but any other configuration of conductor arrays may be used) to define a plurality of opposed pairs of charge storage areas on the surfaces of the dielectric bounding or confining the gas. Thus, for a conductor matrix having H rows and C columns the number of elemental discharge volumes will be the product H xC and the number of elemental or discrete areas will be twice the number of elemental discharge volumes.

The gas volume is one which produces light and a copious supply of charges (ions and electrons) during discharge and, preferably, the gas is a mixture of gases at a pressure sufficient to laterally confine charges generated on discharge within elemental or discrete volumes of gas between opposed pairs of elemental or discrete dielectric areas within the perimeter of such areas. A useful gas mixture is neon and a small percentage of nitrogen.

The space between the dielectric surfaces occupied by the gas is such as to permit photons generated on discharge in a selected discrete or elemental volume of gas to pass freely through the gas space and strike sur-

face areas of dielectric remote from the selected discrete volume, the remote dielectric surface areas struck or impacted by photons emitting electrons to thereby condition the other and remote elemental volumes for discharges at a uniform applied potential.

With respect to the memory function the allowable distance between the dielectric surfaces depends, inter alia, on the frequency of the alternating current supply, the distance being larger for lower frequencies. If the spacing is relatively large then there is insufficient time for charges to transfer to or collect on the elemental or discrete dielectric surface areas during a cycle if the frequency is too high. While the prior art does disclose gaseous discharge devices having externally positioned electrodes for initiating a gaseous discharge, sometimes called "electrodeless discharges," such prior art devices utilize frequencies and spacings or discharge volumes and operating pressures such that although discharges are initiated in the gaseous medium, such discharges are ineffective or not utilized for charge generation and storage in the manner of the present invention.

The term "memory margin" is defined as

$$M.M. = V_f - V_s / V_s$$

where V_f is the magnitude of the applied voltage at which a discharge is initiated in a discrete conditioned (as explained hereinafter) volume of gas defined by common areas of overlapping conductors and V_s is the magnitude of the minimum applied periodic alternating voltage sufficient to sustain discharges once initiated. It will be understood that basic electrical phenomena utilized in this invention is the generation of charges (ions and electrons) alternately storable at pairs of opposed or facing discrete points or areas on a pair of dielectric surfaces backed by conductors connected to a source of operating potential. Such stored charges result in an electrical field opposing the field produced by the applied potential that created them and hence operate to terminate ionization in the elemental gas volume between opposed or facing discrete points or areas of dielectric surface. The term "sustain a discharge" means producing a sequence of momentary discharges, one discharge for each half cycle of applied alternating sustaining voltage, once the elemental gas volume has been fired, to maintain alternate storing of charges at pairs of opposed discrete areas on the dielectric surfaces.

Image resolution as used herein relates to the cross section to which each individual gas discharge can be confined or isolated and the number thereof, side by side, that can be isolated within a given area and still be controlled individually. In accordance with the present invention, prior art perforated plates, etc. which provide image resolution by physical confinement or optical barriers are eliminated. Structurally, the basic physical structures defining a discrete discharge area (and the cross sectional area of elemental or discrete volumes of gas within which a discharge is effected) are the areas of conductor overlap or commonality on opposite conductor arrays, conductor spacing being selected to minimize the effect of fringe fields, e.g., thickness of gas layer and use of thin dielectric films. With these parameters being relatively fixed, the invention utilizes the effect of gas pressure to aid in localizing discharges.

The above as well as other objects, features and advantages of the invention will become apparent and better understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

FIG. 1 is a partially cut-away plan view of a gaseous discharge display — memory panel embodying the invention as connected to a diagrammatically illustrated source of operating potentials,

FIG. 2 is a cross-sectional view (enlarged, but not to proportional scale since the thickness of the gas volume, dielectric members and conductor arrays have been enlarged for purposes of illustration) taken on lines 2—2 of FIG. 1,

FIG. 3 is an explanatory partial cross-sectional view similar to FIG. 2 (enlarged, but not to proportional scale),

FIG. 4 is an isometric view of a larger gaseous discharge display — memory panel incorporating the invention,

FIG. 5 is a voltage versus pressure plot illustrating the effect of pressure on improving the memory margin, and

FIG. 6 is an isometric cross-sectional view (enlarged but not to proportional scale) of a modified form of a gas discharge display — memory panel embodying the invention.

The invention utilizes a pair of dielectric films or coatings **10** and **11** separated by a thin layer or volume of a gaseous discharge medium **12**, said meduim **12** producing a copious supply of charges (ions and electrons) which are alternately collectable on the surfaces of the dielectric members at opposed or facing elemental or discrete areas X and Y defined by the conductor matrix on nongas-contacting sides of the dielectric members, each dielectric member presenting large open surface areas and a plurality of pairs of elemental X and Y areas. While the electrically operative structural members such as the dielectric members **10** and **11** and conductor matrixes **13** and **14** are all relatively thin (being exaggerated in thickness in the drawings) they are formed on and supported by rigid nonconductive support members **16** and **17** respectively.

Preferably, one or both of nonconductive support members **16** and **17** pass light produced by discharge in the elemental gas volumes. Preferably, they are transparent glass members and these members essentially define the overall thickness and strength of the panel. For example, the thickness of gas layer **12** as determined by spacer **15** is under 10 mils and preferably about 5 to 6 mils, dielectric layers **10** and **11** (over the conductors at the elemental or discrete X and Y areas) is between 1 and 2 mils thick, and conductors **13** and **14** about 8,000 angstroms thick (tin oxide). However, support members **16** and **17** are much thicker (particularly larger panels) so as to provide as much ruggedness as may be desired to compensate for stresses in the panel. Support members **16** and **17** also serve as heat sinks for heat generated by discharges and thus minimize the effect of temperature on operation of the device. If it is desired that only the memory function be utilized, then none of the members need be transparent to light although for purposes described later herein it is preferred that one of the support members and members formed thereon be transparent to or pass ultraviolet radiation.

Except for being nonconductive or good insulators the electrical properties of support members **16** and **17** are not critical. The main function of support members **16** and **17** is to provide mechanical support and strength for the entire panel, particularly with respect to pressure differential acting on the panel and thermal shock. As noted earlier, they should have thermal expansion characteristics substantially matching the thermal expansion characteristics of dielectric layers **10** and **11**. Ordinary ¼inch commercial grade soda lime plate glasses have been used for this purpose. Other glasses such as low expansion glasses or transparent devitrified glasses can be used provided they can withstand processing and have expansion characteristics substantially matching expansion characteristics of the dielectric coatings **10** and **11**. For given pressure differentials and thickness of plates, the stress and deflection of plates may be determined by following standard stress and strain formulas (see R. J. Roark, Formulas for Stress and Strain, McGraw-Hill, 1954).

Spacer **15** may be made of the same glass material as dielectric films **10** and **11** and may be an integral rib formed on one of the dielectric members and fused to the other members to form a bakeable hermetic seal enclosing and confining the ionizable gas volume **12**. However, a separate final hermetic seal may be effected by a high strength devitrified glass sealant **15S**. Tabulation **18** is provided for exhausting the space between dielectric members **10** and **11** and filling that space with the volume of ionizable gas. For large panels small bead like solder glass spacers such as shown at **15B** may be located between conductors intersections and fused to dielectric members **10** and **11** to aid in withstanding stress on the panel and maintain uniformity of thickness of gas volume **12**.

Conductor arrays **13** and **14** may be formed on support members **16** and **17** by a number of well known processes, such as photoetching, vacuum deposition, stencil screening, etc. In the panel shown in FIG. **4**, the center to center spacing of conductors in the respective conductor arrays is about 30 mils. Transparent or semitransparent conductive material such as tin oxide, gold or aluminum can be used to form the conductor arrays and should have a resistance less than 3,000 ohms per line. It is important to select a conductor material that is not attacked during processing by the dielectric material.

It will be appreciated that conductor arrays **13** and **14** may be wires or filaments of copper, gold, silver or aluminum or any other conductive metal or material. For example 1 mil wire filaments are commercially available and may be used in the invention. However, formed in situ conductor arrays are preferred since they may be more easily and uniformly placed on and adhered to the support plates **16** and **17**.

Dielectric layer members **10** and **11** are formed of an inorganic material and are preferably formed in situ as an adherent film or coating which is not chemically or physically effected during bake-out of the panel. One such material is a solder glass such as Kimble SG–68 manufactured by and commercially available from the assignee of the present invention.

This glass has thermal expansion characteristics substantially matching the thermal expansion characteristics of certain soda-lime glasses, and can be used as the dielectric layer when the support members **16** and **17** are soda-lime glass plates. Dielectric layers **10** and **11** must be smooth and have a dielectric strength of about 1,000 V and be electrically homogeneous on a microscopic scale (e.g., no cracks, bubbles, crystals, dirt, surface films, etc.). In addition, the surfaces of dielectric layers **10** and **11** should be good photoemitters of electrons in a baked out condition. However, a supply of free electrons for conditioning gas **12** for the ionization process may be provided by inclusion of a radioactive material within the glass or gas space. A preferred range of thickness of dielectric layers **10** and **11** overlying the conductor arrays **13** and **14** is between 1 and 2 mils. Of course, for an optical display at least one of dielectric layers **10** and **11** should pass light generated on discharge and be transparent or translucent and, preferably, both layers are optically transparent.

The preferred spacing between surfaces of the dielectric films is about 5 to 6 mils with conductor arrays **13** and **14** having center to center spacing of about 30 mils.

The ends of conductors **14-1 . . . . 14-4** and support member **17** extend beyond the enclosed gas volume **12** and are exposed for the purpose of making electrical connection to interface and addressing circuitry **19**. Likewise, the ends of conductors **13-1 . . . . 13-4** on support member **16** extend beyond the enclosed gas volume **12** and are exposed for the purpose of making electrical connection to interface and addressing circuitry **19**.

As in known display systems, the interface and addressing circuitry or system **19** may be relatively inexpensive line scan systems or the somewhat more expensive high speed random access systems. However, it is to be noted that a lower amplitude of operating potentials helps to reduce problems associated with the interface circuitry between the addressing system and the display/memory panel, per se. Thus, by providing a panel having greater uniformity in the discharge characteristics throughout the panel, tolerances and operating characteristics of the panel with which the interfacing circuitry cooperate, are made less rigid.

The curve of FIG. **5** illustrates the relationship between gas pressure and firing and sustaining potentials V_f and V_s. The memory margin has been defined as the ratio of the difference between firing potential and the sustaining potential ($V_f - V_s$), to the sustaining potential (V_s). The curves illustrate the improvement in memory margin as gas pressure is increased, at least within the range shown. The curves shown in FIG. **5** were obtained with pressures from about 10 torr to slightly in excess of 760 torr or about 1 atmosphere. The spacing between dielectric surfaces was about 38 mils, the frequency of applied potential was about 100 kH_z and the gas was a mixture of about 97 percent neon and about 3 percent nitrogen

The increased gas pressure is also instrumental in localizing the cross sectional area of the discharge. A further factor involved in improving resolution is the reduction in the thickness of and spacing between the dielectric layers **10** and **11** which reduction minimizes the fringing effect of electric fields between conductors.

In order to demonstrate the effect of gas pressure on localized discharges, a display assembly was constructed where the space between dielectric surfaces was about 10 mils and the gas was a 10:1 neon-nitrogen mixture. The conductors were spaced on 1/16 inch centers and supplied from a 60 kH_z supply at between

1,000 to 1,500 volts. The individual discharges were well localized and easily resolved by the eye, below about ½ atmospheric gas pressure however spreading of the discharge occurred.

One mode of initiating operation of the panel will be described with reference to FIG. 3, which illustrates the condition of one elemental gas volume **30** having an elemental cross-sectional area and volume which is quite small relative to the entire volume and cross-sectional area of gas **12**. The cross-sectional area of volume **30** is defined by the overlapping common elemental areas of the conductor arrays and the volume is equal to the product of the distance between the dielectric surfaces and the elemental area. It is apparent that if the conductor arrays are uniform and linear and are orthogonally (at right angles to each other) related each of elemental areas X and Y will be squares and if conductors of one conductor array are wider than conductors of the other conductor array, said areas will be rectangles. If the conductor arrays are at transverse angles relative to each other, other than 90°, the areas will be diamond shaped so that the cross-sectional shape of each volume is determined solely in the first instance by the shape of the common area of overlap between conductors in the conductor arrays **13** and **14**. The dotted lines **30'** are imaginary lines to show a boundary of one elemental volume about the center of which each elemental discharge takes place. As described earlier herein, it is known that the cross-sectional area of the discharge in a gas is affected by, inter alia, the pressure of the gas, such that, if desired, the discharge may even be constricted to within an area smaller than the area of conductor overlap. By utilization of this phenomena, the light production may be confined or resolved substantially to the area of the elemental cross-sectional area defined by conductor overlap. Moreover, by operating at such pressure charges (ions and electrons) produced on discharge are laterally confined so as to not materially affect operation of adjacent elemental discharge volumes.

In the instant shown in FIG. 3, a conditioning discharge about the center of elemental volume **30** has been initiated by application to conductor **13-1** and conductor **14-1** firing potential V_x' as derived from a source **35** variable phase (for example) and source **36** of sustaining potential V_s (which may be a sine wave, for example). The potential V_x' is added to the sustaining potential V_s as sustaining potential V_s increases in magnitude to initiate the conditioning discharge about the center of elemental volume **30** shown in FIG. 3. There, the phase of the source **35** of potential V_x' has been adjusted into adding relation to the alternating voltage from the source **36** of sustaining voltage V_s to provide a voltage V_f', when switch **33** has been closed, to conductors **13-1** and **14-1** defining elementary gas volume **30** sufficient (in time and/or magnitude) to produce a light generating discharge centered about discrete elemental gas volume **30**. At the instant shown, since conductor **13-1** is positive, electrons **32** have collected on and are moving to an elemental area of dielectric member **10** substantially corresponding to the area of elemental gas volume **30** and the less mobile positive ions **31** are beginning to collect on the opposed elemental area of dielectric member **11** since it is negative. As these charges build up, they constitute a back voltage opposed to the voltage applied to conductors **13-1** and **14-1** and serve to terminate the discharge in elemental gas volume **30** for the remainder of a half cycle.

During the discharge about the center of elemental gas volume **30**, photons are produced which are free to move or pass through gas meduim **12**, as indicated by arrows **37**, to strike or impact remote surface areas of photoemissive dielectric members **10** and **11**, causing such remote areas to release electrons **38**. Electrons **38** are, in effect, free electrons in gas meduim **12** and condition each other discrete elemental gas volume for operation at a lower firing potential V_f which is lower in magnitude than the firing potential V_f' for the initial discharge about the center of elemental volume **30** and this voltage is substantially uniform for each other elemental gas volume.

Thus, elimination of physical obstructions or barriers between discrete elemental volumes, permits photons to travel via the space occupied by the gas meduim **12** to impact remote surface areas of dielectric members **10** and **11** and provides a mechanism for supplying free electrons to all elemental gas volumes, thereby conditioning all discrete elemental gas volumes for subsequent discharges, respectively, at a uniform lower applied potential. While in FIG. 3 a single elemental volume **30** is shown, it will be appreciated that an entire row (or column) of elemental gas volumes may be maintained in a "fired" condition during normal operation of the device with the light produced thereby being masked or blocked off from the normal viewing area and not used for display purposes. It can be expected that in some applications there will always be at least one elemental volume in a "fired" condition and producing light in a panel, and in such applications it is not necessary to provide separate discharge or generation of photons for purposes described earlier.

However, as described earlier, the entire gas volume can be conditioned for operation at uniform firing potentials by use of external or internal radiation so that there will be no need for a separate source of higher potential for initiating an initial discharge. Thus, by radiating the panel with ultraviolet radiation or by inclusion of a radioactive material within the glass materials or gas space, all discharge volumes can be operated at uniform potentials from addressing and interface circuit **19**.

Since each discharge is terminated upon a build up or storage of charges at opposed pairs of elemental areas, the light produced is likewise terminated. In fact, light production lasts for only a small fraction of a half cycle of applied alternating potential and depending on design parameters, is in the nanosecond range.

After the initial firing or discharge of discrete elemental gas volume **30** by a firing potential V_f', switch **33** may be opened so that only the sustaining voltage V_s from source **36** is applied to conductors **13-1** and **14-1**. Due to the storage of charges (e.g., the memory) at the opposed elemental areas X and Y, the elemental gas volume **30** will discharge again at or near the peak of negative half cycles of sustaining voltage V_s to again produce a momentary pulse of light. At this time, due to reversal of field direction, electrons **32** will collect on and be stored on elemental surface area Y of dielectric member **11** and positive ions **31** will collect and be stored on elemental surface area X of dielectric member **10**. After a few cycles of sustaining voltage V_s, the times of discharges become symmetrically located with respect to the wave form of sustaining voltage V_s. At

remote elemental volumes, as for example, the elemental volumes defined by conductor **14-1** with conductors **13-2** and **13-3**, a uniform magnitude or potential V_x from source **60** is selectively added by one or both of switches **34-2** or **34-3** to the sustaining voltage V_s, shown as **36'**, to fire one or both of these elemental discharge volumes. Due to the presence of free electrons produced as a result of the discharge centered about elemental volume **30**, each of these remote discrete elemental volumes have been conditioned for operation at uniform firing potential V_f.

In order to turn "off" an elemental gas volume (i.e. terminate a sequence of discharge representing the "on" state), the sustaining voltage may be removed. However, since this would also turn "off" other elemental volumes along a row or column, it is preferred that the volumes be selectively turned "off" by application to selected "on" elemental volumes a voltage which can neutralize the charges stored at the pairs of opposed elemental areas.

This can be accomplished in a number of ways, as for example, varying the phase or time position of the potential from source **60** to where that voltage combined with the potential from source **36'** falls substantially below the sustaining voltage.

It is apparent that the plates **16–17** need not be flat but may be curved, curvature of facing surfaces of each plate being complementary to each other. While the preferred conductor arrangement is of the crossed grid type as shown herein, it is likewise apparent that where an infinite variety of two dimensional display patterns are not necessary, as where specific standardized visual shapes (e.g., numerals, letters, words, etc.) are to be formed and image resolution is not critical, the conductors may be shaped accordingly.

The device shown in FIG. **4** is a panel having a large number of elemental volumes similar to elemental volume **30** (FIG. **3**). In this case more room is provided to make electrical connection to the conductor arrays **13'** and **14'**, respectively, by extending the surfaces of support members **16'** and **17'** beyond seal **15S'**, alternate conductors being extended on alternate sides. Conductor arrays **13'** and **14'** as well as support members **16'** and **17'** are transparent. The dielectric coatings are not shown in FIG. **4** but are likewise transparent so that the panel may be viewed from either side.

In the modification shown in FIG. **6** each support member has formed therein a plurality of fine grooves or channels **50A** and **50B** and in each groove one conductor of each conductor array **13''** and **14''** is deposited, respectively. Dielectric coating **10''** is deposited on each conductor of conductor array **13''**, respectively, and dielectric coating **11''** is deposited on each conductor of conductor array **14''**. The depth of grooves or channels **50** is greater than the total thicknesses of the conductors and dielectric coatings so that the mouth **51** of each groove or channel is open for the length of each groove. The support members **16''** and **17''** are oriented with their respective grooves at right angles to each other with the lands **52** of each groove on support member **16''** contacting the lands **53** of each groove in support member **17''**. Thus, the distance between opposed elemental pairs of dielectric surfaces at conductor crossings is maintained uniform, for gas pressures less than ambient or environmental pressures. In order to eliminate or minimize stresses due to pressure differentials, where the gas pressure is greater than ambient or environmental pressures the contacting lands in the support members may be coated with dielectric or other fusible material and bonded to each other. In this embodiment, the gas **12''** under pressure will be continuous along a groove mouth and have a waffle configuration along the groove at each intersection with the conductor bearing channels of the opposite support member. In this case photons can pass freely along the lengths of a pair of channels to impact dielectric coatings along the channels and thereby condition elemental volumes along a pair of crossing channels.

The invention is not to be limited to the exact forms shown in the drawing for obviously many changes may be made, some of which are suggested herein, within the scope of the following claims.

1. A method of making a gas discharge display/memory panel comprising the steps of:

providing a pair of rectangular flat glass plate support members,

to each of said flat glass plate support members

1. applying a plurality of parallel conductors constituting a conductor array to each of said plate support member, and
2. applying and in situ curing a thin glass film on said conductor arrays,

forming a glass spacer as an integral rib on one of said plate members in a rectangular shape to thereby define the boundary of a gas discharge chamber,

orienting the other of said plates in a direction such that the parallel conductors thereon are transverse to the direction of the parallel conductors on said plate having to thereby form a cross conductor matrix with the crossings of the conductors locating specific discharge sites,

fusing said integral rib to the other of said plate members to form a bakeable hermetic seal and constitute, with said film on said conductors, a thin gaseous discharge chamber,

evacuating said thin gaseous discharge chamber, and filling the said chamber with a volume of ionizable gas.

2. The method defined in claim **1** wherein said conductors are a metal selected from the group consisting essentially of copper, gold, silver and aluminum and wherein said thin glass films on each said plate consist essentially of a solder glass.

* * * * *