

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
1 September 2005 (01.09.2005)

PCT

(10) International Publication Number  
**WO 2005/079538 A2**

(51) International Patent Classification: Not classified

(21) International Application Number:  
PCT/US2005/005550

(22) International Filing Date: 16 February 2005 (16.02.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/780,089 17 February 2004 (17.02.2004) US

(71) Applicant (for all designated States except US): **INTERNATIONAL BUSINESS MACHINES CORPORATION?** [US/US]; New Orchard Road, Armonk NY 10504 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ACHARYA, Arup**

[IN/US]; 62 Avalon Gardens Drive, Nanuet, NY 10954 (US). **SINGH, Aameek** [IN/US]; 1073 Tumlin Street, Apartment 1, Atlanta, Georgia 30318 (US).


(74) Agent: **WILLINGHAM, George**; August Law Group, 3201 New Mexico Avenue, NW, Suite 350, Washington, DC 20016 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: SIP BASED VOIP MULTIPLAYER NETWORK GAMES

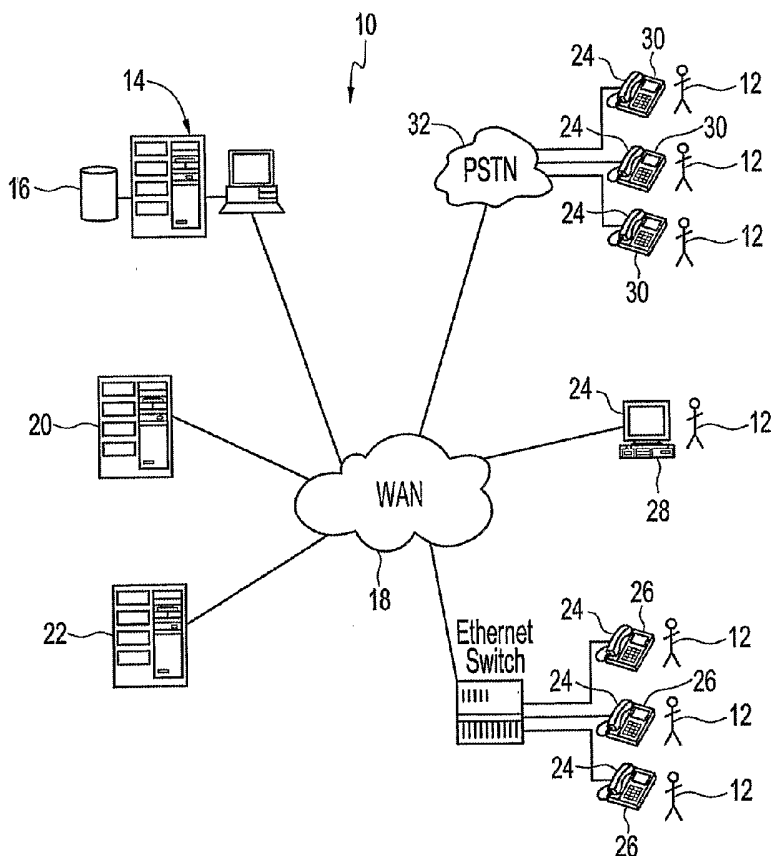

(57) Abstract: This invention is directed to a system and method for the close coupling of Session Initiation Protocol (SIP) based Voice over Internet Protocol (VoIP) with multiplayer network games. Game state dependent voice communications are used as another method of player interaction in the game environment. The system uses SIP enhanced game servers and conference servers with audio mixing capabilities, and the game server controls the creation, maintenance and changing of the voice conferences. Participation in a voice conference is determined by the game state features associated with each player including distance and direction to determine how the voices are mixed in a voice conference.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations* AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA,

ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

**Published:**

- *without international search report and to be republished upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## **SIP BASED VOIP MULTIPLAYER NETWORK GAMES**

### **FIELD OF THE INVENTION**

The present invention is directed to the field of network based computer games. More particularly the present invention is directed to the integration of Voice  
5 over Internet Protocol (VoIP) using Session Initiation Protocol (SIP) to enhance network based multiplayer games.

### **BACKGROUND OF THE INVENTION**

Multiplayer network games have become increasingly popular. These games are played across a computer network, for example the Internet or World Wide Web,  
10 and permit a significant number of geographically dispersed and distant users to participate simultaneously in a single game. Participation in a game requires maintaining a game state for each participant. Since the game environment is dynamic, these games states include the ability of users to join the game, participate and leave the game. In addition, these games provide for interaction among the users  
15 within the gaming environment.

Traditionally, these interactions have been limited to predefined gaming actions, for example shooting, running, fighting and text messaging. A few network gaming systems have recently attempted to provide an element of voice communication among the game participants. The voice functionality facilitates  
20 conversations among the players, but the voice conversations are not game context based. For example, voice communication is used as a messaging mechanism among the players, replacing text messaging. Typically, voice messaging completely falls outside the scope and operation of the game and is user initiated independent of the game. In addition, although VoIP is used to facilitate these conversations, the use of  
25 VoIP has been very limited and restricted and fails to exploit the entire potential and functionality of VoIP.

Traditionally, VoIP has been primarily used as a telecommunications alternative to a standard Public Switched Telephone Network (PSTN); however, VoIP technology possesses potential in a wide variety of other applications.

Therefore, the need exists for a system and method for utilizing the full extent of VoIP functionality to enhance the gaming experience among players. The VoIP would be imbedded in and integrated with the game and maintained by the game in conjunction with the game state, eliminating the need for independent and separate  
5 user initiation of voice communications. The voice data exchange would not be limited to conversations but would incorporate game based context to enhance the gaming experience.

## SUMMARY OF THE INVENTION

The present invention is directed to systems and methods using Voice over  
10 Internet Protocol (VoIP) to complement and enhance the experience of participants in multiplayer network based games. VoIP provides the ability to send voice data alongside or in conjunction with other data over the same network.

The present invention utilizes Session Initiation Protocol (SIP) based VoIP to provide game driven, context based voice interaction among participants in a network  
15 based gaming environment. For example, in addition to allowing players to talk to each other, to make alliances, to discuss strategy and to coordinate teammates and activities, the present invention provides for the restriction of communication among players having a single shared context, e.g. the same physical location or room within the gaming environment. VoIP can also be used to provide more sophisticated audio  
20 mixing to relay information about another player's distance and location with respect to the recipient of the voice communication, e.g. players farther away sound farther away.

In order to achieve this, the present invention utilizes game server controlled conferencing among various sets or groups of players and dynamic switching of  
25 players from one conference to another based on the game state. In addition, more sophisticated conferencing mechanisms, for example media mixing that utilizes other game state features like distance of voice-source from the listener, are used to control conference parameters like voice amplitudes.

Each user, in addition to a gaming system such as a computer, also uses a  
30 VoIP enabled device capable of receiving and transmitting audio signals. In addition to the visual state of the game that each player receives, the players also receive

related audio communications from the game or the other players. For example, players in the same game room or on the same team can talk to each other. When a player changes game rooms, similar to its change of the visual state, the audio also changes seamlessly. The present invention uses the game server to automatically  
5 indicate the requirement for such a change and dynamically switch the players without additional player input.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic representation of an embodiment of a gaming system in accordance with the present invention;  
10 Fig. 2 is a schematic representation of another embodiment of a gaming system in accordance with the present invention;  
Fig. 3 is a schematic representation illustrating the communications among the components of the gaming system;  
Fig. 4 is a schematic representation of a room based environment for use in the  
15 gaming system of the present invention;  
Fig. 5 is a schematic representation illustrating the creation of an audio conference in accordance with the present invention; and  
Fig. 6 is a schematic representation illustrating the modification of an audio conference in accordance with the present invention.

#### 20 DETAILED DESCRIPTION

Referring initially to Figs. 1 and 2, the present invention is directed to a system 10 for providing simultaneous context based audio interaction among a plurality of participants or players 12 in a network based gaming environment. Audio interactions include the transfer of audible communications or signals among the  
25 participants including voice communications. In one embodiment as illustrated in Fig. 1, the system 10 includes a single centralized game server 14 in communication with the plurality of game participants 12. In another embodiment as illustrated in Fig. 2, the system includes a plurality of distributed game servers 14, wherein each game server 12 is associated with at least one game participant 12. Game server 14  
30 can be any type of server known and available in the art and capable of hosting a

dynamic, multi-user, network based gaming environment and maintaining a game state profile for each game participant 12. When the system 10 includes a plurality of game servers 14, each game server maintains a game state profile for each game participant 12. This information can be stored in one or more databases 16 in  
5 communication with the game server 14.

Any protocol suitable for implementing a Voice over Internet Protocol (VoIP) conference can be used in the present invention. Preferably, the protocol is a Session Initiation Protocol (SIP), which has emerged as the frontrunner in VoIP applications. Therefore, in one embodiment, game server 14 includes an SIP stack. SIP is a  
10 HyperText Transfer Protocol (HTTP)-like protocol that is useful to establish sessions among groups of users or locations. SIP provides for a variety of functionality among the users, for example permitting a user to subscribe to interesting events that are hosted at another user's location and to receive notifications whenever those events occur. Additional details about SIP can be found in Internet Architecture Board (IAB)  
15 Request For Proposal number 3261(RFC 3261).

Game server 14 is in communication with the participants through one or more local or wide area networks 18, for example the internet or World Wide Web. Other suitable networks include secure area networks, private networks, virtual private networks and combinations thereof. In one embodiment, game server 14  
20 communicates with the game participants 12 using SIP.

The system also includes one or more audio conference servers 20 in communication with the game server 14. In one embodiment, game server 14 communicates with the audio conference server 20 using SIP. The audio conference server 20 can be any type or server capable of hosting a VoIP based audio conference  
25 between two or more of the game participants 12. Suitable servers are available and known in the art. The conference server 20 and game server 14 are also networked together to provide for communication. In one embodiment, the conference server 20 and game server 14 are in communication through the wide area network 18. This can be the same network across which the game server 14 communicates with the  
30 game participants 12 or can be a separate network. Other suitable networks include local area networks, secure area networks, private networks, virtual private networks and combinations thereof.

The system 10 also includes at least one audio mixer 22 in communication with the audio server 20 capable of providing the audio mixing for the audio conferences. In one embodiment, the audio mixer 22 and audio server 20 are in communication through the wide area network 18. This can be the same network across which the game server 14 communicates with the game participants 12 or can be a separate network. Other suitable networks include local area networks, secure area networks, private networks, virtual private networks and combinations thereof. In another embodiment, audio mixer 22 can be centrally located at the audio server 20 including being integrated into the audio conference server 20.

10 In order to participate in an audio conference, each participant 12 has an audio communication device 24 capable of sending and receiving audio communications such as voice communications. Suitable audio communication devices 24 include an internet protocol phone 26, a software based phone 28 and conventional telephone equipment 30 using an SIP gateway interface through a public switched telephone network (PSTN) 32. The audio mixer 22 is in communication with each audio communication device 24. In one embodiment, the audio mixer 22 and communication devices 24 are in communication through the wide area network 18. This can be the same network across which the game server 14 communicates with the game participants 12 or can be a separate network. Other suitable networks include local area networks, secure area networks, private networks, virtual private networks and combinations thereof. In an alternative embodiment, a plurality of distributed, for example geographically distributed, audio conference servers 20 and audio mixers 22 can be used to improve audio conference performance. In this embodiment, each audio mixer 22 and audio server 20 is in communication with at least one of the audio conference participants 12. Suitable distributed arrangements of audio conference servers 20 and mixers 22 are described in U.S. patent application no. 10/697,834, titled "System and Apparatus for Geographically Distributed VoIP Service with Enhanced QoS", which is incorporated herein by reference in its entirety.

30 Audio conferences among two or more participants are established by the audio conference server 20 in response to instructions from the game server 14. The audio mixer 22 controls and delivers the audio signal directly to each audio communication device 24 as instructed by the audio conference server 20. The game

server 14 initiates and controls the audio conferences based upon the game state profiles of the game participants. For example, the game server 14 uses the game state profiles to determine which participants 12 are to be included in a given audio conference. The participants 12 do not initiate or control the audio conferences.

5 Therefore, as illustrated in Fig. 3, the game participants 12 communicate with the game server 14 and the audio mixer 22, but do not directly send instructions or queries to the conference server 20.

For a given audio conference, the game server 14 determines or selects, based upon the current game state profiles for each game participant 12, a group of game participants 12. Alternatively, the game server 14 manages a plurality of  
10 simultaneous and independent audio conferences, each audio communication containing a group of two or more game participants 12. The number of participants in the group can be from one, for example for hearing echoed sound, up to the entire current number of game participants 12. The communication can be two-way or one-  
15 way, for example when eavesdropping. Each game participant 12 can simultaneously be a member of two or more groups and participate in two or more independent audio conferences. In general game participants 12 in a given group have one or more shared game contexts. As used herein, shared context defines a set of parameters or attributes within the game state profiles that allow audio communication between two  
20 or more participants.

For example as illustrated in Fig. 4, the shared context can be physical proximity. As illustrated, the game environment includes a physical structure 34, for example a house, having interior and exterior regions and a plurality of rooms 36. The audio conference groups would include game participants 12 located in the same  
25 region or room. This could be referred to as room-based conferencing or view-based conferencing. For example, players in the same game room can talk to each other (talking trash, strategizing).

As game participants 12 move between rooms or regions, the game server 14 monitors the changes to the game state profiles and dynamically switches game  
30 participants 12 between the appropriate groups. The game server 14 can also eliminate groups or initiate new groups depending upon the game state profiles. As game participants 12 change rooms, the audio changes seamlessly in conjunction with

the visual state of the game. Changes are made without additional input from the game participants 12.

Other shared contexts include possession of a communication medium, for example a two-way radio, membership in a group, for example belonging to the same airplane squadron or army, telepathic connections, and shared language. Therefore, the present invention adds game specific context to communications among the participants, enhancing the gaming experience.

In another embodiment of the present invention, the gaming experience is further enhanced by the use of sophisticated audio mixing of the audio signals delivered to each game participant. In general, each game participant 12 receives an audio signal that simply contains the cumulative input from all the other game participants 22 in the group for a particular audio conference. In accordance with the present invention, however, the received audio is not simply a straight combination of audio signals, but is game-state dependent. For example, in a soccer game, players hear the voices of all of the other players on the soccer field. That is the group contains all of the game participants located on the soccer field. However, the loudness of the voices from various players depends upon factors like distance from the listener. Thus the forward hears louder voices from other forwards and midfielders and the other team's defenders than from its own defenders. This provides for a greater life-like simulated experience and integrates well with the game.

As illustrated in Fig. 4, a first participant 38 receives an audio signal that contains the  $\Sigma$  (audio signals or voices from all other participants 12 in the same room 36). In order to add additional context, a feature vector,  $X$ , is defined between the first participant and every other participant in the room. This feature vector is determined by the game server 14 based upon game context features including, but not limited to distance from the first participant, communication medium (air, water, telephone, etc.), transmission frequency, transmission amplitude, tone of the speaker's voice, room acoustics and room layout, for example the existence of partial barriers 40. The game server 14 sends the feature vector for each game participant 12 to the audio mixer 22 through the audio conference server 20.

A separate feature vector can be provided for each game participant 12, or different feature vectors can be calculated, some that apply to all of the participants in

the group and some that are specific to a single participant or a single pair of participants.

Therefore, the audio signal received by the first participant is  $\Sigma (X_2(\text{audio from second participant 42}) + X_3(\text{audio from third participant 44}) + X_4(\text{audio from fourth participant 46}) + X_5(\text{audio from fifth participant 48}))$ . Similar calculations are made for the other group members.

In addition, the feature vector can indicate not only scalar qualities of the audio signal such as distance and loudness but can indicate directional information including left or right, up or down and forward or back. Therefore, based upon the audio signal received by the first participant 38, that participant would be able to tell that in the game environment that both the second and fourth participants 42,46 are to the left and upstairs and that the second participant 42 is farther away than that fourth participant 46. The directional information is particularly well suited for stereo, surround sound, virtual reality or holographic applications. The exact values for the feature vectors can be set to any values suitable to provide the desired game environment effects.

In order to provide simultaneous context based audio interaction among the plurality of game participants 12 in a network based gaming environment, a network based game environment containing a plurality of game participants 12 is established. Referring to Fig. 5, in order to join the gaming environment, each game participant 12 contacts 50 the game server 14 and gives an address for its audio communication device 24 to use for audio or voice communication in conjunction with the game. After the game participant 12 has contacted the game server, the game participant 12 can play the game. While the game is being played, the game server, either centralized or distributed, maintains a game state profile for each one of the game participants 12 that have joined.

For a centralized game sever 14 embodiment, the game server 14 acts as a link between all the game participants 12 and maintains the game state profiles for each game participant 12. In the distributed game server 14 embodiment, the maintenance and exchange of game state profile information is done by the each one of the distributed game servers 14. In an embodiment having a game server 14 associated with each participant 12, the participants 12 themselves maintain and exchange the

game state information. In this embodiment, whenever any participant 12 performs any action (moves, shoots, leaves, etc.), that participant 12 notifies all other participants 12 about this action, and the other participants update their game state profiles accordingly.

5           After a game participant 12 has contacted the game server 14 and joined the game, the game server 14 brings the participant into the game and initiates the audio communication device and gaming device identified by the game participant 52, for example by using the SIP "INVITE" command to invite the devices into the game. The participant responds by sending its signal description protocol (SDP) 53, for  
10           example by using the SIP "OK" command.

          The game server 14 maintains game state profiles for each participant in the game, and as participants 12 join the game or participate in the game, the game server 14, in accordance with the present invention, establishes one or more VoIP based audio conferences among the game participants 12 based upon the game state profiles.  
15           Preferably, the game server establishes an SIP based VoIP based audio conference. Establishing the audio conferences includes creating new conferences and modifying or terminating existing conferences.

          In one embodiment as illustrated in Fig. 5, the game server 14 obtains the media or audio path information for the game participant 12 from the received SDP.  
20           This information is forwarded to the audio conference server 54 which passes it along to the audio mixer 56, both using, for example, the SIP "INVITE" command. The audio mixer responds to the conference server 58 which responds to the game server 60, both using, for example, the SIP "OK" command. These responses contain the SDP for the conference server and audio mixer. The game server extracts the  
25           necessary media information from these SDP's and forwards this information to the game participant 62, for example using the SIP "ACK" command. The game server, also using, for example, the SIP "ACK" command, contacts the audio conference server 64 which in turn contacts the audio mixer 66. This establishes and enables the audio path 68 between the game participant 12 and the audio mixer 22 to be used in  
30           the VoIP audio conference.

          In an embodiment having a plurality of distributed game servers, game servers associated with each game participant maintain sessions directly with the conference

server and, depending upon the game state, initiate the establishment and dynamic switching of audio conferences. In this embodiment, the interactions performed by the game servers are done by a client side utility, and the communications with the conference servers come from each one of the participant associated game servers.

5           When establishing audio conferences, the game server 14 determines at least one group, or a plurality of groups, of game participants possessing a shared context that permits the transmission or receipt of audio communications among game participants in that group. The game server 14 maintains or modifies the participants in each group based upon changes in the game state profiles of those game  
10 participants. This includes the addition or removal of participants from the groups and the switching of at least one participant between two distinct groups. The switching of participants between groups is accomplished dynamically and seamlessly by the game server without any disruption in the game or audio conference or without the need for additional input from the participants. In the room-based conferencing  
15 example, as soon as a game participant moves to another room, the game server notices the change and switches that participant to an audio conference associated with the new room. In general, the game participants do not do any SIP signaling with the conference server themselves. The game server acts as a back-to-back user agent and maintains their sessions on their behalf, setting up the media path to point to  
20 each audio communication device.

Referring to Fig. 6, when a game participant 12 moves or acts within the game environment, this information is communicated to the game server 70. If the actions or motion of the game participant 12 dictate the need to transfer that participant from one conference group to another, the game server 14 updates the media information at  
25 both the audio mixer 22 and the game participant 12. The game server 14 initiates the transfer process by removing the game participant from one audio conference, for example by sending an SIP "BYE" command to the conference sever 72 which sends an SIP "BYE" command to the audio mixer 74. The change is acknowledge back to the game server 14, for example by sending an SIP "OK" command to the conference  
30 server 76 which sends an SIP "OK" command to the game server 78.

The game server 14 then, using for example an SIP "RE-INVITE" command, obtains the media or audio path information for the game participant 80. This

information is forwarded to the audio conference server 54 which passes it along to the audio mixer 56, both using, for example, the SIP "INVITE" command. The audio mixer responds to the conference server 58 which responds to the game server 60, both using, for example, the SIP "OK" command. These responses contain the SDP  
5 for the conference server and audio mixer. The game server extracts the necessary media information from these SDP's and forwards this information to the game participant 62, for example using the SIP "ACK" command. The game server, also using, for example, the SIP "ACK" command, contacts the audio conference server 64 which in turn contacts the audio mixer 66. This establishes and enables the audio  
10 path 68 between the game participant 12 and the audio mixer 22 to be used in the VoIP audio conference.

In one embodiment, establishing an audio conference includes delivering an audio signal to each audio conference participant that comprises the sum of all received audio signals from all other audio conference participants. Preferably, the  
15 game server determines the audio feature vector for each pair of audio conference participants based upon the game state profiles associated with the participants and modifies audio signals transmitted between the pair of audio conference participants in accordance with the audio feature vector. In one embodiment, the game server modifies the audio feature vector in response to changes in the game state profiles of  
20 the audio conference participants.

In one embodiment, the feature vectors are transmitted by the game server to the conference server and audio mixer. This can be achieved by the conference server subscribing to such information at the game server, using for example an SIP  
"SUBSCRIBE" command, and the gaming server sending messages to the conference  
25 server containing such feature vectors for the players, using for example an SIP "NOTIFY" command.

The present invention is also directed to a computer readable medium containing a computer executable code that when read by a computer causes the computer to perform a method for providing simultaneous context based audio  
30 interaction among a plurality of participants in a network based gaming environment. In one embodiment, this code is maintained, read and executed by the game server.

While it is apparent that the illustrative embodiments of the invention disclosed herein fulfill the objectives of the present invention, it is appreciated that numerous modifications and other embodiments may be devised by those skilled in the art. Additionally, feature(s) and/or element(s) from any embodiment may be used  
5 singly or in combination with other embodiment(s). Therefore, it will be understood that the appended claims are intended to cover all such modifications and embodiments, which would come within the spirit and scope of the present invention.

## CLAIMS

What is claimed is:

- 1    1.    A system for providing simultaneous context based audio interaction among a  
2       plurality of participants in a network based gaming environment, the system  
3       comprising:  
4       a game server in communication with a plurality of game participants, the  
5       game server capable of hosting the network based gaming environment and  
6       maintaining a game state profile for each game participant; and  
7       an audio conference server in communication with the game server, the audio  
8       conference server capable of hosting a voice over internet protocol based  
9       audio conference between two or more game participants;  
10      wherein the audio conference server establishes the audio conference in  
11      response to instructions from the game server.
- 1    2.    The system of claim 1, wherein the participants in the audio conference are  
2       determined by the game server based upon the game state profiles of the game  
3       participants.
- 1    3.    The system of claim 1, wherein the participants in the audio conference  
2       comprise a shared context.
- 1    4.    The system of claim 1, wherein the game server comprises a session initiation  
2       protocol stack and the audio conference is a session initiation protocol based  
3       voice over internet protocol communication.
- 1    5.    The system of claim 1, wherein each participant comprises an audio  
2       communication device and the system comprises at least one audio mixer in  
3       communication with the audio server and each participant audio  
4       communication device to provide the audio mixing for the audio conference.

- 1     6.     The system of claim 5, wherein the audio communication device comprises an  
2           internet protocol phone, a software based phone or conventional telephone  
3           equipment.
- 1     7.     The system of claim 5, wherein the audio mixer is centrally located at the  
2           audio server.
- 1     8.     The system of claim 5, further comprising a plurality of distributed audio  
2           mixers, each audio mixing in communication with one of the audio conference  
3           participants.
- 1     9.     The system of claim 1, wherein the game server is capable of managing a  
2           plurality of simultaneous and independent audio conferences, each audio  
3           communication comprising two or more game participants.
- 1     10.    The system of claim 9, wherein each game participant can simultaneously  
2           participate in two or more independent audio conferences.
- 1     11.    The system of claim 1, further comprising a plurality of distributed audio  
2           servers in communication with the game server, each audio server capable of  
3           hosting an audio conference between two or more game participants.
- 1     12.    The system of claim 1, further comprising a plurality of distributed game  
2           servers.
- 1     13.    A method for providing simultaneous context based audio interaction among a  
2           plurality of participants in a network based gaming environment, the method  
3           comprising:  
4           establishing a network based game environment containing a plurality of game  
5           participants;  
6           maintaining a game state profile for each one of the game participants; and

7        establishing one or more voice over internet protocol based audio conferences  
8        among the game participants based upon the game state profiles.

1    14.    The method of claim 13, wherein the step of maintaining a game state profile  
2        comprises maintaining a game state profile for each participant in a single  
3        centralized game server.

1    15.    The method of claim 13, wherein the step of maintaining a game state profile  
2        comprises maintaining a game state profile for each participant in each one of  
3        a plurality of distributed game servers associated with each participant.

1    16.    The method of claim 13, wherein the step of establishing an audio conference  
2        comprises establishing a session initiation protocol based voice over internet  
3        protocol based audio conference.

1    17.    The method of claim 13, wherein the step of establishing an audio conference  
2        comprises determining at least one group of game participants possessing a  
3        shared context that permits the transmission or receipt of audio  
4        communications among game participants in the group.

1    18.    The method of claim 17, further comprising modifying the group of  
2        participants based upon changes in the game state profiles of game  
3        participants in the group.  
4

1    19.    The method of claim 18, wherein the step of modifying the group of  
2        participants comprises removing participants or adding participants.

1    20.    The method of claim 17, further comprising determining a plurality of groups  
2        of participants wherein each group of game participants possessing a shared  
3        context that permits the transmission or receipt of audio communications  
4        among game participants in that group.

- 1    21.    The method of claim 20, further comprising dynamically switching at least  
2           one participant between two distinct groups.
- 1    22.    The method of claim 13, wherein the step of establishing an audio conference  
2           comprises delivering an audio signal to each audio conference participant that  
3           comprises the sum of all received audio signals from all other audio  
4           conference participants.
- 1    23.    The method of claim 13, wherein the step of establishing an audio conference  
2           comprises determining an audio feature vector for each pair of audio  
3           conference participants based upon the game state profiles associated with the  
4           participants; and  
5           modifying audio signals transmitted between the pair of audio conference  
6           participants in accordance with the audio feature vector.
- 1    24.    The method of claim 23, wherein the audio feature vector comprises  
2           information about distance, direction, communication medium, transmission  
3           frequency or transmission amplitude.
- 1    25.    The method of claim 23, further comprising modifying the audio feature  
2           vector in response to changes in the game state profiles of the audio  
3           conference participants.
- 1    26.    A computer readable medium containing a computer executable code that  
2           when read by a computer causes the computer to perform a method for  
3           providing simultaneous context based audio interaction among a plurality of  
4           participants in a network based gaming environment, the method comprising:  
5           establishing a network based game environment containing a plurality of game  
6           participants;  
7           maintaining a game state profile for each one of the game participants; and  
8           establishing one or more voice over internet protocol based audio conferences  
9           among the game participants based upon the game state profiles.

- 1 27. The computer readable medium of claim 26, wherein the step of maintaining a  
2 game state profile comprises maintaining a game state profile for each  
3 participant in a single centralized game server.
- 1 28. The computer readable medium of claim 26, wherein the step of maintaining a  
2 game state profile comprises maintaining a game state profile for each  
3 participant in each one of a plurality of distributed game servers associated  
4 with each participant.
- 1 29. The computer readable medium of claim 26, wherein the step of establishing  
2 an audio conference comprises establishing a session initiation protocol based  
3 voice over internet protocol based audio conference.
- 1 30. The computer readable medium of claim 26, wherein the step of establishing  
2 an audio conference comprises determining at least one group of game  
3 participants possessing a shared context that permits the transmission or  
4 receipt of audio communications among game participants in the group.
- 1 31. The computer readable medium of claim 30, further comprising modifying the  
2 group of participants based upon changes in the game state profiles of game  
3 participants in the group.
- 1 32. The computer readable medium of claim 31, wherein the step of modifying the  
2 group of participants comprises removing participants or adding participants.
- 1 33. The computer readable medium of claim 30, further comprising determining a  
2 plurality of groups of participants wherein each group of game participants  
3 possessing a shared context that permits the transmission or receipt of audio  
4 communications among game participants in that group.

- 1 34. The computer readable medium of claim 33, further comprising dynamically  
2 switching at least one participant between two distinct groups.
- 1 35. The computer readable medium of claim 26, wherein the step of establishing  
2 an audio conference comprises delivering an audio signal to each audio  
3 conference participant that comprises the sum of all received audio signals  
4 from all other audio conference participants.
- 1 36. The computer readable medium of claim 26, wherein the step of establishing  
2 an audio conference comprises determining an audio feature vector for each  
3 pair of audio conference participants based upon the game state profiles  
4 associated with the participants; and  
5 modifying audio signals transmitted between the pair of audio conference  
6 participants in accordance with the audio feature vector.
- 1 37. The computer readable medium of claim 36, wherein the audio feature vector  
2 comprises information about distance, direction, communication medium,  
3 transmission frequency or transmission amplitude.
- 1 38. The computer readable medium of claim 36, further comprising modifying the  
2 audio feature vector in response to changes in the game state profiles of the  
3 audio conference participants.

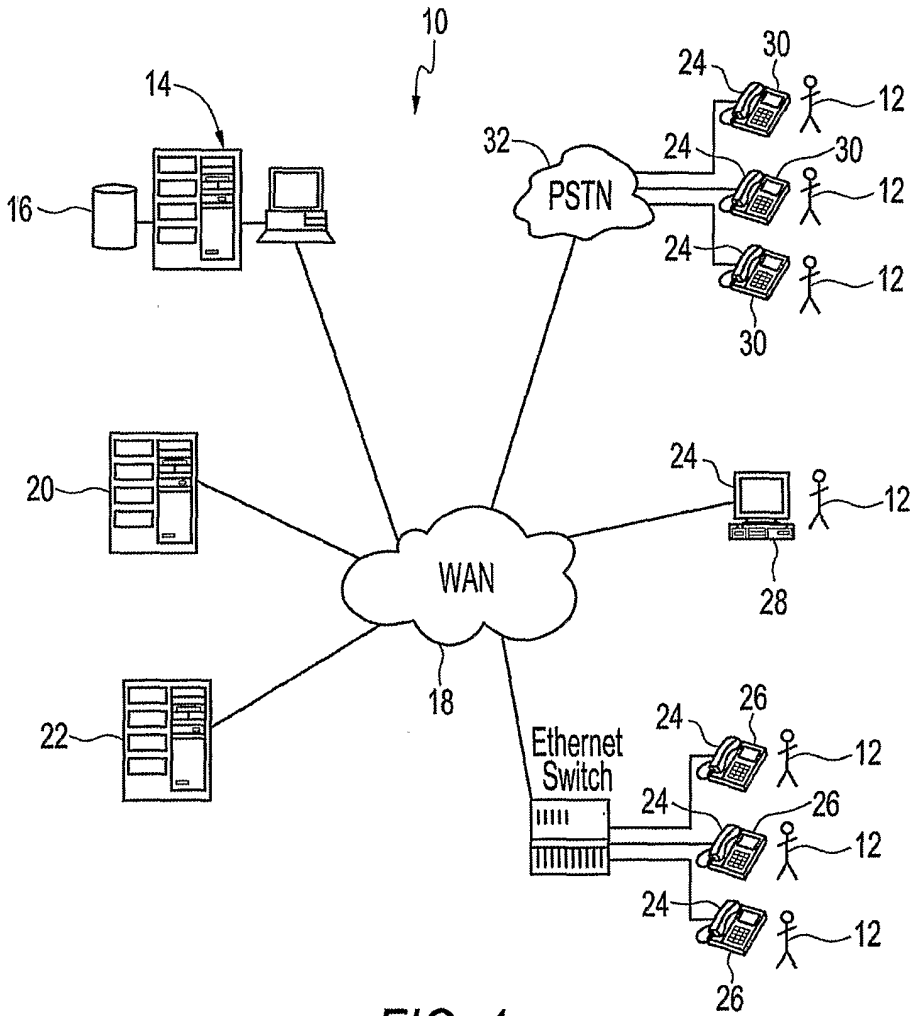


FIG. 1

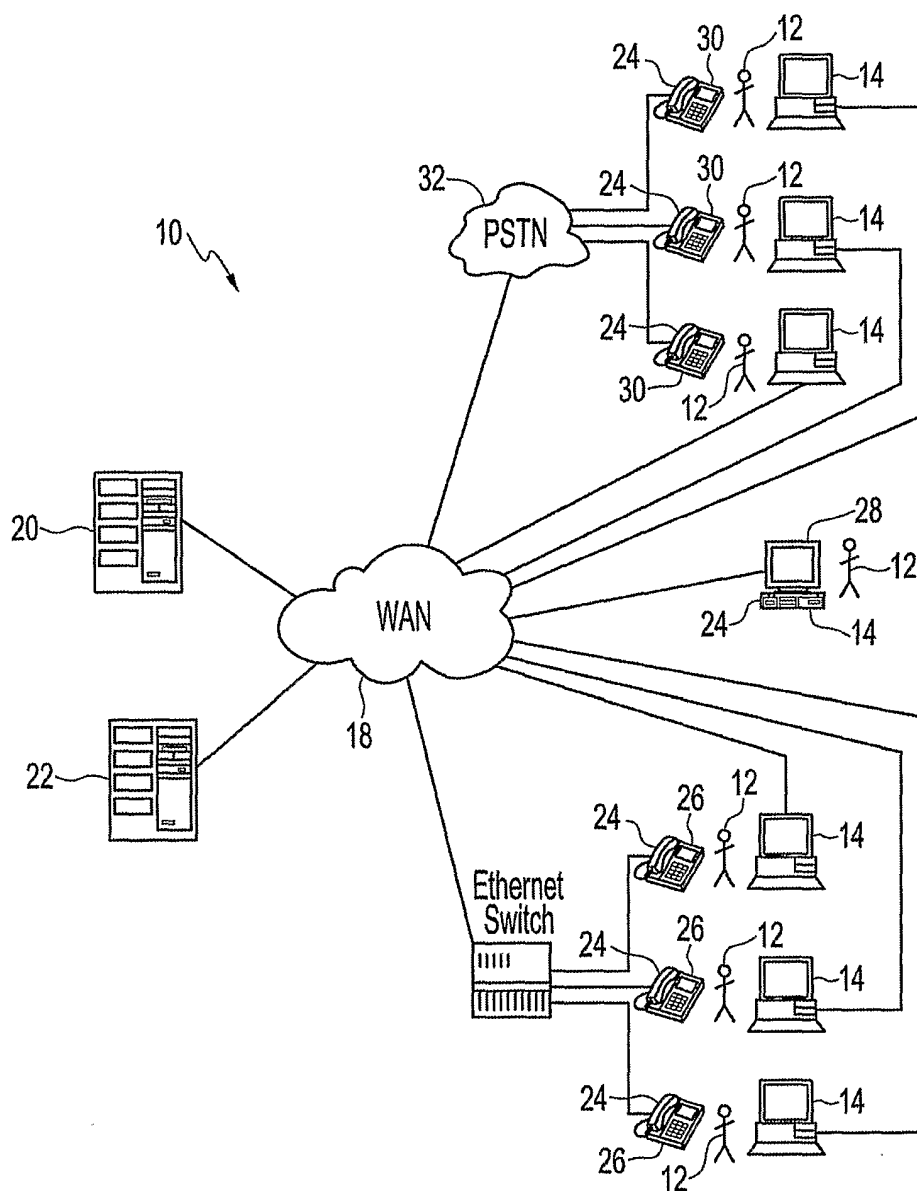


FIG. 2

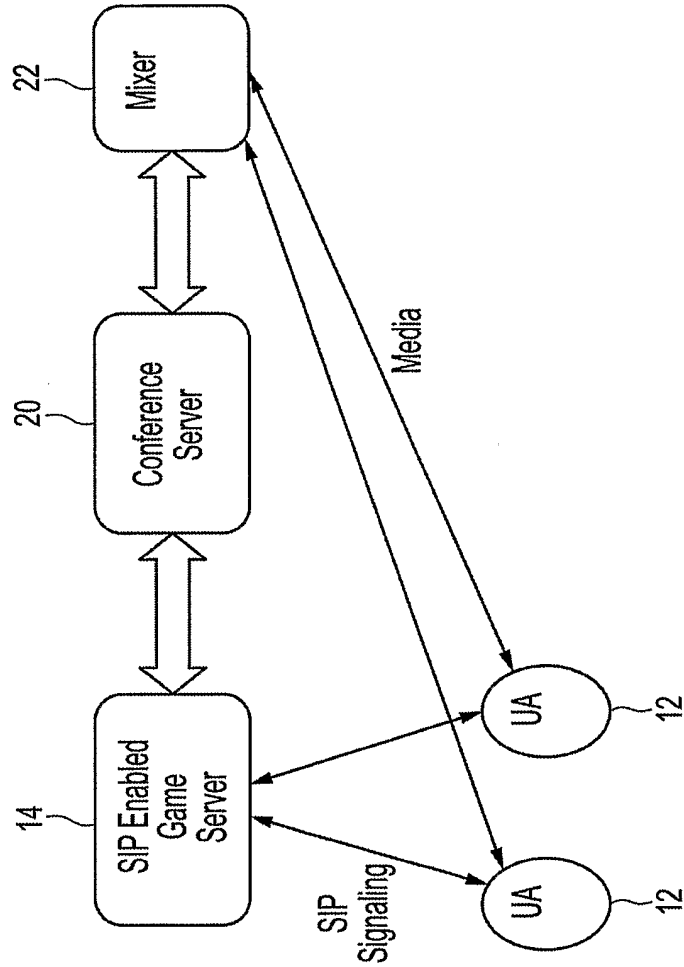


FIG. 3



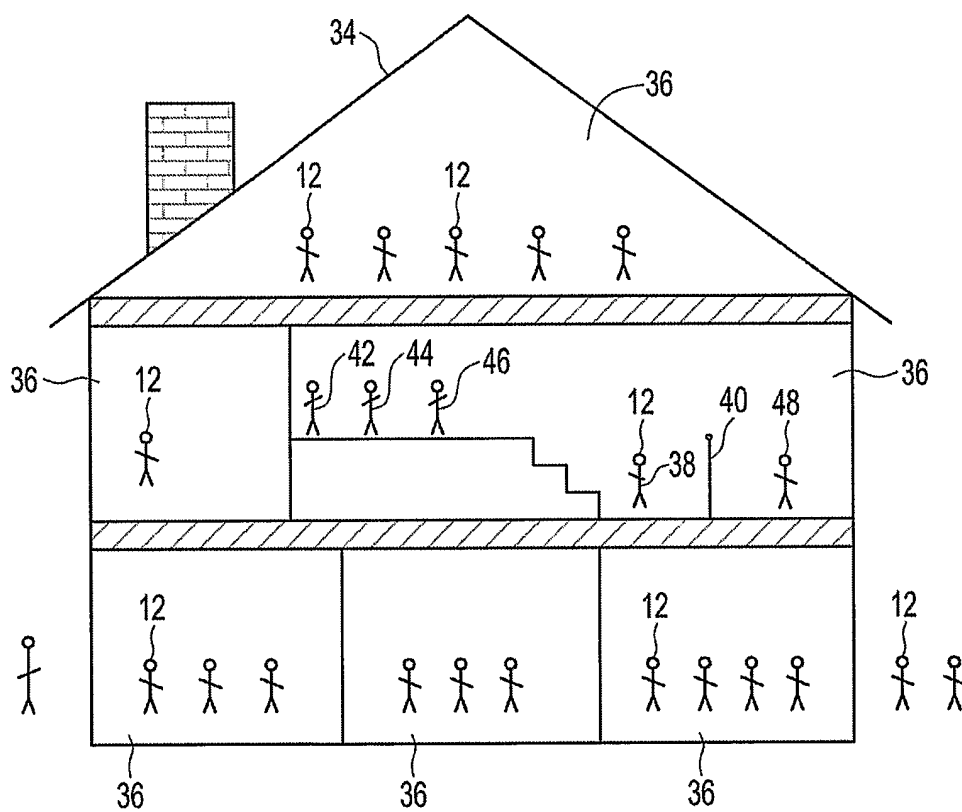


FIG. 4

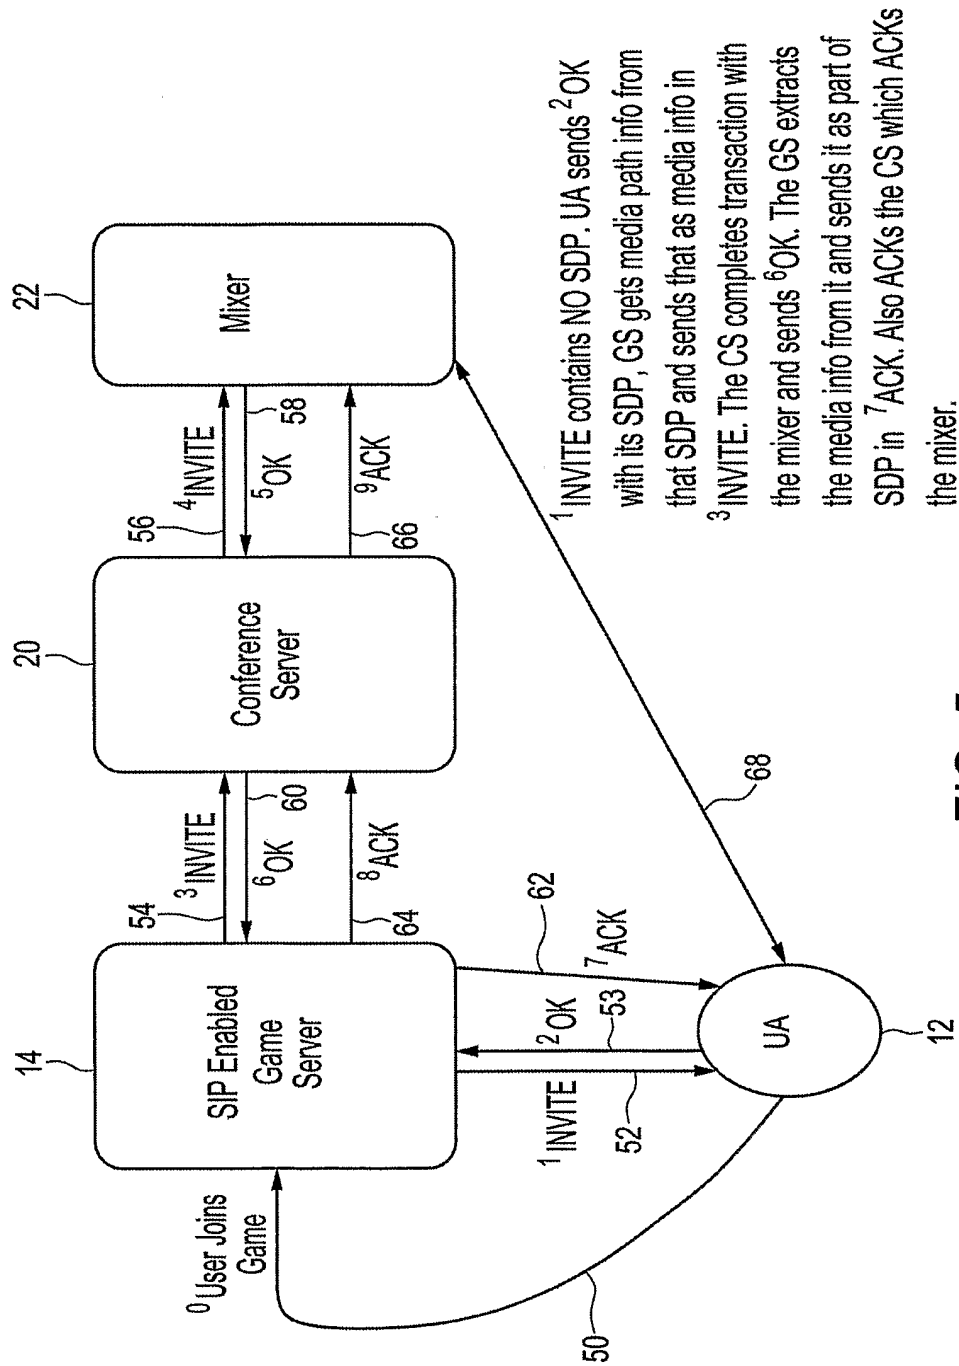

<sup>1</sup> INVITE contains NO SDP. UA sends <sup>2</sup> OK with its SDP, GS gets media path info from that SDP and sends that as media info in <sup>3</sup> INVITE. The CS completes transaction with the mixer and sends <sup>6</sup> OK. The GS extracts the media info from it and sends it as part of SDP in <sup>7</sup> ACK. Also ACKs the CS which ACKs the mixer.

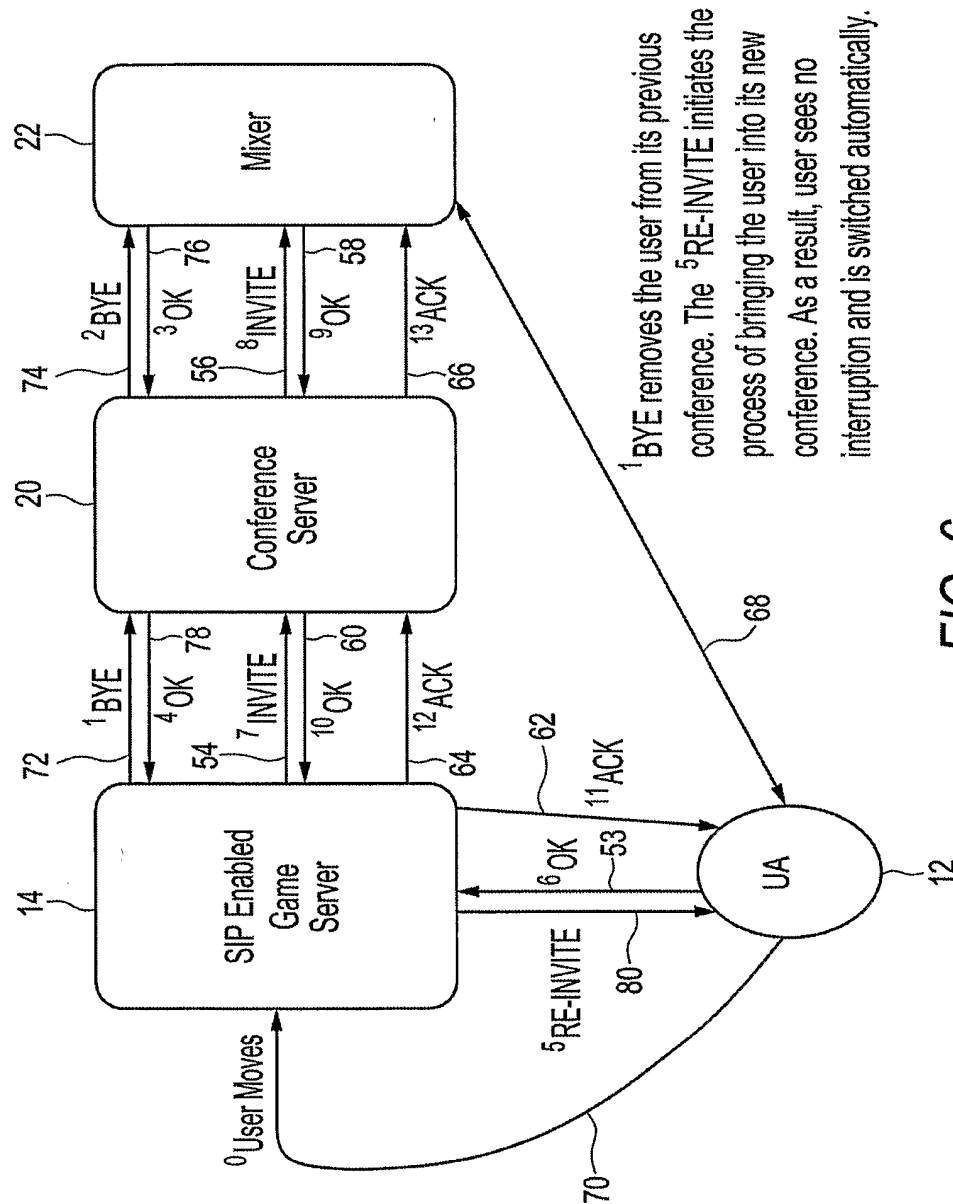

<sup>1</sup> BYE removes the user from its previous conference. The <sup>5</sup> RE-INVITE initiates the process of bringing the user into its new conference. As a result, user sees no interruption and is switched automatically.

FIG. 6