



(51) International Patent Classification:

H01R 103/00 (2006.01) *H01R 24/58* (2011.01)
H01R 105/00 (2006.01)

(21) International Application Number:

PCT/EP2011/055920

(22) International Filing Date:

14 April 2011 (14.04.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/329,630	30 April 2010 (30.04.2010)	US
1050429-8	30 April 2010 (30.04.2010)	SE

(71) Applicant (for all designated States except US): **ST JUDE MEDICAL SYSTEM AB** [SE/SE]; Box 6350, S-751 35 Uppsala (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MAHLIN, Fredrik** [SE/SE]; Fågelbo 19, S-755 92 Uppsala (SE).

(74) Agent: **HOLMBERG, Anders**; P.o. Box 12246, S-102 26 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: MALE CONNECTOR AND A METHOD OF PRODUCING THE MALE CONNECTOR

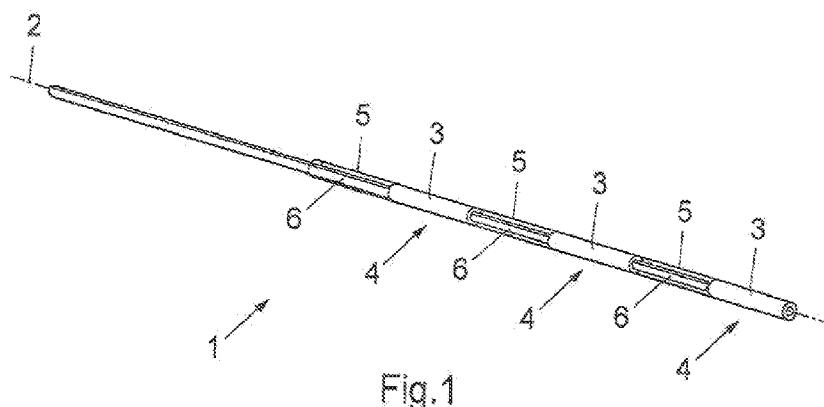

(57) Abstract: The present invention relates to an elongated male connector (1), for a medical device, and a method of producing the male connector (1). The male connector (1) has a longitudinal axis (2) and comprises a plurality of conductive members (3), each having an outer contact surface (4) and being separated from each other by insulating members (5). The conductive and insulating members (3, 5) are disposed along the male connector (1), such that the outer contact surfaces (4) are arranged essentially at the same surface level, and that each of the conductive members (3) has an elongated extension (6) along the longitudinal axis (2) of the male connector (1). Each conductive member (3) is provided with an insulated microrod (6) extending at least partially along the length of the male connector (1), and the conductive members (3) are hollow and have an essentially cylindrical cross-section and form, together with the insulating members (5), a self-supporting male connector (1) having no core wire.

Title

Male connector and a method of producing the male connector

Field of the invention

- 5 The present invention relates to an injection-mouldable male connector for a medical device and a method of producing the male connector, according to the preambles of the independent claims.

Background of the invention

- 10 In many medical procedures, various physiological conditions present within a body cavity need to be monitored. These physiological conditions are typically physical in nature – such as pressure, temperature, rate-of-fluid flow, and provide the physician or medical technician with critical information as to the status of a patient's condition.
- 15 For example, one medical device that is widely used to monitor conditions is a intravascular pressure sensor. The pressure sensor senses the magnitude of a patient's blood pressure, and converts it into a representative electrical signal that is transmitted to the exterior of the patient. For most applications it is also required that the sensor is electrically energized. Some means of signal and energy transmission for such a medical
- 20 device is thus required.

For the blood pressure sensor, most commonly, extremely thin electrical cables, sometimes called microcables, are provided inside a guide wire, which itself preferably is provided in the form of a tube, which often has an outer diameter in the order of 0.35 mm,

25 and oftentimes is made of steel. In order to increase the bending strength of the tubular guide wire and improve pushability and torque response, a core wire may be positioned inside the tube. The mentioned electrical cables are then e.g. positioned in the space between the inner lumen wall and the core wire.

- 30 In a guide wire mounted sensor, the signals from the sensor, arranged at the distal end of the guide wire, are lead through the electrical leads to a male connector at the proximal end of the guide wire. In use, the male connector is connected to a corresponding female

connector and the signals from the pressure sensor are transferred to an interface, which converts the signals and presents them in a desired form for an operator.

A conventional male connector for a medical device, basically comprises a core wire, a plurality of conductors, a plurality of conductive members, and insulating material therebetween. When the male connector is connected to the female connector, the conductive members transfer the signals from the conductors of the male connector to similar conductive members inside the female connector.

Several different designs of male connectors are known in the prior art, and examples of such male connectors are disclosed in US 6196980 B1, US 6090052 A, and US 6908442 B2, which are assigned to the same assignee as in the present application.

For example, the male connector used today for guide wires is made by individually attaching each conductor (an electrical lead placed alongside a core wire) to a conductive member (a contact ring which is wrapped around the core wire). Each of the conductive members are connected, by bonding or soldering, respectively, to a conductor. The core wire is used to prevent kinks and to provide strength to the male connector. Especially when the male connector is inserted into the female connector, there is a substantial risk of over-bending the male connector or damaging the thin conductors inside the connector.

Soldering or bonding the conductive members to the conductors is a time-consuming process and may be a source of manufacturing mistakes, leading to loss of time and material in the manufacturing process. For example, there may be a risk that the conductive members and the conductors are not properly connected or that they disconnect due to over-bending of the male connector and this in its turn involves a risk for short circuit in the male connector.

Consequently, there remains a need for a male connector which is less expensive, easy and straightforward to manufacture and which reduces the risk of short circuit. In addition, there is a need for a male connector which is possible to test before assembling with the medical device.

There is also a need for a male connector which makes it possible to bond or solder all the electrical cables at one end of the finished module, whereby the male connector may be mounted in one piece to electrical cable(s) for e.g. a sensor guide wire.

5

Summary of the invention

The above-mentioned objects are achieved by the present invention according to the independent claim.

10 Preferred embodiments are set forth in the dependent claims.

Thus, the object of the present invention is to achieve an improved male connector that is easier to manufacture and assemble than presently used male connectors, and which mechanically is more stable and which not tend to kink when inserted into a female
15 connector.

Further, the object of the present invention is to provide a method of manufacturing a male connector by injection-moulding.

20 The elongated male connector, for a medical device, in accordance with the present invention, has a longitudinal axis and comprises a plurality of conductive members, each having an outer contact surface and being separated from each other by insulating members. The conductive and insulating members are disposed along the male connector, such that the outer contact surfaces are arranged essentially at the same surface level, and
25 that each of the conductive members has an elongated extension along the longitudinal axis of the male connector. Each conductive member is provided with an insulated microrod extending at least partially along the length of the male connector, and said conductive members are hollow and have an essentially cylindrical cross-section and form, together with said insulating members, a self-supporting male connector having no
30 core wire. The male connector is adapted to any medical device adapted to be inserted into the body.

The invention will now be described in detail with reference to the drawings.

Short description of the appended drawings

Figure 1 shows the male connector according to the present invention.

- 5 Figure 2 shows a close-up view of the male connector according a first preferred embodiment of the present invention.

Figure 3 shows a single conductive member provided with a microrod.

Figure 4 shows the male connector, according to a second preferred embodiment of the present invention, in which figure, the insulating members have been omitted.

- 10 Figure 5 shows the distal end of the male connector, according to a second embodiment of the present invention, in which figure, the insulating members have been omitted.

Throughout the figures the same reference signs designate the same, or essentially the same features.

15

Detailed description of preferred embodiments of the invention

Throughout the application the word distal refers to the part located furthest away in respect of the operator, and the word proximal refers to the part located closest in respect of the operator.

20

In Figure 1, an elongated male connector 1, for a medical device, according to the present invention, is disclosed. The male connector 1 has a longitudinal axis 2 and comprises a plurality of conductive members 3, each having an outer contact surface 4 and being separated from each other by insulating members 5, the conductive and insulating

25 members 3, 5 being disposed along the male connector 1, such that the outer contact surfaces 4 are arranged essentially at the same surface level, and that each of the conductive members 3 has an elongated extension along the longitudinal axis 2 of the male connector 1.

- 30 As illustrated in figure 2, each conductive member 3 is provided with an insulated microrod 6 extending at least partially along the length of the male connector 1. The conductive members 3 are hollow and have an essentially cylindrical cross-section and

form, together with the insulating members 5, a self-supporting male connector 1 having no core wire. Thus, the male connector 1 consists merely of the conductive and insulating members 3, 5 and the insulated microrods 6.

- 5 The male connector is adapted to any medical device adapted to be inserted into the body. The medical device may be e.g. a sensor guide wire for intravascular measurements of physiological variables in a living body. The sensor may be designed to measure temperature and/or flow e.g. within the vascular system. Miniature sensors may also be designed to measure other variables, such as magnetic flux, other electromagnetic
10 variables, conductance, or inductance, e.g. generated from outside the body and used inter alia for positioning purposes.

- As discussed above, and as shown in figures 1-2, the outer contact surfaces 4 are arranged essentially at the same surface level. However, as an obvious constructive variation, the
15 surface level of the conductive members 3 may be arranged slightly elevated in respect to the surface level of the insulating members 5, i.e. the radius of the conductive members 3 is larger than the radius of the insulating members 5. As an example, the conductive members have a cross-sectional diameter of 0,2 - 0,4 mm.

- 20 According to a preferred embodiment of the present invention, the microrods 6 are arranged to extend through more distally arranged conductive and insulating members 3, 5, as illustrated in figures 1 and 2. The insulating members 5 are preferably made of LCP (Liquid Crystal Polymer), and the LCP is preferably injection-moulded onto the assembled male connector 1. However, other suitable materials, such as PEI (polyetherimide) or
25 PEEK (polyetheretherketone), may also be used to insulate between the conductive members 3.

- Figure 3, shows a single conductive member 3, of a male connector 1 according to a first preferred embodiment of the present invention. In this preferred embodiment, the
30 conductive members 3 have a circular cross-section, and the microrods 6 are adapted to be arranged to extend through more distally and more proximally arranged conductive and insulating members 3, 5. The microrods 6, connected to the conductive members 3, are

preferably insulated with polyimide, or other suitable insulating material, such as oxide coating or acrylic insulation. The conductive members 3 provided with the microrods 6 are according to this preferred embodiment manufactured by cutting out separate units of conductive members 3 provided with microrods 6, preferably by laser, from an elongated
5 tube (not shown).

In another embodiment, the conductive members 3 provided with microrods 6 may be produced by laser cutting a flat sheet of conductive material, e.g. sheet metal, and bent or rolled into a cylindrical shape.

10

According to another preferred embodiment of the present invention, shown in figure 4, in which figure the insulating members have been omitted, the microrods 6 are arranged to extend through more distally, or both through more distally and more proximally, arranged conductive and insulating members 3, 5. Since the male connector 1 has no core wire, the
15 microrods 6 instead support the conductive and insulating members 3, 5, to achieve a mechanically stable male connector 1 which does not kink. Thus, the microrods 6 support the conductive and insulating members 3, 5 and gives the male connector 1 the necessary stability and stiffness.

20 In other embodiments the microrods 6 instead are produced separately, and thereafter fastened to the conductive members 3. This may be achieved e.g. by means of spot-welding, or soldering, according to the embodiment shown in figures 4 and 5. However, other suitable techniques, such as welding or gluing, may also be used to attach the microrods 6 to the conductive members 3. At least one of the microrods 6 are, according
25 to this embodiment, fastened to the inner space 10 of the hollow conductive members 3.

According to one embodiment of the present invention, the microrods 6 are provided with contact surfaces 8 at a distal end 9 of the male connector 1, as shown in detail in figure 5. When the male connector 1 is in use, the contact surfaces 8 are connected, preferably by
30 welding, to electrical leads provided in the medical device, e.g. a sensor guide wire. Contact surfaces 8 at one end of the male connector 1 is advantageous since it makes it possible to test the male connector 1 before assembling with the medical device. Thereby,

the risk for short circuit in the male connector module 1 is reduced. Also, having all the contact surfaces adjacent to each other at one end simplifies connecting several electrical leads to the male connector.

- 5 In the embodiment illustrated in figure 5, the microrods 6, have a semilunar cross-section. The dimensions of the semilunar microrods 6 are adapted to the diameter of the inner space 10 of the hollow conductive members 3, so that one or more microrods 6 may be arranged to extend through the conductive member 3 supported by the inner space 10 of the conductive members 3 to make the male connector 1 mechanically stable. As shown in
- 10 figures 4 and 5, the most distal arranged conductive member 11 may be provided with a distal microrod 12 having less dimensions than the other microrods 6 attached to the more proximal arranged conductive members 3. The distal microrod 12 is preferably attached to the distal edge 13 of the most distal arranged conductive member 11.
- 15 The present invention also relates to a method of producing the male connector 1, for a medical device. The method includes:
- a) providing a plurality of hollow elongated conductive members 3 having a cylindrical cross-section and an outer contact surface 4, where each conductive member 3 is provided with an elongated insulated microrod 6;
 - 20 b) arranging, spaced apart, a plurality of the conductive members 3 next to each other and centred along a longitudinal axis 2 with the microrods 6 extending through more distally arranged conductive members 3, and
 - c) providing insulating members 5 between adjacent conductive members 3, thereby forming a self-supporting male connector 1 having no core wire.
- 25 According to the method for producing a male connector 1, step b) may further include the sub step of:
- b1) arranging at least one of the microrods 6 to extend through at least one proximally arranged conductive member 3.
- 30 As a preferred method, and according to the preferred embodiment of the present invention shown in figures 1-3, the hollow elongated conductive members 3 provided with the microrods 6, are manufactured at the same time, by cutting out separate units,

preferably by laser, from an elongated tube, made of any commonly used conductive material, such as stainless steel, platinum or titanium. Each cut out conductive member 3 and microcable 6 are then insulated with a suitable insulating material, such as polyimide, oxide coating or acrylic insulation as is common in the art.

5

As also discussed above, and according to another embodiment, the conductive members 3 provided with microrods 6 may be produced by laser cutting a flat sheet of conductive material, e.g. sheet metal, and bent or rolled into a cylindrical shape.

10 However, in the embodiment illustrated in figures 4-5, as discussed above, the microrods 6 are fastened to the conductive members 3 by means of spot-welding.

According to the method, the insulating members 5 may be provided by means of injection-moulding. In detail, the conductive members 3 provided with the microrods 6 are then arranged spaced apart, and next to each other, and adjacent conductive member 3 are
15 threaded on to adjacent microrods 6, so that the microrods 6 extends through more distally and/or proximally arranged conductive members 3, as shown in figures 4-5. Subsequently, the insulation is injection-moulded onto the microrods 6, between adjacent conductive members 3, in order to form the insulating members 5.

20

Furthermore, and according to the method, the microrods 6 are bonded or soldered at a distal end 9 of the male connector 1 to form a plurality of contact surfaces 8.

Advantageously, all cable connector contact surfaces 8 to be connected to the desired medical device are then arranged at one end of the male connector 1.

25

The present invention is not limited to the above-described preferred embodiments. Various alternatives, modifications and equivalents may be used. Therefore, the above embodiments should not be taken as limiting the scope of the invention, which is defined by the appending claims.

30

Claims

1. An elongated male connector (1) for a medical device, the male connector (1) having a longitudinal axis (2) and comprises:
 - a plurality of conductive members (3), each having an outer contact surface (4) and being
- 5 separated from each other by insulating members (5), the conductive and insulating members (3, 5) being disposed along the male connector (1), such that the outer contact surfaces (4) are arranged essentially at the same surface level, and that each of the conductive members (3) has an elongated extension along the longitudinal axis (2) of the male connector (1), c h a r a c t e r i z e d i n that each conductive member (3) is
- 10 provided with an insulated microrod (6) extending at least partially along the length of the male connector (1), and that said conductive members (3) are hollow and have an essentially cylindrical cross-section and form, together with said insulating members (5), a self-supporting male connector (1) having no core wire.
- 15 2. An elongated male connector (1) according to claim 1, wherein said microrods (6) are arranged to extend through more distally arranged conductive and insulating members (3, 5).
3. An elongated male connector (1) according to any of claims 1-2, wherein
- 20 said conductive members (3) have a circular cross-section.
4. An elongated male connector (1) according to any of claims 1-3, wherein said conductive members (3) is made of a flat sheet of conductive material, e.g. a sheet metal, which is bent or rolled into a cylindrical shape.
- 25 5. An elongated male connector (1) according to any of claims 1-4, wherein at least one of said microrods (6) is arranged to extend through more proximally arranged conductive and insulating members (3, 5).
- 30 6. An elongated male connector (1) according to any of claims 1-5, wherein said insulating members (5) are made of LCP (Liquid Crystal Polymer).

7. An elongated male connector (1) according to any of claims 1-6, wherein said microrods (6) are provided with contact surfaces (8) at a distal end (9) of said male connector (1).

5 8. An elongated male connector (1) according to any of claims 1-7, wherein said microrods (6) are fastened to said conductive members (3) by means of spot-welding.

9. An elongated male connector (1) according to any of claims 1-7, wherein said microrods (6) are fastened to said conductive members (3) by means of soldering.

10

10. An elongated male connector (1) according to any of claims 1-9, wherein said microrods (6) have a semilunar cross-section.

11. Method of producing a male connector (1), for a medical device, the method
15 includes:

a) providing a plurality of hollow elongated conductive members (3) having a cylindrical cross-section and an outer contact surface (4), where each conductive member (3) is provided with an elongated insulated microrod (6);

b) arranging, spaced apart, a plurality of said conductive members (3) next to each other
20 and centred along a longitudinal axis (2) with said microrods (6) extending through more distally arranged conductive members (3), and

c) providing insulating members (5) between adjacent conductive members (3) thereby forming a self-supporting male connector (1) having no core wire.

25 12. Method for producing a male connector (1) according to claim 11, where step b) further includes the sub step of:

b1) arranging at least one of said microrods (6) to extend through at least one proximally arranged conductive member (3).

30 13. Method according to any of claims 11-12, wherein said insulating members (5) are provided by means of injection-moulding.

14. Method according to any of claims 11-13, wherein said microrods (6) is fastened to said conductive members (3) by means of spot-welding.



15. Method according to any of claims 11-13, wherein said microrods (6) is fastened to said conductive members (3) by means of soldering.

16. Method according to any of claims 11-13, wherein said conductive members (3) provided with said microrods (6) are provided by cutting out separate units of conductive members (3) provided with microrods 6, preferably by laser, from an elongated tube.

17. Method according to any of claims 11-13, wherein said conductive members (3) are provided by laser cutting a flat sheet of conductive material, e.g. a sheet metal, which subsequently is bent or rolled into a cylindrical shape.

18. Method according to any of claims 11-17, wherein said microrods (6) are bonded or soldered at a distal end (9) of said male connector (1) to form a plurality of contact surfaces (8).

1/3

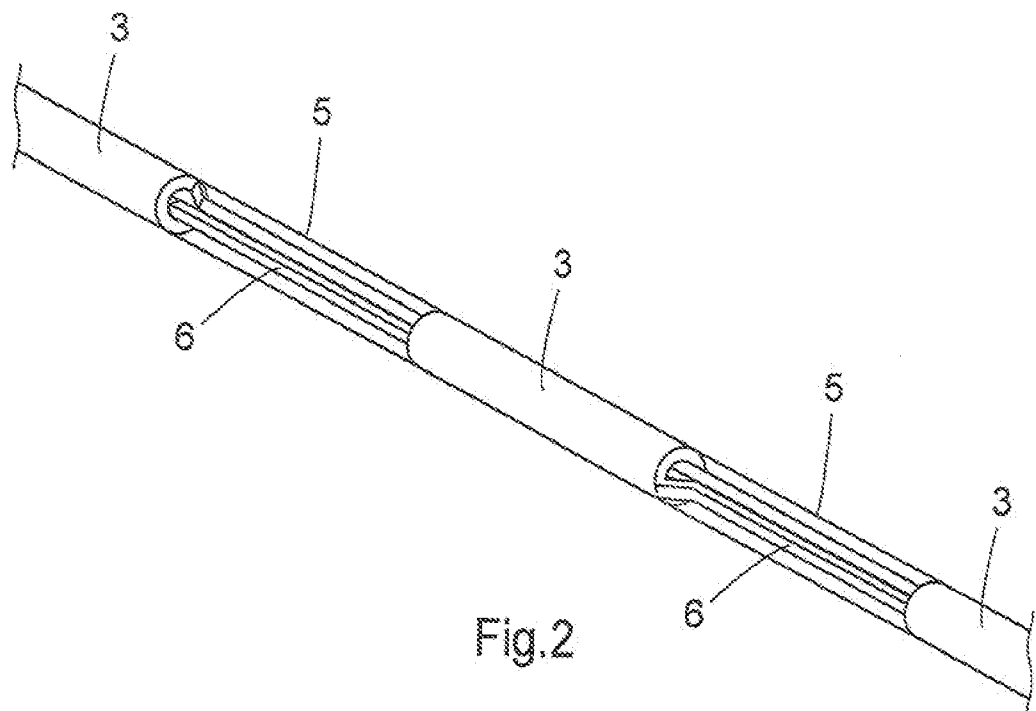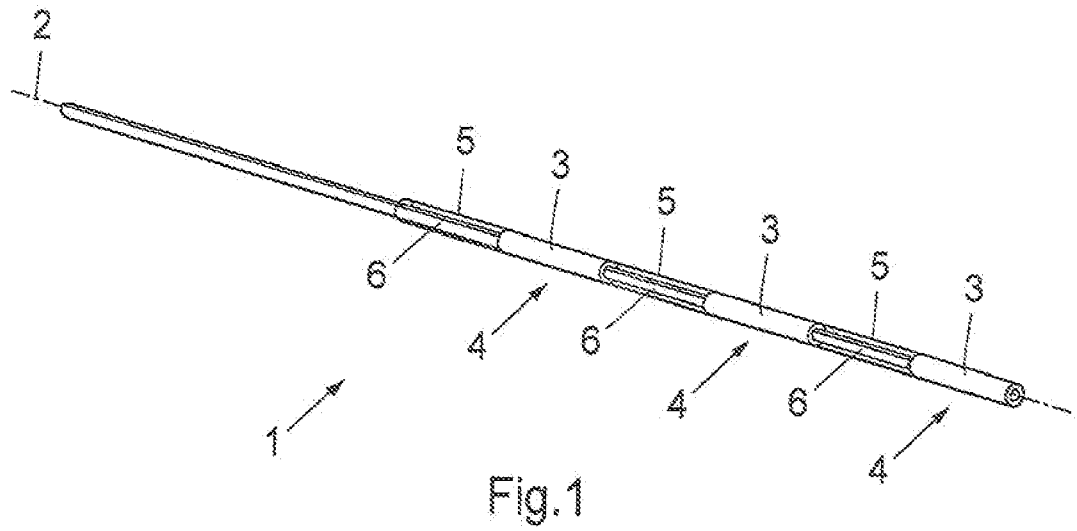

2/3

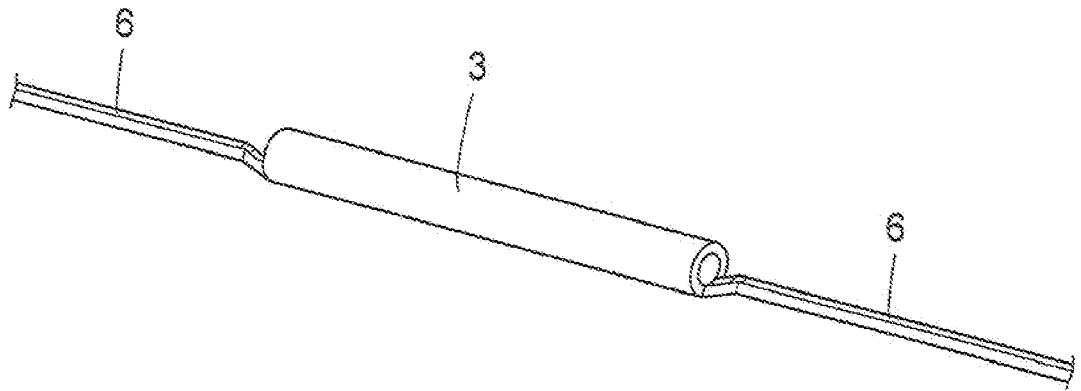


Fig.3


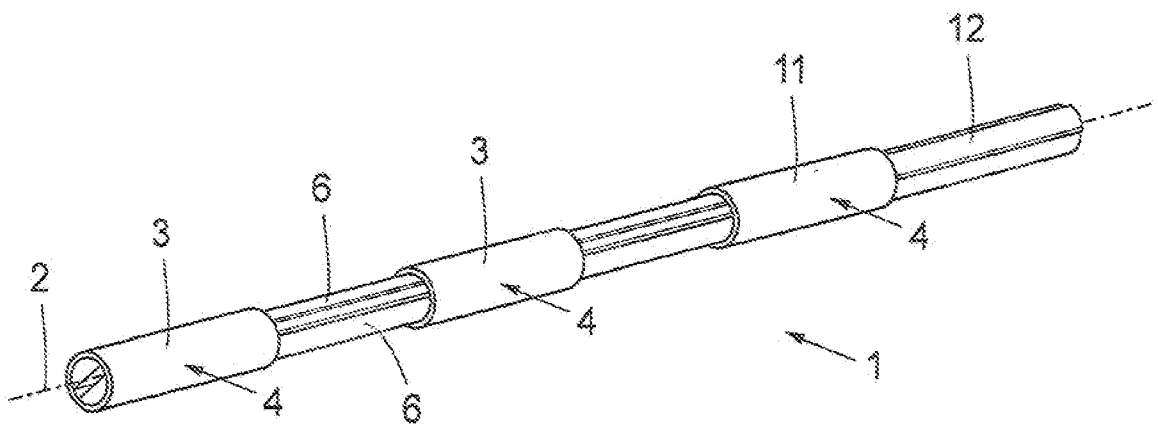


Fig.4

3/3

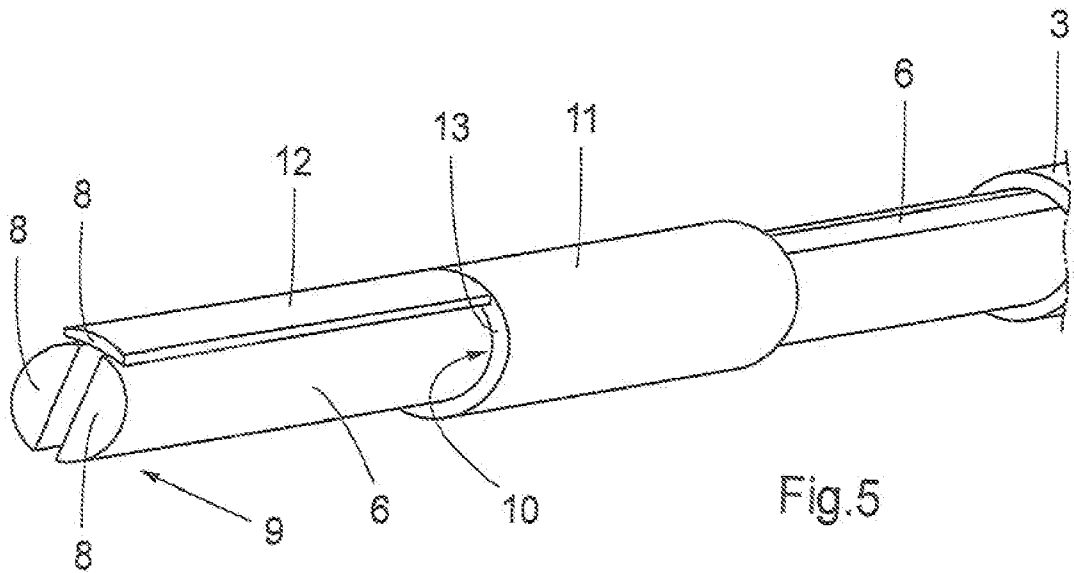

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2011/055920

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01R103/00 H01R105/00 H01R24/58
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01R A61M A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	WO 2009/091495 A2 (APPLE INC [US]; STIEHL KURT [US]) 23 July 2009 (2009-07-23) the whole document	1-3,5,7, 11,12,18 4,6, 8-10, 13-17
X Y	----- US 2008/160843 A1 (CHEN WU-KUANG [TW] ET AL) 3 July 2008 (2008-07-03) the whole document	1-3,5,7, 11,12,18 4,6, 8-10, 13-17
X	----- US 6 439 933 B1 (MOJI EIRO [JP]) 27 August 2002 (2002-08-27) the whole document ----- -/-	1,4,7-9, 11,14, 15,18

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

29 July 2011

Date of mailing of the international search report

09/08/2011

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Salojärvi, Kristiina

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2011/055920

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2004/186542 A1 (VAN VENROOIJ PAUL [NL] ET AL) 23 September 2004 (2004-09-23) figures 31-37	10
Y	----- US 2009/254162 A1 (QUINCI THOMAS [US] ET AL) 8 October 2009 (2009-10-08) page 5, column 2, line 33 -----	6

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2011/055920

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2009091495 A2	23-07-2009	CN 101971438 A US 2009311915 A1	09-02-2011 17-12-2009
US 2008160843 A1	03-07-2008	CN 101212107 A	02-07-2008
US 6439933 B1	27-08-2002	CN 1309444 A FI 20001353 A JP 3569658 B2 JP 2001230031 A	22-08-2001 18-08-2001 22-09-2004 24-08-2001
US 2004186542 A1	23-09-2004	WO 2004084986 A2	07-10-2004
US 2009254162 A1	08-10-2009	US 2007276458 A1 US 2010174350 A1 US 2005240252 A1	29-11-2007 08-07-2010 27-10-2005