



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : B25J 9/16, G05B 19/405	A1	(11) International Publication Number: WO 91/08869 (43) International Publication Date: 27 June 1991 (27.06.91)
--	-----------	--

(21) International Application Number: PCT/JP90/01648

(22) International Filing Date: 18 December 1990 (18.12.90)

(30) Priority data:

68115 A-89	18 December 1989 (18.12.89)	IT
68116 A-89	18 December 1989 (18.12.89)	IT
68117 A-89	18 December 1989 (18.12.89)	IT

(71) Applicant (for all designated States except US): AMADA COMPANY, LIMITED [JP/JP]; 200 Ishida, Isehara-shi, Kanagawa 259-11 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): PRUNOTTO, Gianpao-lo [IT/IT]; PRADA, Marco [IT/IT]; Via San Quintino, 28, I-10121 Torino (IT).

(74) Agent: MIYOSHI, Hidekazu; 5th fl., Toranomon-Daiichi Building, 2-3, Toranomon 1-chome, Minato-ku, Tokyo 105 (JP).

(81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, KR, LU (European patent), NL (European patent), SE (European patent), US.


Published

With international search report.

(54) Title: DEVICE FOR CONTROL OF A ROBOT MANIPULATOR FOR A METAL SHEET BENDING INSTALLATION

(57) Abstract

To perform a simple and rapid preparation of control program, the control device for a robot manipulator for a sheet metal bending installation is provided with a first key means for inputting a command signal for actuating a first actuator means that is adapted to move a movable element of the metal sheet bending installation through a constant distance or amount, and a second key means for inputting a command signal for actuating a second actuator that is adapted to move another movable element of the metal sheet bending installation through a changeable distance or amount. Further, to increase the working speed of the sequence of control signals for the metal sheet bending installation, the control device is provided with means for detecting a plurality of command signals for subsequently actuating a plurality of actuators and for subsequently moving an element or elements of the installation, and means for associating the plurality of command signals to produce an associated single command signal for actuating subsequently the plurality of the second actuator without any stops between the actions thereof.

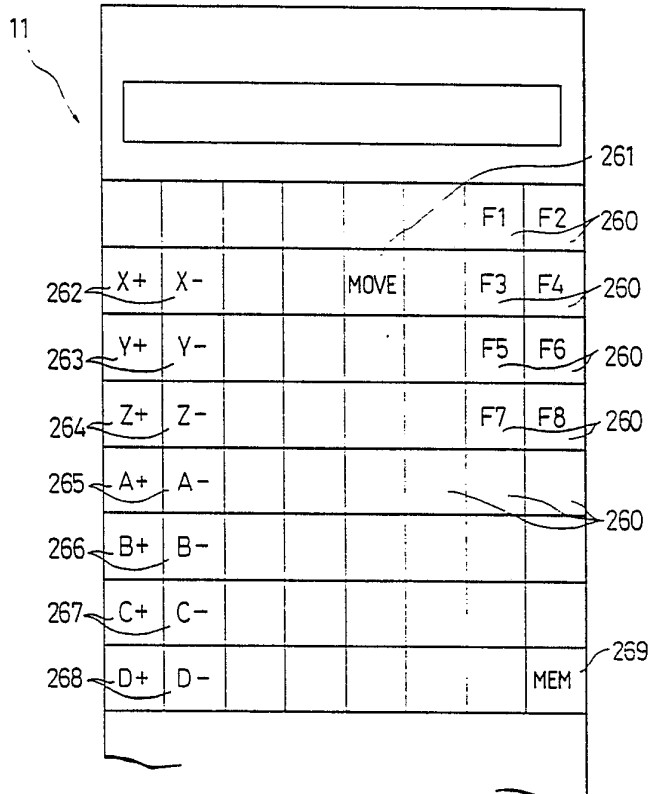

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MR	Mauritania
BE	Belgium	GA	Gabon	MW	Malawi
BF	Burkina Faso	GB	United Kingdom	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	SD	Sudan
CF	Central African Republic	KP	Democratic People's Republic of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SN	Senegal
CH	Switzerland	LI	Liechtenstein	SU	Soviet Union
CI	Côte d'Ivoire	LK	Sri Lanka	TD	Chad
CM	Cameroon	LU	Luxembourg	TC	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark				

- 1 -

TITLE OF THE INVENTION

DEVICE FOR CONTROL OF A ROBOT MANIPULATOR FOR A METAL SHEET
BENDING INSTALLATION

5

BACKGROUND OF THE INVENTIONField of the Invention

The present invention relates to a device for control of a
10 robot manipulator for a metal sheet bending installation.

Description of the Prior Art

The present invention is advantageously applied to the
15 command and control of a robot manipulator of the type
described in Italian Patent application filed 15 March 1988
under application No 67224-A/88 by the same applicant. This
manipulator device comprises a pair of motor driven
manipulator heads which translate within a manipulation
20 space and are rotatable about a common axis which is
parallel to a linear bending zone defined by the dies of a
press. The manipulator heads are adapted to grip the
opposite edges of a metal sheet and to position this metal
sheet between the dies of the press in such a way as to
25 allow a predetermined bending of the metal sheet. This
manipulator device further has an arm with a
plurality of auxiliary pincers which can grip an edge of
the metal sheet to invert it. The manipulator device and
the press are controlled by an electronic command and
30 control unit which, on the basis of previously memorised
instructions, imparts thereto sequential instructions
defining successive bending cycles.

The instructions for the various working phases are
35 normally imparted to the command unit by the so-called

"self-learning" procedure on the basis of which an operator physically moves the machine in a sequential manner through the movements which the bending cycle requires, and when each individual movement has been effected inserts into the
5 command unit the parameters relating to this movement.

In this way the various positions assumed by the elements of the machine (for example the successive positions assumed by the manipulator heads) are memorised in a
10 sequential manner within the RAM memory of the command and control unit, and can subsequently be read by this command unit and therefore performed again during the operating bending cycles.

15 It is clear from what has been explained above that when it is desired to modify a previously memorised bending cycle it is necessary to perform a new self-learning procedure which takes up considerable time to complete and is rather onerous.

20

Moreover, the staff employed to perform the self-learning procedure must know the machine and the admissible sequence of operating steps very well, and must position the various elements thereof with extreme precision, so as to insert
25 reliable data into the control unit.

SUMMARY OF THE INVENTION

Thus, a first object of the present invention is to provide
30 a device for control of a robot manipulator for the sheet metal bending installation, which apparatus effects automatic creation of command signals for controlling the phases of the working cycle of a robot manipulator for a sheet metal bending installation, and which allows a
35 simpler and more rapid definition of the cycle of operations to be achieved.

The first object of the present invention is achieved by the provision of a control device characterised by the fact that it comprises means selectable by an operator and operable to create a complete sequence of the said command
5 signals for controlling the said phases.

A second object of the present invention is to provide a control apparatus for increasing the working speed of the sequence of control signals for a metal sheet bending installation so as to reduce the time taken to perform the
10 working cycle with respect to that defined as a result of programming, with a guarantee of the correct and complete execution of the various operating phases of the bending cycle.

15 The second object of the present invention is achieved by the provision of a control device that is characterised by the fact that it includes means for detecting at least a predetermined one of the command and control signals, and for associating another command and control signal to the
20 predetermined signal.

Further, in the control device of the prior art, in order to reduce the time taken to create the instructions for the various phases of a bending cycle, the instructions are
25 defined either in a specimen installation or in an external unit outside the central electronic command and control unit of the installation, and only then memorised in the central unit of the operating installation for execution. This however presents a series of difficulties in that a
30 bending installation is composed of a plurality of separate component parts (a press, a magazine for the metal sheets, a support for the auxiliary pincers etc) which are not connected together stably, and which must be mounted to the floor of the space in which the bending installation is
35 housed, in such a way that the various parts of the

installation are spaced from one another, and are disposed in such a way as to achieve a well defined dimensional configuration.

5 Inasmuch as the sequences of command signals for the various movements of the parts of the installation during the bending phases would have been previously defined for a given specimen disposition of the said parts, it is evident that, if the various parts of the bending installation are
10 assembled in a manner even slightly different from that of the specimen configuration the bending installation will not function in a correct manner when acting on the previously defined instructions.

15 Thus, A third object of the present invention is to provide a control device for checking the dimensions of the configuration of a metal sheet bending installation, and for automatic adaptation of command and control signals for the various movements of the parts of the installation,
20 which allows a sequence of such signals previously defined in a specimen configuration of the installation to be utilised in a manner which overcomes the above-indicated disadvantages, and allows a reduction in the operating times of the installation.

25

The third object is achieved by the present invention which relates to a control device for checking the dimensions of the configuration of a robot manipulator device of a metal sheet bending installation, and for automatic adaptation of
30 the command and control signals for the said robot manipulator device, characterised by the fact that it comprises a first stage in which a first sequence of the said command and control signals is defined for a specimen configuration of the said installation, a second stage in
35 which corresponding dimensional values of the said specimen

configuration and of the said configuration of the said installation are compared, and a third stage in which the said first sequence of command and control signals is automatically adapted to obtain a second sequence of signals suitable for the said assembled configuration of the said installation.

BRIEF DESCRIPTION OF THE DRAWING

10 For a better understanding of the present invention a non-limitative description of an embodiment thereof is now given, with reference to the attached drawings, in which:

15 Figure 1 is a perspective view of a sheet metal bending installation comprising a bending press, a manipulator device, a loading device and a workpiece unloading table, controlled by an electronic command and control unit using the speed increasing system which is the subject of the present invention;

20 Figure 2 is a side elevation view of the manipulator device illustrated in Figure 1, with some parts represented in different positions;

Figure 3 is a perspective view of a manipulator head of the manipulator device illustrated in Figure 1;

25 Figure 4 is a plan view from above of the manipulator device;

Figure 5 is a partially sectioned side view of an auxiliary pincer of the manipulator device of Figure 1, and of the beam which supports it;

30 Figure 6 is a partial front elevation view of the support structure for the auxiliary pincer illustrated in Figure 5;

Figure 7 represents a shaped sheet metal profile made with the installation illustrated in Figure 1;

Figure 8 schematically illustrates the successive bending stages necessary to obtain the profile illustrated in Figure 7;

Figure 9 is a flow chart of the operation of the electronic command and control unit illustrated in Figure 1;

Figures 10a and 10b comprise a flow chart of the phases of the operating cycle created to produce the profile illustrated in Figure 7;

Figure 11 illustrates a portable keyboard (hand box) utilised to send to the command and control unit of Figure 1 the command signals necessary for the production of the profile illustrated in Figure 7;

Figure 12 schematically illustrates the interconnections between the electronic command and control unit, illustrated in Figure 1, and the various devices connected to it;

Figure 13 is a flow chart of the operation of the command and control unit of the system forming the subject of the present invention;

Figures 14a and 14b are flow charts showing more detail than the flow chart of Figure 13; and

Figures 15a and 15b are flow charts illustrating the phases of the operating cycle for producing the profile illustrated in Figure 7, as obtained according to the system of the present invention.

Figures 16a and 16b are perspective views of a first and a second metal block utilised as equipment in the dimension checking system of the present invention for the bending installation illustrated in Figure 1;

Figure 17 is a perspective view of a pair of the blocks of Figures 16a and 16b, utilised by a manipulator head and by an auxiliary pincer of the installation of Figure 1 (partially represented) in a first dimension checking stage according to the system of the present invention;

Figure 18a is a perspective view of the block of Figure 16b, utilised by a manipulator head (partially represented) of the installation of Figure 1, in a second dimension checking stage according to the system of the present invention, shown against a metal sheet (partially shown);

Figure 18b is a partial perspective view of a pair of blocks in the second dimensional checking stage of Figure 18a, at opposite sides of a metal sheet;

Figure 19a is a side view of a block of Figure 16b utilised by a manipulator head (partially shown) of the installation of Figure 1 in a third dimension checking stage according to the system of the present invention, shown against a workpiece discharge table;

Figure 19b is a partial view on an enlarged scale of a portion of Figure 19a;

Figures 20 and 21 are flow charts of various stages of the dimensional checking and automatic adaptation system of the present invention; and

Figure 22 is a more detailed flow chart of a component block of the flow chart illustrated in Figure 21.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A first embodiment of the present invention will now be described as applied to a sequence of command and control signals for a robot manipulator device of a sheet metal bending press the structure of which is represented in Figures from 1 to 6; in particular, in Figure 1 there is illustrated a sheet metal bending installation 500, and the reference numeral 1 generally indicates a bending press including a die 2 and a die 3. In front of the press 1 there is a manipulator device generally indicated 4.

On one side of the press 1 there is located a magazine with a loader device 5 and a discharge table generally indicated 6.

- 5 An electronic microprocessor controlled unit 7 controls the operation of the manipulator device 4 and the press 1. The electronic unit 7 is provided with an alphanumeric keyboard 8, a video 9, and a small portable keyboard 11 (hand box) utilised in a manner which will be clarified hereinbelow.

10

The loader device 5 comprises a bed 20 with an upper plane 22 on which rests a stack of flat, rectangular metal sheets 23 to be subjected to bending.

- 15 A movable beam 24, controlled by actuators 26, carries a series of suckers 28 for lifting the sheets 23 in succession and transferring them to a horizontal position in the space between the loader device 5 and the discharge table 6, which latter is constituted by a simple bed with
20 an inclined support plane 30. The plane 30 is intended, as will be seen, to receive the shaped sheets from the manipulator device 4.

- This manipulator device 4 includes a support base having
25 feet 32 which carry a guide 34. The guide 34 extends parallel to the working plane of the press 1 along the whole of the lower part of the press 1, and into the space between the loader device 5 and the discharge table 6.

- 30 On the guide 34 there slides an elongate carriage generally indicated 36, which is slidable parallel to the die 2, that is to say along the X-axis. The carriage 36 is movable along the guide 34 from a position in which it faces the press 1 to a position in which it is located between the
35 loading device 5 and the discharge table 6.

These movements of the carriage 36 along the guide 34 are controlled by a servo motor 38 which is preferably numerically controlled. The servo motor 38 drives a toothed wheel (not shown) which cooperates with a rack (not shown) which extends along the guide 34.

The carriage 36 supports, adjacent its ends, a pair of longitudinal guides 40 which extend parallel to the Y-axis. Each of these guides 40 is vertically slidable on the carriage 36 parallel to the Z-axis. Their movement along the Z-axis is controlled by a numerically controlled servo motor 42 carried by the carriage 36. Each guide 40 is supported by a vertical rod 44 slidable in the carriage 36. The servo motor 42 drives in unison respective toothed wheels (not shown) meshing with respective racks (not shown) supported by the rods 44.

The guides 40 support a robust beam 46 which extends parallel to the bending zone defined by the dies 2 and 3.

The beam 46 is supported on the guides 40 by respective slides 48 movable parallel to the Y-axis.

Each slide 48 carries a vertical pin 50 about which the beam 46 can oscillate horizontally through a small angle.

The movements of each slide 48 are controlled by a respective, numerically controlled servo motor 52 carried by the respective guide 40. Each servo motor 52 drives a respective worm screw (not shown) which extends within the guide 40 and which cooperates with a nut (not shown) fixed to the respective slide 48.

The movements of the beam 46 along the Y-axis, during manipulation of the workpieces, are controlled by the two

servo motors 52 acting in unison in such a way that the beam 46 moves parallel to itself.

5 In order to effect a precise positioning of the sheet 23, the press 1 is provided with a pair of alignment sensors 66 which are mounted on supports slidable along the Y-axis, and which are disposed close to the die 3. The sensors 66 are provided with a rod 67 which is movable parallel to the Y-axis and terminates with an end 68 adapted to detect
10 contact with an edge of the metal sheet 23.

The side of the beam 46 facing the press 1 carries two motor driven slides (not shown) slidable in unison and in opposite directions along the beam 46 itself; each slide
15 carries a robust hollow projecting arm 74 extending towards the bending press 1. Each of these arms 74 carries at its free ends a respective manipulator head 10 the axis of rotation of which is common to the two heads.

20 As will be understood, the movements of the two slides serve to cause engagement of the manipulator heads 10 with the edges of the sheet 23 and their disengagement therefrom.

25 The rotations, in unison, of the two heads 10 about their axes, both for changing the attitude and the position of the manipulator pincers carried by the heads 10, are controlled by a numerically controlled servo motor.

30 Referring now to Figure 3, the preferred structure of the two manipulator heads 10 will be described.

The head 10 comprises a square flange 90 which supports two projecting opposite cheeks 92 and 94. The free ends of
35 these cheeks 92 and 94 are shaped in such a way as to

- 11 -

constitute respective outer fixed jaws 96 and 98, of a manipulator pincer 72 and a manipulator pincer 73 respectively.

5 Centrally between the two cheeks 92 and 94 extends a rod 100 to which is fixed a double piston. The piston is surrounded by a movable body 104 constituting a cylinder for the piston. The body 104 is movable to and fro along the rod 100.

10

To the body 104 are fixed two movable jaws 106 and 108 one of which forms part of the manipulator pincer 72 and the other of which forms part of the manipulator pincer 73.

15 As can be seen, the disposition is such that when the pincer 73 is open the pincer 72 is closed and vice versa.

As can also be seen, the two diametrically opposite manipulator pincers 72 and 73 are situated eccentrically
20 with respect to the axis of rotation of the head 10. The fixed jaws 96 and 98 are situated on the outline of the head, whilst the movable jaws 106 and 108 are slidable within the outline of the head 10. This disposition is the most favourable for achieving a manipulator head 10 of very
25 small dimensions and permits the maximum possible approach of the manipulator pincers 72 and 73 to the bending zone.

Both the fixed jaws 96 and 98 and the movable jaws 106 and 108 are replaceable in a simple and rapid manner with jaws
30 of different dimensions, especially in width. Whilst the jaws 908 and 108 shown may be of minimum width, the maximum width of the jaws can be equal to the width of the head.

Referring now to Figures 1 and 4, an auxiliary support for
35 the manipulation of very long sheet metal workpieces, with

which the manipulator device 4 is provided, will now be described.

When a sheet of this type is supported at its ends by the
5 pincers of the manipulator head 10 before bending, or when only small bends have been formed, it is susceptible of sagging and it is therefore necessary to support it in at least one intermediate zone.

10 For this purpose, along the beam 46 there is mounted at least one principal auxiliary support device generally indicated 110. This device 110 comprises a carriage 112 which is manually movable along the beam 46 and lockable on this in a desired position. If only one auxiliary device
15 110 is provided this position is the median position illustrated in Figure 1.

A hollow projecting auxiliary support arm 114 is articulated on the carriage 112 about a horizontal axis
20 parallel to the X-direction. When the device 110 is in operation an actuator (not shown) carried by the carriage 112 maintains the arm 14 in a raised position. At its free end the arm 114 carries an auxiliary support head 116 having two suction tubes.

25

The head 116 is rotatable about an axis which coincides with the axis of rotation of the manipulator heads 10 and the auxiliary head 116 turns in unison with the manipulator heads 10.

30

The head 116 carries two series of diagonally opposite lower suckers 119 and upper suckers 120 like the manipulator pincers 72 and 73 and having abutment surfaces which correspond with the gripping planes of the
35 manipulator heads 10. The suckers 120 are connected, in a manner not shown, to a vacuum source (not shown).

As will be understood, the suckers 119 or 120 are able to support a sheet at its intermediate zone independently of the attitude of the surface of the sheet which they engage.

- 5 In the case of a sheet of great width the auxiliary support device 110 is utilised when forming the first bends.

When the auxiliary support is not needed the actuator is controlled in such a way as to cause the arm 114 to descend
10 to an inactive position.

The auxiliary support 110 is flanked by two secondary support devices 121 which are disposed on opposite sides of the device 110 and have a similar structure. The devices
15 121, among other things have a plurality of upper suckers 123 and lower suckers 122 the function of which is analogous to that of the suckers 119 and 120.

As illustrated in Figures 1, 2 and 6, a robust supporting
20 column 124 is fixed to the floor on the side of the base 32 opposite that facing the press 1, which column includes two facing box-like uprights 125. Between the uprights 125 there is located a robust oscillating box-like arm 126 supported by the uprights 125 by means of a pin 128.

25

In one of the uprights 125 there is incorporated a vertical actuator 130 (Figure 2). Associated with the arm of the actuator 130 there is a pulley block 132 for a chain 134 anchored to the arm 126.

30

Finally, the arm 126 carries a beam 14 which carries spaced pincers 12 at its front and is mounted so as to be rotatable through 180° at the free upper end of the oscillating arm 126.

35

Within the arm 126 there is incorporated a double acting longitudinal pneumatic actuator 136 which controls the rotation of the beam 14 about the support axis on the arm 126 by means of a chain transmission 138.

5

The structure comprising the arm 126, the beam 14 and the pincers 12 can be made to oscillate, by means of the actuator 130, between the inclined position illustrated in solid outline in Figure 2 and the vertical raised position
10 illustrated in broken outline in Figure 2.

In Figure 2 the beam 46 and one of the support arms 74 of the manipulator heads 10 are shown in solid outline in the lowermost position of greatest advance towards the press 1,
15 and in broken outline in the uppermost and most retracted position. The reference numeral 139 indicates the manipulation space within which the common axis of rotation of the manipulator head 10 and the auxiliary support head 116 can move.

20

Referring to Figures 5 and 6, the beam 14 has a pair of longitudinal guides 140 along which are mounted four slides 142 which are manually displaceable and lockable on the guides themselves in the positions considered most
25 convenient.

As illustrated in Figure 5, each slide 142 has fixed to it the cylinder 144 of a double acting pneumatic actuator 146. The arm of the actuator 146 is indicated 148 and projects
30 forwardly with respect to the beam 14.

The cylinder 144 carries a bracket 150 which surrounds the arm 148 and carries a transverse pin 152. The pin 152 constitutes a central fulcrum for the two symmetrical jaws
35 154 of the auxiliary pincer 12.

Each jaw 154 is provided with a pair of lateral rollers 156. The arm 148 is provided with a front plate 158 with which the rollers 156 cooperate.

- 5 Between the plate 158 and each jaw 154 are interposed tension coil springs 160 hooked into respective cavities or seats of the plate and the jaw.

10 The arrangement is such that when the actuator 146 and the plate 158 are retracted, the springs 160 maintain the pincer 12 open with the jaws 154 separated, as illustrated in solid outline in Figure 5.

When pressure is introduced into the actuator 146 the arm 15 148 advances and the plate 158 presses on the rollers 156 forcing the jaws 154 to close. This situation is illustrated in broken outline in Figure 5.

In Figure 12 the interconnections between the electronic 20 control unit 7 and the various devices connected to it and controlled by it are shown schematically. In particular, the electronic unit 7 controls the press 1, the manipulator device 4, the loader device 5, and the discharge table 6 (if automated with a device for removing the finished 25 pieces from the plane 30). The electronic unit 7 is moreover provided with a portable keyboard 11 and a keyboard 8 utilised to create a sequence of control signals in a manner which will be explained clearly hereinbelow. The electronic unit 7 is finally provided with a video 9 30 for visualisation of the sequence of control signals, and can be connected to an external unit 480, indicated in broken outline, which can be utilised both for the generation and for the memorisation of sequences of control signals.

In Figure 7 there is shown the profile of a shaped workpiece 499 having six parallel bend lines 200, 210, 220, 230, 240 and 250 obtained from a flat metal sheet 23 of rectangular form by a bending cycle which will be described in detail with reference to Figures 8a to 8q.

In these Figures 8a-8q the bending press 1 is schematically illustrated as comprising the lower die 2 and the upper die 3. In the illustrated example the die 2 is fixed, whilst the die 3 is reciprocally movable in a vertical working plane. The die 2 has a hollow profile with a dihedral angle and the die 3 has a complementary convex profile with a dihedral angle. In the example illustrated the dihedral angle is 90° and is symmetrical with respect to the working plane.

As previously mentioned, the manipulator device 4 comprises a pair of manipulator heads 10 which carry respective manipulator pincers 72 and 73. These pincers 72 and 73 are illustrated in Figures 8a-8q in a different position from that illustrated in Figure 3; in particular the pincers 72 and 73 have gripper openings on the same side of the head 10 and are movable in unison and in opposition (closure and opening) with respect to one another.

Each manipulator head 10 is mounted rotatably about an axis 150 common to the two heads.

With reference to Figure 8a, the metal sheet 23, after it has been released by the loader device 5, is taken by the manipulator device 4, and in particular is gripped by the manipulator pincers 72 thereof, which carries it between the dies 2 and 3 of the press 1, which are still in the open position. The heads 10 are caused to rise simultaneously until they carry the sheet 23 onto the die 2

with the rear edge of the sheet 23 coming into contact with the ends 68 of the sensors 66; in this way the sensors 66 emit a signal which indicates that the sheet 23 has reached, within the interior of the press 1, the
5 predetermined position for the formation of the first bend 200 at the predetermined height. The die 2 and the die 3 are then caused to advance towards one another in such a way as to retain the sheet 23 without bending it.

10 In the subsequent phase the two manipulator pincers 72 open and the two heads 10 move apart disengaging the sheet 23.

The following phase is the bending phase in which the die 3 is further lowered and forms the bend 200 in the sheet 23.

15

At the end of this bending operation, as can be seen in Figure 8b, there are formed two leaves 205 and 206 in the sheet 23, which form between them an angle of about 100° .

20 In the subsequent phase, also illustrated in Figure 8b, whilst the sheet 23 is still clamped between the two dies 2 and 3, the heads 10 rise and rotate assuming an attitude such that the pincers 72 lie in a gripping plane which coincides with the plane of the leaf 206 facing the pincers
25 72, and can regrip the sheet 23.

After the sheet 23 has been gripped again the die 3 rises and the heads 20 move away from the press 1 until they reach the region of the auxiliary pincers 12 as
30 schematically shown in Figure 8c.

The auxiliary pincers 12 lie in an inclined gripping plane. To permit the gripping of the sheet 23 by the auxiliary pincers 12, in their rising motion moving away from the
35 press 1 the heads 10 have been caused to rotate in such a

way as to carry the leaf 206 of the sheet 23 into correspondence with this plane. As illustrated in Figure 8c, the auxiliary pincers 12 grip the longitudinal edge of the sheet 23.

5

In the subsequent phase the manipulator pincers 72 disengage from the lateral edges of the sheet 23 and move away.

- 10 In the following phase (Figure 8d) the manipulator heads 10 rotate through more than 180° about their axis 150 and the manipulator pincers 73 grip the edge of the leaf 205 of the sheet 23, whilst the auxiliary pincers 12 subsequently open and move away with the raising of the arm 126.

15

In the next successive phase the two heads 10 are again lowered, turning about the axis 150, and advanced to bring the leaf 206 of the sheet 23 to rest on the edges of the die 2. As illustrated in Figure 8e, the sheet 23 is rested
20 on the die 2 in such a way that the rear edges of the leaf 206 are aligned with the ends 68 of the sensors 66 positioned along the Y axis at a height corresponding to the production of the second bend 210.

- 25 Subsequently the die 3 descends to the position shown in Figure 8e and the manipulator pincers 73 release the sheet 23 retained between the two dies.

In the following phase (Figure 8f) the die 3 descends
30 further forming the second bend 210.

Then the heads 10 rise again and upon turning grip the leaf 205 of the sheet 23 with the pincers 73.

In the subsequent phase (Figure 8g) after the press 1 has opened again, the heads 10 are reorientated, positioning the leaf 206 of the sheet 23 in such a way that its edge comes into contact with the sensors 66, repositioned for the production of the third bend 220. The sheet 23 is then locked in the press 1, released by the pincers 73, and then the third bend 220 is formed (Figure 8h).

Subsequently the head 10 performs a rotation about its axis 150 and translates gripping the sheet 23 by means of the pincers 72 (Figure 8h).

In the following phase the press 1 is opened again and the leaf 206 of the sheet 23 is inserted between the die 2 and the die 3 until the rear edge comes into contact with the sensors 66 as illustrated in Figure 8i, for the production of the fourth bend 230. Subsequently the sheet 23 is released from the pincers 72 and the press 1 forms the fourth bend 230. As can be established from Figure 8j, after the production of the fourth bend a part of the leaf 206 of the sheet 23 envelops the die 3. This prevents or renders difficult the disengagement of the sheet 23 from the die 3 during its rising movement.

The two heads 10 gripping the sheet 23 with the pincers 72 are therefore raised and simultaneously rotated about their axis of rotation 150 during the elevation of the die 3 so as to release the sheet 23 from the die 3 (tracking).

After the sheet 23 has been completely removed from the press 1 the heads 10 move completely away from the press 1 to reach the auxiliary pincers 12 as schematically shown in Figure 8l.

The auxiliary pincers 12 grip the edge of the leaf 205 of the sheet 23 (Figure 8l) along its longitudinal edge, and the manipulator pincers 72 disengage from the lateral edges of the leaf 206; subsequently (Figure 8m) the auxiliary pincers 12 invert the sheet 23 by rotation of the beam 14, then the manipulator pincers 72 grip the leaf 205 of the sheet 23 again, and finally the auxiliary pincers 12 open and move away.

10 In the next successive phase (Figure 8n) the two heads 10 move down again, reorientate themselves with the gripper plane of the pincers 72 horizontal and advance to carry an edge of the leaf 205 of the sheet 23 into contact with the sensors 66 at the height prearranged for the production of the fifth bend 240.

Subsequently the manipulator pincers 72 release the sheet 23 retained between the die 2 and the die 3, and the die 3 descends to the position corresponding to Figure 8o, and forms the fifth bend 240.

Subsequently the pincers 72 grip the leaf 206 of the sheet 203 again, the press 1 is re-opened and the head 10 displaced in such a way as to position the leaf 205 of the sheet 23 as illustrated in Figure 8p. After this the sheet 23 is locked between the die 2 and the die 3 and the pincers 72 open releasing the sheet 23. Finally the press 1 closes further (Figure 8q) in such a way as to form the sixth and final bend 250 in the leaf 205 of the sheet 23. After this the pincers 72 grip the completely shaped piece 499.

The press 1 is then re-opened and the manipulator device 4 moves to the discharge table 6 where the pincers 72 release the workpiece 499 which falls onto the plane 30 of the table 6.

In the working cycle just described it has been supposed, for simplicity, that the pincers 72 and 73 always grip the leaf of the sheet 23 closest to the fold to be formed, but the programme of the working cycle can arrange, for certain
5 bending phases, for the farther leaf to be gripping.

The creation in the electronic unit 7 of the command and control signals for a sheet metal bending cycle of the type illustrated above is conveniently achieved by means of the
10 system described in the said Patent application by the same applicant entitled "System for the Automatic Creation of Command and Control Signals for the Phases of the Operating Cycles of a Robot Manipulator Device of a Sheet Metal Bending Installation".

15 The electronic unit 7 is in fact provided with a programme by which it is possible, by means of the portable keyboard 11 (hand box), or possible by means of the keyboard 8, to define a complete sequence of operating phases which can be
20 performed by the sheet metal bending installation 500.

With particular reference to Figure 11 the keyboard 11 is provided with a plurality of function keys 260 each of which is adapted to define a complete sequence of command
25 and control signals for the sheet metal bending installation 500, for a respective phase in the cycle by which a shaped sheet metal profile is formed, for example of the type illustrated in Figure 7. These sequences of control and command signals, corresponding to each of the
30 function keys 260, are conveniently memorised in a memory block of the electronic unit 7.

In particular, the keys 260 are indicated with a letter "F" to define that this key is a function key, and with a
35 number, indicated after the letter "F", to distinguish the

various operating functions which can be achieved by means of the keys 260.

With reference to Figure 11, the various function keys 260 are listed and their significance is explained as follows:

- F1. - command opening of the pincers 72
- F2. - command closure of the pincers 72
- F3. - command opening of the pincers 73
- F4. - command closure of the pincers 73
- 10 F5. - raise the auxiliary metal sheet support device 110 and command activation of the upper suckers 120
- F6. - raise the auxiliary metal sheet support device 110 and command activation of the lower suckers 119
- 15 F7. - command lowering of the auxiliary metal sheet support device 110 and deactivate the suckers 119 and 120
- F8. - raise the auxiliary metal sheet support devices 110 and 121 and command activation of the upper suckers 120 and 123
- 20 F9. - raise the auxiliary metal sheet support devices 110 and 121 and command activation of the lower suckers 119 and 122
- 25 F10. - command lowering of the auxiliary metal sheet support devices 110 and 121, and deactivate the suckers 119, 120, 122 and 123
- F13. - command closure of the auxiliary pincers 12 and approach of the beam 14 to the press 1
- 30 F14. - command opening of the auxiliary pincers 12 and approach of the beam 14 to the press 1
- F15. - command rotation of the beam 14 and then inversion of the metal sheet 23
- 35 F17. - execute the alignment procedure to align the metal sheet 23 against the rear sensors 66 of

- the press 1, and grip, without deformation, the metal sheet 23 between the die 2 and the die 3
- 5 F18. - command the press 1 to perform the bending operation on the sheet 23 between the die 2 and the die 3
- F19. - command opening of the press 1 and disengagement of the metal sheet 23 from the press 1 when a part of the sheet 23 envelops the die 3 (tracking), with simultaneous displacement of the manipulator heads 10
- 10 F20. - command opening of the press 1 and disengagement of the metal sheet 23 from the press 1 without displacement of the manipulator heads 10
- 15 F21. - command initiation of the alignment procedure of the metal sheet 23 within the press 1, with the required positioning of the sensors 66 along the Y axis
- F22. - command loading of the sheet 23 by the loader device 5 by activation of the suckers 28 and displacement of the beam 24 into the gripping position for the manipulator device 4.
- 20 F23. - command separation of the sheet 23 from the loader device 5 by disactivation of the suckers 28
- 25 F24. - command the execution of an initial positioning procedure of the auxiliary metal sheet support devices 110 and 121, and of the beam 14.
- 30 The keyboard 11 (hand box), is also provided with other keys which can also be used in combination with the function keys 260 to define other instructions which can be executed by the sheet metal bending installation 500. In particular, the keyboard 11 includes a key 261 indicated
- 35 with the symbol "MOVE" adapted to define command signal

instructions for translation of the manipulator device 4 along three axes X, Y and Z. The "MOVE" key 261 is also able to define instructions for signals commanding rotation of the heads 10 about their common axis 150, displacement of the head 10 along the axis X, and finally rotation of the beam 14 and inclination of the arm 126.

The "MOVE" key 261 is utilised jointly with other keys on the keyboard 11 to define a vector which comprises all the movements listed above and definable by the "MOVE" key itself.

For the definition of these movements the (hand box) keyboard 11 includes:

- 15 two keys 262 indicated "X+" and "X-" operable to impart to the beam 46 of the manipulator device 4 a movement in one direction or the other along the X axis; two keys 263 indicated "Y+" and "Y-" operable to impart to the beam 46 of the manipulator device 4 a movement in one direction or the other along the Y axis;
- 20 two keys 264 indicated "Z+" and "Z-" operable to impart to the beam 46 of the manipulator device 4 a movement in one direction or the other along the Z axis;
- 25 two keys 265 indicated "A+" and "A-" operable to impart to the heads 10 a clockwise rotation or an anti-clockwise rotation about their common axis 150;
- 30 two keys 266 indicated "B+" or "B-" operable to displace the heads 10 in one direction or the other along the X axis simultaneously and in opposite directions;
- 35 two keys 267 indicated "C+" and "C-" operable to impart to the beam 14 a clockwise or an anti-clockwise rotation about the central support axis of the arm 126;

and two keys 268 indicated "D+" and "D-" operable to impart to the arm 126 a clockwise or an anti-clockwise rotation about the pin 128.

5

Purely by way of non-limitative example, there will now be indicated a vector which includes the instructions for the command signals defined with the "MOVE" key 261 together with the keys 262-268.

10

This vector can be of the form:

MOVE ($\pm X$, $\pm Y$, $\pm Z$, $\pm A$, $\pm B$, $\pm C$, $\pm D$)

where MOVE is the instruction defined by the key 261 and X, Y, Z, A, B, C and D are the numerical values inserted by means of the keys 262-268 which represent how far and in which direction the beam 46 of the manipulator 4, the heads 10, the beam 14, and the arm 126 must move with respect to an initial position.

20 Moreover it can happen that it is necessary to impart to the manipulator 4 or to the heads 10 instructions to perform consecutive movements; in this case the key 261 can be utilised successively to create a sequence of vectors of the type:

25

MOVE ($\pm X_1$, $\pm Y_1$, $\pm Z_1$, $\pm A_1$, $\pm B_1$, $\pm C_1$, $\pm D_1$)
MOVE ($\pm X_2$, $\pm Y_2$, $\pm Z_2$, $\pm A_2$, $\pm B_2$, $\pm C_2$, $\pm D_2$)
MOVE (.....)
MOVE ($\pm X_n$, $\pm Y_n$, $\pm Z_n$, $\pm A_n$, $\pm B_n$, $\pm C_n$, $\pm D_n$)

30 The keyboard 11 further includes a "MEM" key 269 for memorisation of the previously made key selections, and the manner of operation of this will be described in more detail below.

Figure 9 is a flow chart illustrating the operations performed by the electronic command unit 7 to create the basic sequence of command and control signals for the bending installation 500 so as to be able then to perform the bending cycle previously described to produce the profile illustrated in Figure 7.

With reference to Figure 9 the initial block 270 detects if the creation of a new sequence of operating phases has been requested by the operator, for example with the selection on the keyboard 8 or 11, or if the execution of previously memorised operating phases has been requested.

If the creation of a new sequence has been requested the system passes from block 270 to block 272 which detects if a key of the keyboard 11 (hand box) has been pressed. In the negative case it remains in closed cycle in this block waiting for a key to be pressed. If a key has already been pressed, from block 272 the system passes to a block 273 which detects if a function key 260 has been pressed. In the positive case, from the block 273 it passes to a block 274 which commands execution of the phases determined by the function key 260 which has been pressed. From block 274 it passes to a block 275 which detects if the memorisation of the selected function key has been requested by means of the key 269. In the positive case it passes to a block 276 which effects memorisation of the command signals defined by the selected function key 260, and the successive return to the block 272 to wait for a new selection on the keyboard 11. If this memorisation has not been requested, it returns from block 275 to block 272 directly.

Returning to block 273, if this block detects that a function key 260 has not been pressed it passes to a block

277 which detects if the key pressed is the key 261 defining a sequence of movements. If a key has been pressed which is not a key defining a sequence of movements, it moves from block 277 onto a block 278 which
5 commands execution of the operation requested with this key, and subsequent exit from the programme. If the block 277 detects that the key 261 defining an instruction for movement has been pressed, it passes to a block 279 which commands execution of the movement requested by means of
10 the keys 262-268. From block 279 it then moves to a block 280 which detects if memorisation of the selected movements has been requested by means of the key 269. In the positive case it moves from block 280 to a block 281 which effects memorisation of the command signals defined with
15 the selected movement keys 262-268, and then returns to the block 272, whilst if such memorisation has not been requested, it returns from block 280 to block 272 directly.

On the other hand, if execution of previously memorised
20 operating phases is requested, as described with reference to blocks 272-281, it passes from block 270 to a block 271 which commands execution of these operating phases as will be explained in more detail hereinbelow. Subsequently, when execution of these operating phases is completely
25 finished, it exits from the programme.

Figures 10a and 10b are a flow chart illustrating its operation of the electronic unit 7 with the system of Figure 9, and define the sequence of command and control
30 signals for the bending installation 500 to perform the bending cycle previously described with reference to Figures 8a-8q to obtain the workpiece 499 of Figure 7. This arrangement therefore has a sequence of blocks which comprise instructions for movement of the parts of the
35 installation (heads 10, press 1, loader device 5 etc) or

instructions for the operation of the installation (defined by the said function keys 260).

With reference to Figures 10a and 10b, the process starts
5 initially at a block 300 which initiates the general
starting procedures of the programme. From block 300 it
passes to a block 301 which comprises the instructions for
the signals to command the loader device 5 to take up the
sheet 23 and for the lateral positioning of the bed 20 over
10 the sliding zone of the beam 46 on the guide 34; these
instructions are determined by activation of the function
key 260 indicated F22 on the keyboard 11.

From block 301 it passes to a block 302 by means of which
15 the predetermined initial positioning of the auxiliary
support devices 110 and 121 and of the beam 14 are defined;
this block having been created with the activation of the
function key indicated F24.

20 From the block 32 it passes to a block 303 comprising the
instructions for the signals commanding the pincers 72 to
open, determined by activation of the function key F1.

From block 303 it passes to a block 304 which comprises,
25 with a previously defined "MOVE" vector, the sequence of
instructions created by activation of the key 261 and keys
262 for the coarse movement signals defining the movement
of the manipulator device 4 towards the bed 20 for loading
the sheet 23.

30
It then passes to a block 307 which comprises the
instructions, created by activation of the key 261 and keys
262, 263, 264, 265, 266 for the final and precise movement
of the beam 46 and the gripper heads 10 of the manipulator
35 device 4 so as to carry it and the pincers 72 into the

gripping position at the edges of the sheet 23; from this block 307 it moves on to a block 308, defined by the function key F2, which comprises the instructions for the signals for commanding closure of the pincers 72 to grip
5 the sheet 23.

From block 308 it passes to a block 309 defined by the function key F8, which comprises instructions for command signals for raising the auxiliary support devices 110 and
10 121 which support the sheet 23, and activation of the suckers 120 and 123.

From the block 309 it then passes to a block 310 defined by the function key F23, which comprises the instructions for
15 separating the loader device 5 from the sheet 23 by means of disactivation of the suction from the suckers 28.

From block 310 it passes to a block 311 comprising, with the MOVE vector, the instructions for movement of the beam
20 46 of the manipulator 4 towards the press 1 (carrying the sheet 23); this block 311 is followed by a block 470, defined by the function key F21 which comprises the instructions for command signals for the sensor positioning procedure (sensors 66) which define the depth of alignment
25 of the sheet 23 into the press 1 (Figure 8a).

The block 470 is followed by a block 471 which comprises the instructions for the command signals for moving the heads 10 and the beam 46 of the manipulator device 4 to
30 bring the rear edge of the sheet 23 up to the sensors 66. From block 471 it passes to a block 312, defined by the function key F17, which comprises the instructions for signals commanding the procedure for alignment of the sheet 23 in the press 1, in the position for forming the first
35 bend 200, and lowering of the die 3 into contact with the sheet 23 to retain it in position.

The block 312 is followed by a block 313, defined by function key F1, which comprises the instructions for the command signals for opening the pincers 72.

- 5 From block 313 it passes to a block 314 which comprises the instructions for command signals for withdrawing the manipulator heads 10 from the manipulation space 139.

10 From the block 314 it moves onto a block 315 defined by the function key F18, which comprises the instructions for command signals to the press 1 to form the first bend 200.

15 From block 315 it passes to a block 316, defined by the activation of the function key F10, comprising the instructions for command signals to lower the support devices 110 and 121 and disactivate the suckers 120 and 123.

20 From block 316 it passes to a block 317 which comprises the instructions for the command signals for movement of the manipulator head 10 towards the bent sheet 23.

25 From block 317 it passes to a block 319 which comprises the instructions for command signals for the final and precise movement of the manipulator device 4 in such a way that the manipulator heads 10 arrive at a position such as to grip the folded sheet 23 (Figure 8b). Subsequently it passes from block 319 to a block 320, defined by function key F2, comprising the instructions for command signals for closure
30 of the pincers 72 to grip the sheet 23.

From block 320 it passes to a block 321, defined by function key F8, which comprises instructions for command signals to raise the auxiliary support devices 110 and 121
35 as already described.

From block 321 it passes to a block 322 defined by the activation of the function key F20, which comprises the instructions for command signals for opening the press 1 and release of the metal sheet 23.

5

From block 322 it then passes to a block 323 which comprises the instructions for the command and control signals for moving the manipulator 4 (which supports the bent sheet 23) towards the auxiliary pincers 12 (Figure 8c).

10

From block 323 it passes to a block 324 defined by the function key F13, which comprises the instructions for command signals for closure of the auxiliary pincers 12 to grip the sheet 23.

15

The block 324 is followed by a block 325, defined by function key F1, which comprises the instructions for the command signals for opening the pincers 72 to release the sheet 23.

20

From the block 325 it passes to a block 326 which comprises the sequence of instructions for command signals to withdraw the device 4 from the manipulation space 139.

25

From block 326 it passes to a block 327, defined by function key F10, comprising the instructions for the command signals for lowering the devices 110 and 121.

30 The block 327 is followed by a block 330 defined by function key F3, which comprises the instructions for opening the pincers 73.

From block 330 it passes to a block 331 which defines the commands for movement of the heads 10 of the manipulator

35

devices 4 towards the auxiliary pincers 12 to grip the sheet 23 again on the outermost leaf 205 (Figure 8d).

Subsequently, from block 331 it passes to a block 332, defined by function key F4, comprising the instructions for command signals to control closure of the pincers 73 to grip the sheet 23.

From block 332 it passes to a block 333 defined by function key F14, which comprises the instructions for the command signals to control the re-opening of the auxiliary pincers 12 to release the sheet 23.

From block 333 it passes to a block 334 which defines the commands for movement of the heads 10 of the manipulator device 4, with the sheet 23, towards the press 1.

The block 334 is followed by a block 335, defined by function key F21, which comprises the instructions for the signals to command the procedure for positioning the sensors 66 (Figure 8e).

The block 335 is followed by a block 336 which comprises the instructions for the command signals for movement of the heads 10 and the beam 46 of the manipulator device 4 to cause the rear edge of the sheet 23 to approach the sensors 66.

From block 336 it passes to a block 337 defined by function key F17, which comprises the instructions for command signals for the procedure for alignment of the sheet 23 in the press 1, and gripping it between the dies 2 and 3.

The block 337 is followed by a block 338, defined by function key F3, which comprises the instructions for signals commanding opening of the pincers 73.

From block 338 it passes to a block 340 which comprises the instructions for command signals for withdrawal of the heads 10 of the device 4 from the bending zone.

- 5 From the block 340 it moves on to a block 341, defined by function key F18, which comprises the instructions for command signals to the press 1 to form the second bend 210 (Figure 8f).
- 10 From block 341 it passes to a block 342 which comprises the instructions for the command signals for movement of the heads 10 of the manipulator device 4 towards the sheet 23, which now has the two bends 200 and 210.
- 15 The block 342 is followed by a block 343 which comprises the instructions for signals commanding the final and precise movement of the manipulator device 4 in such a way that the pincers 73 of the manipulator head 10 are moved to a position adapted to grip the leaf 205 of the bent sheet
20 23.

Subsequently, after the block 344 is passes to a block 345 defined by function key F4, which comprises instructions for command signals for closure of the pincers 73 to grip
25 the sheet 23.

From block 345 it passes to a block 346, defined by function key F20, which comprises instructions for command signals for opening the press 1 and release of the metal
30 sheet 23.

From block 346 it passes to a block 347 which comprises the instructions for command signals for controlling movement of the manipulator heads 10, for repositioning the metal
35 sheet 23 in the press 1.

The block 347 is followed by a block 350, defined by function key F21, which comprises the instructions for command signals for controlling the procedure for repositioning the sensors 66, for achieving the third bend
5 220 (Figure 8g).

The block 350 is followed by a block 351 which comprises the instructions for signals commanding the movement of the head and the beam 46 of the manipulator device 4 to bring
10 the rear edge of the sheet 23 up to the sensors 66.

From block 351 it passes to a block 352 defined by function key F17, which comprises the instructions for the signals commanding the procedure for alignment of the sheet 23 in
15 the press 1, and gripping it between the dies 2 and 3.

The block 351 is followed by a block 353, defined by the function key F3, which comprises the instructions for signals commanding opening of the pincers 73.
20

From block 353 it passes to a block 354 which comprises the instructions for signals commanding disengagement of the heads 10 of the device 4 from the bending zone.

25 From block 354 it passes to a block 355, defined by the function key F18, which comprises the instructions for signals commanding the press 1 to form the third bend 220 (Figure 8h).

30 The block 355 is followed by a block 356 defined by the function key F1, which comprises the instructions for the signals commanding opening of the pincers 72 to prepare them for the subsequent gripping of the sheet 23.

From block 356 it passes to a block 357 which comprises the instructions for signals commanding movement of the heads 10 of the manipulator device 4 towards the sheet 23, which now has three bends 200, 210, 220.

5

The block 357 is followed by a block 359 which comprises the instructions for the command signals for the final and precise movement of the manipulator device 4 in such a way that the pincers 72 of the manipulator heads 10 are moved
10 into a position adapted to grip the leaf 205 of the bent sheet 23.

Subsequently, after block 359 it passes to a block 360, defined by function key F2, which comprises the
15 instructions for the signals commanding closure of the pincers 72 to grip the sheet 23.

From block 360 it passes to a block 361, defined by the function key F20, which comprises the instructions for
20 signals commanding the opening of the press 1 and release of the metal sheet 23.

From block 361 it passes to block 364, defined by the function key F8, which comprises the instructions for
25 command signals to raise the auxiliary support devices 110 and 121, activating the suckers 120 and 123.

From block 364 it passes to a block 365 which comprises the instructions for command signals for the movement of the
30 manipulator heads 10, for repositioning the leaf 206 of the metal sheet 23 in the press 1.

The block 365 is followed by a block 366, defined by function key F21, which comprises the instructions for
35 command signals for the procedure for repositioning the sensors 66 for forming the fourth bend (Figure 8i).

The block 366 is followed by a block 367, defined by the function F17, which comprises the signals for commanding the procedure for alignment of the sheet 23 in the press, and gripping it between the dies 2 and 3.

5

The block 367 is followed by a block 368, defined by the function key F1, which comprises the instructions for the signals for commanding opening of the pincers 72.

- 10 From block 368 it passes to a block 370 which comprises the instructions for command signals for withdrawal of the heads 10 of the device 4 from the bending zone.

- 15 From block 370 it passes to a block 371, defined by function key F18, which comprises the instructions for command signals to the press 1 to form the fourth bend 230 (Figure 8j).

- 20 From block 371 it moves on to a block 372, defined by the function key F10, which comprises the instructions for command signals for lowering and disactivation of the auxiliary support devices 110 and 121.

- 25 From block 372 it passes to a block 373 which comprises the instructions for the command signals for movement of the heads 10 of the manipulator device 4 towards the sheet 23, which now has four bends 200, 210, 220 and 230.

- 30 The block 373 is followed by a block 375 which comprises the instructions for command signals for the final and precise movement of the manipulator device 4 in such a way that the pincers 72 of the manipulator heads 10 are disposed in a position suitable for gripping the leaf 206 of the bent sheet 23.

35

After the block 375 it passes to a block 376, defined by the function key F2, which comprises the instructions for command signals for the closure of the pincers 72 to grip the sheet 23.

5

From block 376 it passes to a block 377, defined by the function key F8, which comprises the instructions for command signals to raise the auxiliary support devices 110 and 121.

10

From block 377 it passes to a block 378, defined by the function key F19, which comprises the instructions for signals commanding opening of the press 1 and the simultaneous movement of the manipulator heads 10 for the disengagement of the metal sheet 23.

15

From block 378 it passes to a block 379 which comprises the instructions for command signals for the movement of the manipulator 4 (which supports the bent sheet 23) towards the auxiliary pincers 12 (Figure 81).

20

From block 379 it passes to a block 380, defined by the function key F13, which comprises the instructions for command signals for closing the auxiliary pincers 12 to grip the metal sheet 23.

25

From block 380 it passes to a block 381, defined by the function key F1, which comprises the instructions for command signals for opening the pincers 72 of the heads 10.

30

From block 381 it passes to a block 382 which comprises the instructions for command signals for withdrawal of the device 4 from the manipulation space 139.

From block 382 it passes to a block 383, defined by the function key F10, which comprises the instructions for command signals for lowering the devices 110 and 121.

- 5 From block 383 it passes to a block 384, defined by the function key F15, which comprises the instructions for command signals for rotating the beam 14 and lowering the sheet 23(Figure 8m).
- 10 From block 384 it passes to a block 385 which comprises the instructions for the signals commanding movement of the heads 10 towards the auxiliary pincers 12.

- From block 385 it passes to a block 450, defined by
15 function key F2, which comprises the instructions for signals commanding closure of the pincers 72.

- The block 450 is followed by a block 451, defined by
20 function key F14, which comprises the instructions for the command signals for opening the auxiliary pincers 12.

- From block 451 it passes to a block 452 which comprises the instructions for the command signals for movement of the head 10 towards the press 1.
25

- The block 452 is followed by a block 386, defined by function key F21, which comprises the instructions for signals commanding the procedure for a new positioning of the sensors 66 (Figure 8n).

- 30 The block 386 is followed by a block 387, defined by the function key F17, which comprises the instructions for signals commanding the procedure for alignment of the sheet 23 in the press 1 and gripping it between the dies 2 and 3.

The block 387 is followed by a block 388, defined by the function key F1, which comprises the instructions for signals commanding opening of the pincers 72.

- 5 From block 388 it passes to a block 390 which comprises the instructions for signals commanding withdrawal of the heads 10 of the device 4 from the bending zone.

10 From block 390 it passes to a block 391, defined by function key F18, which comprises the instructions for signals commanding the press 1 to form the fifth bend 240 (Figure 8o).

15 The block 391 is followed by a block 460 which comprises the instructions for command signals for movement of the heads 10 of the manipulator 4 towards the sheet 23 which now has five bends 200, 210, 220, 230 and 240.

20 The block 460 is followed by a block 392 which comprises the instructions for signals commanding the final and precise movement of the manipulator device 4 in such a way that the pincers 72 of the manipulator heads 10 are disposed in a position adapted to grip the leaf 206 of the bent sheet 23.

25

Subsequently, from block 392 it passes to a block 393, defined by the function key F2, which comprises the instructions for command signals for closing the pincers 72.

30

From block 393 it passes to a block 461, defined by function key F20, which comprises the instructions for signals commanding opening of the press 1, and release of the metal sheet 23.

35

The block 461 is followed by a block 394 which comprises the instructions for signals commanding the movement of the manipulator heads 10, and the repositioning of the metal sheet 23 in the press 1 (Figure 8p).

5

From block 394 it passes to block 395, defined by function key F21, which comprises the instructions for signals commanding the procedure for the new positioning of the sensors 66.

10

The block 395 is followed by a block 396, defined by the function key F17, which comprises the instructions for the signals commanding the procedure for aligning the sheet 23 in the press 1, and gripping it between the dies 2 and 3.

15

The block 396 is followed by a block 397, defined by the function key F1, which comprises the instructions for signals commanding the opening of the pincers 72.

20 From block 397 it passes to a block 400 which comprises the instructions for the signals commanding withdrawal of the heads 10 of the device 4 from the bending zone.

From block 400 it moves on to a block 401, defined by the
25 function F18, which comprises the instructions for the command signals to the press 1 to form the sixth, and final, bend 250 (Figure 8q).

From the block 401 it passes to a block 402 which comprises
30 the instructions for the command signals for movement of the heads 10 of the manipulator device 4 towards the finished workpiece 499.

The block 402 is followed by a block 404 which comprises
35 the instructions for the command signals for final and

precise movement of the manipulator device 4 in such a way that the manipulator heads 10 are disposed in a position adapted to grip the bent workpiece 499.

- 5 Subsequently, from block 404 it passes to a block 405, defined by the function key F2, which comprises the instructions for command signals for closure of the pincers 72.
- 10 From block 405 it passes to block 406, defined by the function key F20, which comprises the instructions for command signals for opening the press 1 and release of the workpiece 499.
- 15 From block 406 it passes to a block 410 which comprises the instructions for command signals for the movement of the manipulator device 4 to the position for transforming the workpiece 499 to the discharge table 6.
- 20 The block 410 is followed by a block 411, which comprises the instructions for command signals for the final and precise movement of the manipulator device 4 in such a way that one side of the workpiece 499 rests on the inclined support plane 30 of the discharge table 6.
- 25 From block 411 it passes to a block 412, defined by the function key F1, which comprises the instructions for command signals for opening the pincers 72 to release the workpiece 499.
- 30 From block 412 then it leaves the sheet bending phases definition cycle.

The flow chart illustrated in Figure 10 and described above
35 is then executed by the unit 7 by means of the command

block 271 (Figure 9) for performing the production cycle and producing the profile illustrated in Figure 7.

The advantages obtained with the first embodiment capable
5 of automatic creation of the command and control signals
for the phases of working cycles of a robot manipulator
device of a sheet metal bending installation are evident
from what has been described; in fact, by means of the
function keys 260, the operator selecting the appropriate
10 functional key originates a desired sequence (more or less
complex) of operating phases of the installation which can
be associated with possible other automatic functions for
controlling the performance of these preselected phases
and/or the sequencing thereof without having to define
15 every step of these phases.

The sequence of command signals, of the type described
above, is treated by the electronic unit 7, with the system
constituting the subject of the present invention, which
20 provides for increasing the working speed of the sequence
itself.

In particular, the electronic unit 7 comprises, as
illustrated in Figure 13, a first block 501 which checks if
25 a sequence of command and control signals for the
manipulator device 4 and the system 500 already exists; if
this sequence does not exist it exits from the programme,
on the other hand if this sequence does exist it passes to
a second block 502 which effects a first increase in the
30 speed of the sequence.

The block 502 acts on the instructions for displacement
command signals for the manipulator device 4, defined
conveniently with the "MOVE" key, and initially checks if
35 the "MOVE" type instructions are isolated, or if they are

grouped in a sequence. If the "MOVE" instructions are isolated they are not modified. If instead these "MOVE" type instructions are grouped in a set of two or more consecutive instructions the block 502 associates each instruction of the group with the following one.

In particular, the block 502 associates together the pairs of numerical values X, Y, Z, A, B, C, D of two consecutive "MOVE" instructions (which correspond to the position assumed by the heads 10 and the arm 126 with the beam 14 in a first and in a second position) in such a way as to approximate the trajectory passing through the said positions, and therefore to reduce the time taken for the displacement. This association operation is repeated for all the pairs of successive "MOVE" instructions in such a way that a movement of the heads 10 which has been defined by means of a complex trajectory constituting the sum of individual trajectories between a number of positions, is speeded up in that each individual trajectory is modified and recorded with the adjacent trajectories; it is therefore not necessary to have to stop in the intermediate positions, but only to stop in the final position, defined by the last "MOVE" instruction of the group, which has not been modified.

The block 502 further determines, before the said association between the "MOVE" instructions, a testing of the successive "MOVE" instructions at each bending phase of the press 1, and generates, before the sheet 23 is taken again by the heads 10, a synchronisation and control signal obtained after the bend execution command so as to allow the correct completion of the bending phase and subsequent secure gripping by the heads 10 without having to wait for completion of the bending phase before initiating the movement of the heads 10 towards the sheet 23.

In particular, with reference to Figure 14a, from block 502 it passes to a first block 509 which commands analysis of the first instruction of the flow chart illustrated in Figures 10a and 10b and formed as described, then moves on to a block 510 which detects if this instruction relates to the command for execution of a bend in the sheet 23, defined by the function key F18; if not it moves on to a block 511 which commands analysis of a subsequent instruction of the flow chart of Figures 10a and 10b, and then moves onto a block 512 which detects if this instructions is the last instruction of the cycle. If not it returns to the block 510, whilst if it is it moves on to a subsequent block 513. In the case of a positive condition detected by the block 510 it moves on to a block 560 which associates, to the block for commanding execution of a bend, conveniently defined by the function key F18, the commencement of a parallel sequence for obtaining this synchronisation and control signal T3, and then moves onto a block 515 which detects if the instruction under examination commands the final and precise positioning of the pincers 72 or 73 of the heads 10 at the sides of the sheet 23, which is detectable for example by means of the value of the dimension B of the "MOVE" instruction by referring it to the positioning of the heads 10 along the X-axis with respect to a central reference point on the beam 46, and testing if this value B is less than a value B1; if not this indicates that the instruction under examination still relates to a displacement before this final and precise positioning of the pincers 72 or 73 of the heads 10 against the edges of the sheet 23 so that it moves on to a block 516 which commands analysis of a subsequent instruction of the flow chart of Figure 10a and 10b, and then returns to the block 515, whilst if it is it moves on to a block 517 which imposes a delay on the synchronisation and control signal T3 until this

instruction is detected, and then moves on to the block 511 for continuation of the analysis of the instructions of the cycle. With this block 517 there is therefore introduced a block 517' to command the delay in the signal T3, between
5 the blocks 317 and 319 of Figure 10a, as can be seen in the final block diagram obtained according to the present invention and illustrated in Figures 15a and 15b, and similarly blocks 517' are inserted between the other pairs of corresponding blocks 342-344, 357-359, 373-375, 460-392,
10 402-404. Moreover, the block 560 links the commencement of the sequence to obtain the signal T3 to each of the blocks 315, 341, 355, 371, 391 and 401 for commanding the formation of a bend.

15 The block 513 then in turn commands analysis of the first instruction of the flow chart illustrated in Figures 10a, 10b then moves on to a block 520 which detects if this instruction is of the "MOVE" type, and if so moves on to a block 521 which detects if this instruction is isolated,
20 that is to say relates to a displacement between two individual points: if not it moves on to a block 522 which associates this "MOVE" instruction to the subsequent "MOVE" instruction as already indicated, and then moves on to a block 523 which commands the analysis of a subsequent
25 instruction of this block diagram of Figures 10a and 10b. It also moves directly to this block 523 following detection of the negative condition of the block 520 or the positive condition of the block 521. From block 523 it moves to block 524 which detects if this instruction is the
30 last one of the cycle. If it is not it returns to block 520, whilst if it is it exits from block 502.

Subsequently, from block 502 (Figure 13) it passes to a block 503 which effects the "parallelisation" of the
35 sequences of command signals of the operations for

discharge of the finished workpiece 499 onto the discharge table 6, loading of a new metal sheet 23 from the magazine 5, and movement of the heads 10. This means that the block 503 modifies and optimises the sequences of command signals relating to the movement of the manipulator device 4 and the loader device 5, in such a way that when the manipulator device 4 is positioned to release the finished workpiece 499 on the discharge table 6 the initiation of the new phase of loading a metal sheet 23 from the magazine 5 is commanded and, moreover, before the gripping of the new sheet 23 with the heads 10 there is a delay in the synchronisation and control signal T2 following the command for the sheet 23 to be lifted by the loading device 5 so as to allow the correct positioning of the sheet 23 over the beam 46 by the loading device 5.

In particular, with reference to Figure 14b, within block 503 there is a first block 529 which commands analysis of the first instruction of the flow chart illustrated in Figures 10a and 10b, which then moves on to a block 530 which detects if this instruction relates to the command to form a final bend in the sheet 23, defined by the function key F18; in the negative case it moves on to a block 531 which commands analysis of a subsequent instruction of this block diagram of Figures 10a and 10b, and then returns to block 530, whilst in the positive case it moves on to a subsequent block 532 which detects if the instruction under examination commands the final and precise positioning of the manipulator device 4 in such a way that the workpiece 499 is lowered on to the inclined plane 30 of the discharge table 6, detectable for example by means of the value of the dimension Z of the move instruction referring to the positioning of the height of the heads 10, and checking if this value Z is greater than a value Z1; in the negative case this indicates that the instruction under examination

still relates to a displacement preceding this final and precise positioning of the heads 10 with respect to the discharge table 6 so that it moves on to a block 533 which commands the analysis of a subsequent instruction of the flow chart of Figures 10a and 10b, and then returns to the block 532, whilst in the positive case it moves on to a block 534 which causes the loading device 5 to commence lifting the sheet 23 and positioning it over the sliding zone of the beam 46, and moreover causes the commencement of a parallel sequence for obtaining the synchronisation and control signal T2. In particular this block 534 inserts a block 301' functionally similar to the block 301 of Figure 10a, between blocks 411 and 412 of the Figure 10b flow chart, as can be seen in the final flow chart shown in Figure 15b.

From block 534 it moves on to block 535 which determines the delay in the signal T2 before the final and precise movement of the beam 46 and the gripper heads 10 of the manipulator device 4 to the grip position to grip the sides of the sheet 23, which is defined by the block 307 of Figure 10a. With this block 535 there is therefore inserted a block 535' for commanding a delay in the signal T2, after the block 412 and before a block 307, as can be seen in the final flow chart according to the present invention and illustrated in Figure 15b; this block 307 is then followed by a block 308 and thereafter, as illustrated in Figure 10a, by a new bending cycle. With reference to Figure 14b, from block 535 it exits from block 503, and from block 503 (Figure 13) it exits from the system of the present invention for increasing the speed of operation of the sequence of command and control signals for the bending installation 500.

The flow charts of Figures 15a and 15b described above can be executed by the unit 7 by means of the command block 271 (Figure 9) for the execution of the production cycle and the production of the profile illustrated in Figure 7.

5 The advantages obtained with the system of the present invention for increasing the speed of operation of a robot manipulation device of a sheet metal bending installation are evident from what has been described; in fact, after an
10 operator has defined an operating cycle the electronic unit 7 automatically associates the instructions which command movements between successive points therefore avoiding unnecessary stops at intermediate points in the trajectory; moreover, there is an operative association of various
15 phases of the cycle which can be effected contemporaneously, and, for security, there are also inserted delay signals for synchronisation and control of the command instructions connected to the phases which are commanded simultaneously, to guarantee that a following
20 phase is only performed after the preceding phase has been completed.

Referring to Figs. 16a, 16b-22 as well as Figs. 1-11, a second embodiment of the present invention will now be
25 described.

The arrangement of the second embodiment differs from that of the first embodiment in the arrangement shown in Figs. 16a, 16b-22.

30 In the system constituting the second embodiment of the present invention, a sequence of command signals of the type described above, and defined for a given bending installation, is modified automatically by the electronic
35 unit 7 on the basis of the dimension of the bending installation on which it effectively operates.

More precisely, a sequence of command signals, for example those utilised to form the profile illustrated in Figure 7, is created by controlling a bending installation having a given configuration utilised as a reference for all the other bending installations; this specimen bending installation will be indicated hereinafter with the term "master" and all the other similar bending installations assembled subsequently will be indicated with the term "slave".

10

The second embodiment of the present invention operates to perform a series of tests on the "master" installation and on the "slave" installation, to detect by how much certain dimensions of the configurations comprising parts of the "slave" installation differ from the corresponding dimensions of the "master" installation, and to modify the sequence of command signals utilised on the "slave" installation (but defined for the "master" installation) in such a way that this sequence of command signals controls the "slave" bending installation in an absolutely correct and precise manner.

To detect the difference between the "master" installation and the "slave" installation dimensional checks are made on these, and a first and a second metal specimen block are utilised, illustrated in Figures 16a and 16b, and indicated with the numerals 702 and 707, which are respectively gripped by the auxiliary pincers 12 and by the pincers 72 and 73 of the heads 10, and serve as abutment elements for the detection of various dimensions of these installations, as will be described hereinbelow.

The first specimen block 702 includes a first flat portion 703 shaped as a rectangular parallelepiped from one end of

which extend two portions 704 of greater thickness, which terminate with flat front surfaces 705. These appendices 704, moreover, are inclined with respect to the portion 703 by an angle gamma (γ) equal to about 130° so as to be
5 divergent from one another.

The second specimen block 707 comprises a flat parallelepiped main portion 708 from the front of which extends a coplanar projection 709 of reduced thickness
10 which terminates with a flat front surface 710.

The portion 708 has a second portion 711, which extends laterally of the portion 708 in a direction perpendicular to the first projection 711, and terminates with a flat
15 front face 712 which functions as an abutment element in a manner which will be clarified hereinbelow, moreover this portion 711 has an end part 714 of greater thickness at the top, the surface of which will also be utilised as will be seen in detail.

20

There will now be described, with reference to Figures from 17 to 19, the three predetermined configurations used in the system of the present invention, in which the dimensions of the bending installations 500 are detected by
25 positioning the specimen blocks 702 and/or 707, and in particular the position of the loading device 5 is detected, as is that of the discharge table 6 and the auxiliary support unit 124 with respect to the manipulator device 4.

30

To obtain the first of these predetermined detection configurations (Figure 17) the blocks 702 and 707 are firmly gripped, respectively, by an auxiliary pincer 12 of the auxiliary support group 124, and by a pincer 72 of the
35 manipulator heads 10; in particular, the jaws 154 of the

pincer 12 close on the free end faces of the flat portion 703 of the block 702, and the jaws 96 and 106 of the pincer 72 close on the faces of the main portion 708 of the block 707.

5

The auxiliary support group 124 and the manipulator device 4 are then moved, conveniently by means of the keyboard 11 and the associated movement keys as described hereinabove, in such a way that the box-like arm 126 is tilted down
10 towards the press 1, and consequently the beam 14, which carries the auxiliary pincers 12 is likewise lowered so that the axis of the upper portion 704 of the block 702 is located horizontally; the manipulator head 10 which carries the block 707 is in turn displaced until it approaches the
15 block 702, and the flat front face 712 of the block 707 comes into contact with the side wall of the portion 704 with the upper front edge of the end wall 714 fitting together with the upper side edge of the portion 704.

20 The dimensions (X, Y, Z, A, B, C, D) relating to this first configuration and which identify the position of the auxiliary support group 124 with respect to the manipulator device 4 are then memorised in a manner which will be clarified hereinbelow.

25

In the second predetermined detection configuration (Figures 18a and 18b) the position of the loader device 5 is modified with respect to the manipulator device 4, with reference to the positioning of the sheet 23 for gripping
30 with the manipulator heads 10.

To effect this detection an operator imparts to the loader device 5 the instruction to load a sheet 23 so that the suckers 28 grip this sheet 23 which is then raised by the
35 beam 24, and positioned between the loader device 5 and the

discharge table 6 in the gripping zone of the heads 10. At this point the operator, for example still by means of the keys on the keyboard 11, causes the beam 46 to move along the X axis towards the magazine 5, and causes the head 10 carrying the block 707 to move, as has already been described in the first detection configuration, until the upper front edge of the end wall 714 of the block 707 comes into contact with the lateral edge of the sheet 23 (which is rectangular) parallel to the Y axis (Figure 18a) with the central axis of the upper wall of this part 714, coincident with the central axis of the sheet 23 (along the X axis).

This second detection configuration can also be effected with a pair of blocks 707 carried by the pair of heads 10 against the parallel lateral edges of the sheet 23 (Figure 18b). The dimensions X, Y, Z, A, B of this second configuration and which identify the position of the sheet 23, and consequently of the supporting loading device 5, with respect to the manipulator device 4, are also memorised as will be described below.

In the third of the predetermined detection configurations (Figure 19a) the position of the discharge table 6 with respect to the manipulator device 4 is checked.

To effect this detection an operator, again conveniently utilising the keyboard 11, moves the beam 46 until the heads 10 are located in front of the discharge table 6. Subsequently the heads 10 which carry a respective block 707 as already illustrated for the preceding detection configurations, are raised and caused to rotate in such a way that the block 707 is located in front of the support bed 30 with the projection 709 facing towards this bed 30 and positioned on parallel inclined planes.

Finally, as is visible in the detail of Figure 19b, the heads 10 are caused to translate slowly until the lower edge of the front wall 710 of the projection 709 comes into contact with the front edge of the table 30. Again the dimensions (X, Y, Z, A, B) of this third detection configuration, which identify the position of the support bed 30 of the table 6 with respect to the manipulator device 4 are memorised.

10 In Figure 20 there is illustrated in detail a flow chart of a first operating stage of the system according to the present invention, conveniently effected with a command and control unit 7 of the specimen installation, in which the dimensions (X, Y, Z, A, B, C, D) relating to the
15 predetermined detection configurations and described hereinabove with reference to Figures from 14 to 16 are memorised for this "master" specimen bending installation 500.

20 In particular it has a block 731 which, after the first predetermined detection configuration has been reached (Figure 17) by means of a key of the keyboard 11 selected by an operator, commands a memory block of the unit 7 to acquire a first set of dimensions which defines the
25 position of the auxiliary support unit 124 with respect to the manipulator device 4 in the master installation.

Conveniently this block 731 can preliminarily present on the video 9 a schematic illustration such as that shown in
30 Figure 17, which serves as a guide for the operator for the configuration which must be achieved. After memorisation of this first set of dimensions has taken place, from the block 731 it passes to a block 732 analogous to block 731 it passes to a block 732 analogous to block 731 which,
35 after the second predetermined detection configuration has

been reached (Figure 18a) conveniently preliminarily shown on the video 9, commands the acquisition of the second set of dimensions which define the position of the loader device 5 with respect to the manipulator device 4 of the master installation.

From the block 732 it then passes to a block 733 analogous to the two preceding blocks and which, after the third predetermined detection configuration (Figure 19a) has been reached, commands the acquisition of the third set of dimensions which define the position of the discharge table 6 with respect to the manipulator device 4 of the "master" installation.

The block 733 is followed by a block 736 which provides for regrouping of the said first, second and third sets of dimensions in a form which can be extracted from the electronic unit 7.

In Figure 21 there is illustrated in detail a flow chart of a second operating stage of the system of the present invention, conveniently put into effect with the command and control unit 7 of the slave installation to be tested, in which the dimensions (X, Y, Z, A, B, C, D) relating to the three predetermined detection configurations described hereinabove with reference to Figures from 17 to 19 are detected in this "slave" installation and memorised. These dimensions are then compared with the previously detected corresponding dimensions of the "master" installation, and there is then performed, in an automatic manner, an adaptation of the sequence memorised in a sample installation of the command and control signals defining a bending cycle for the said installation.

In particular, it has a first block 740 which tests if the three sets of "master" installation dimensions for the three configurations defined hereinabove have been already memorised in the electronic unit 7 of the assembled "slave" installation 500. In the negative case it exits from this stage, whilst in the positive case it passes from block 740 to a block 731', analogous to the block 731 of Figure 20, which, after the first predetermined detection configuration has been reached by the "slave" installation (Figure 17) commands, by means of a key of the keyboard 11 selected by an operator, effects the acquisition in a memory block of the unit 7 of the "slave" installation 500, of a first set of dimensions which define the position of the auxiliary support unit with respect to the manipulator device 4. Conveniently this block 731' can also preliminarily present to the operator, on the video 9, a schematic illustration of the detection configuration which must be reached. After memorisation of this first set of dimensions of the slave installation has taken place it passes from the block 731' to a block 732', analogous to the block 732 of Figure 20, which after the second predetermined detection configuration has been reached by the slave installation (Figure 18a) commands the acquisition of the second set of dimensions which define the position of the loader device 5 with respect to the manipulator device 4 of the slave installation.

From block 732' it passes to a block 733', analogous to the block 733 of Figure 20, which, after the third predetermined detection configuration of the "slave" installation has been reached (Figure 19a) commands the acquisition of the third set of dimensions which define the position of the discharge table 6 with respect to the manipulator device 4.

The block 733' is followed by a block 746 which provides for monitoring the compatibility of the dimensions of the "master" installation with those of the "slave" installation indicative of the correct assembly of the "slave" installation. This block 746 tests by how much the dimensions of the "master" in each of the three detected configurations differ from the corresponding dimensions of the "slave" installation, and if this difference exceeds predetermined limit values previously defined and memorised in the electronic unit 7 the block 746 provides a display on the video 9 of the dimensions exceeding the normal, and activates an acoustic alarm signal so that the operator can arrange for rectification of the assembly of the bending installation 500.

If on the other hand all the dimensions of the "slave" system in the three configurations differ from the corresponding dimensions of the "master" installation by an amount less than the limit value, it passes from block 746 to a block 747 without any alarm indication.

If the differences between the corresponding dimensions exceed the limit values the block 747 determines the end of the dimensional testing stage according to the present invention, whilst on the other hand if all these differences are less than the limit values it passes to a block 748 which acts to effect automatic correction of a memorised sequence defined on a specimen system for the command and control signals defining a bending cycle to be performed on the "slave" installation 500.

The block 748 of Figure 21 is illustrated in detail in Figure 21. It starts with a block 751 which recalls from the memory of the electronic unit 7 the corresponding dimensions for the three predetermined detection

configurations of the "master" and "slave" installations, compares them and finally calculates the associated differences; in particular a first block 900 calculates the differences X_1 , Y_1 , Z_1 , A_1 , B_1 , C_1 , D_1 between the dimensions X , Y , Z , A , B , C memorised by the blocks 731 and 731' in the first detection configuration, a second block 901 calculates the differences X_2 , Y_2 , Z_2 , A_2 , B_2 , C_2 , D_2 between the dimensions X , Y , A , B , C , D memorised by the blocks 732 and 732' in the second detection configuration, and a third block 902 calculates the differences X_3 , Y_3 , Z_3 , A_3 , B_3 , C_3 , D_3 between the dimensions X , Y , Z , A , B , C , D memorised by the blocks 733 and 733' in the third detection configuration.

From the block 751 it passes to a block 752 which re-examines the created sequence of command signals (for example of the type described with reference to Figures 10a and 10b) and searches within this sequence of instructions for command signals produced with the MOVE key and thus expressed in the form $\text{MOVE } (+X, +Y, +Z, +A, +B, +C, +D)$, and relating to the displacement of the manipulator device 4 in proximity to the loading device 5; the block 752 thus modifies all the signals expressed with the MOVE key in which the variable X is greater than a predetermined numerical reference value X_0 (for example $X \geq 3500$), which indicates that the manipulator device 4 is located close to the loading device 5, and this block 722 modifies the values of these movement command instructions on the basis of the differences X_2 , Y_2 , Z_2 , A_2 , B_2 , C_2 determined by the block 901 and representative of the differences between the dimensions of the "master" and "slave" installations for the movement instructions relating to this loading stage.

In particular, within block 752 there is a first block 905 which commands the analysis of the first instruction of the

flow chart illustrated in Figures 10a and 10b and formed as described, then moves on to a block 906 which detects if this instruction relates to the command for positioning the heads 10 against the sheet 23, carried by the loading
5 device 5, which is detectable by means of the value of the dimension X of the "MOVE" instruction, i.e. by testing if this value X is greater than a value X_0 . In the negative case this indicates that the instruction under examination still relates to an earlier displacement stage than the
10 positioning of the heads 10 against the sheet 23, so that it moves onto a block 907 which commands analysis of a subsequent instruction of this flow chart of Figures 10a and 10b, and then returns to the block 906, whilst in the positive case it moves on to a block 908 which imposes the
15 modification, in the sequence of movement command instructions for which X remains greater than X_0 , by an amount corresponding to the values X_2 , Y_2 , Z_2 , A_2 , B_2 , C_2 , D_2 determined by the block 901, and then moves on to a block 753 for the continuation of the analysis of the
20 instructions of the cycle.

The block 753 searches in the previously memorised sequence of command signals those command signals indicative of a commencement of utilisation of the auxiliary support group
25 124 and obtained for example by means of the function key F13. Once this command signal is found the Y and Z values of the "MOVE" type command signal which immediately precedes the command signal formed utilising the function key F13 are memorised. On the basis of these Y and Z
30 values the dimensions of all the consecutive "MOVE" type command signals which precede this command signal defined by the function key F13, and which are close to this position differing from these Y and Z values by a predetermined value Y_0 and Z_0 (for example 100 mm) are
35 changed, and these dimensions of the command signals X, Y,

Z, A, B, C, D are modified on the basis of the differences X_1 , Y_1 , Z_1 , A_1 , B_1 , C_1 , D_1 determined by the block 900 and representative of the differences between the dimensions of the "master" and "slave" installations for the movement

5 instructions referred to this working stage between the manipulator device 4 and the beam 14 with the auxiliary pincers 12. In particular, within block 733 there is a block 910 which tests if the instruction of the flow chart of Figures 10a and 10b under examination relate to the

10 command for initiation of the use of the auxiliary support group 124 (determined by the function key F13); in the negative case it moves on to block 911 which commands analysis of a subsequent instruction of this flow chart of Figures 10a and 10b, and then moves on to a block 912

15 which, in an analogous manner to block 906, detects if this instruction relates to the command for positioning the heads 10 with the sheet 23 at the discharge table 6, this being detectable by means of the value of the dimension X of the "MOVE" instruction, and testing if this value X is

20 greater than a value X_0 ; in the negative case this indicates that the instruction under examination still relates to an earlier stage or displacement than this final positioning of the heads 10 with the sheet 23 at the discharge table 6 so that it returns to the block 910,

25 whilst in the positive case it moves on to a block 913 the operation of which will be described in detail hereinbelow. IF the positive condition is detected by the block 910, indicative of the command for utilisation of the auxiliary support group 124, it moves on to a block 914 which

30 commands memorisation of the Y and Z values of the "MOVE" type command signal which immediately precede the command signal relating to the block 910. From block 914 it moves to a block 915 which commands analysis of a previous instruction defined in this flow chart of Figures 10a and

35 10b, and then to a block 916 which detects if this previous

instruction is of the "MOVE" type and in the negative case it exits from block 753 and moves on to a subsequent block 754. In the case of a positive condition detected by the block 916 it moves on to a block 917 which detects if this movement instruction under examination has Y and Z values which differ from the Y and Z values memorised by the block 914 by an amount less than a respective predetermined maximum limit Y_0 and Z_0 : in the negative case (movement beyond this predetermined field) it exits from block 753 and moves to a subsequent block 754, whilst in the positive case it moves on to a block 918 which imposes on the instructions under examination, for each dimension of the command signal (X; Y; Z; A; B) a modification by a corresponding value X_1 ; Y_1 ; Z_1 ; A_1 ; B_1 ; C_1 ; D_1 determined by the block 900, and then returns to the block 915 for continuation of the possible modification of all the preceding succession of movement instructions.

The block 754 then searches in the sequence of previously memorised command signals for command signals indicative of the termination of the utilisation of the auxiliary support group 124, and obtained for example by means of the function key F14. Once this command signal is found the dimensions of all the "MOVE" type command signals which lie between the beginning and the end of this use of the auxiliary support group 124 are changed, and these values of the command signals (X, Y, Z, A, B, C, D) are modified on the basis of the corresponding differences X_1 , Y_1 , Z_1 , A_1 , B_1 , C_1 , D_1 determined by the block 900 and representative of the differences between the "master" and "slave" installations for the working stages as already described. In particular, block 554 has a block 925 which tests if the instruction of the flow chart of Figures 10a and 10b under examination relates to the command for the end of the use of the auxiliary support group 124

(determined by the function key F14); in the negative case it moves on to a block 926 which commands the analysis of a subsequent instruction in this flow chart of Figures 10a and 10b, and then returns to the block 925. In the case of
5 a positive condition detected by the block 925, and therefore indicative of the command terminating the use of the auxiliary support group 124, it moves on to a block 927 which commands the analysis of a preceding instruction defined in this flow chart of Figures 10a and 10b, and then
10 to a block 928 which detects if this preceding instruction is of the "MOVE" type. In the case of a positive condition detected by the block 928 it moves on to a block 929 which imposes the modification, in these instructions under examination, for each value of the command signal X; Y; Z;
15 A; B by the corresponding value X1; Y1; Z1; A1; B1; C1; C1; determined by the block 900, and then returns to the block 927 to continue the modification of the preceding movement instructions. In the case of a negative condition detected by the block 928, so that the preceding instruction is not
20 of the "MOVE" type, it moves on to a block 930 which detects if the instruction of the flow chart of Figures 10a and 10b under examination relate to the command to commence utilisation of the auxiliary support unit 124 (determined by the function key F13); in the negative case it returns
25 to the block 927 which commands the analysis of a preceding instruction in the flow chart of Figures 10a and 10b, whilst in the case of a positive condition detected by the block 930, and thus indicative that the modification has been made for all the movement instructions lying in the
30 field of use of the auxiliary support group 124, it exits from block 754 and moves on to a block 755 which, splitting off from the command signal indicative of the end of utilisation of the auxiliary support group 124, defined for example by the function key F14, commands the memorisation
35 of the Y and Z values of the "MOVE" type command signal

which immediately follows this command signal formed utilising the function key Fl4. On the basis of these Y and Z values the values of all the consecutive "MOVE" type command signals which follow this command signal defined by the function key Fl4, and which are close to this position differing from these Y and Z values by a predetermined value Y_0 and Z_0 (for example 100 mm) are changed, and these command signal values (X, Y, Z, A, B, C; D) are modified on the basis of the differences X_1 , Y_1 , Z_1 , A_1 , B_1 , C_1 , D_1 determined by the block 900 and representative of the differences between the dimensions of the "master" and "slave" installations for this stage corresponding to the working of the manipulator device 4 with the auxiliary pincers 12. In particular, block 755 has a block 931 which commands the analysis of a subsequent instruction of the flow chart of Figures 10a and 10b, and then moves on to a block 932, which, in a manner analogous to the block 925, tests if the instruction under examination of the flow chart of Figures 10a and 10b relate to the command for the end of utilisation of the auxiliary support group 124 (determined by the function key Fl4); in the negative case it moves on to a block 933, analogous to block 926, which commands analysis of a subsequent instruction of the flow chart of Figures 10a and 10b, and then returns to the block 932. In the case of a positive condition detected by the block 932, that is to say indicative of the command for the end of the use of the auxiliary support group 124, it moves on to a block 934 which commands the memorisation of the Y and Z values of the "MOVE" type command signal which immediately follows the command signal detected by the block 932. From block 934 it moves to a block 935 which commands the analysis of a following instruction defined in the flow chart of Figures 10a and 10b, and then to a block 936 which detects if this following instruction is of the "MOVE" type, and in the negative case it exits from block

755 and moves to a subsequent block 937. In the case of a positive condition detected by the block 936 it moves on to a block 938 which detects if this movement instruction under examination has Y and Z values which differ from the Y and Z values memorised by the block 934 by an amount less than a respective predetermined maximum limit value Y_0 and Z_0 : in the negative case (movement beyond this predetermined range) it exits from block 755 and moves on to block 937, whilst in the positive case it moves to a block 939 which imposes on the instruction under examination, for each value of the command signal (X, Y, Z, A, B ...) a modification by a corresponding value (X_1 , Y_1 , Z_1 , A_1 , B_1 , C_1 , D_1) determined by the block 900, and then returns to the block 935 to continued with possible modifications on all the following movement instructions in succession.

The block 937 then detects if the instruction under examination relates to the command for positioning the heads 10 with the sheet 23 over the discharge table 6, this being detectable by means of the value of the dimension X in the "MOVE" instruction, and testing if this value X is greater than a value X_0 ; in the negative case this signifies that the instruction under examination still relates to a stage of a displacement earlier than this final displacement of the heads 10 with the sheet 23 over the discharge table 6 so that it returns to the block 753 for the continuation of the correction of the movement instructions relating to other possible working stages between the manipulator device 4 and the auxiliary pincers 12; whilst in the positive case it moves to the block 913 which imposes the modification, in the sequence of movement command instructions for which X remains greater than X_0 , by corresponding amounts equal to the values X_3 , Y_3 , Z_3 , A_3 , B_3 ... determined by the block 902, and then exits from

the block 748 and from the stage of automatic correction of the instructions for the working cycle according to the present invention.

- 5 The flow chart illustrated in Figures 10a and 10b and with the movement command instructions automatically modified as described above according to the embodiment of the present invention, is then executed by the unit 7 of the installation 500 by means of the command block 271 (Figure 10 9) for the execution of the production cycle and the formation of the profile illustrated in Figure 7.

The advantages obtained with the system of the present invention for dimensional testing of the configuration of the sheet metal bending installation 500 and the automatic adaptation of the command signals for controlling the movement of this installation are evident from what has been described; in fact, after a sheet metal bending installation similar to a specimen installation has been assembled, the system of the present invention is able, by detecting of the coordinates of the position of the manipulator device in three predetermined configurations, and by comparing them with the corresponding coordinates of analogous configurations on the specimen system, to test if the configuration of the assembled installation is correct, and of warning the operator, and moreover, in the case of correction of this assembled configuration, the system of the present invention is able automatically to adapt the sequence of movement command and control signals dimensionally for this manipulator device, which signals were defined on the specimen installation, taking into account the small dimensional differences which inevitably exist between the two installations. In this way, therefore, it is not necessary to have to define a new sequence of command and control signals (for an already defined bending cycle) for each new installation fitted,

and the sequence already memorised and defined on the specimen installation can be utilised, with evident advantages of reduction in preparation times for this already defined bending cycles for new installations.

5

The detection of the dimensions of the position of the manipulator device in the new installation and the comparison with the dimensions of the analogous configurations on the specimen installation are effected in
10 three predetermined configurations which are those relating to the working stages of the heads of the manipulator device respectively with the auxiliary support pincers, with the loading magazine and with the discharge table, and only those sequences of command and control signals for
15 movements of this manipulator device which are close to these working stages are automatically dimensionally adapted so that only in correspondence with these precise stages of movement is it necessary to obtain exact correspondence between the values of the movement
20 instructions as defined on the specimen installation and the values effective on the actual installation.

Finally, it is clear that the system forming the subject of
25 the present invention can have variations and modifications introduced thereto without departing from the protective ambit thereof.

For example the function keys 260 of the keyboard 11 (hand
30 box) can be selected in pairs, or together with keys having a different significance.

The flow chart illustrated in Figure 10 can be achieved with an external programming unit 480 independently from
35 the electronic unit 7, this external unit also being

provided with function keys similar to the keys 260, which define the various previously described working phases, which are then memorised in the unit 7 by direct connection (by cable) or indirect connection (with magnetic supports etc) for execution as a production cycle. In this case the unit 7 in the flow chart of Figure 9 from the block 270 directly commands the execution of the cycle with the block 271.

10 The associated sequences of command and control signals described and effected by the blocks 502 and 503 can be made only partially, or combined differently; moreover, with reference to Figure 10a, the positioning command of the sensors 66 for reference in positioning the sheet 23
15 between the dies 2 and 3 (conveniently defined by the function key F21) can also be associated with command instructions for movement of the heads 10 (with the sheet 23 gripped thereon) towards the press 1, so as to be achieved simultaneously.

20

The commands for association of phases of the operation can be determined by detection of positions achieved by the movable elements of the system, or for example by the selections effected on the function keys in the creation of
25 the basic sequences of command and control signals.

The flow chart illustrated in Figures 10a and 10b can also be achieved with an external programming unit 480 independent from the electronic unit 7, and then speeded up
30 with the system of the present invention still in this outer unit 480, and then memorised in the unit 7 to be performed as a production cycle.

The effective speeding up system of the present invention,
35 can be utilised for sheet metal bending installations

having a form and operation different from that described, and also not provided with function keys as previously illustrated.

- 5 The dimensional testing and automatic adaptation system of the present invention can, finally, be utilised for sheet metal bending installations having a different form and operation from that described.
- 10 Finally, the system described can be utilised for sheet metal bending installations having a different function and form from that described.

- 68 -

CLAIMS

1. A device for control of a robot manipulator of a metal sheet bending installation, comprising:
 - 5 a first key means for inputting a command signal for actuating a first actuator means that is adapted to move a movable element of the metal sheet bending installation through a constant distance or amount; and
 - a second key means for inputting a command signal
 - 10 for actuating a second actuator that is adapted to move another movable element of the metal sheet bending installation through a changeable distance or amount.
2. A control device of Claim 1, wherein the first key
- 15 means including a plurality of function keys that are constructed to be selectively actuated.
3. A control device of Claim 2, wherein the second key means including a MOVE key for inputting a signal showing
- 20 that a data input after the signal is the changeable distance or amount through which the another movable element is to be moved, and a key for inputting the data for the changeable distance or amount through which the another movable element is to be moved.
- 25
4. A device for control of a robot manipulator of a metal sheet bending installation, comprising:
 - a first key means for inputting a first command signal for actuating a first actuator means that is adapted to
 - 30 move a movable element of the metal sheet bending installation through a constant distance or amount;
 - a second key means for inputting a second command signal for actuating a second actuator that is adapted to move another movable element of the metal sheet bending
 - 35 installation through a changeable distance or amount;
 - the second key means including a MOVE key for

- 69 -

- inputting a signal showing that a data input after the signal is the changeable distance or amount through which the another movable element is to be moved, and a key for inputting the data for the changeable distance or amount
- 5 through which the another movable element is to be moved;
- means for storing the first and the second command signals in the order of actuation of the movable elements;
- means for detecting second command signals that are subsequently stored in the store means; and
- 10 means for associating the the subsequent second command signals to produce an associated second command signal for actuating subsequently a plurality of the second actuator without any stops between the actions thereof.
- 15 5. A device for control of a robot manipulator of a metal sheet bending installation, comprising:
- a first key means for inputting a first command signal for actuating a first actuator means that is adapted to move a movable element of the metal sheet bending
- 20 installation through a constant distance or amount;
- a second key means for inputting a second command signal for actuating a second actuator that is adapted to move another movable element of the metal sheet bending installation through a changeable distance or amount;
- 25 means for storing the first and the second command signals in the order of actuation of the movable elements;
- means for inputting the a command signal commanding time-delay in actuation of the actuator, before the command signal commanding a precise positioning of a head of the
- 30 robot manipulator in the command series stored in the store means.
6. A method for control of a robot manipulator of a metal sheet bending installation which includes a metal sheet
- 35 bending press, an auxiliary support unit, a loader device, and a discharge table, the method comprising the steps of:

- 70 -

detecting in a master specimen bending installation positional relationships between the robot manipulator and the auxiliary support unit, between the robot manipulator and the loader device, and between the robot manipulator

5 and the discharge table;

a first key means for inputting a first command signal for actuating a first actuator means that is adapted to move a movable element of the metal sheet bending installation through a constant distance or amount;

10 a second key means for inputting a second command signal for actuating a second actuator that is adapted to move another movable element of the metal sheet bending installation through a changeable distance or amount, the changeable distance or the amount being adjusted in
15 accordance the positional relationship between the robot manipulator and the auxiliary support unit, between the robot manipulator and the loader device, and between the robot manipulator and the discharge table, so that the manipulator can be precisely positioned with respect to the
20 auxiliary support unit, the loader device, and the discharge table in operation;

means for storing the first and the second command signals in the order of actuation of the movable elements;

detecting in a slave specimen bending installation
25 positional relationships between the robot manipulator and the auxiliary support unit, between the robot manipulator and the loader device, and between the robot manipulator and the discharge table;

preparing command signals for controlling the robot
30 manipulator of the slave specimen robot bending installation, based on the data obtained above;

the command signal preparing step including the steps of,

modifying the second command signals stored in the
35 storing means in accordance with differences between the positional relation ship between the robot manipulator and

- 71 -

the auxiliary support unit and the like of the master specimen bending installation and those of the slave specimen bending installation.

5

10

15

20


25

30

35

1/24

FIG.1

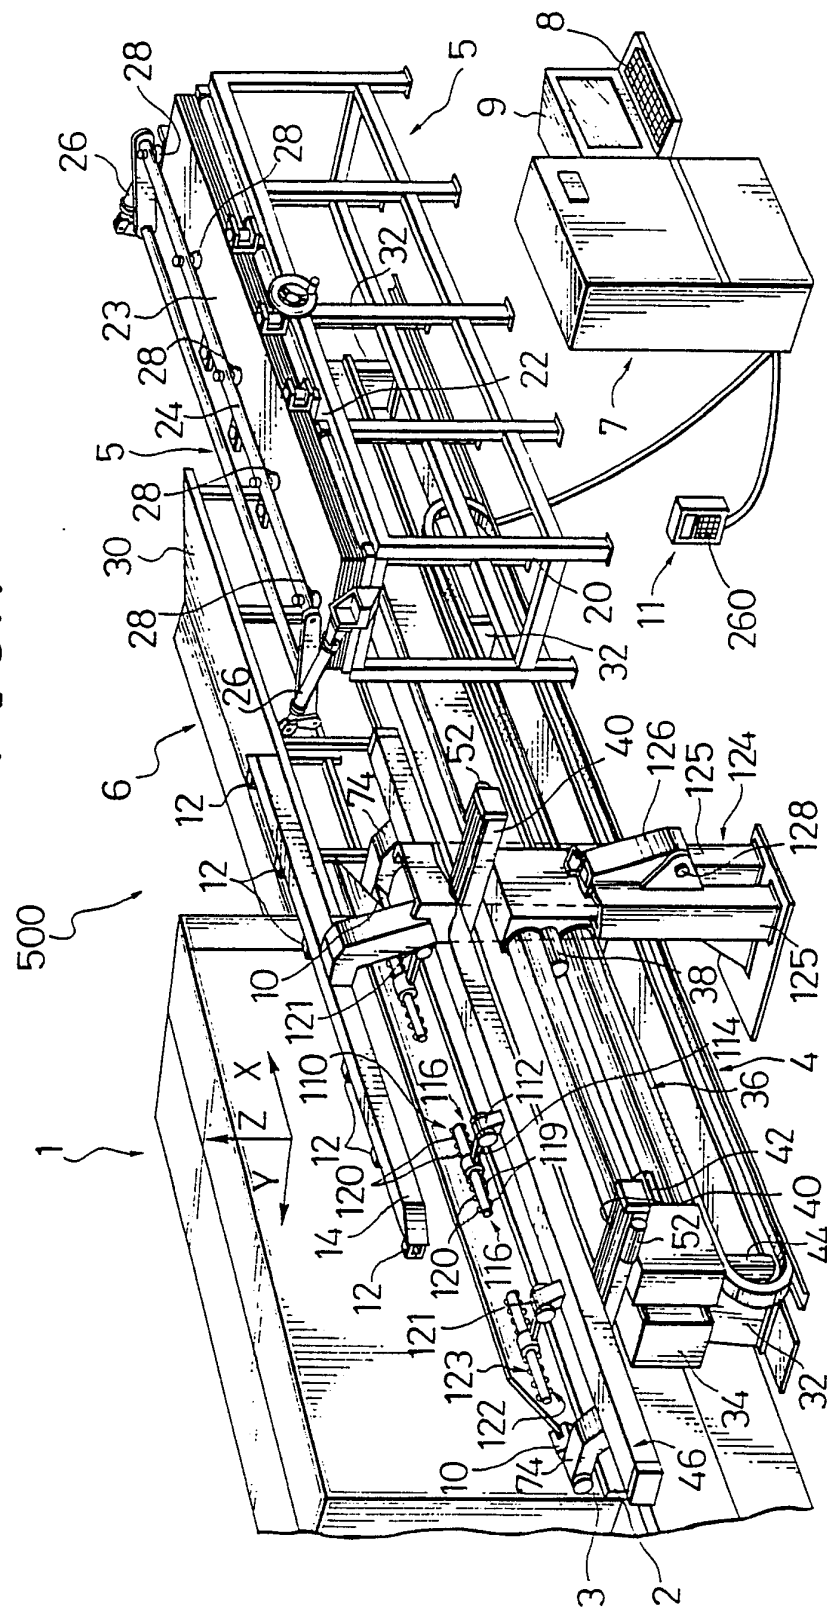

4/24

FIG. 4

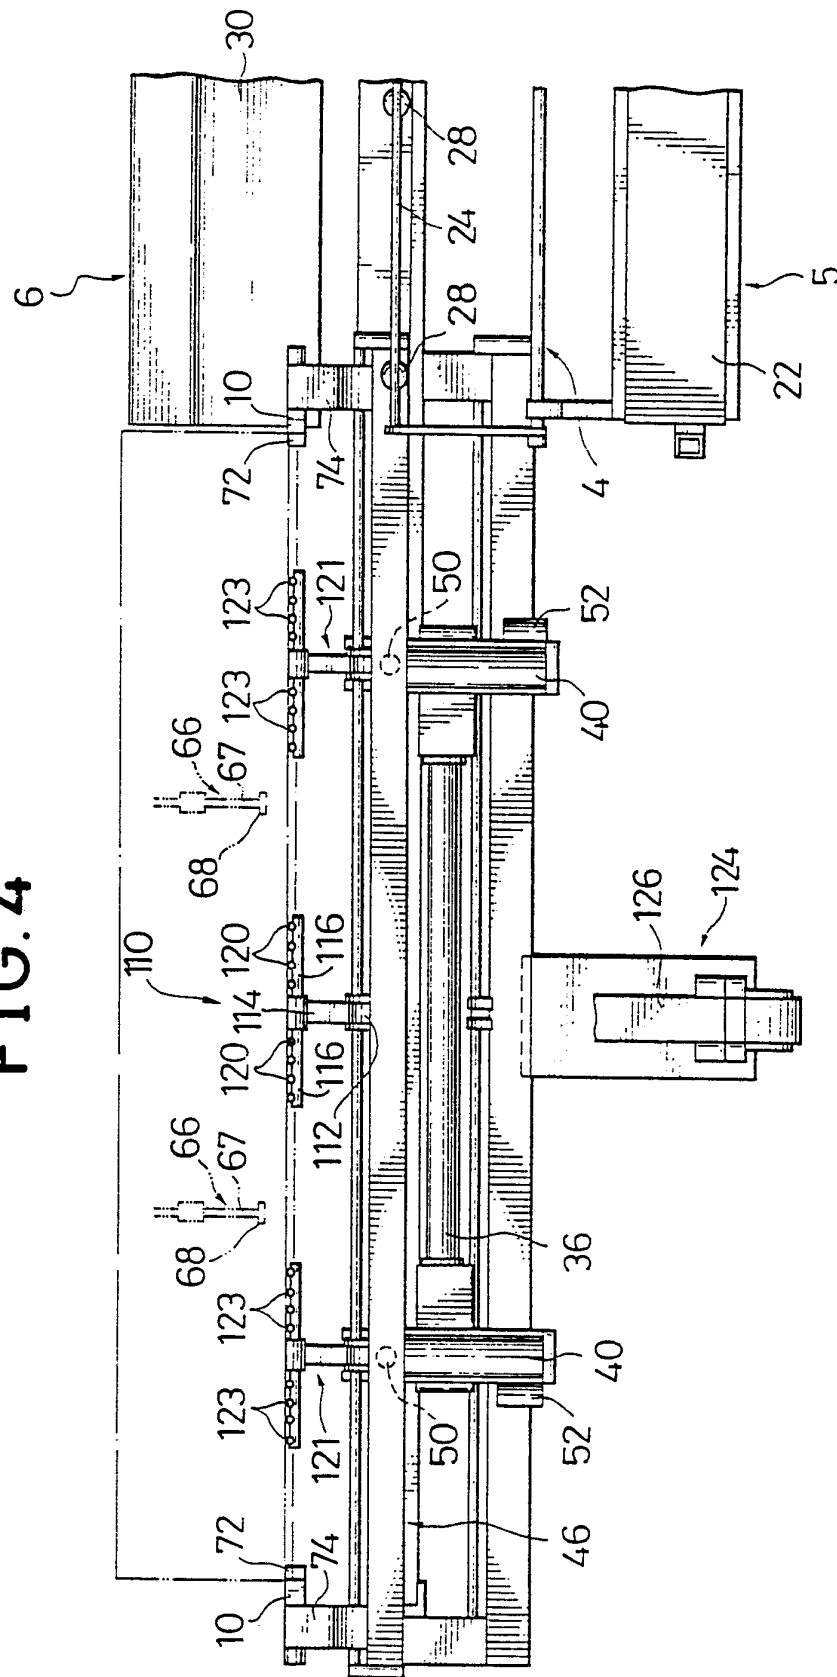


FIG.5

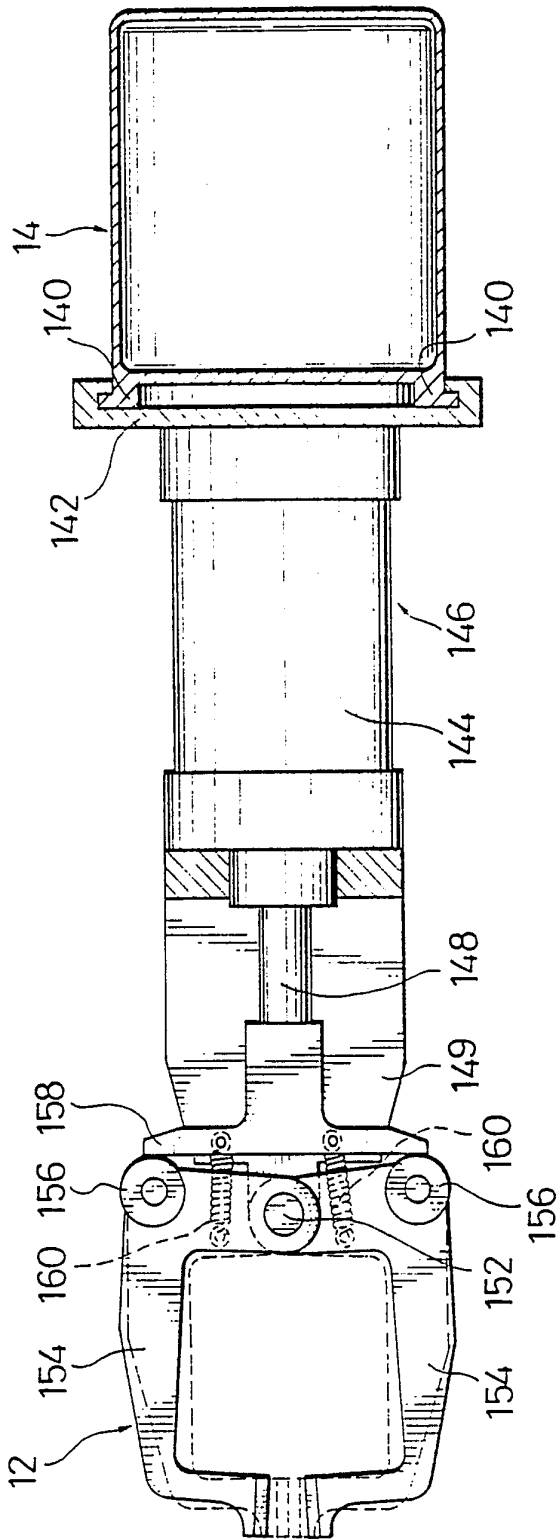


FIG. 6


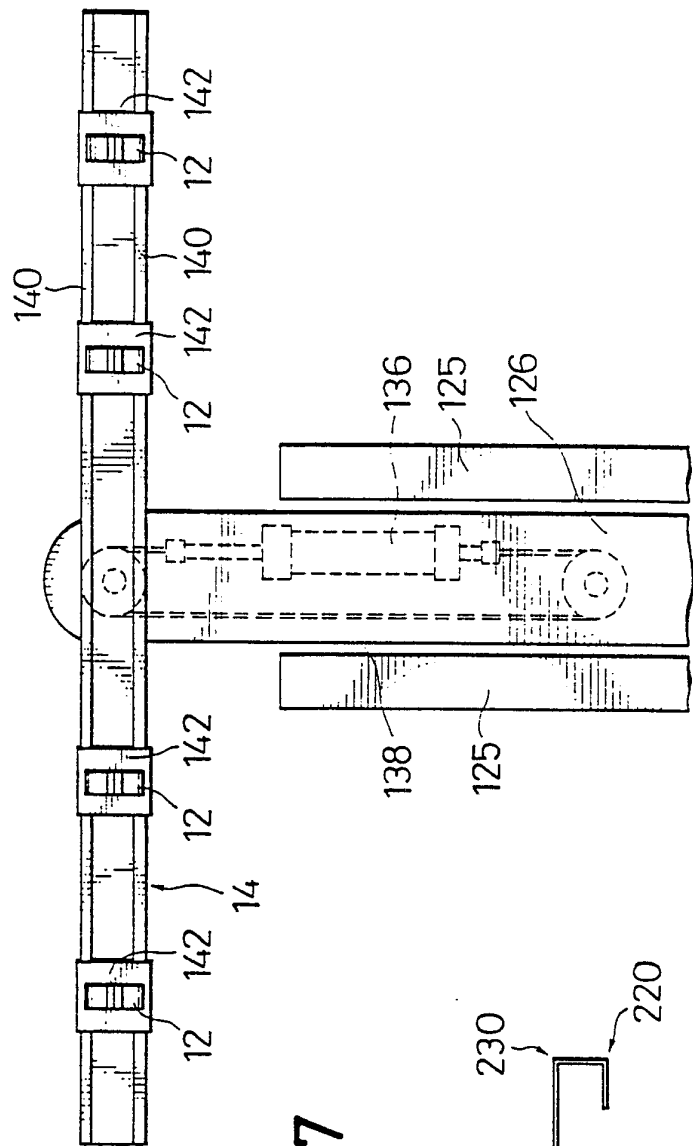


FIG. 7

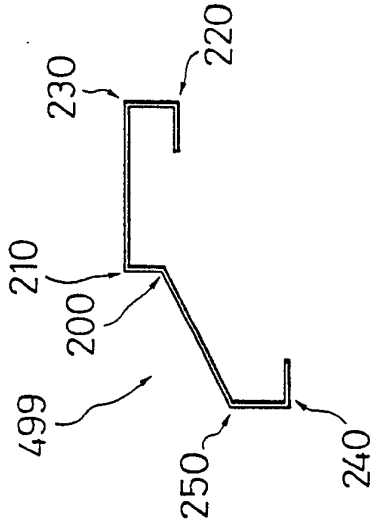

7/24

FIG. 8a

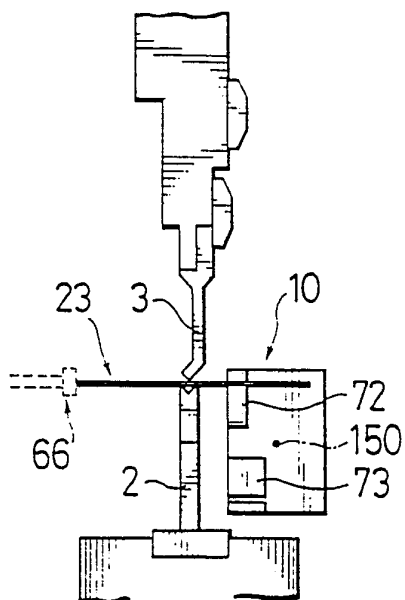


FIG. 8b

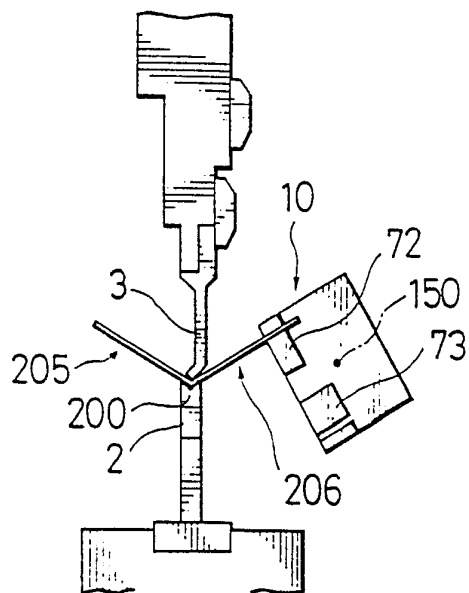


FIG. 8c


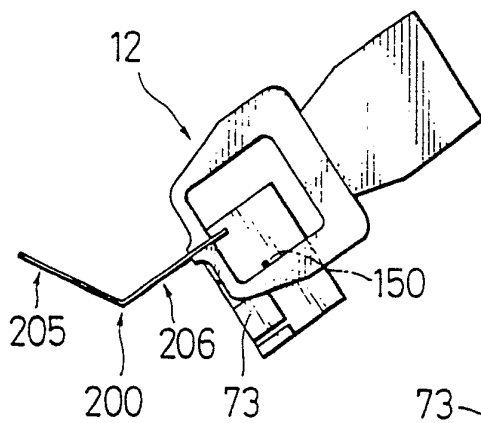


FIG. 8d

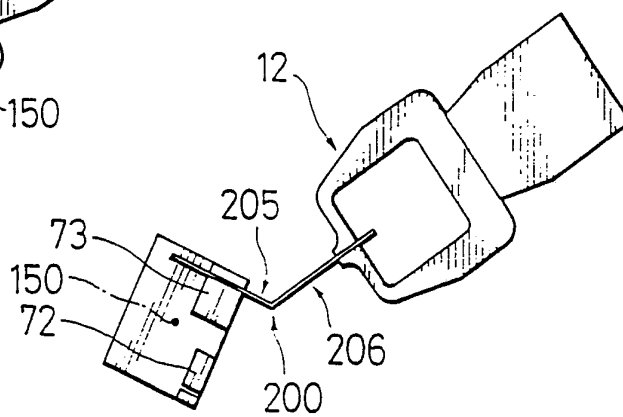

8/24

FIG. 8e

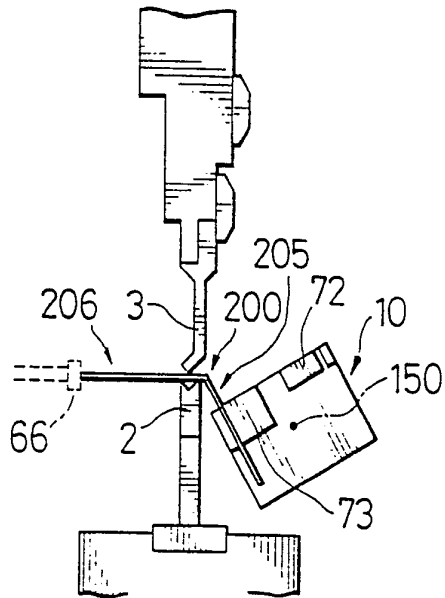


FIG. 8f

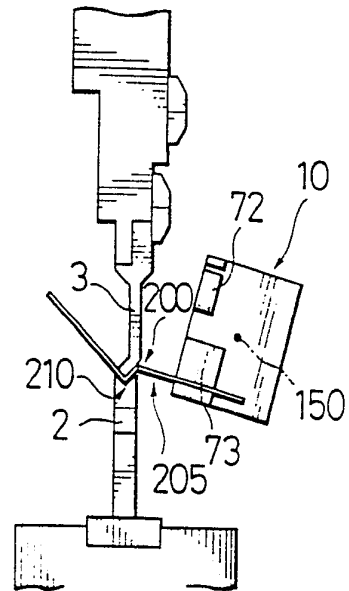


FIG. 8g


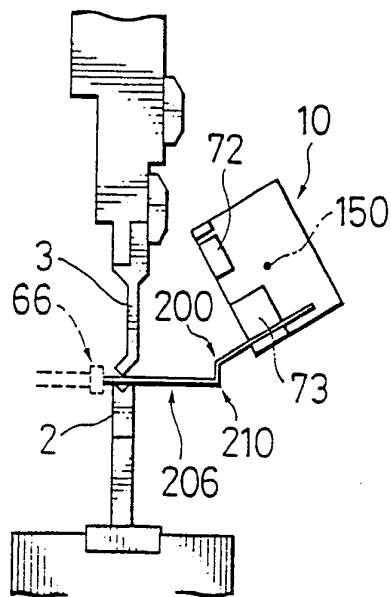


FIG. 8h

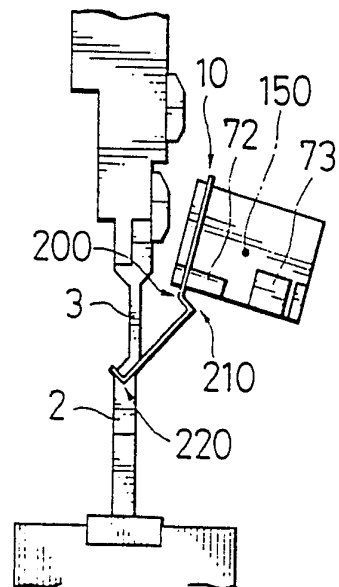

9/24

FIG. 8i

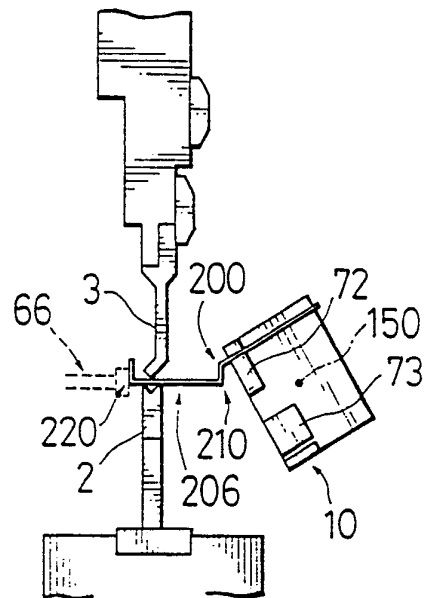


FIG. 8j

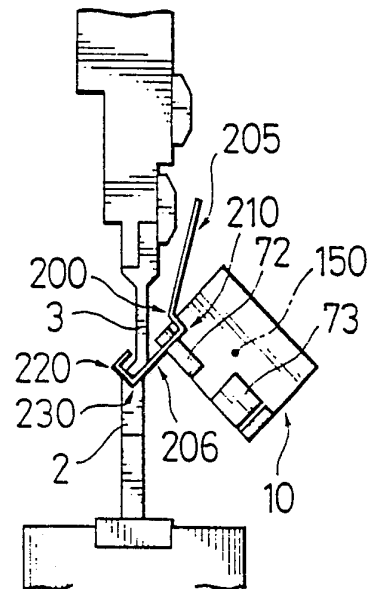


FIG. 8l


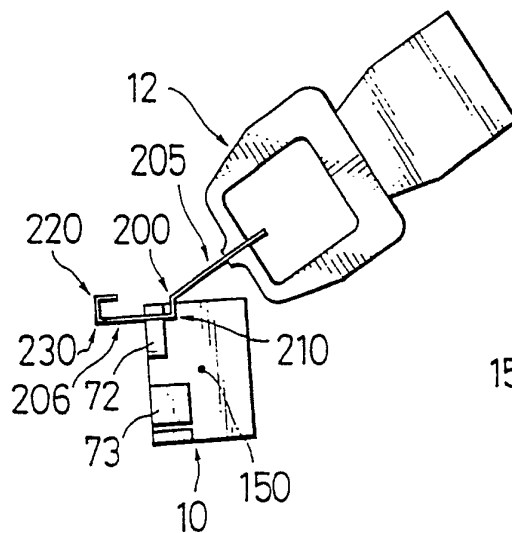


FIG. 8m

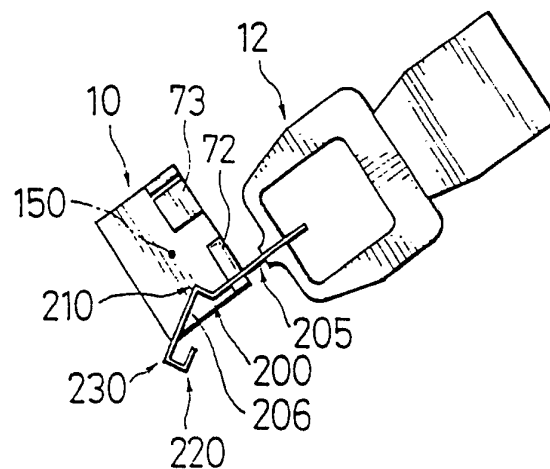

10/24

FIG. 8n

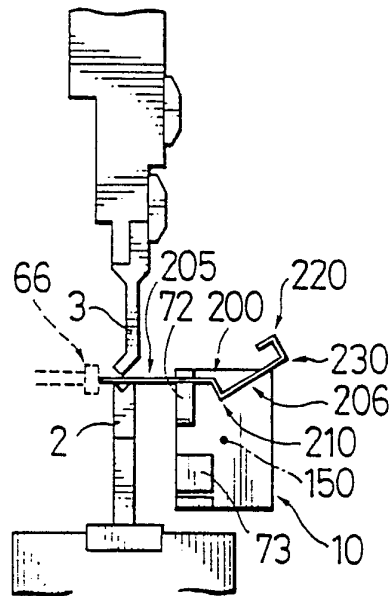


FIG. 8o

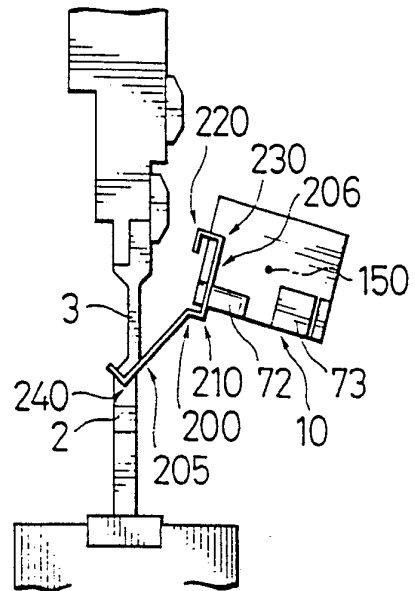


FIG. 8p

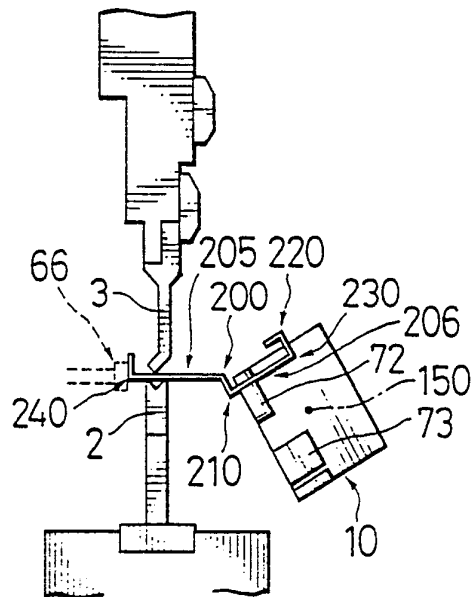


FIG. 8q

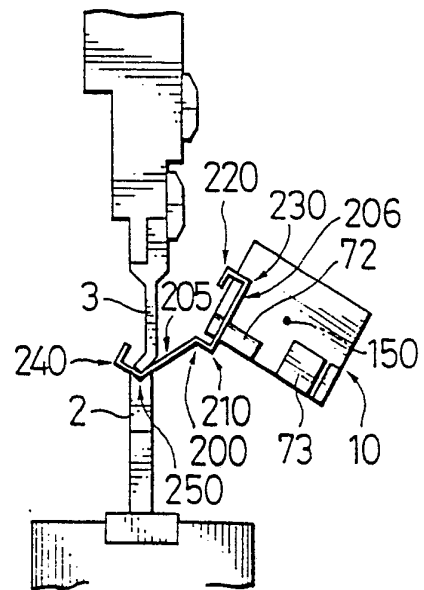


FIG.12



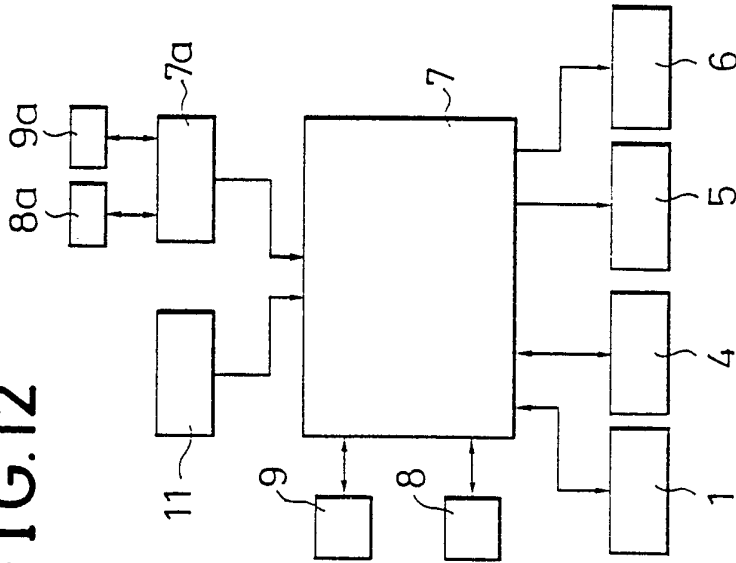


FIG. 9

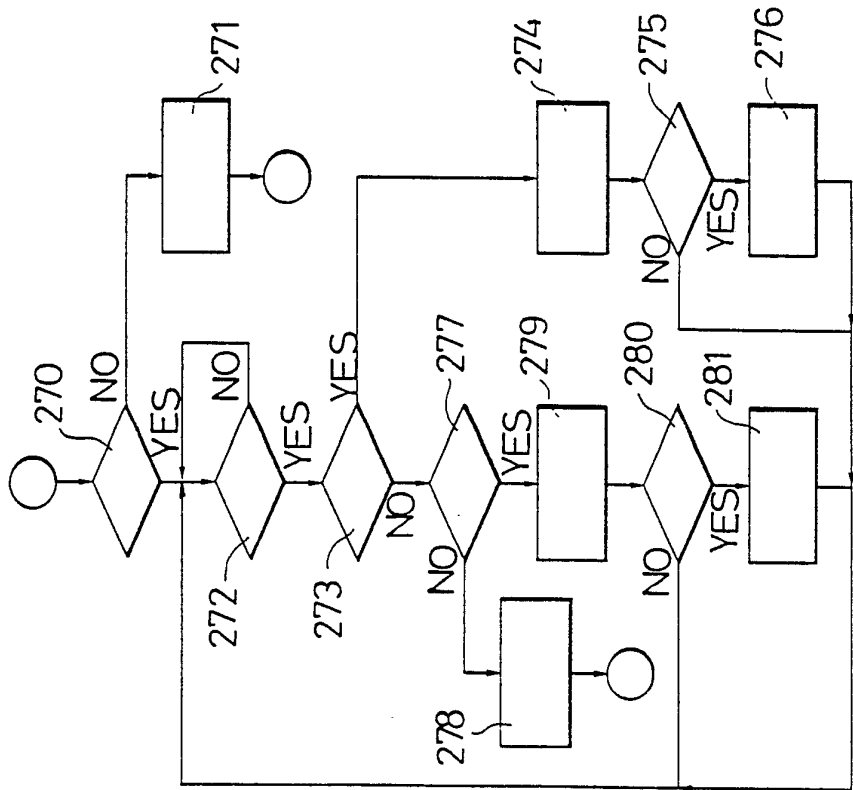

12/24

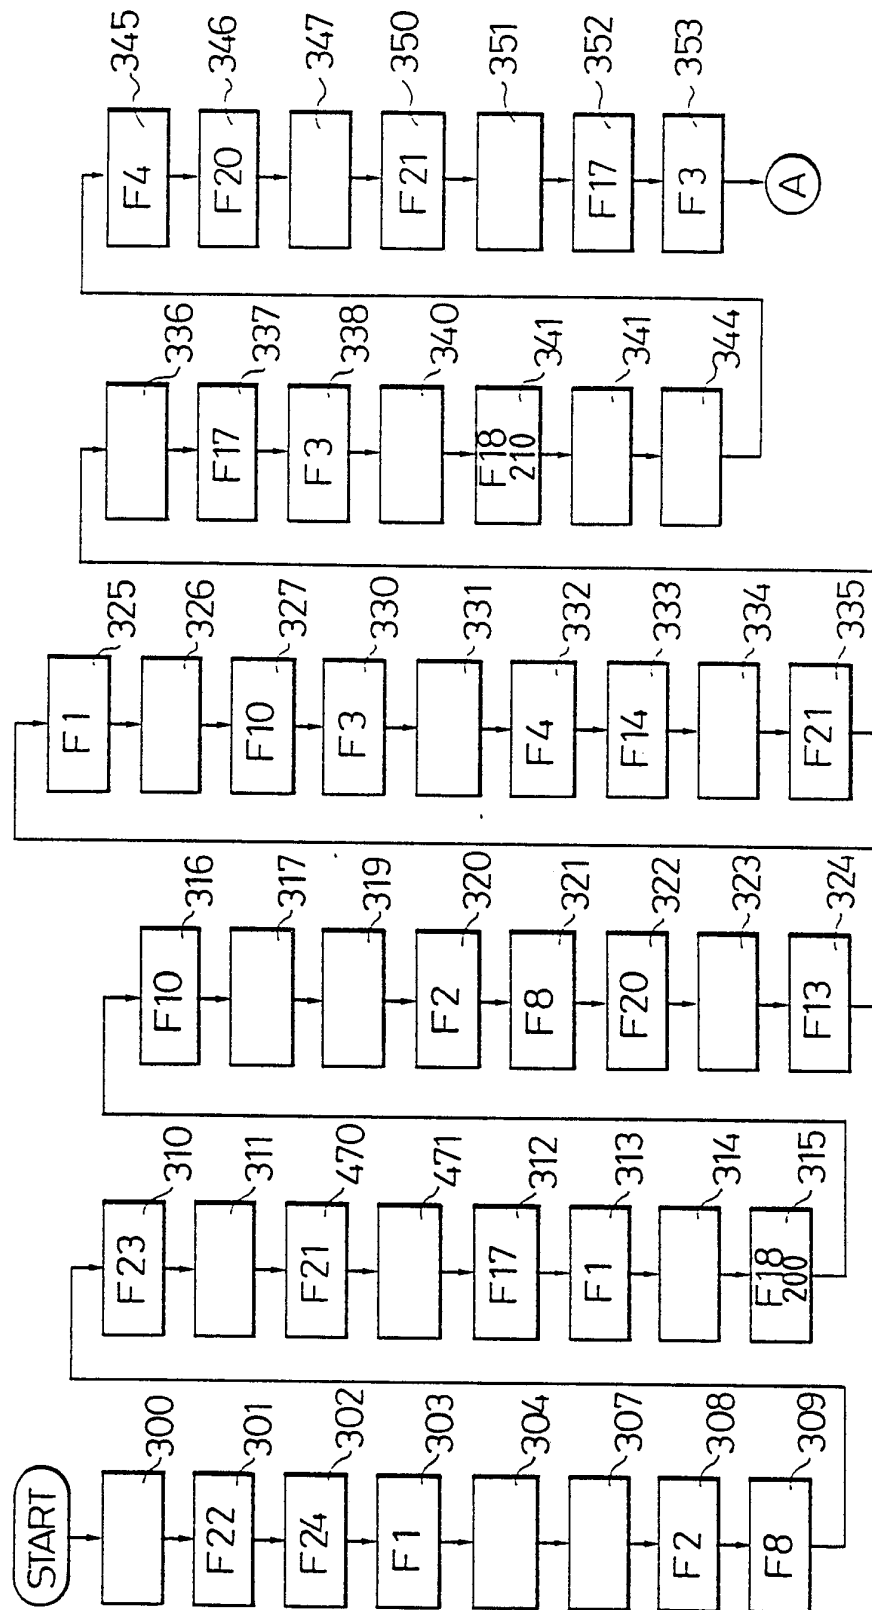

13/24

FIG. 10b



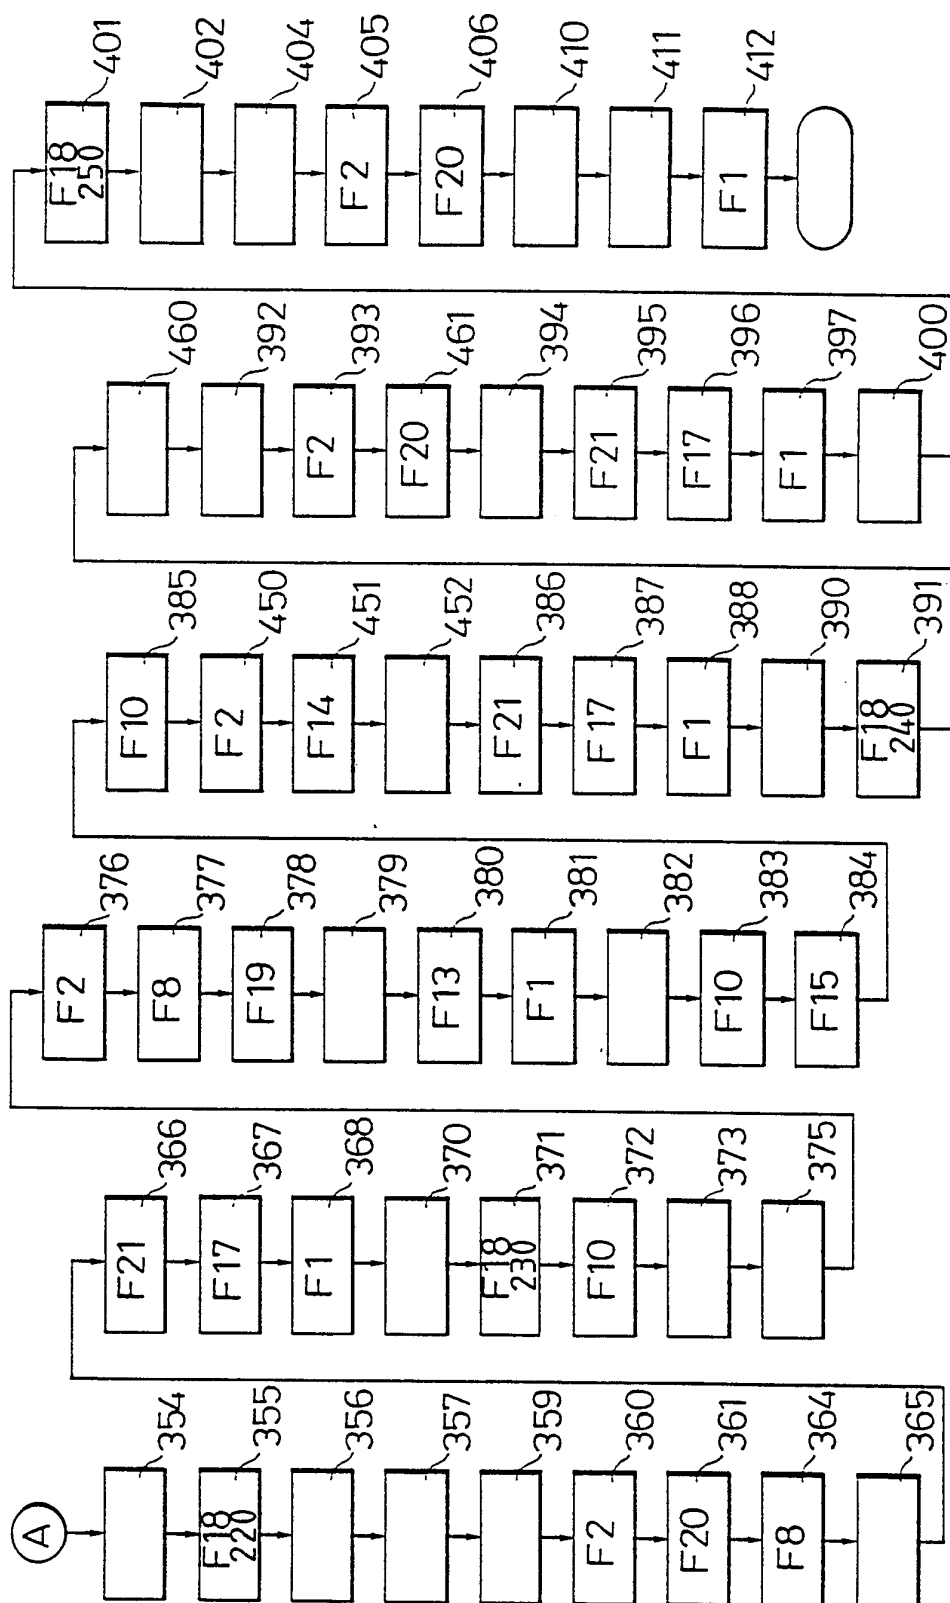


FIG.11

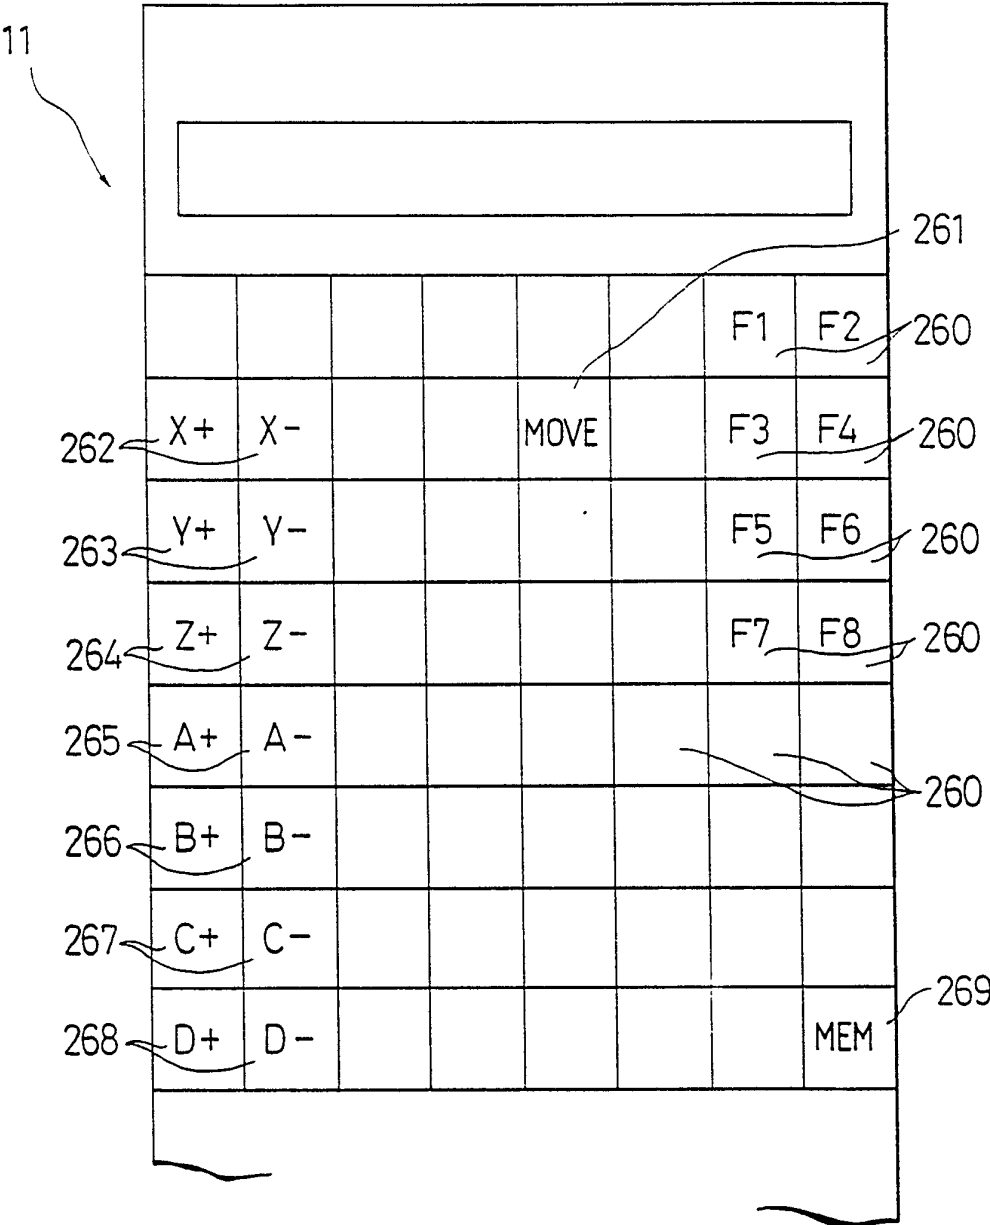


15/24

FIG.13

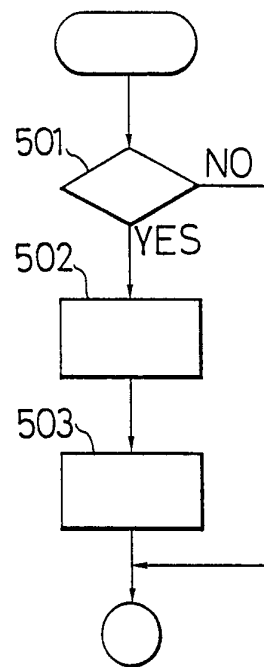

16/24

FIG.14a

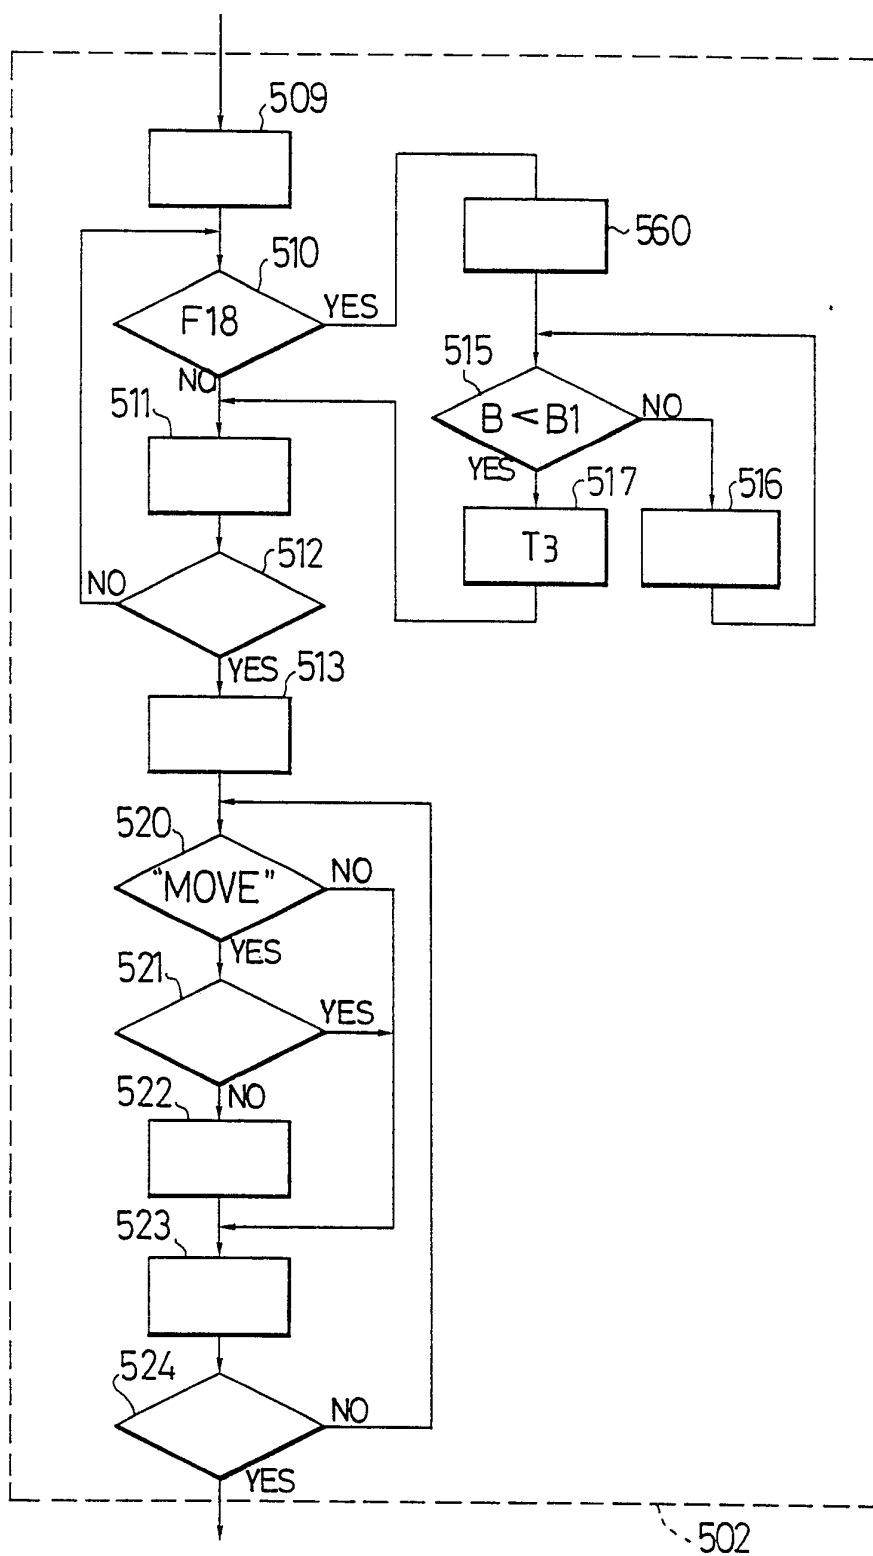

17/24

FIG.14b

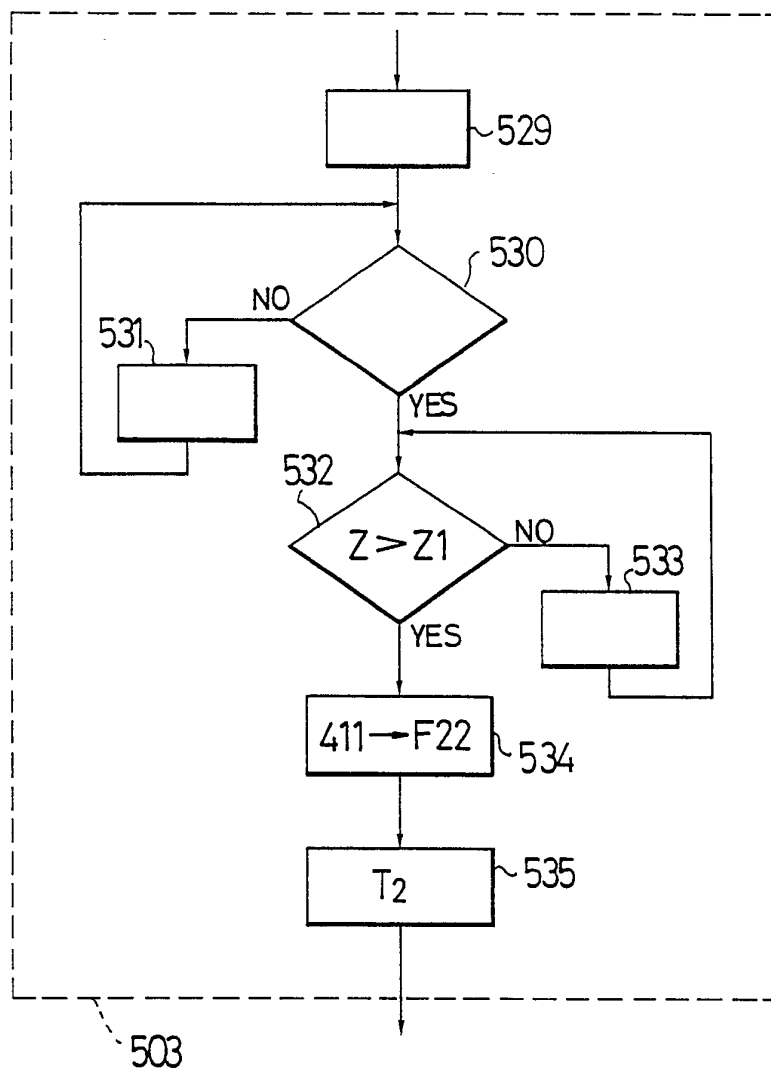


FIG.15a


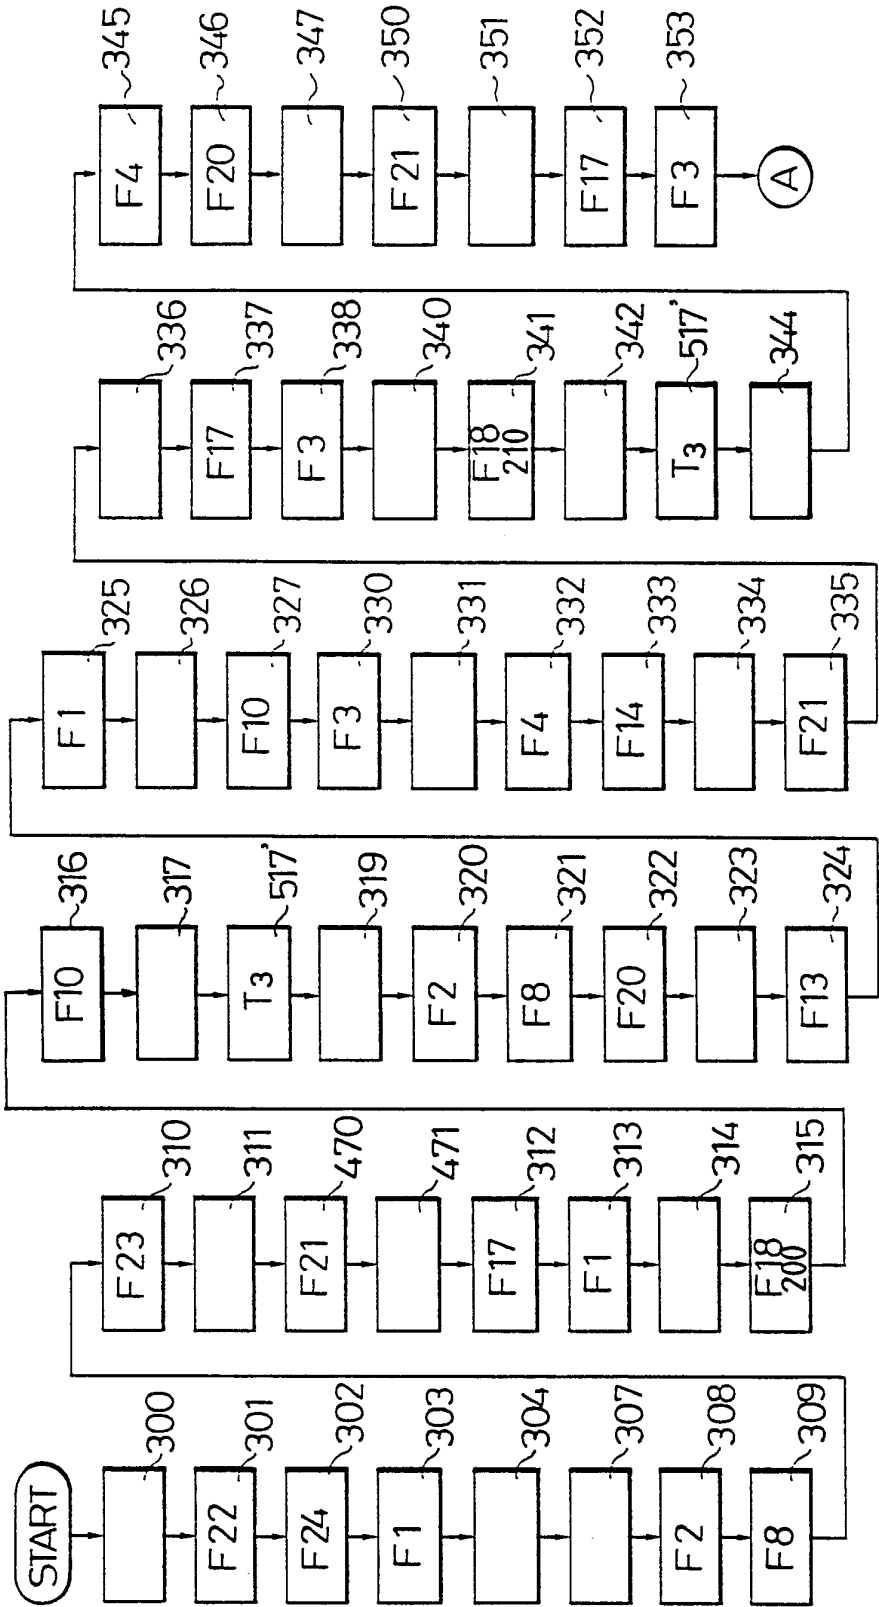


FIG. 15b

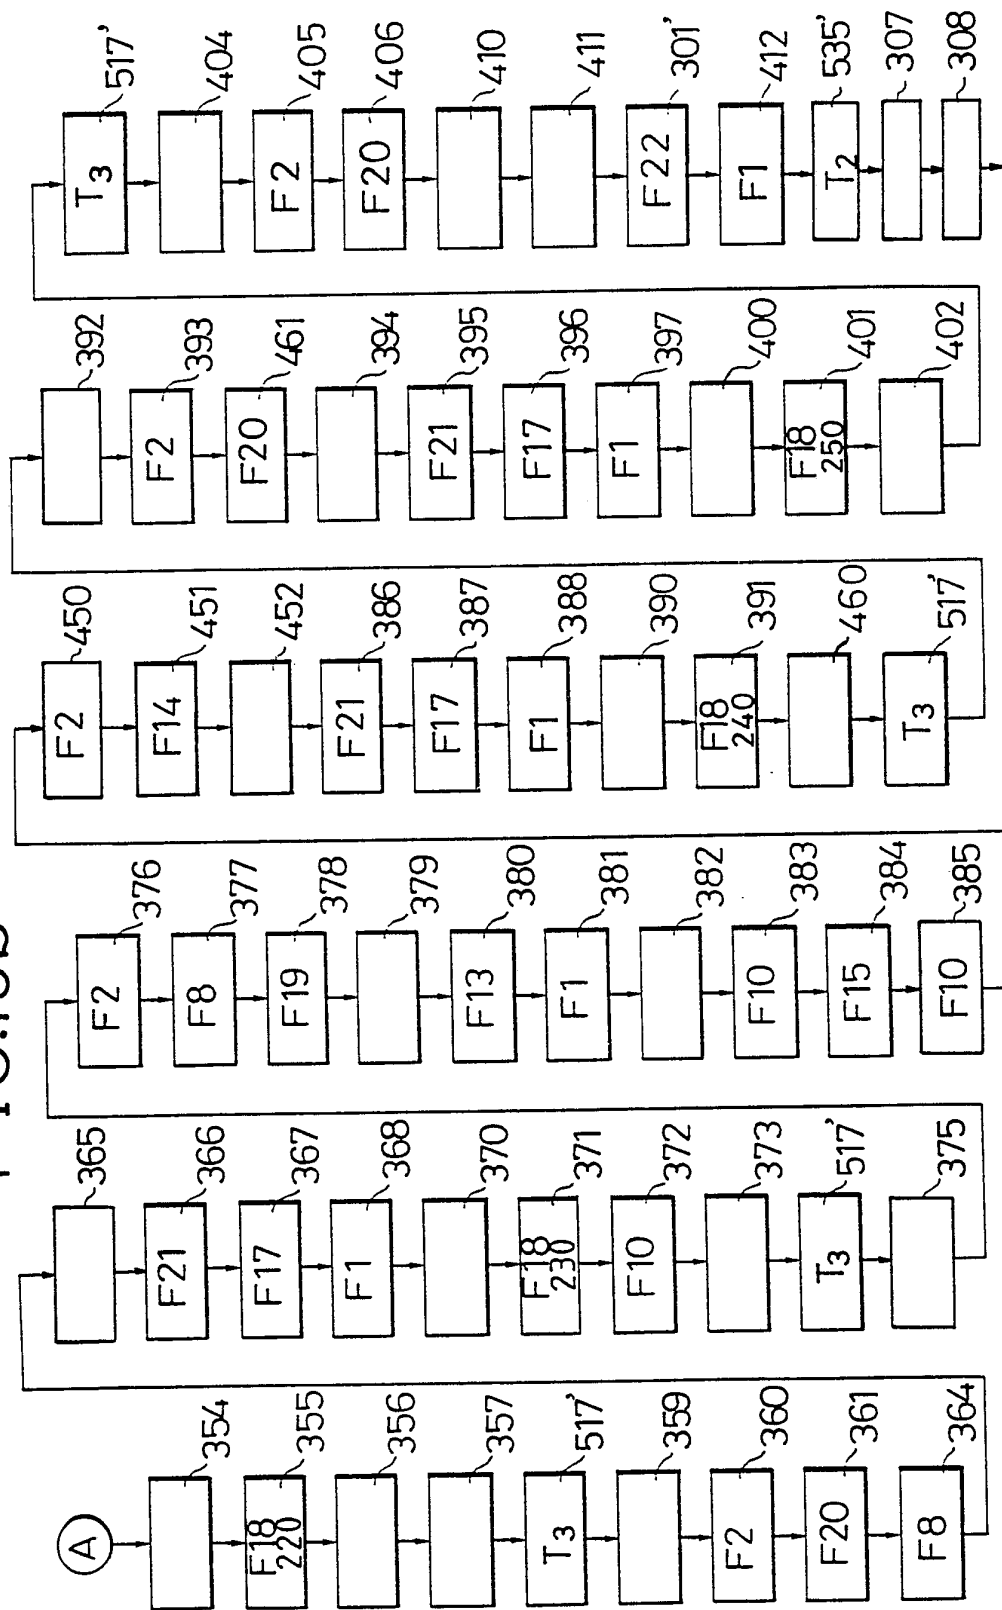

20/24

FIG.16a

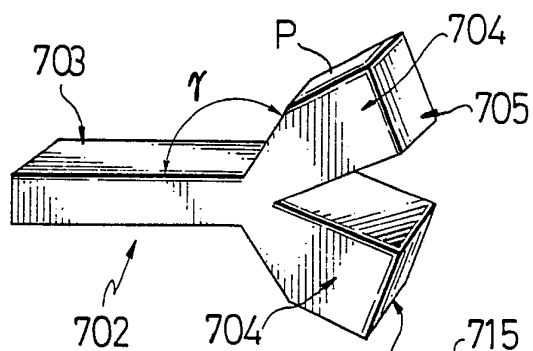


FIG.16b

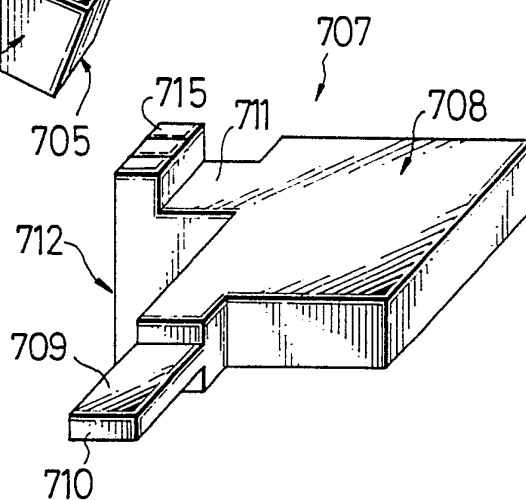


FIG.17

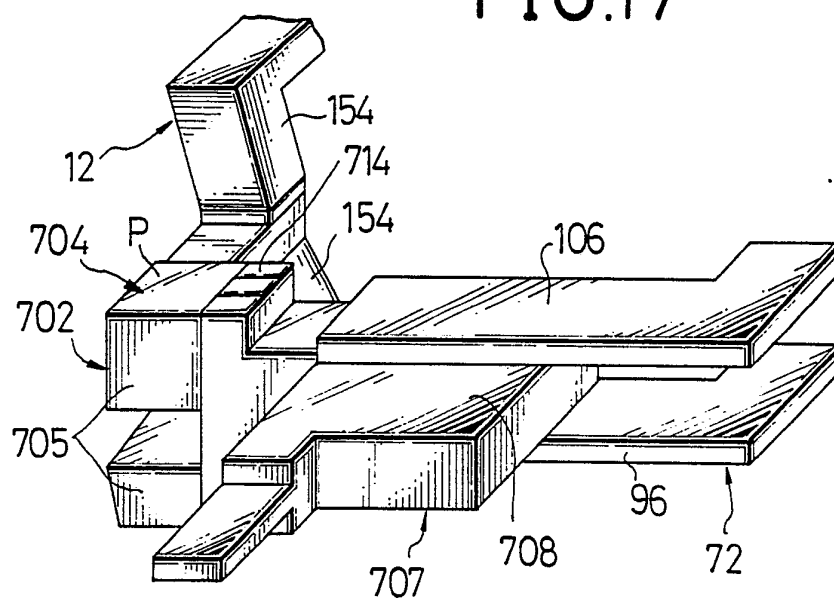


FIG.18a


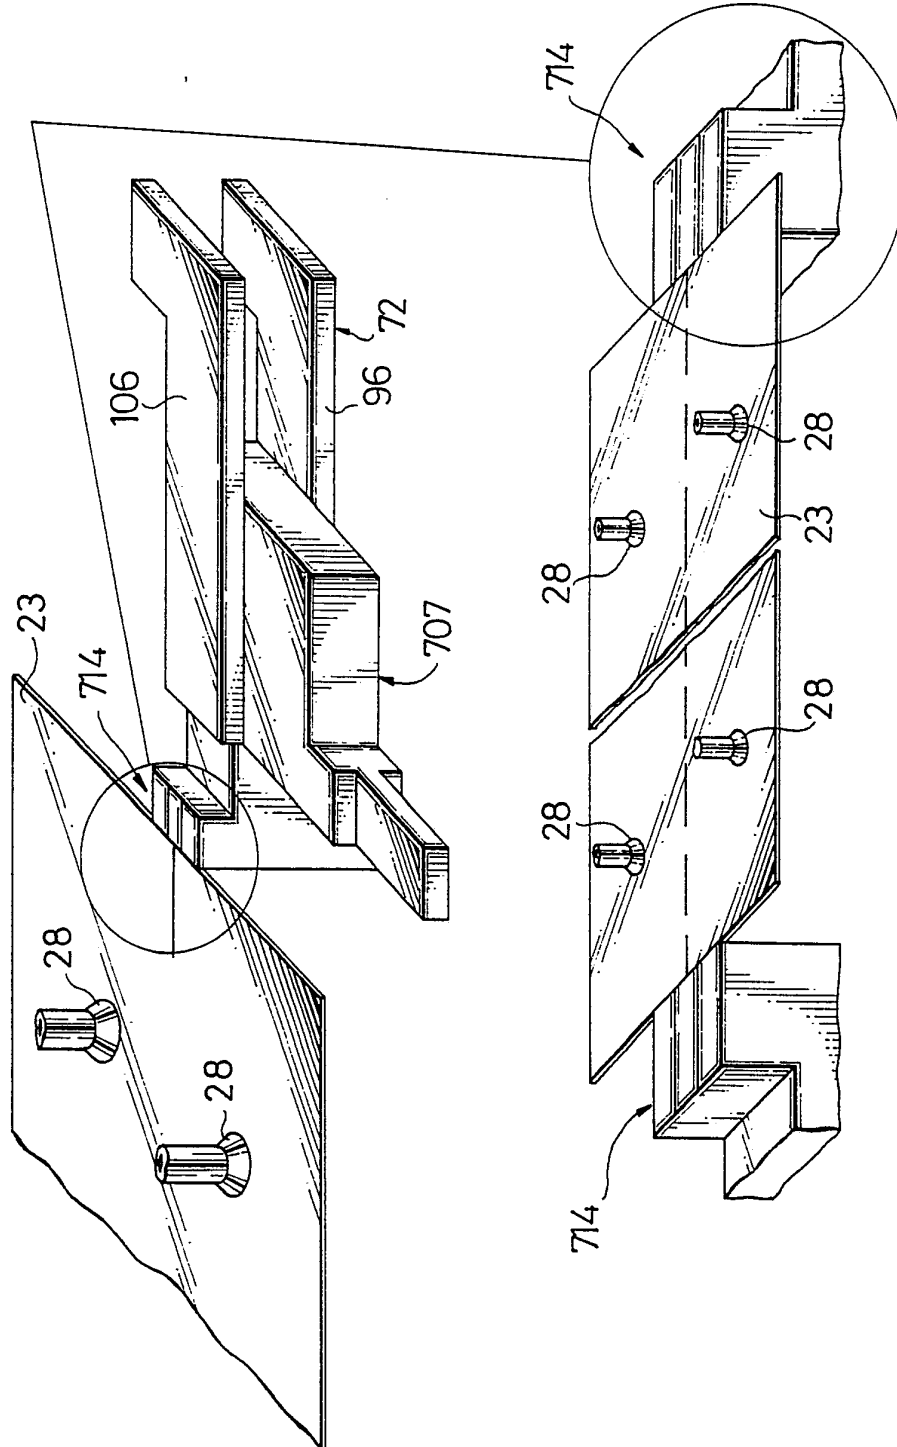


FIG.18b

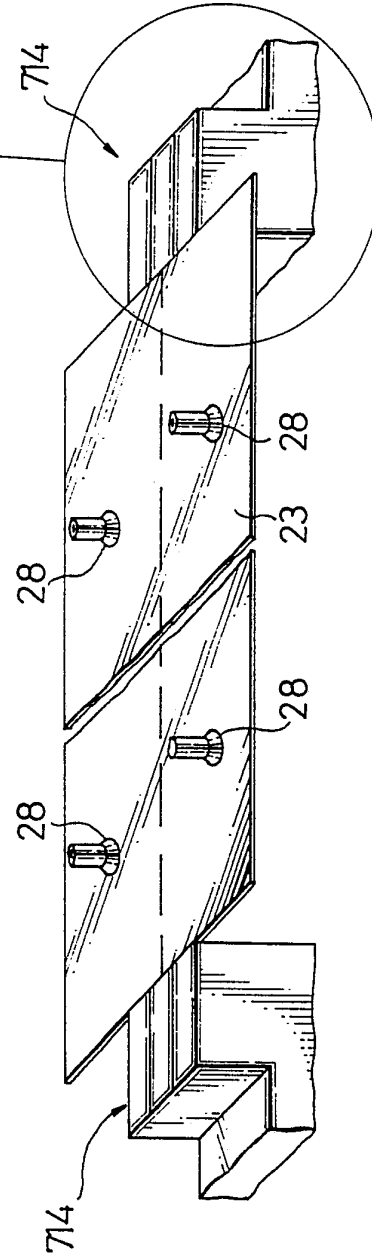

22/24

FIG.19a

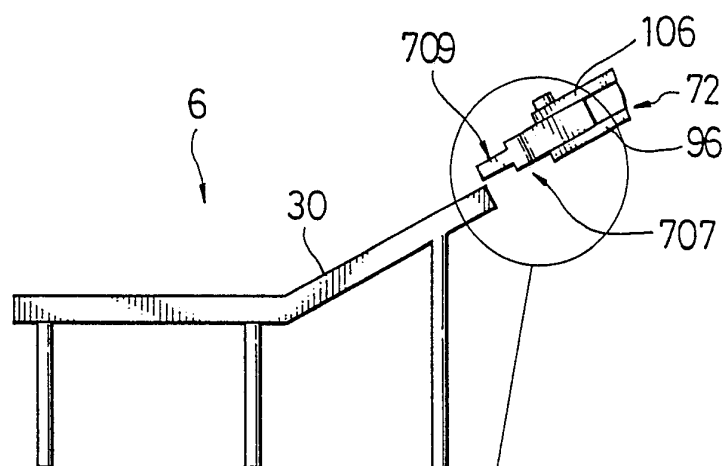
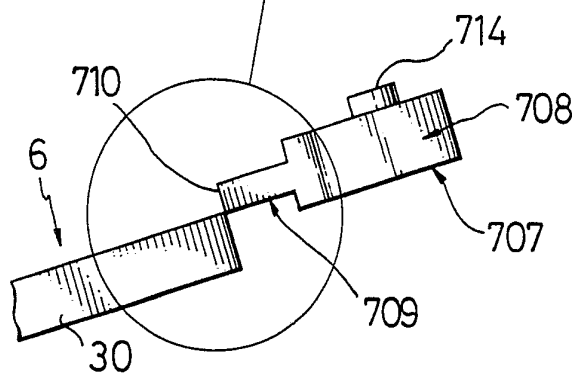


FIG.19b

FIG. 20

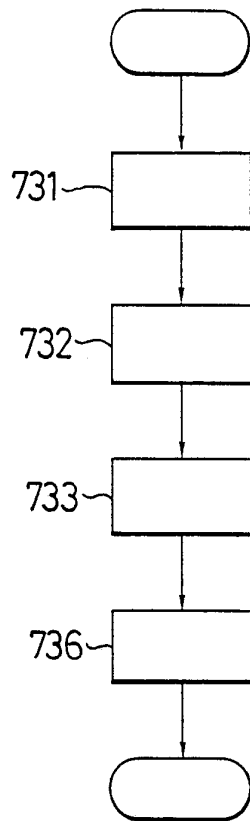


FIG. 21



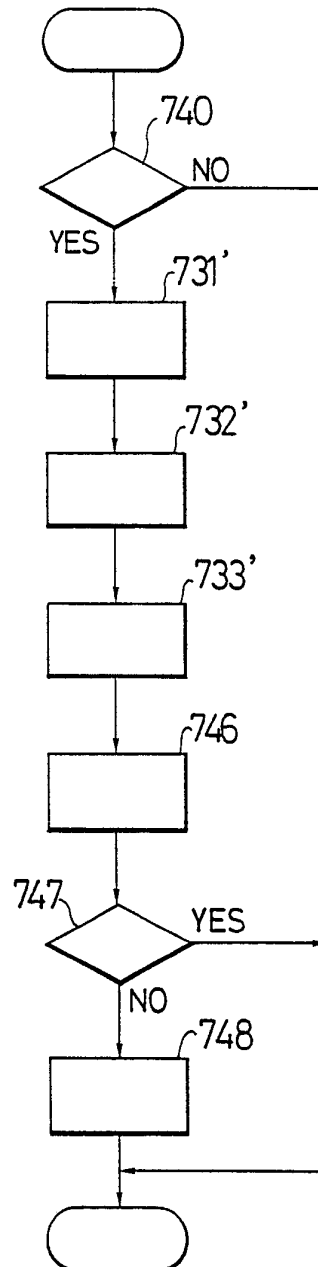


FIG. 22

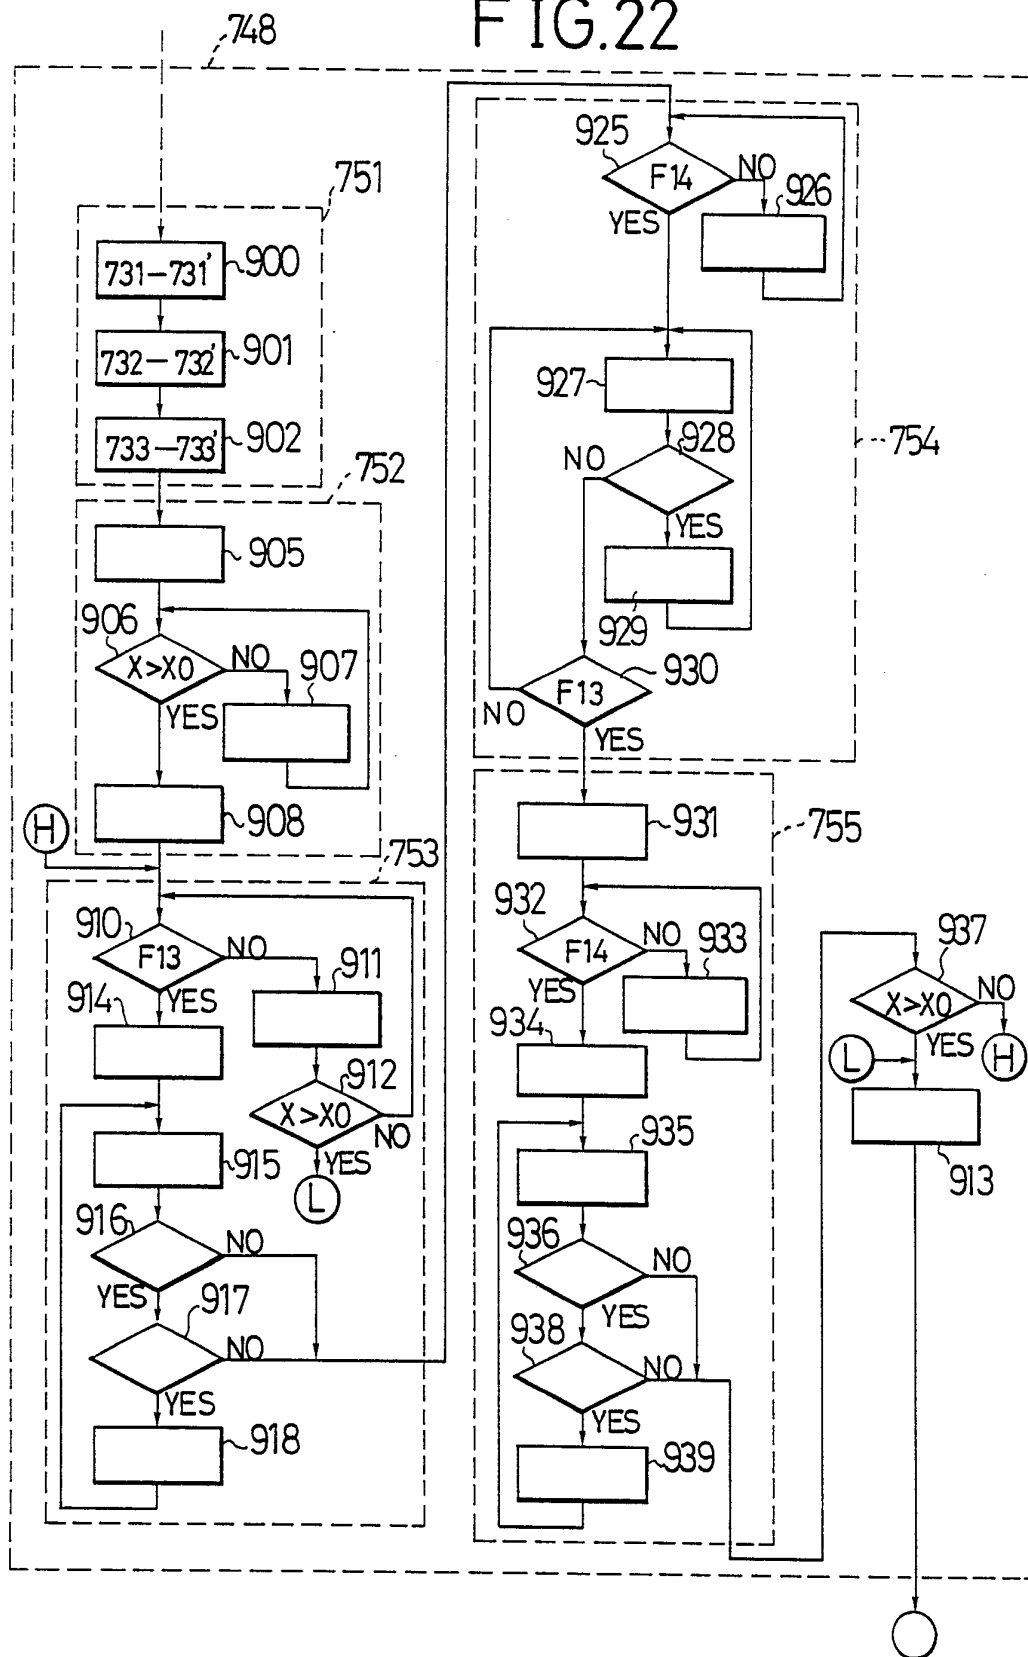

INTERNATIONAL SEARCH REPORT

International Application No PCT/JP 90/01648

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶ According to International Patent Classification (IPC) or to both National Classification and IPC IPC5: B 25 J 9/16, G 05 B 19/405		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
IPC5	B 25 J, G 05 B	
Documentation Searched other than Minimum Documentation to the extent that such Documents are included in Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
Y	DE, A1, 3322220 (ASEA) 5 January 1984, see page 9, line 30 - page 12, line 30; figure 2 --	1-6
Y	GB, A, 2211002 (AMADA) 21 June 1989, see page 2 - page 4; figure 1 --	1-6
Y	GB, A, 2217244 (AMADA) 25 October 1989, see abstract corresponds to the Italian application 67224-A/88, cited in the application --	1-6
<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>* Special categories of cited documents:¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 48%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> </div> </div>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
12th March 1991	22. 03. 91	
International Searching Authority	Signature of Authorized Officer	
EUROPEAN PATENT OFFICE	 MISS D. S. KOWALCZYK	

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No
A	US, A, 3920972 (CORWIN) 18 November 1975, see abstract -- -----	1-6

ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.PCT/JP 90/01648

SA 42648

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on 31/01/91
The European Patent office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-A1- 3322220	05/01/84	JP-A- 59011405	21/01/84
		SE-B-C- 436848	28/01/85
		US-A- 4888708	19/12/89
GB-A- 2211002	21/06/89	DE-A- 3842254	06/07/89
		FR-A- 2624411	16/06/89
		JP-A- 1284427	15/11/89
		SE-A- 8804534	15/12/88
GB-A- 2217244	25/10/89	DE-A- 3908496	28/09/89
		FR-A- 2628661	22/09/89
		JP-A- 2205213	15/08/90
		SE-A- 8900926	16/09/89
US-A- 3920972	18/11/75	CA-A- 1020651	08/11/77
		DE-A-B-C 2526504	29/01/76
		GB-A- 1481134	27/07/77
		JP-C- 1500631	28/06/89
		JP-A- 51025273	01/03/76
		JP-B- 60051121	12/11/85
		SE-B-C- 428977	01/08/83
		SE-A- 7507986	19/01/76

For more details about this annex : see Official Journal of the European patent Office, No. 12/82