




- (51) International Patent Classification:
H01R 13/506 (2006.01) *H01R 13/6592* (2011.01)
H01R 13/719 (2011.01)
- (21) International Application Number:
PCT/US2013/072601
- (22) International Filing Date:
2 December 2013 (02.12.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/737,921 17 December 2012 (17.12.2012) US
- (71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).
- (72) Inventors: **LEE, Kok Hoe**; 1 Yishun Avenue 7, Singapore 768923 (SG). **BANDHU, Saujit**; 1 Yishun Avenue 7, Singapore 768923 (SG).
- (74) Agents: **MOSHREFZADEH, Robert, S.** et al.; 3M Center, Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: CONNECTOR ASSEMBLY

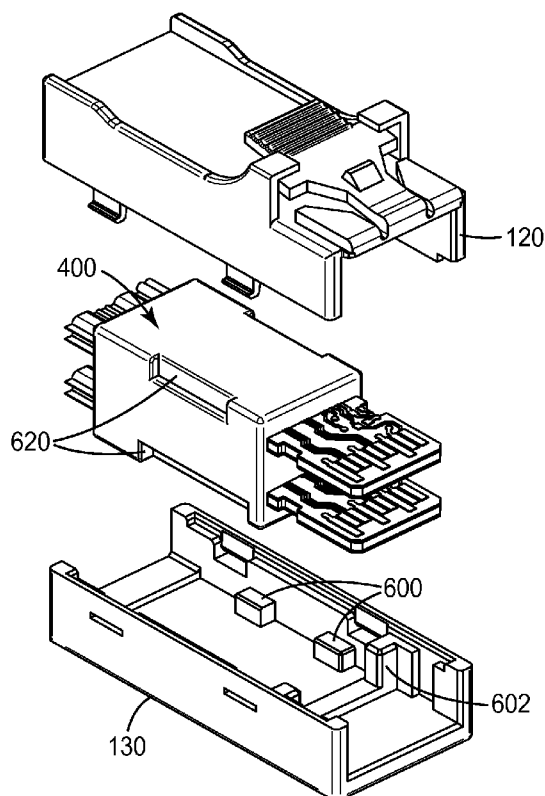

(57) Abstract: A connector assembly includes a housing, a plurality of circuit board cable assemblies, and an overmold. Each of the circuit board cable assemblies may include a printed circuit board and a pair of shielded cables. The overmold may extend and insulate a portion of the shielded cables and a portion of the printed circuit board that includes a plurality of conductive contact pads for electrical connection to the shielded cables.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of
the earlier application (Rule 4.17(iii))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*

Published:

— *with international search report (Art. 21(3))*

CONNECTOR ASSEMBLY

5

FIELD

The disclosure relates to connector assemblies and, in particular, to connector assemblies that includes an insulative housing and an overmold.

BACKGROUND

10

High-speed signal protocols such as, e.g., MiniSAS HD, etc. are often used for a number of applications. For example, high-speed protocols are often used for data communication between various electronic apparatus such as storage devices in computers. Connector assemblies for high-speed protocols are often limited to generic designs including 1-piece, hollow housings.

15

Additionally, it may be difficult to manufacture a connector assembly for use with high-speed signal protocols that has low impedance while maintaining structural integrity (e.g., during plugging and unplugging of the connector assembly, etc.).

BRIEF SUMMARY

20

The disclosure relates to connector assemblies and, in particular, to connector assemblies that include an insulative housing and an overmold, among other aspects.

25

In many embodiments, a connector assembly may include an insulative housing, a plurality of vertically spaced apart circuit board cable assemblies, and an overmold. The insulative housing may include an insulative upper housing half and an insulative lower housing half, a side wall of the lower housing half defining at least one opening therein, and a corresponding side wall of the upper housing half having at least one latch. The upper housing half may be removably assembled to the lower housing half by the at least one opening receiving and engaging the at least one latch.

30

The plurality of vertically spaced apart circuit board cable assemblies may be disposed within the housing. Each circuit board cable assembly may include a printed circuit board (PCB) and a pair of shielded cables. The PCB may include an upper surface, an opposing lower surface, a mating end for engaging a mating connector, a cable end opposite the mating end, a first plurality of conductive contact pads disposed on the upper and lower surfaces at the mating end for engaging terminals of a mating connector, and a second plurality of conductive contact pads disposed on the upper and lower surfaces at the cable end and electrically connected to the first plurality of conductive contact pads. Each shielded cable of the pair of shielded cables may include a plurality of conductor sets and first and second

35

conductive shielding films disposed on opposite first and second sides of the shielded cable. Each of the

conductor sets may extend along a length of the cable and include two or more insulated conductors. Each insulated conductor may include a central conductor surrounded by a dielectric material. The first and second conductive shielding films may include cover portions and pinched portions arranged such that, in transverse cross section, the cover portions of the first and second shielding films in combination substantially surround each conductor set, and the pinched portions of the first and second shielding films in combination form pinched portions of the shielded cable on each side of each conductor set. Exposed ends of the central conductors in the pair of shielded cables may be terminated at the second plurality of conductive contact pads.

The overmold may be molded around the plurality of vertically spaced apart circuit board cable assemblies. Further, the overmold may tightly enclose at least a portion of each circuit board cable assembly along a rear to front direction of the overmold portions of the pair of shielded cables behind the cable end of the PCB, the cable end of the PCB, the exposed ends of the central conductors in the pair of shielded cables, the second plurality of conductive contact pads, and a portion of the PCB in front of the second plurality of conductive contact pads with the first plurality of conductive contact pads projecting forwardly from a front end of the overmold. The connector assembly may be assembled by first inserting the overmold in one of the upper and lower housing halves and then assembling the upper and lower housing halves.

In further embodiments, the connector assembly may include a latching member. The latching member may include a resilient arm making an oblique angle with the housing. The resilient arm may include a fixed end attached to the housing, an opposite free end, and a latch disposed between the fixed and free ends. In at least one embodiment, the fixed end may be removably attached to the housing.

In further embodiments, the at least one of the upper and lower housing halves may include a plurality of positioning protrusions and the overmold may include a corresponding plurality of positioning recesses such that when the connector assembly is assembled, the plurality of positioning recesses receive and engage the plurality of positioning protrusions to position and hold the overmold in a predetermined position within the housing. In at least one embodiment, at least one positioning recess in the plurality of positioning recesses receives and engages two or more positioning protrusions in the plurality of positioning protrusions.

In further embodiments, the connector assembly may include, or define, a thickness direction along thickness directions of the PCBs in the plurality of vertically spaced apart circuit board cable assemblies and, when assembling the connector assembly, the overmold may be configured to be inserted in one of the upper and lower housing halves only along the thickness direction of the connector assembly. In at least one embodiment, after the overmold is inserted in one of the upper and lower housing halves, the other one of the upper and lower housing halves may be configured to be assembled

to the overmold and the one of the upper and lower housing halves only along the thickness direction of the connector assembly.

In further embodiments, the connector assembly may conform to SFF 8643.

In further embodiments, the impedance measured between the first plurality of conductive pads of the printed circuit board and the central conductor of the insulated conductors of the plurality of conductor sets of the pair of shielded cables is less than or equal to 110 ohms (e.g., 105 ohms, 100 ohms, etc.).

In further embodiments, the connector assembly may be configured to be applied to the an internal MiniSAS HD cable assembly using a SFP+ twinaxial ribbon cable to, e.g., further enhance routability and signal integrity performance

In further embodiments, a connector assembly may include an insulative housing, a plurality of vertically spaced apart circuit board cable assemblies disposed within the housing, and an overmold. The insulative housing may include an insulative upper housing half and an insulative lower housing half, and the upper housing half may be removably assembled to the lower housing half. Each circuit board cable assembly may be configured to be coupled, or couplable, to a pair of shielded cables and may include a printed circuit board (PCB). The PCB may include an upper surface, an opposing lower surface, a mating end for engaging a mating connector, a cable end opposite the mating end, a first plurality of conductive contact pads disposed on the upper and lower surfaces at the mating end for engaging terminals of a mating connector, and a second plurality of conductive contact pads disposed on the upper and lower surfaces at the cable end. The second plurality of conductive contact pads may be electrically connected to the first plurality of conductive contact pads and electrically connectable to exposed ends of central conductors of the pair of shielded cables. The overmold may be molded around the plurality of vertically spaced apart circuit board cable assemblies. Further, the overmold may tightly enclose at least a portion of each circuit board cable assembly along a rear to front direction of the overmold portions of the pair of shielded cables behind the cable end of the PCB, the cable end of the PCB, the exposed ends of the central conductors in the pair of shielded cables, the second plurality of conductive contact pads, and a portion of the PCB in front of the second plurality of conductive contact pads with the first plurality of conductive contact pads projecting forwardly from a front end of the overmold. The connector assembly may be assembled by first inserting the overmold in one of the upper and lower housing halves and then assembling the upper and lower housing halves. The connector assembly may include a thickness direction along thickness directions of the PCBs in the plurality of vertically spaced apart circuit board cable assemblies, and, when assembling the connector assembly, the overmold may be configured to be inserted in one of the upper and lower housing halves only along the thickness direction of the connector assembly.

The details of one or more embodiments of the invention are set forth in the accompanying drawings and the description below. Other features, objects, and advantages of the invention will be apparent from the description and drawings, and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The disclosure may be more completely understood in consideration of the following detailed description of various embodiments of the disclosure in connection with the accompanying drawings, in which:

FIG. 1 is a perspective view of an exemplary connector assembly;

FIG. 2 is an exploded perspective view of the connector assembly of **FIG. 1**;

FIG. 3A is a top perspective view of an exemplary circuit board cable assembly of the connector assembly of **FIG. 1**;

FIG. 3B is a bottom perspective view of the circuit board cable assembly of **FIG. 3A**;

FIG. 4 is a perspective end view of an exemplary shielded cable for use with the circuit board cable assembly of **FIG. 3A**;

FIG. 5A is a side perspective view of an exemplary overmold and circuit board cable assembly of the connector assembly of **FIG. 1**;

FIG. 5B is a side perspective view of the exemplary overmold and circuit board cable assembly of **FIG. 5A** with the overmold being translucent;

FIG. 6A is a side perspective view of the housing of the connector assembly of **FIG. 1** showing an angle formed by an exemplary latching member;

FIG. 6B is a top perspective view of the housing of the connector assembly of **FIG. 1** showing the exemplary latching member of **FIG. 6A**; and

FIGS. 7A-7D are exploded perspective views of the connector assembly of **FIG. 1**.

DETAILED DESCRIPTION

In the following detailed description, reference is made to the accompanying drawings that form a part hereof, and in which are shown by way of illustration several specific embodiments. It is to be understood that other embodiments are contemplated and may be made without departing from the scope or spirit of the present disclosure. The following detailed description, therefore, is not to be taken in a limiting sense.

All scientific and technical terms used herein have meanings commonly used in the art unless otherwise specified. The definitions provided herein are to facilitate understanding of certain terms used frequently herein and are not meant to limit the scope of the present disclosure.

Unless otherwise indicated, all numbers expressing feature sizes, amounts, and physical properties used in the specification and claims are to be understood as being modified in all instances by the term “about.” Accordingly, unless indicated to the contrary, the numerical parameters set forth in the foregoing specification and attached claims are approximations that can vary depending upon the desired properties sought to be obtained by those skilled in the art utilizing the teachings disclosed herein.

As used in this specification and the appended claims, the singular forms “a,” “an,” and “the” encompass embodiments having plural referents, unless the content clearly dictates otherwise. As used in this specification and the appended claims, the term “or” is generally employed in its sense including “and/or” unless the content clearly dictates otherwise.

Spatially related terms, including but not limited to, “lower,” “upper,” “beneath,” “below,” “above,” and “on top,” if used herein, are utilized for ease of description to describe spatial relationships of an element(s) to another. Such spatially related terms encompass different orientations of the device in use or operation in addition to the particular orientations depicted in the figures and described herein. For example, if an object depicted in the figures is turned over or flipped over, portions previously described as below or beneath other elements would then be above those other elements.

As used herein, when an element, component or layer for example is described as forming a “coincident interface” with, or being “on” “connected to,” “coupled with” or “in contact with” another element, component or layer, it can be directly on, directly connected to, directly coupled with, in direct contact with, or intervening elements, components or layers may be on, connected, coupled or in contact with the particular element, component or layer, for example. When an element, component or layer for example is referred to as being “directly on,” “directly connected to,” “directly coupled with,” or “directly in contact with” another element, there are no intervening elements, components or layers for example.

As used herein, “have,” “having,” “include,” “including,” “comprise,” “comprising” or the like are used in their open ended sense, and generally mean “including, but not limited to.” It will be understood that the terms “consisting of” and “consisting essentially of” are subsumed in the term “comprising,” and the like.

The present disclosure relates to connector assemblies and, in particular, to connector assemblies that includes an insulative housing and an overmold, among other aspects. The exemplary cable assemblies described herein may include a snap-fitting, symmetrical or asymmetrical 2-piece insulative housing for protection of a termination portion of the cable assembly. The overmold and insulative housing may be configured to be coupled together to securely locate, or hold, at least one PCB and at least one shielded cable within the insulative housing. The overmold may include one or more polymer materials that may be molded around the PCB(s) and shielded cable(s). The overmold and the insulative housing may include various mating features such as apertures, recesses, indentions, stubs, protrusions,

pins, etc. that may be configured to mate (e.g., be located adjacent one another) to provide alignment and secure coupling between the overmold and the insulative housing. The insulative housing may include an upper portion and a lower portion that may be removably coupled to each other around the overmold. The insulative housing may be referred to as a detachable 2-piece housing, which, e.g., may
5 accommodate reworking of cable assemblies should there be any defect in one or more of its components and increase yield. For example, the 2-piece housing may be detachable therefore increasing manufacturing yield should there be any defect on one or more components of cable assembly. In other words, the convenience of disassembling the cable assembly may allow defective parts to be detected and replaced at a shorter duration. While the present disclosure is not so limited, an appreciation of various
10 aspects of the disclosure will be gained through a discussion of the examples provided below.

FIG. 1 is a perspective view of an exemplary connector assembly **100** and **FIG. 2** is an exploded perspective view of the connector assembly **100** of **FIG. 1**. As shown, the connector assembly **100** may include a housing **110**. The housing **110** may be configured to insulate and securely position, or hold, one or more components of the connector assembly **100** at least partially or entirely located within the
15 housing **110**. The housing **110** may include insulative, or dielectric, material, and thus, be referred to as an "insulative" housing. The insulative material of the housing **110** may include any suitable polymeric material, etc.

The housing **110** may include an upper housing half, or portion, **120** and a lower housing half, or portion **130** that may be coupled, or attached, to one another. In other words, the upper housing half **120**
20 may be coupled, or attached, to the lower housing half **130**, and vice versa. Although each of the upper and lower housing halves **120**, **130** are described herein as being "halves," it is to be understood that each of the upper and lower housing halves **120**, **130** may not be substantially "half" of the housing **110**, and instead, by describing each of the upper and lower housing halves **120**, **130** has halves, it is to be understood that the housing **110** includes two portions, namely the upper housing half **120** and the lower
25 housing half **130**.

Additionally, the upper housing half **120** and the lower housing half **130** may be described as being removably coupled to one another. As used herein, "removably coupled" may be defined as a coupling between two elements, or objects, that may remain coupled to one another upon the application of normal operating forces and may be uncoupled, or removed from being coupled, by the application of a
30 selected amount of force (e.g., greater than the normal operating forces) in one or more selected, or particular, directions. For example, after a user couples (e.g., snaps together) the upper housing half **120** and the lower housing half **130**, the upper housing half **120** and the lower housing half **130** may remain coupled together during normal operation until a user may decide to uncouple the upper housing half **120**

from the lower housing half **130**. Further, each of the upper and lower housing halves **120**, **130** may be insulative, and thus, be referred to as insulative housing halves.

The upper housing half **120** and the lower housing **130** may be coupled together, or assembled, using any suitable methods including, but not limited to, snap fit, friction fit, press fit, mechanical clamping, etc. Additionally, many different structures such as, e.g., latches, openings, protrusions, etc., may be used to provide the coupling between the upper housing half **120** and the lower housing half **130**. As shown **FIG. 2**, a side wall **132** of the lower housing half **130** may define at least one (e.g., one or more, a plurality, only one, etc.) opening **134** therethrough (or partially therein) and a corresponding side wall **122** (e.g., corresponding to the side wall **132** of the lower housing half **130**) of the upper housing half **120** may define at least one latch **124**. The at least one opening **134** and the at least one latch **124** may be configured to engage with each other (e.g., snap-fit to each other) to assemble, or couple, the lower housing half **130** to the upper housing half **120**. For example, the upper housing half **130** may be removably assembled to the lower housing half **130** by the at least one opening **134** receiving and engaging the at least one latch **124**. The at least one latch **124** may extend within the at least one opening **134** in a direction transverse, or perpendicular, to a thickness direction **401** described further herein with reference to **FIGS. 7A-7D**. The housing **110** may include an upper housing half **120** having four latches **124**, two latches **124** located extending from each side wall **122**, and a lower housing half **130** having four openings **134**, two openings **134** located through (or partially therein) each side wall **132**.

The exemplary connector assembly **100** may further include one or more (e.g., a plurality, only one, two, etc.) circuit board cable assemblies **200**, one of which is shown in **FIGS. 3A-3B**, which depict top and bottom perspective views, respectively. The exemplary circuit board cable assembly **200** of the connector assembly **100** may include a printed circuit board (PCB) **300** and a pair of shielded cables **2**. As shown in **FIG. 2**, the circuit board cable assemblies **200** may be vertically spaced apart from one another. As used herein, "vertically spaced apart" may mean that the circuit board cable assemblies **200** may be separated by space in the thickness direction **401** described further herein with respect to **FIGS. 7A-7D** or in a direction perpendicular to the plane of each PCB **300** of the assemblies **200**. Additionally, each PCB **300** may be arranged such that the plane of each PCB **300** may be parallel to each other.

The printed circuit board (PCB) **300** may include an upper surface **310** and an opposing lower surface **320**, a mating end **330**, and a cable end **340** opposite the mating end **330**. The mating end **330** may be configured to, or for, engaging a mating connector. In other words, the mating end **330** may be a male interface configured to be coupled to the mating connector, which may be a female interface.

Each of the PCBs **300** may further define one or more notches **324** that may be used for positioning of the circuit board cable assemblies **200** within the housing **110**, which will be described further herein with respect to **FIGS. 7A-7D**.

A plurality of conductive contact pads may be disposed (e.g., located on the surfaces **310**, **320** of the PCB **300**) at each end **330**, **340** of the PCB **300** for electrical connection to a mating connector and a shield cable **2**, respectively. More specifically, a first plurality of conductive contact pads **350** may be disposed on one or both of the upper and lower surfaces **310**, **320** at the mating end **330** for engaging terminals of a mating connector, e.g., when a mating connector is coupled to the connector assembly **100**. Further, a second plurality of conductive contact pads **360** may be disposed on one or both of the upper and lower surfaces **310**, **320** at the cable end **340**. The second plurality of conductive contact pads **360** may be configured to be coupled a shielded cable **2** as described further herein. Additionally, the second plurality of conductive contact pads **360** may be electrically connected, or coupled, to the first plurality of conductive contact pads **350**, e.g., through conductive traces located on and/or through the PCB **300**, through one or more wires extending along the PCB **300**, etc.

An exemplary shielded cable **2** for use with the circuit board cable assembly **200** is depicted in **FIG. 4**. The shielded cable **2** may include a plurality of conductor sets **4** and conductive shielding films **8**, **9** disposed, or located, on either side of the shielded cable **2**. Although the shielded cable **2** as shown includes 2 shielding films **8**, **9**, it is to be contemplated that the conductor sets **4** may be encapsulated, or wrapped, with a single shielding film, or more than two shielding films.

Each of the conductor sets **4** may extend along a length of the shielded cable **2** (e.g., from a first end region to a second end region) and may include two or more insulated conductors **6**. Each insulated conductor **6** may include a central conductor **5** surrounded by, or wrapped in, a dielectric material **7**. The central conductor **5**, as self-described, may include conductive material such as, e.g., copper, aluminum, etc. Likewise, the dielectric material **7** may include one or more dielectric, or nonconductive, materials such, e.g., one or more polymers.

The first and second conductive shielding films **8**, **9** may include, or form, cover portions **11** and pinched portions **13** along the shielded cable **2**. The cover portions **11** and the pinched portions **13** may be arranged such that, in a transverse cross section as partially shown in the perspective end view in **FIG. 4**, the cover portions **11** of the first and second shielding films **8**, **9** in combination substantially surround each conductor set **4**, and the pinched portions **13** of the first and second shielding films **8**, **9** in combination form pinched portions **13** of the shielded cable **2** on each side of each conductor set **4**. In other words, the first and second shielding films **8**, **9** form cover portions **11** that extend around each conductor set **4** and pinched portions **13** between each conductor set **4**. The cover portions **11** and the pinched portions **13** may be formed by locating the first shielding film **8** above the conductor sets **4** and the second shielding film **9** below the conductors set **4** and coupling (e.g., bonding, thermo-welding, adhering, etc.) the shielding films **8**, **9** to form the pinched portions **13**, and in turn, form the cover portions **11**.

The shielded cable **2** may further include ground conductors **12** extending along a length of the shielded cable **2**. The ground conductors **12** may be electrically coupled to the first and second shielding films **8, 9** (e.g., pinched between each of the first and second shielding films **8, 9**) to, e.g., provide electromagnetic shielding for the conductor sets **4**. Additionally, the outside of the shielded cable **2** may be insulated from the environment, such as, e.g., any object (e.g., one or more components located within a server case) or any user that may touch the shielded cable **2**. To insulate the shielded cable **2** (or more particularly, the first and second shielding films **8, 9**) from the environment, the first and second shielding films **8, 9** may be coated in, or surrounded by, one or more dielectric materials such as, e.g., one or more polymers, etc.

As shown, the dielectric material **7** and the conductive shielding **8, 9** disposed on opposed first and second sides of the shielded cable **2** may leave exposed ends **14** of the central conductors **5** exposed to allow conductive coupling, or attachment, of the central conductors **5** to conductive elements such as the conductive pads **360** of the PCB **300**. As shown in **FIGS. 3A-3B**, the exposed end **14** of the central conductors **5** are terminated at (e.g., electrically coupled to, soldered to, laser welded, etc.) the conductive pads **360**.

The exemplary connector assembly **100** may further include an overmold **400** located around the one or more circuit board cable assemblies **200** as shown in **FIGS. 5A-5B**. The overmold **400** may be molded around, or about, the circuit board cable assemblies **200**. In at least one embodiment, the overmold **400** may be formed by locating the circuit board cable assemblies **200** within a two-piece mold, injecting overmold **400** material in a fluid state into the two-piece mold, and allowing the overmold **400** material to cure around the circuit board cable assemblies **200**. In other words, the overmold **400** may be "injection" molded.

Further, the overmold **400** may be described as being a unitary piece that is permanently molded around and/or in between the one or more circuit board cable assemblies **200** in such a way that the overmold cannot be removed and reassembled and, furthermore, it cannot be removed from what it is molded over without at least damaging the overmold. In other words, the material of the overmold **400** may be located around and in between each of the one or more circuit board cable assemblies **200**. Additionally, the material of the overmold **400** may fill-in the space between the circuit board cable assemblies **200**. Still further, the overmold **400** may be in flush contact with the portion **420** of the upper and lower surfaces **310, 320** of the PCBs **300**, e.g., as opposed to merely touching a small portion or region of the PCBs **300** such as the edges of the PCBs **300** (e.g., such as in a cable organizer or holder, in which the cables and/or PCBs may be removable therefrom). Further, after the overmold **400** has been applied or coupled to the circuit board cable assemblies **200**, the PCBs **300** and the shielded cables **2** may not be removable from the overmold **400**. In other words, the circuit board cable assemblies **200**

(including the PCBs **300** and the shield cables **2**) may be permanently coupled to the overmold **400**. In one or more embodiments, the overmold **400** may be defined as being one continuous piece or of unitary construction (e.g., the overmold **400** may be described as being "integral," etc.). A unitary construction refers to a construction that does not have any internal interfaces, joints, or seams. In some cases, a unitary structure or construction is capable of being formed in a single forming step such as machining, casting or molding. A unitary construction or article is not formed by bonding components parts together. Additionally, the PCBs **300** may be coated with a layer of material such as, e.g., epoxy, prior the overmold **400** being molded thereabout.

Although the overmold **400** may be described herein as being one continuous piece or of unitary construction, it is to be understood that the overmold **400** may have many different constructions. For example, in at least one embodiment, the overmold **400** may include a one or more overmold portions, each being formed, or molded, around one PCB **300**, and subsequently, each of the overmold portions may be coupled, or bonded, together using any suitable method/structure, including but not limited to snap fit, friction fit, press fit, and mechanical clamping, to form overmold **400**. Additionally, although as described herein, the overmold **400** is configured to be used with two circuit board cable assemblies **200**, it is to be understood that the overmold **400** may be used with only one circuit board assembly **200** or more than two circuit board assemblies **200** depending on the configuration of the connector assembly **100**.

The overmold **400** may extend around one or more portions or components of the connector assembly **100**, e.g., to provide secure attachment between portions/components, to provide protection of one or more portions/components, to provide insulation of one or more portions/components, etc. Further, the overmold **400** may provide for proper spacing between circuit board cable assemblies **200** without the use of a spacer, or equivalent item, located between the circuit board cable assemblies **200**. Additionally, the overmold **400** may define one or more features such as, e.g., indentations, protrusions, apertures, recesses, etc. configured to mate with one or more features of the housing **110**, which will be described further herein.

The overmold **400** may tightly enclose each circuit board cable assembly **200** along a rear to front direction **425** as shown in FIG. **5B** and at least a portion of the pair of shielded cables **2** behind the cable end **340** of the PCB **300**, the cable end **340** of the PCB **300**, the exposed ends **14** of the central conductors **5** in the pair of shielded cables **2**, the second plurality of conductive contact pads **360**, and a portion, or region, **420** of the PCB **300** in front of the second plurality of conductive contact pads **360** with the first plurality of conductive contact pads **350** projecting forwardly from a front end **430** of the overmold **400**. In other words, the overmold **400** may extend about, or around, the connector assembly **100** from the shielding films **8, 9** of the shielded cables **2** to a portion **420** of the PCB **300** located beyond the second

plurality of conductive contact pads **360** but not beyond the first plurality of conductive pads **350** such that, e.g., an exposed portion, or region, **422** of the PCB **300** may be exposed. In this configuration, the overmold **400** may be configured to insulate the second plurality of conductive pads **360**. Further, the overmold **400** may be configured to provide structural stability between the second plurality of conductive pads **360** and the exposed ends **14** of the shielded cables **2**. For example, if a force were applied to the shielded cables **2** in a direction opposite that of the front direction **425** (e.g., the front direction extending from the rear end **432** to the front end **430**) while the overmold **400** were held, or secured, stationary, the force would be transferred to the overmold **400** instead of the electrical coupling, or connection, between the second plurality of conductive pads **360** and the exposed ends **14**.

The connector assembly **100** may further include additional elements or features that may be used to couple the connector assembly **100** to a female interface, or connector. For example, as shown in **FIGS 6A-6B**, the connector assembly may further include a latching member **500**, e.g., configured to latch to a portion of a female interface to removably coupled the connector assembly to the female interface. The latching member **500** may include a resilient arm **510** making an oblique angle θ with the housing **110**. The oblique angle θ may be greater than about 3 degrees and less than about 45 degrees. In at least one embodiment, the oblique angle θ may be about 10 to about 15 degrees. The resilient arm **510** may include a fixed end **520** attached to the housing **110**, an opposite free end **530**, and a latch **540** disposed between the fixed and free ends **520**, **530**. The latch **540** may be a protrusion extending from the surface of the resilient arm **510** that may be configured to engage, or latch, within a portion (e.g., an aperture) of a female interface. The resilient arm **510** may be configured to deflect, or move, by applying force to the resilient arm **510** such that the latch **540** may be engaged or disengaged with a portion of the female interface. Further, the resilient arm **510** may be biased to position the latch **540** to engage a portion of a female interface, and a user may have to apply a force to the resilient arm **510** (e.g., to the free end **530**) to disengage the connector assembly **100** from the female interface. In at least one embodiment, the fixed end **520** may be removably attached to the housing **110** such that, e.g., the latching member **500** may be removed from the housing **110** if not needed.

FIGS. 7A-7D depict exploded perspective views of the connector assembly **100**. The connector assembly **100** may be assembled by first inserting the overmold **400** in either one of the upper and lower housing halves **120**, **130** and then assembling the upper and lower housing halves **120**, **130** along a thickness direction **401**, which is along thickness directions **402** of each of PCBs **300**. The thickness directions **401**, **402** may be defined as directions perpendicular to each of the planes formed by the PCBs **300** of the circuit board cable assemblies **200**. In other words, the thickness of the PCBs **300**, or the distance between the upper and lower surfaces **310**, **320** of the PCBs **300**, may define the thickness directions **402** and the thickness direction **401** may be parallel the thickness directions **402**. For example,

the connector assembly **100** may include, or define, a thickness direction **401** along thickness directions **402** of the PCBs **300** in the plurality of vertically spaced apart circuit board cable assemblies **200**. When assembling the connector assembly **100**, the overmold **400** may be configured to be inserted in one of the upper and lower housing halves **120**, **130** only along the thickness direction **401** of the connector assembly **100**.

Further, after the overmold **400** is inserted in one of the upper and lower housing halves **120**, **130**, the other one of the upper and lower housing halves **120**, **130** may be configured to be assembled to the overmold **400** and the one of the upper and lower housing halves **120**, **130** only along the thickness direction **401** of the connector assembly **100**. In other words, each of the upper housing half **120**, lower housing half **130**, and the overmold **400** may be assembled to each other only along the thickness direction **401**. Further, the connector assembly **100** may be disassembled in a similar, but opposite, process as the assembly thereof. For example, one of the upper and lower housing halves **120**, **130** may be removed from the other along the thickness direction **401**, and then the overmold **400** may be removed from one of the halves **120**, **130** (the half within which the overmold **400** remains) also along the thickness direction. Since the couplings between the upper housing half **120** and the lower housing half **130** and between the housing halves **120**, **130** and the overmold **400** are not permanent, such components, or elements thereof, may not be deformed or destroyed due to disassembly.

One or more features may be included in the upper housing half **120**, lower housing half **130**, and the overmold **400** to align each of the upper housing half **120**, lower housing half **130** and the overmold **400** during assembly and to provide support to circuit board cable assemblies **200**. For example, the upper housing half **120** and lower housing half **130** may include features such as protrusions, indentations, recesses, etc. that correspond to similar features of the overmold **400**. Such features may mate together, or be located adjacent to each other, to provide aid in assembly and provide support.

As shown in **FIGS. 7A-7D**, at least one of the upper and lower housing halves **120**, **130** may include a plurality of positioning protrusions **600**, **610** and the overmold **400** may include a corresponding plurality of positioning recesses **620** such that when the connector assembly **100** is assembled, the plurality of positioning recesses **620** receive and engage the plurality of positioning protrusions **600**, **610** to position and hold the overmold **400** in a predetermined position within the housing **110**. Further, as shown, each positioning recess **620** receives two positioning protrusions **600**, **610** separated by space. In other words, at least one positioning recess **620** in the plurality of positioning recesses **620** may receive and engage two or more positioning protrusions **600**, **610** in the plurality of positioning protrusions **600**, **610**. In other embodiments, any number of positioning recesses **620** and positioning protrusions **600**, **610** may be included in the connector assembly **100** to provide adequate support.

As described herein, each of the PCBs **300** may further define one or more notches **324** located in an exposed portion **422** of the PCBs **300**. The notches **324** may correspond to vertical protrusions **602** of, or defined by, the lower housing half **130**. For example, when the connector assembly **100** is assembled within the overmold **400** including the circuit board cable assemblies **200**, the notches **324** may be mate, or engage, the vertical protrusions **602** of the lower housing half **130** to, e.g., provide further support to the circuit board cable assemblies **200**.

The exemplary connector assembly **100** described herein may be configured to be used in multiple different high-speed signal protocols such as, e.g., MiniSAS HD, etc. As shown, the connector assembly **100** may conform to SFF 8643, an integrated connector receptacle specification, developed by and available from the Small Form Factor (SFF) committee.

The exemplary connector assembly **100** may provide low impedance across its electrical connections to conform to various industry standards. For example, an impedance measured between a conductive pad of the first plurality of conductive pads **350** of the PCB **300** and a corresponding central conductor **5** of the insulated conductors **6** of the plurality of conductor sets **3** of the pair of shielded cables **2** may be less than or equal to 115 ohms, less than or equal to 110 ohms, less than or equal to 105 ohms, less than or equal to 100 ohms, etc.

The following are a list of items of the present disclosure:

Item 1 is a connector assembly, comprising:

an insulative housing comprising an insulative upper housing half and an insulative lower housing half, a side wall of the lower housing half defining at least one opening therein, a corresponding side wall of the upper housing half having at least one latch, the upper housing half being removably assembled to the lower housing half by the at least one opening receiving and engaging the at least one latch;

a plurality of vertically spaced apart circuit board cable assemblies disposed within the housing, each circuit board cable assembly comprising:

a printed circuit board (PCB) comprising:

an upper surface and an opposing lower surface;

a mating end for engaging a mating connector and a cable end opposite the mating end;

a first plurality of conductive contact pads disposed on the upper and lower surfaces at the mating end for engaging terminals of a mating connector; and

a second plurality of conductive contact pads disposed on the upper and lower surfaces at the cable end and electrically connected to the first plurality of conductive contact pads; and

a pair of shielded cables, each shielded cable comprising:

a plurality of conductor sets, each conductor set extending along a length of the cable and comprising two or more insulated conductors, each insulated conductor comprising a central conductor surrounded by a dielectric material;

5 first and second conductive shielding films disposed on opposite first and second sides of the shielded cable, the first and second conductive shielding films including cover portions and pinched portions arranged such that, in transverse cross section, the cover portions of the first and second shielding films in combination substantially surround each conductor set, and the pinched portions of the first and second shielding
10 films in combination form pinched portions of the shielded cable on each side of each conductor set; exposed ends of the central conductors in the pair of shielded cables being terminated at the second plurality of conductive contact pads; and

an overmold molded around the plurality of vertically spaced apart circuit board cable assemblies, the overmold tightly enclosing each circuit board cable assembly along a rear to front
15 direction of the overmold portions of the pair of shielded cables behind the cable end of the PCB, the cable end of the PCB, the exposed ends of the central conductors in the pair of shielded cables, the second plurality of conductive contact pads, and a portion of the PCB in front of the second plurality of conductive contact pads with the first plurality of conductive contact pads projecting forwardly from a front end of the overmold, wherein the connector assembly is assembled by first inserting the overmold in
20 one of the upper and lower housing halves and then assembling the upper and lower housing halves.

Item 2 is the connector assembly of item 1 further comprising a latching member comprising a resilient arm making an oblique angle with the housing and having:

a fixed end attached to the housing;

an opposite free end; and

25 a latch disposed between the fixed and free ends.

Item 3 is the connector assembly of item 2, wherein the fixed end is removably attached to the housing.

Item 4 is the connector assembly of item 1, wherein at least one of the upper and lower housing halves comprises a plurality of positioning protrusions and the overmold comprises a corresponding
30 plurality of positioning recesses such that when the connector assembly is assembled, the plurality of positioning recesses receive and engage the plurality of positioning protrusions to position and hold the overmold in a predetermined position within the housing.

Item 5 is the connector assembly of item 4, wherein at least one positioning recess in the plurality of positioning recesses receives and engages two or more positioning protrusions in the plurality of positioning protrusions.

Item 6 is the connector assembly of item 1 comprising a thickness direction along thickness directions of the PCBs in the plurality of vertically spaced apart circuit board cable assemblies, wherein when assembling the connector assembly, the overmold is configured to be inserted in one of the upper and lower housing halves only along the thickness direction of the connector assembly.

Item 7 is the connector assembly of item 6, wherein after the overmold is inserted in one of the upper and lower housing halves, the other one of the upper and lower housing halves is configured to be assembled to the overmold and the one of the upper and lower housing halves only along the thickness direction of the connector assembly.

Item 8 is the connector assembly of item 1, wherein the connector assembly conforms to SFF 8643.

Item 9 is the connector assembly of item 1, wherein impedance measured between a conductive pad of the first plurality of conductive pads of the printed circuit board and a corresponding central conductor of the central conductor of the insulated conductors of the plurality of conductor sets of the pair of shielded cables is less than or equal to 110 ohms.

Item 10 is a connector assembly, comprising:

an insulative housing comprising an insulative upper housing half and an insulative lower housing half, the upper housing half being removably assembled to the lower housing half;

a plurality of vertically spaced apart circuit board cable assemblies disposed within the housing, each circuit board cable assembly couplable to a pair of shielded cables and comprising:

a printed circuit board (PCB) comprising:

an upper surface and an opposing lower surface;

a mating end for engaging a mating connector and a cable end opposite the mating end;

a first plurality of conductive contact pads disposed on the upper and lower surfaces at the mating end for engaging terminals of a mating connector; and

a second plurality of conductive contact pads disposed on the upper and lower surfaces at the cable end, wherein the second plurality of conductive contact pads are electrically connected to the first plurality of conductive contact pads and electrically connectable to exposed ends of central conductors of the pair of shielded cables; and

an overmold molded around the plurality of vertically spaced apart circuit board cable assemblies, the overmold tightly enclosing each circuit board cable assembly along a rear to front

direction of the overmold portions of the pair of shielded cables behind the cable end of the PCB, the cable end of the PCB, the exposed ends of the central conductors in the pair of shielded cables, the second plurality of conductive contact pads, and a portion of the PCB in front of the second plurality of conductive contact pads with the first plurality of conductive contact pads projecting forwardly from a front end of the overmold,

wherein the connector assembly is assembled by first inserting the overmold in one of the upper and lower housing halves and then assembling the upper and lower housing halves, wherein the connector assembly comprises a thickness direction along thickness directions of the PCBs in the plurality of vertically spaced apart circuit board cable assemblies, wherein when assembling the connector assembly, the overmold is configured to be inserted in one of the upper and lower housing halves only along the thickness direction of the connector assembly.

Thus, embodiments of CONNECTOR ASSEMBLY are disclosed. One skilled in the art will appreciate that the compositions described herein can be practiced with embodiments other than those disclosed. The disclosed embodiments are presented for purposes of illustration and not limitation.

CLAIMS

What is claimed is:

5

1. A connector assembly, comprising:

an insulative housing comprising an insulative upper housing half and an insulative lower housing half, a side wall of the lower housing half defining at least one opening therein, a corresponding side wall of the upper housing half having at least one latch, the upper housing half being removably assembled to the lower housing half by the at least one opening receiving and engaging the at least one latch;

10

a plurality of vertically spaced apart circuit board cable assemblies disposed within the housing, each circuit board cable assembly comprising:

a printed circuit board (PCB) comprising:

15

an upper surface and an opposing lower surface;

a mating end for engaging a mating connector and a cable end opposite the mating end;

a first plurality of conductive contact pads disposed on the upper and lower surfaces at the mating end for engaging terminals of a mating connector; and

20

a second plurality of conductive contact pads disposed on the upper and lower surfaces at the cable end and electrically connected to the first plurality of conductive contact pads; and

a pair of shielded cables, each shielded cable comprising:

25

a plurality of conductor sets, each conductor set extending along a length of the cable and comprising two or more insulated conductors, each insulated conductor comprising a central conductor surrounded by a dielectric material;

first and second conductive shielding films disposed on opposite first and second sides of the shielded cable, the first and second conductive shielding films including cover portions and pinched portions arranged such that, in transverse cross section, the cover portions of the first and second shielding films in combination substantially surround each conductor set, and the pinched portions of the first and second shielding films in combination form pinched portions of the shielded cable on each side of each conductor set; exposed ends of the central conductors in the pair of shielded cables being terminated at the second plurality of conductive contact pads; and

30

an overmold molded around the plurality of vertically spaced apart circuit board cable assemblies, the overmold tightly enclosing each circuit board cable assembly along a rear to front direction of the overmold portions of the pair of shielded cables behind the cable end of the PCB, the cable end of the PCB, the exposed ends of the central conductors in the pair of shielded cables, the second plurality of conductive contact pads, and a portion of the PCB in front of the second plurality of conductive contact pads with the first plurality of conductive contact pads projecting forwardly from a front end of the overmold, wherein the connector assembly is assembled by first inserting the overmold in one of the upper and lower housing halves and then assembling the upper and lower housing halves.

2. The connector assembly of claim 1 further comprising a latching member comprising a resilient arm making an oblique angle with the housing and having:

a fixed end attached to the housing;

an opposite free end; and

a latch disposed between the fixed and free ends.

3. The connector assembly of claim 2, wherein the fixed end is removably attached to the housing.

4. The connector assembly of claim 1, wherein at least one of the upper and lower housing halves comprises a plurality of positioning protrusions and the overmold comprises a corresponding plurality of positioning recesses such that when the connector assembly is assembled, the plurality of positioning recesses receive and engage the plurality of positioning protrusions to position and hold the overmold in a predetermined position within the housing.

5. The connector assembly of claim 4, wherein at least one positioning recess in the plurality of positioning recesses receives and engages two or more positioning protrusions in the plurality of positioning protrusions.

6. The connector assembly of claim 1 comprising a thickness direction along thickness directions of the PCBs in the plurality of vertically spaced apart circuit board cable assemblies, wherein when assembling the connector assembly, the overmold is configured to be inserted in one of the upper and lower housing halves only along the thickness direction of the connector assembly.

7. The connector assembly of claim 6, wherein after the overmold is inserted in one of the upper and lower housing halves, the other one of the upper and lower housing halves is configured to be assembled

to the overmold and the one of the upper and lower housing halves only along the thickness direction of the connector assembly.

8. The connector assembly of claim 1, wherein the connector assembly conforms to SFF 8643.

9. The connector assembly of claim 1, wherein impedance measured between a conductive pad of the first plurality of conductive pads of the printed circuit board and a corresponding central conductor of the central conductor of the insulated conductors of the plurality of conductor sets of the pair of shielded cables is less than or equal to 110 ohms.

10. A connector assembly, comprising:

an insulative housing comprising an insulative upper housing half and an insulative lower housing half, the upper housing half being removably assembled to the lower housing half;

a plurality of vertically spaced apart circuit board cable assemblies disposed within the housing, each circuit board cable assembly couplable to a pair of shielded cables and comprising:

a printed circuit board (PCB) comprising:

an upper surface and an opposing lower surface;

a mating end for engaging a mating connector and a cable end opposite the mating end;

a first plurality of conductive contact pads disposed on the upper and lower surfaces at the mating end for engaging terminals of a mating connector; and

a second plurality of conductive contact pads disposed on the upper and lower surfaces at the cable end, wherein the second plurality of conductive contact pads are electrically connected to the first plurality of conductive contact pads and electrically connectable to exposed ends of central conductors of the pair of shielded cables; and

an overmold molded around the plurality of vertically spaced apart circuit board cable assemblies, the overmold tightly enclosing each circuit board cable assembly along a rear to front direction of the overmold portions of the pair of shielded cables behind the cable end of the PCB, the cable end of the PCB, the exposed ends of the central conductors in the pair of shielded cables, the second plurality of conductive contact pads, and a portion of the PCB in front of the second plurality of conductive contact pads with the first plurality of conductive contact pads projecting forwardly from a front end of the overmold,

wherein the connector assembly is assembled by first inserting the overmold in one of the upper and lower housing halves and then assembling the upper and lower housing halves, wherein the connector

assembly comprises a thickness direction along thickness directions of the PCBs in the plurality of vertically spaced apart circuit board cable assemblies, wherein when assembling the connector assembly, the overmold is configured to be inserted in one of the upper and lower housing halves only along the thickness direction of the connector assembly.

1/7

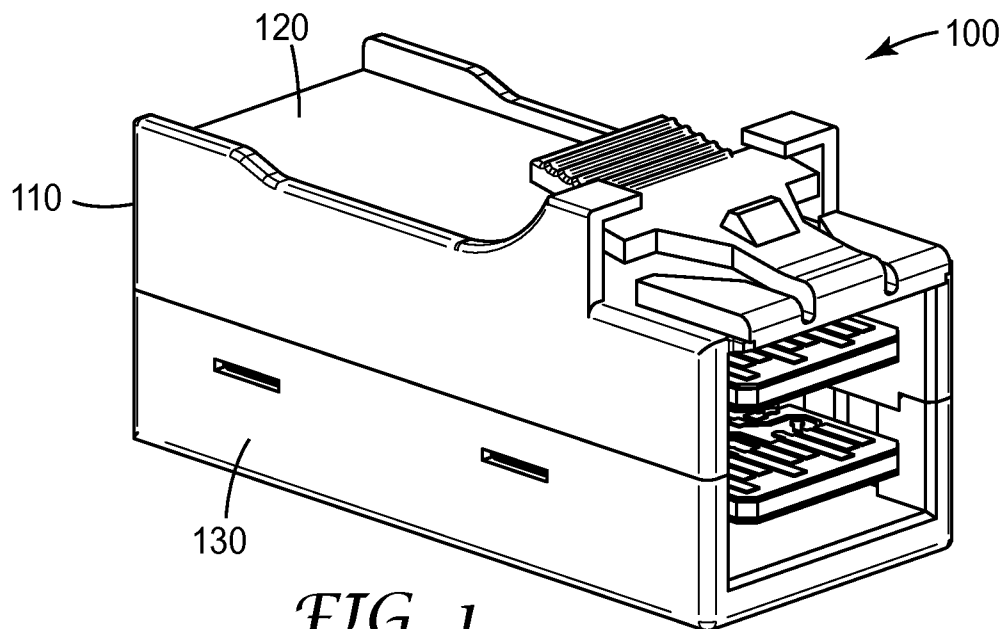


FIG. 1

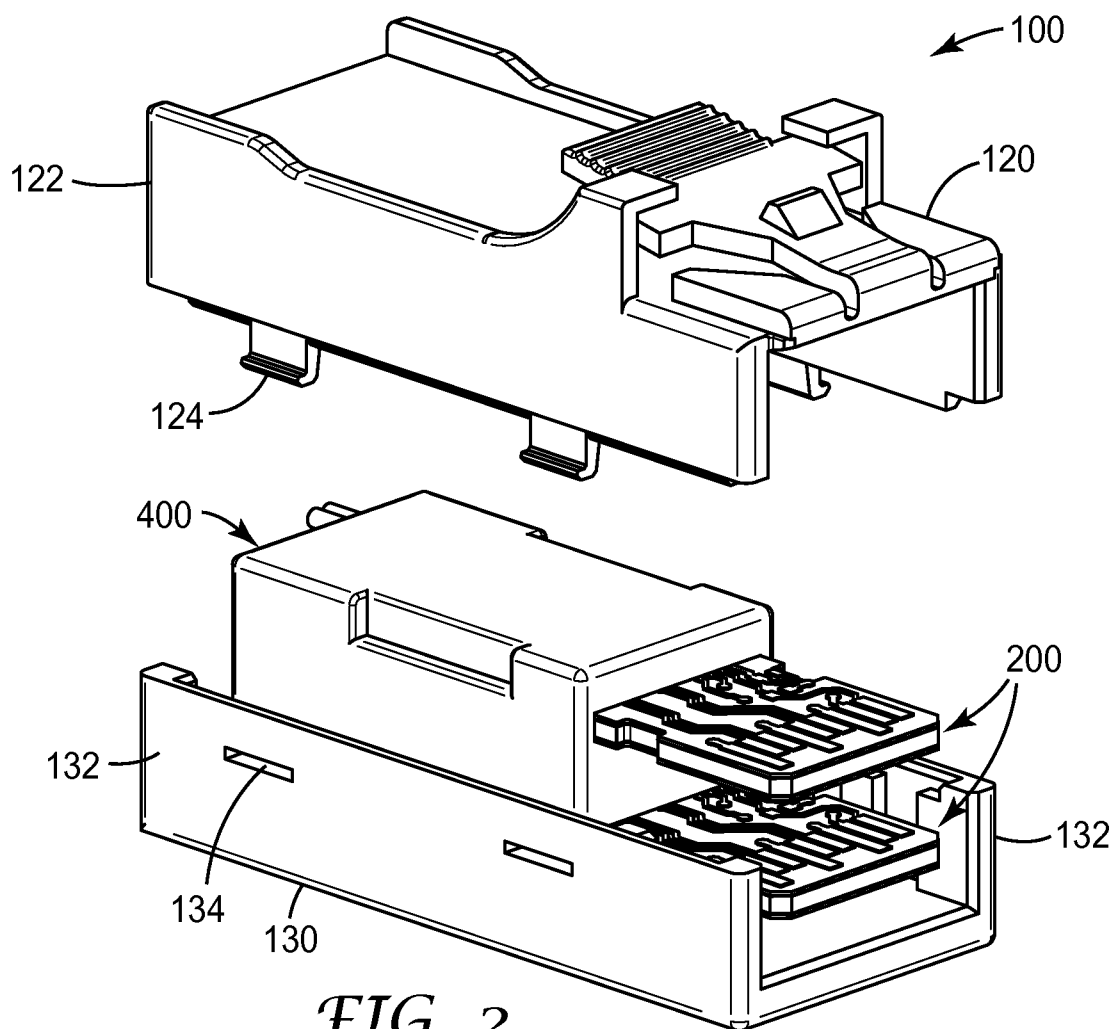
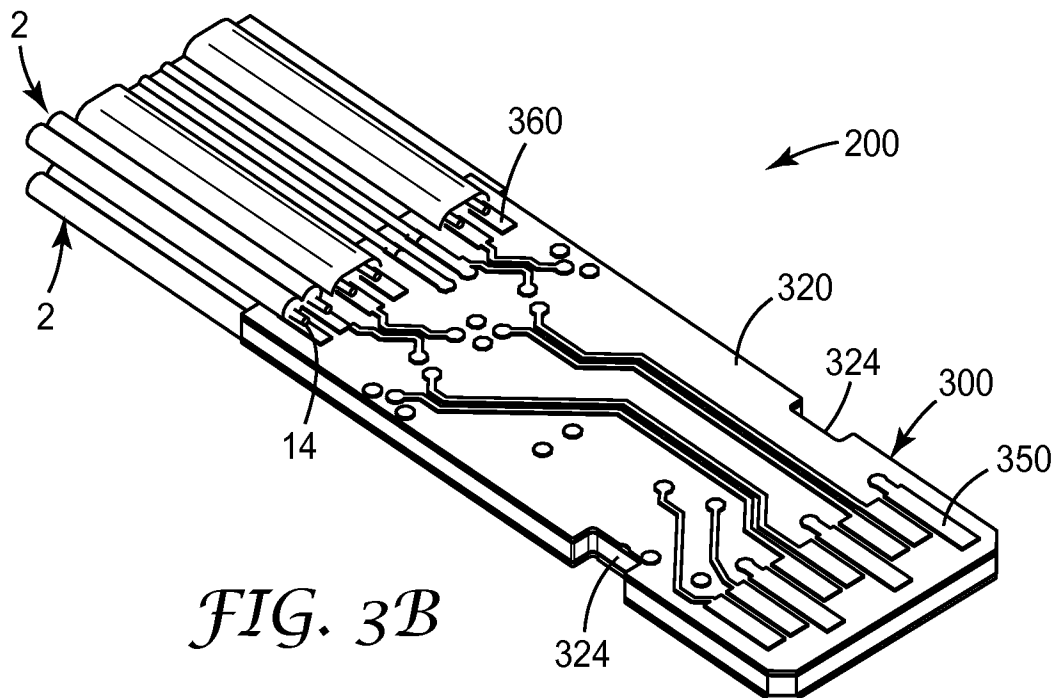
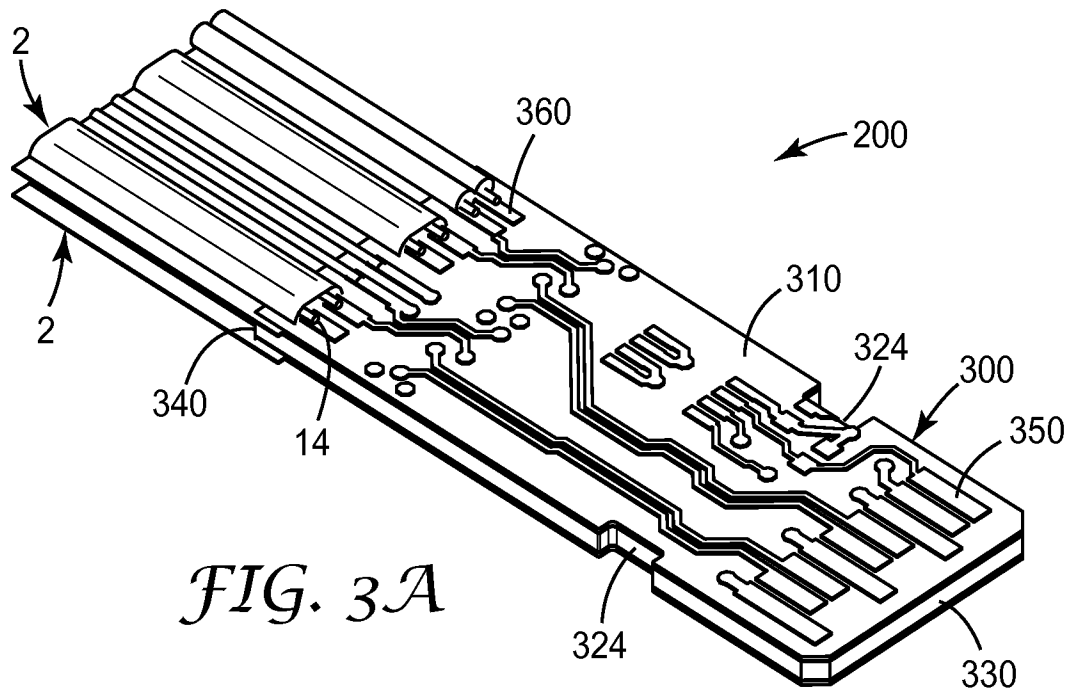


FIG. 2

2/7





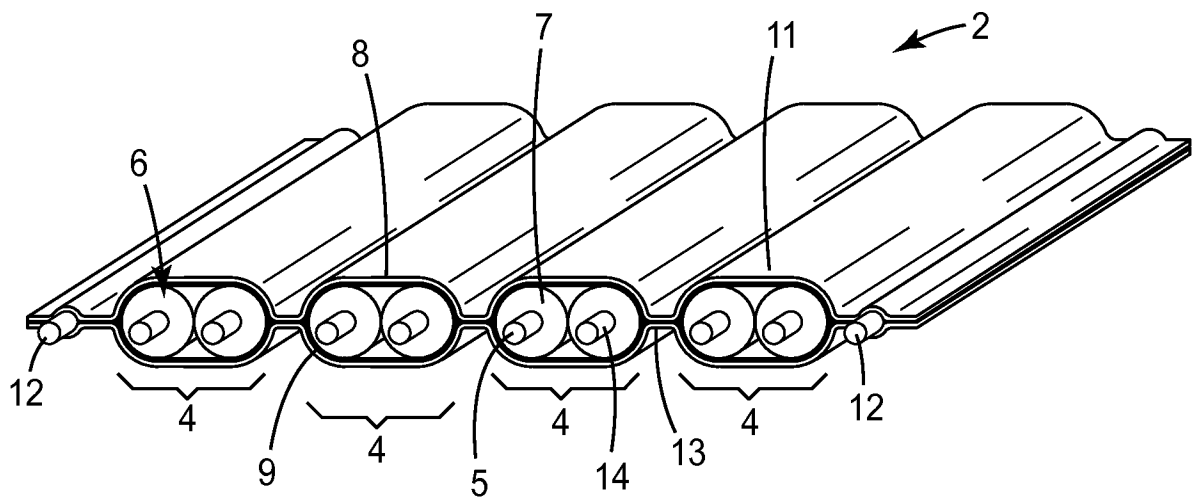


FIG. 4

4/7

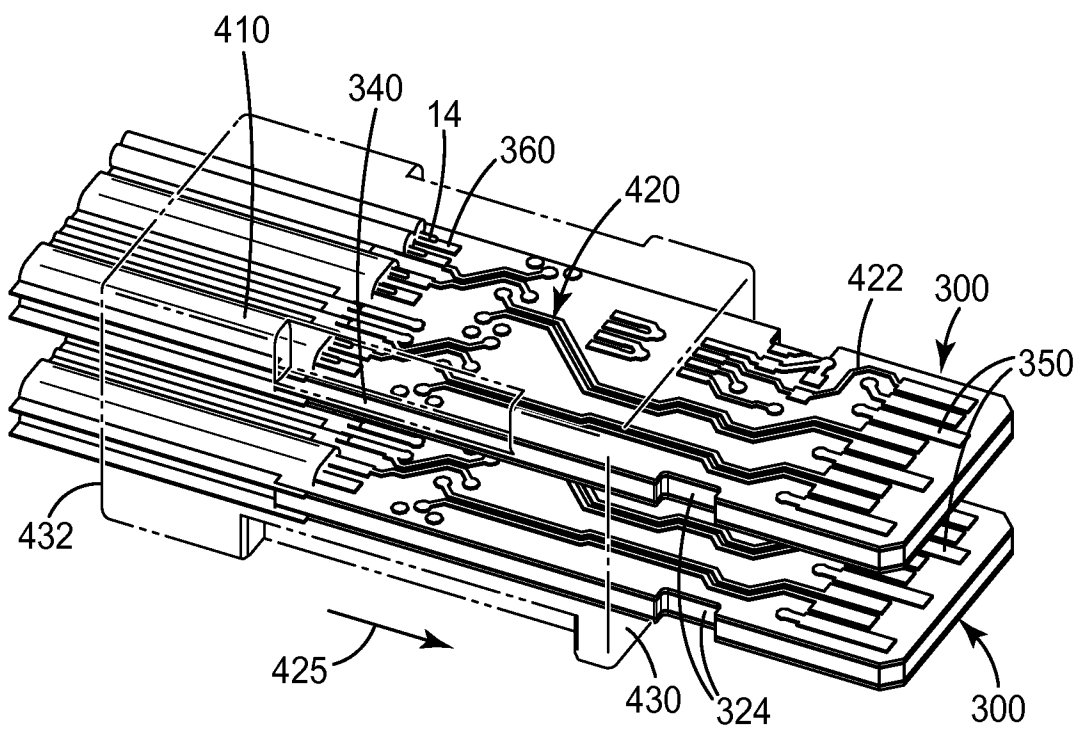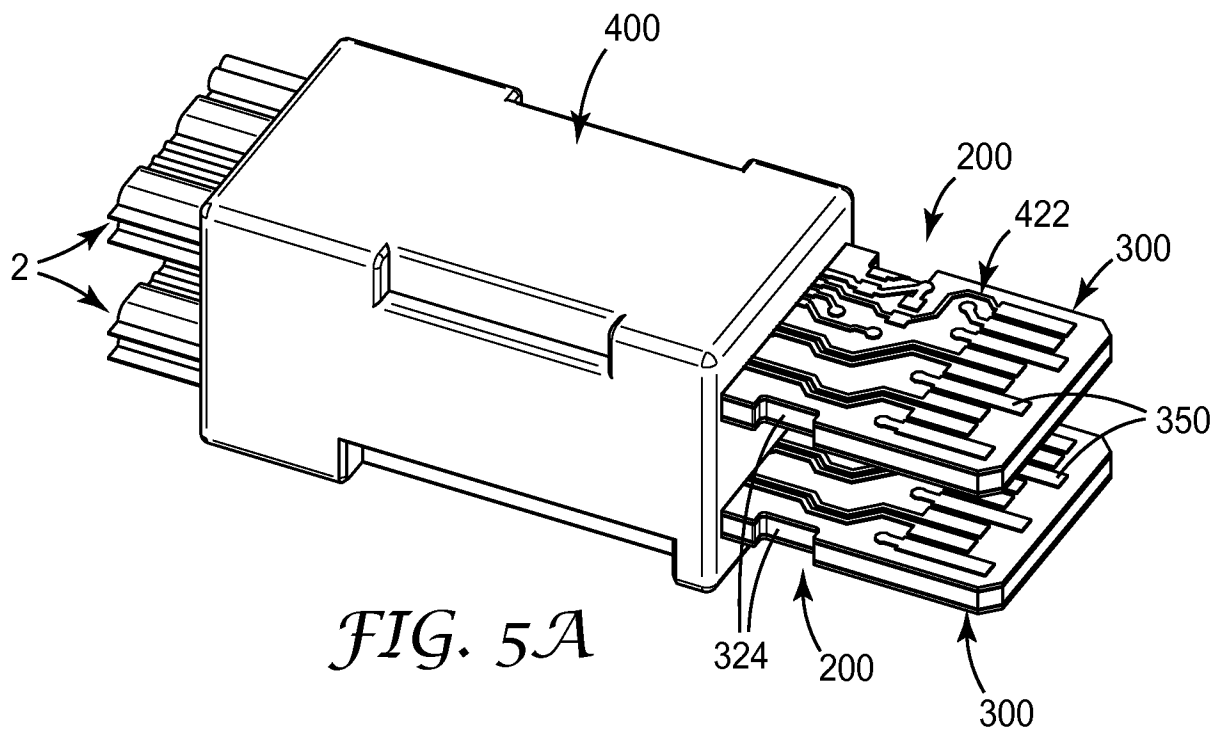

5/7

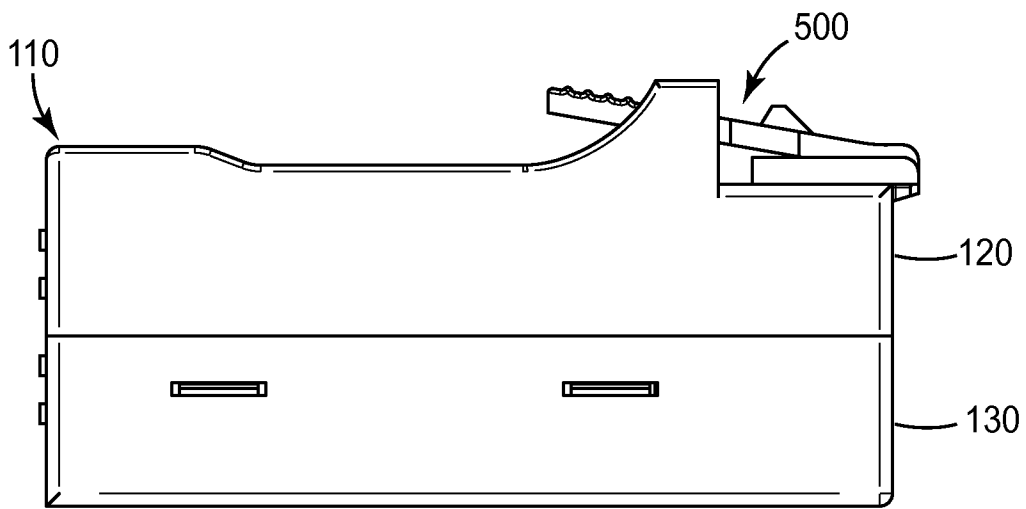


FIG. 6A

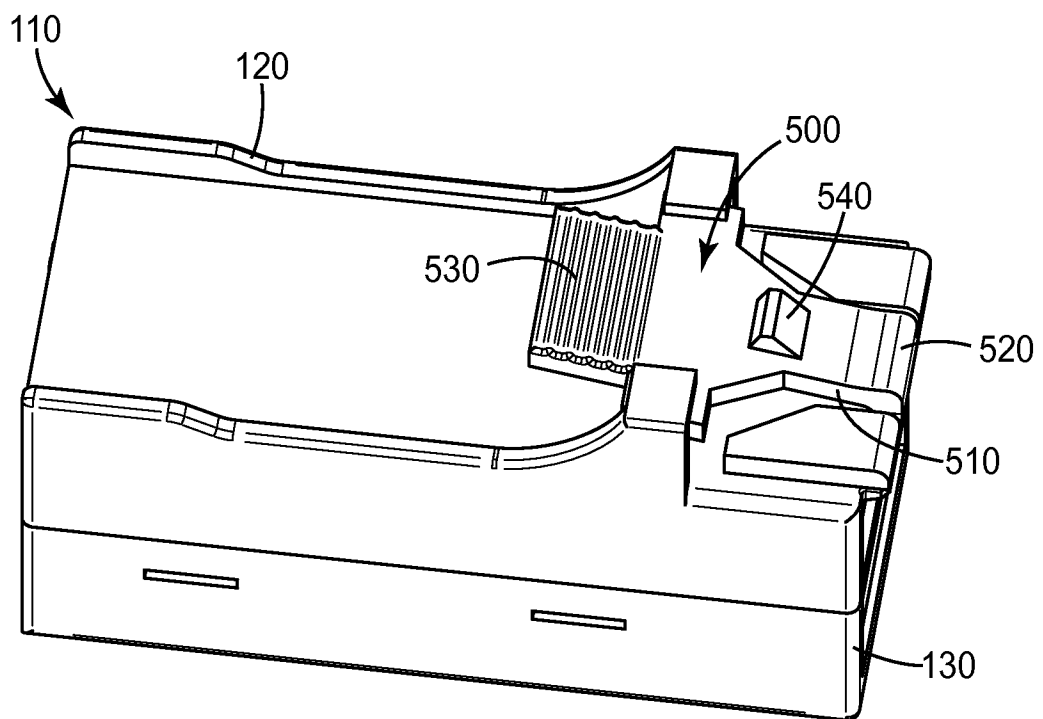


FIG. 6B

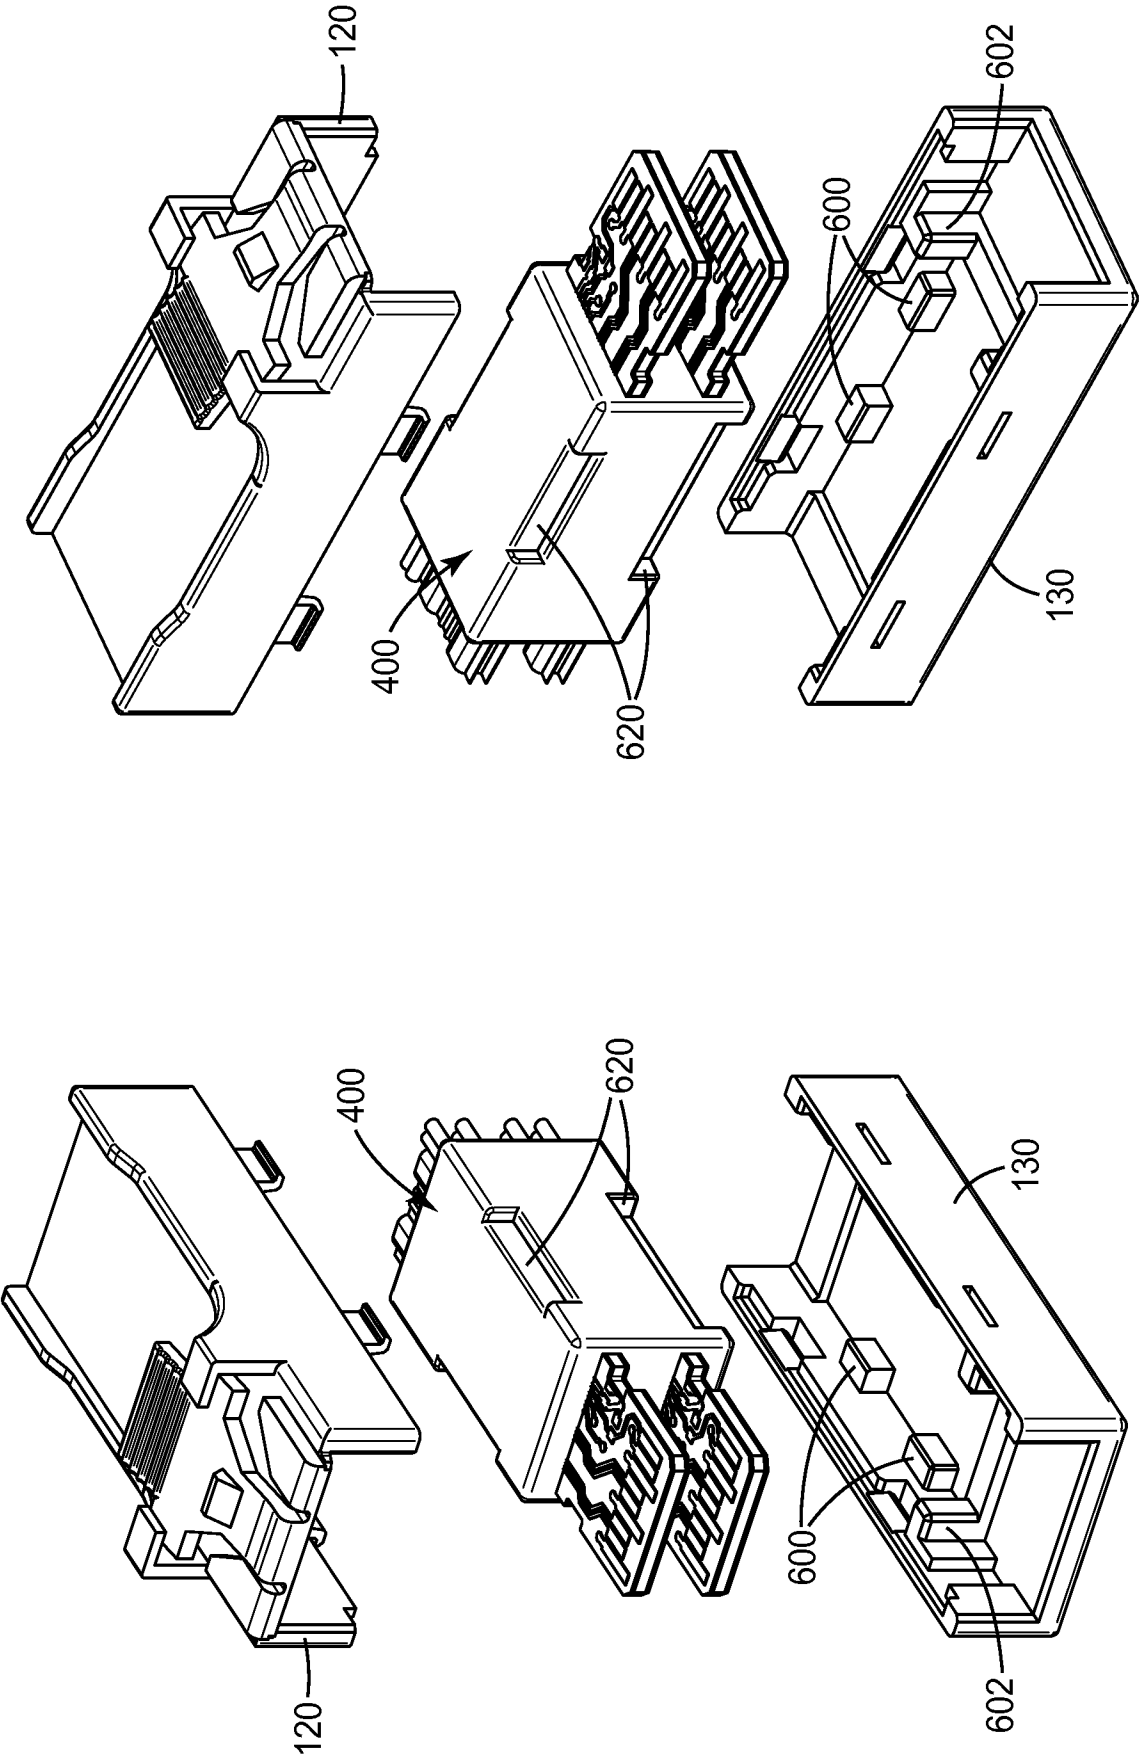


FIG. 7B

FIG. 7A

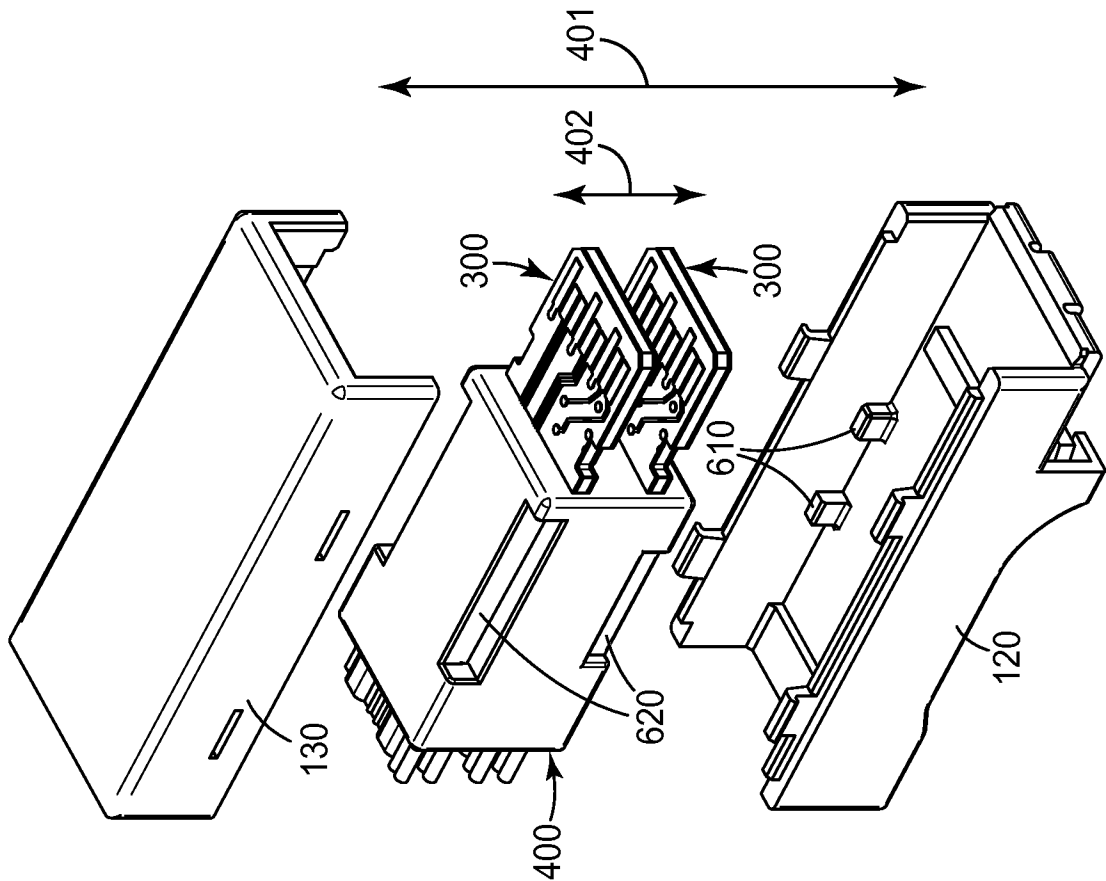


FIG. 7D

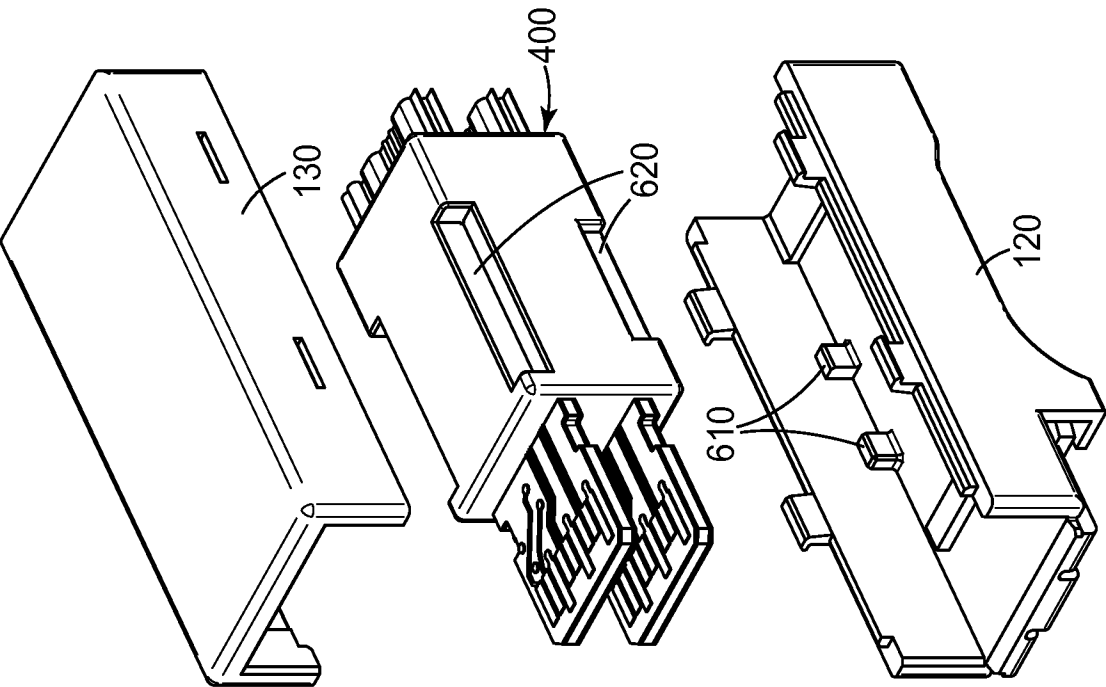


FIG. 7C

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/072601

A. CLASSIFICATION OF SUBJECT MATTER

INV. H01R13/506 H01R13/719 H01R13/6592
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	CN 202 373 767 U (AMPHENOL ASSEMBLE TECH XIAMEN CO LTD) 8 August 2012 (2012-08-08) figures 1-5	1-10
Y	WO 2012/030362 A1 (3M INNOVATIVE PROPERTIES CO [US]; GUNDEL DOUGLAS B [US]; BALLARD WILLI) 8 March 2012 (2012-03-08) figures 1,3,9a,9b,40	1-10
Y	US 2011/136368 A1 (WU JERRY [US]) 9 June 2011 (2011-06-09) figures 1-6	1-10
A	EP 2 086 058 A2 (HON HAI PREC IND CO LTD [TW]) 5 August 2009 (2009-08-05) figure 2	1-10



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

10 February 2014

Date of mailing of the international search report

17/02/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Ferreira, João

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/072601

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
CN 202373767	U	08-08-2012	NONE
WO 2012030362	A1	08-03-2012	CA 2809345 A1 08-03-2012
			CN 102870169 A 09-01-2013
			EP 2522020 A1 14-11-2012
			EP 2685467 A2 15-01-2014
			JP 5369231 B2 18-12-2013
			JP 2013065559 A 11-04-2013
			JP 2013247117 A 09-12-2013
			JP 2013527563 A 27-06-2013
			KR 20130114090 A 16-10-2013
			SG 187820 A1 28-03-2013
			TW 201209852 A 01-03-2012
			US 2012285723 A1 15-11-2012
			US 2013146327 A1 13-06-2013
			US 2014000931 A1 02-01-2014
			US 2014014406 A1 16-01-2014
			WO 2012030362 A1 08-03-2012
US 2011136368	A1	09-06-2011	CN 201741902 U 09-02-2011
			US 2011136368 A1 09-06-2011
EP 2086058	A2	05-08-2009	CN 201178180 Y 07-01-2009
			EP 2086058 A2 05-08-2009