



- (51) International Patent Classification:  
*G03F 7/027* (2006.01) *G03F 7/038* (2006.01)
- (21) International Application Number:  
PCT/EP2014/062227
- (22) International Filing Date:  
12 June 2014 (12.06.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
13171975.9 14 June 2013 (14.06.2013) EP
- (71) Applicant: **AGFA GRAPHICS NV** [BE/BE]; IP Department 3622, Septestraat 27, B-2640 Mortsel (BE).
- (72) Inventors: **LOCCUFIER, Johan**; c/o Agfa Graphics NV, IP Department 3622, Septestraat 27, B-2640 Mortsel (BE). **STEENACKERS, Marin**; c/o Agfa Graphics NV, IP Department 3622, Septestraat 27, B-2640 Mortsel (BE). **VERBRUGGHE, Sam**; c/o Agfa Graphics NV, IP Department 3622, Septestraat 27, B-2640 Mortsel (BE). **HEYLEN, Kristof**; c/o Agfa Graphics NV, IP Department 3622, Septestraat 27, B-2640 Mortsel (BE).
- (74) Agent: **STRIJCKERS, Hans**; Agfa Graphics NV, IP Department 3622, Septestraat 27, B-2640 Mortsel (BE).

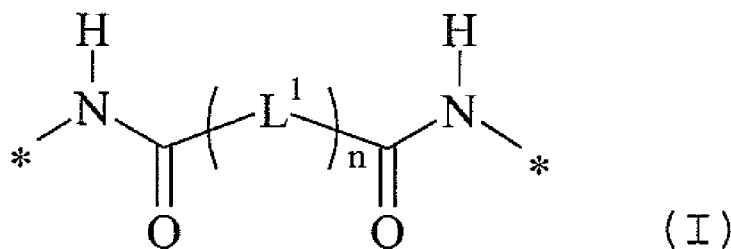
(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report (Art. 21(3))

(54) Title: A LITHOGRAPHIC PRINTING PLATE PRECURSOR



(57) Abstract: A negative-working lithographic printing plate precursor is disclosed which includes a support and a coating containing a photopolymerisable layer; characterised in that the coating comprises a compound including at least one moiety having a structure according to Formula (I) at a level above 10 %wt and below 40 %wt relative to the total dry weight of the ingredients of the coating, wherein n represents an integer equal to 0 or 1; L<sup>1</sup> represents a divalent linking group; with the proviso that the carbonyl groups in Formula (I) are bonded to a carbon atom.

## A LITHOGRAPHIC PRINTING PLATE PRECURSOR

**[DESCRIPTION]**

## 5 FIELD OF THE INVENTION

[0001] The present invention relates to a negative-working lithographic printing plate precursor comprising a novel compound.

## 10 BACKGROUND OF THE INVENTION

[0002] Lithographic printing presses use a so-called printing master such as a printing plate which is mounted on a cylinder of the printing press. The master carries a lithographic image on its surface and a print is obtained by applying ink to said image and then transferring the ink from the master onto a receiver material, which is typically paper. In conventional, so-called "wet" lithographic printing, ink as well as an aqueous fountain solution (also called dampening liquid) are supplied to the lithographic image which consists of oleophilic (or hydrophobic, i.e. ink-accepting, water-repelling) areas as well as hydrophilic (or oleophobic, i.e. water-accepting, ink-repelling) areas. In so-called driographic printing, the lithographic image consists of ink-accepting and ink-abhesive (ink-repelling) areas and during driographic printing, only ink is supplied to the master.

[0003] The so-called "analogue" printing plates are generally obtained by first applying a so-called computer-to-film (CtF) method, wherein various pre-press steps such as typeface selection, scanning, color separation, screening, trapping, layout and imposition are accomplished digitally and each color selection is transferred to graphic arts film using an imagesetter. After processing, the film can be used as a mask for the exposure of an imaging material called plate precursor and after plate processing, a printing plate is obtained which can be used as a master. Since about 1995, the so-called "computer-to-plate" (CtP) method has gained a lot of interest. This method, also called "direct-to-plate", bypasses the creation of film because the digital document is transferred directly to a printing plate precursor by means of a

platesetter. A printing plate precursor for CtP is often called a digital plate.

[0004] The support of the lithographic printing plates are typically aluminum supports which have a hydrophilic surface or on which a hydrophilic layer has been provided. This hydrophilic surface and/or layer should improve the water acceptance of the non-printing areas of a lithographic printing plate and the repulsion of the printing ink in these areas. During developing the soluble portions of the coating should be easily removed whereby the surface of the support remains residue-free so that clean background areas are obtained during printing.

[0005] Digital plates can roughly be divided in three categories:

(i) silver plates, working according to the silver salt diffusion transfer mechanism; (ii) photopolymer plates containing a photopolymerisable composition that hardens upon exposure to light and (iii) thermal plates of which the imaging mechanism is triggered by heat or by light-to-heat conversion.

[0006] Photopolymer printing plates rely on a working-mechanism whereby the coating - which typically includes free radically polymerisable compounds - hardens upon exposure. "Hardens" means that the coating becomes insoluble or non-dispersible in the developing solution and may be achieved through polymerization and/or crosslinking of the photosensitive coating upon exposure to light. Photopolymer plate precursors can be sensitized to blue, green or red light i.e. wavelengths ranging between 450 and 750 nm, to violet light i.e. wavelengths ranging between 350 and 450 nm or to infrared light i.e. wavelengths ranging between 750 and 1500 nm. Optionally, the exposure step is followed by a heating step to enhance or to speed-up the polymerization and/or crosslinking reaction. The presslife of photopolymer plates is related to the cohesive strength within the polymerized photolayer. The higher the cohesive strength, the higher the presslife. The cohesive strength can preferably be improved by increasing the crosslinking degree and/or by supramolecular non-covalent interactions such as H-bonding, Van der Waals interactions and dipole-dipole interactions.

[0007] In general, a toplayer or protective overcoat layer over the imageable layer is required to act as an oxygen barrier to

provide the desired sensitivity to the plate. A toplayer typically includes water-soluble or water-swellaable polymers such as for example polyvinylalcohol. Besides acting as barrier for oxygen, the toplayer should best be easily removable during processing and be  
5 sufficiently transparent for actinic radiation, e.g. from 300 to 450 nm or from 450 to 750 nm or from 750 to 1500 nm.

[0008] The classical work flow of photopolymer plates involves first an exposure step of the photopolymer printing plate precursor in a violet or infrared platesetter, followed by an optional pre-  
10 heat step, a wash step of the protective overcoat layer, an alkaline developing step, and a rinse and gum step. Over the past years, there is a clear evolution in the direction of a simplified work flow where the pre-heat step and/or wash step are eliminated and where the processing and gumming step are carried out in one  
15 single step. However, it is known that the developing step becomes much more critical when the alkaline developer is replaced by a gum solution with a pH below 8. For example, the hydrophilic polymers in the protective overcoat layer result in a problematic viscosity increase of the gum solution limiting the exhaustion behavior of  
20 the plate. Therefore, besides the need to reduce material cost or to avoid the investment of additional coating equipment, there is a high interest in the industry to eliminate the the protective overcoat layer present on photopolymer plates. The elimination of the toplayer however negatively impacts the sensitivity and/or  
25 presslife of the printing plate.

[0009] EP 919 868 discloses a positive type image forming material comprising a polymer (A) containing a phenolic hydroxyl group which is soluble in an aqueous alkaline solution and a light and heat decomposing compound (B) which suppresses the solubility  
30 of polymer (A) and a cross-linkable compound (C) which increases the solubility-suppressing effect of compound (B).

[0010] US 4,782,005 discloses a radiation sensitive composition comprising an acrylic or methacrylic acid ester, a photoinitiator, and a small amount of the additive N,N'-diorgano dicarboxamide. The  
35 radiation sensitive composition is sensitive to ultraviolet light and the N,N'-diorgano dicarboxamide is present in the composition in a minor amount ranging between 1 and 10%wt.

[0011] US 7,279,255 discloses a thermal photopolymer plate

without a toplayer nor need for a preheat step which has a good shelf life because of the incorporation of a specified poly(alkylene glycol) primary additive into the coating of the plate.

5 [0012] US 2009/0186299 describes a single-layer thermal photopolymer plate where the imageable element includes an organic adhesion promoter having an ethylenically unsaturated carbon-carbon double bond connected to an alkoxysilyl or hydroxysilyl group.

10 [0013] US 8,329,383 discloses a light sensitive printing plate which require no protective overcoat layer nor a preheat step and which includes carboxylamino compounds as oxygen scavenger and shelf life stabilizer.


[0014] US 2009/0142702 discloses a method for making a light sensitive, negative-working photopolymer printing plate which is 15 gum processable by including in the coating a specific compound including two hydroxyl groups.

[0015] Although many attempts have been made in the art to provide single-layer photopolymer printing plates without any loss in sensitivity and plate performance, there is still an urgent need 20 to improve the lithographic properties such as for example sensitivity and presslife of such overcoat-free printing plates.

#### SUMMARY OF THE INVENTION

25 [0016] It is an object of the present invention to provide a negative-working lithographic printing plate precursor including a photopolymerisable layer which provides a printing plate with excellent lithographic properties in terms of both sensitivity and presslife.

30 [0017] The object of the present invention is realized by claim 1, i.e. a negative-working lithographic printing plate precursor comprising a support having a hydrophilic surface or which is provided with a hydrophilic layer, and a coating including a photopolymerisable layer,  
35 characterised in that the coating comprises a compound including at least one moiety having a structure according to Formula (I):



wherein

n represents an integer equal to 0 or 1;

L<sup>1</sup> represents a divalent linking group; and


5 \* denotes the linking positions to the rest of the structure;  
 and wherein the compound according to Formula I is present in  
 an amount above 10%wt and below 40%wt relative to the total dry  
 weight of the ingredients of the coating,  
 with the proviso that the carbonyl groups in Formula (I) are  
 10 bonded to a carbon atom.

[0018] We have surprisingly found that coatings including a  
 compound containing the moiety according to Formula (I) at a level  
 varying above 10%wt and below 40%wt relative to the total dry  
 15 weight of the ingredients of the coating result, even without a  
 protective overcoat layer, in printing plates with an excellent  
 sensitivity and an excellent presslife.

[0019] Other features, elements, steps, characteristics and  
 advantages of the present invention will become more apparent from  
 20 the following detailed description of preferred embodiments of the  
 present invention. Specific embodiments of the invention are also  
 defined in the dependent claims.

#### DETAILED DESCRIPTION OF THE INVENTION

25 [0020] The compound according to the present invention includes  
 at least one moiety having a structure according to Formula (I):



wherein

30 n represents an integer equal to 0 or 1;

L<sup>1</sup> represents a divalent linking group and

\* denote the linking positions to the rest of the structure, with the proviso that the carbonyl groups in Formula (I) are bonded to a carbon atom.

5 [0021] The compound according to the present invention is further also referred to herein as "the inventive compound".

[0022] The compound according to the present invention can be a monomer, an oligomer (i.e. a structure including a limited amount of monomers such as two, three or four repeating units) or a  
10 polymer (i.e. a structure including more than four repeating units). The compound according to the present invention may contain one moiety according to Formula (I), preferably two to 150 moieties according to Formula (I), more preferably two to 100 moieties according to Formula (I) and most preferably two, three or four  
15 moieties according to Formula (I).


[0023] The divalent linking group  $L^1$  is preferably selected from an optionally substituted alkylene, cycloalkylene, arylene, or heteroarylene, -O-, -CO-, -CO-O-, -O-CO-, -CO-NH-, -NH-CO-,  
-NH-CO-O-, -O-CO-NH-, -NH-CO-NH-, -NH-CS-NH-, -CO-NR', -NR''-CO-,  
20 -NH-CS-NH-, -SO-, -SO<sub>2</sub>-, -SO<sub>2</sub>-NH-, -NH-SO<sub>2</sub>-, -CH=N-, -NH-NH-, -  
N<sup>+</sup>(CH<sub>3</sub>)<sub>2</sub>-, -S-, -S-S-, and/or combinations thereof, wherein R' and R'' each independently represent an optionally substituted alkyl, aryl, or heteroaryl. The substituents optionally present on the  
25 alkylene, the cycloalkylene, the arylene or the heteroarylene group may be represented by an alkyl group such as a methyl, ethyl, propyl or isopropyl group, substituents including for example oxygen or sulfur; a halogen such as a fluorine, chlorine, bromine or iodine atom; a hydroxyl group; an amino group; an alkoxy group such as a methoxy or ethoxy group or a (di)alkylamino group.

30 [0024] More preferably, the divalent linking group  $L^1$  is a divalent aliphatic group including straight or branched carbon chain(s) or alicyclic, non-aromatic ring(s). Optionally the aliphatic linking group may contain substituents including for example oxygen or sulfur; alkyl groups such as a methyl, ethyl,  
35 propyl or isopropyl group and halogens such as a fluorine, chlorine, bromine or iodine atom.

Most preferably, the linking group  $L^1$  represents an optionally substituted alkylene or cycloalkylene group. The substituents optionally present on the alkylene or cycloalkylene group may be represented by an alkyl group such as a methyl, ethyl, propyl or isopropyl group or a halogen such as a fluorine, chlorine, bromine or iodine atom.

[0025] Most preferably, the linking group  $L^1$  represents an optionally substituted alkylene or cycloalkylene group. The substituents optionally present on the alkylene or cycloalkylene group may be represented by an alkyl group such as a methyl, ethyl, propyl or isopropyl group or a halogen such as a fluorine, chlorine, bromine or iodine atom.

[0026] The compound according to the present invention, is preferably represented by Formula (II):



15

wherein

$R^1$  and  $R^2$  independently represent a terminal group;

$n$  represents an integer equal to 0 or 1;

$L^2$  and  $L^3$  independently represent a divalent linking group, and  $L^1$  represents a divalent linking group as described above for Formula (I),

with the proviso that the carbonyl groups in Formula (II) are bonded to a carbon atom.

[0027] The terminal groups  $R^1$  and  $R^2$  are preferably represented by hydrogen, an optionally substituted alkyl or cycloalkyl group, an optionally substituted aryl group, an optionally substituted aralkyl group or an optionally substituted heteroaryl group.

[0028] Suitable alkyl groups include 1 or more carbon atoms such as for example  $C_1$  to  $C_{22}$ -alkyl groups, more preferably  $C_1$  to  $C_{12}$ -alkyl groups and most preferably  $C_1$  to  $C_6$ -alkyl groups. The alkyl group may be linear or branched such as for example methyl, ethyl, propyl (n-propyl, isopropyl), butyl (n-butyl, isobutyl, t-butyl), pentyl, 1,1-dimethyl-propyl, 2,2-dimethylpropyl and 2-methyl-butyl,

30

or hexyl.

[0029] Suitable cycloalkyl groups are non-aromatic, homocyclic groups containing carbon atoms and may be monocyclic- or polycyclic. Examples include cyclopentyl, cyclohexyl or adamantyl.

5 [0030] Suitable aryl groups include for example phenyl, naphthyl, benzyl, tolyl, ortho- meta- or para-xylyl, anthracenyl or phenanthrenyl.

[0031] Suitable aralkyl groups include for example phenyl groups or naphthyl groups including one, two, three or more C<sub>1</sub> to 10 C<sub>6</sub>-alkyl groups.

[0032] Suitable heteroaryl groups are preferably monocyclic- or polycyclic aromatic rings comprising carbon atoms and one or more heteroatoms in the ring structure. Preferably 1 to 4 heteroatoms independently selected from nitrogen, oxygen, selenium and sulphur and/or combinations thereof. Examples include pyridyl, pyrimidyl, 15 pyrazoyl, triazinyl, imidazolyl, (1,2,3,)- and (1,2,4)-triazolyl, tetrazolyl, furyl, thienyl, isoxazolyl, thiazolyl and carbazoyl:

[0033] More preferably R<sup>1</sup> and R<sup>2</sup> are independently represented by hydrogen or an optionally substituted alkyl, aryl or aralkyl 20 group, and/or combination thereof.

[0034] Most preferably, R<sup>1</sup> and R<sup>2</sup> independently represent hydrogen or methyl.


[0035] The alkyl, cycloalkyl, aralkyl, aryl or heteroaryl groups may include one or more substituents. The optional 25 substituents on the alkyl, cycloalkyl, aralkyl, aryl or heteroaryl groups are preferably selected from an alkyl group such as a methyl, ethyl, n-propyl, isopropyl, n-butyl, 1-isobutyl, 2-isobutyl and tertiary-butyl group; an ester, amide, ether, thioether, ketone, aldehyde, sulfoxide, sulfone, sulfonate ester or 30 sulphonamide group, a halogen such as fluorine, chlorine, bromine or iodine, -OH, -SH, -CN and -NO<sub>2</sub>, and/or combinations thereof.

[0036] The linking groups L<sup>2</sup> and L<sup>3</sup> preferably independently represent a group as described above for L<sup>1</sup>.

[0037] Preferably, the linking group L<sup>1</sup> of Formula (I) and 35 Formula (II) does not contain a tertiary amine group because these groups are often responsible for staining on the plate in the non-

image areas after processing. Compounds including a linking group  $L^1$  containing an aromatic ring structure may be of less interest because they have a limited solubility in the photopolymer coating solution.

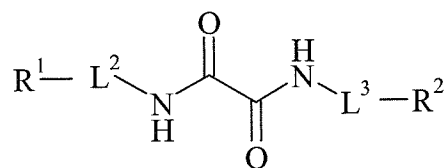
5 [0038] In a preferred embodiment,  $n=0$  and the inventive compound is represented by Formula (III):



wherein  $R^1$  and  $R^2$  independently represent a terminal group as described above;

10 and  $L^2$  and  $L^3$  independently represent a divalent linking group as described above.

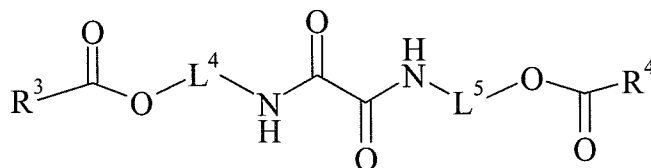[0039] In a most preferred embodiment the compounds according to the present invention are presented by Formula (IV):



15 wherein  $R^3$  and  $R^4$  independently represent a terminal group;

and  $L^4$  and  $L^5$  independently represent an optionally substituted divalent linking group.

[0040] The optionally substituted divalent linking groups  $L^4$  and  $L^5$  preferably independently represent a group as described above for  
20 the divalent linking groups  $L^1$  and  $L^2$ .

[0041] Preferably, the terminal groups  $R^3$  and  $R^4$  independently represent a group as described above for the terminal groups  $R^1$  and  $R^2$ .







[0042] The alkylene group as referred to in the above  
25 paragraphs is preferably an aliphatic group including straight or branched carbon chain(s) and is preferably represented by  $-(\text{CH}_2)_p-$  wherein  $p$  represent 0, 1, or an integer greater than 1, preferably an integer selected from 1 to 20, more preferably  $p$  represent an integer selected from 1 to 10, most preferably  $p$  represent an












integer selected from 2, 3, 4, 5 or 6.







[0043] The amount of the inventive compound in the coating ranges between more than 10%wt and below 40%wt relative to the total dry weight of the ingredients of the coating. Preferably, the inventive compound is present in the coating in an amount -  
 5 relative to the total dry weight of the ingredients of the coating - ranging between 12%wt and 35%wt, more preferably in an amount ranging between 15%wt and 30%wt and most preferably 15%wt and 25%wt.

10 [0044] Suitable Examples of inventive compounds are given below in Table A.

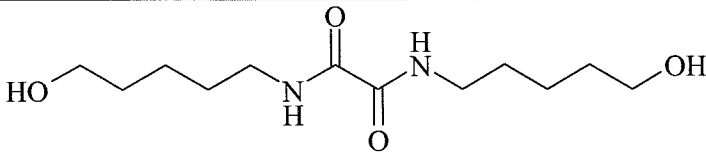Table A: Suitable Examples of compounds according to the present invention.

Compound	inventive compound
COMP-1	
COMP-2	
COMP-3	
COMP-4	
COMP-5	
COMP-6	

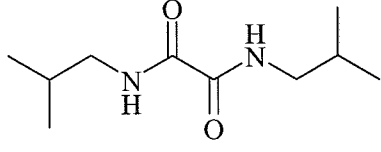COMP-7	
COMP-8	
COMP-9	
COMP-10	
COMP-11	
COMP-12	
COMP-13	
COMP-14	
COMP-15	
COMP-16	
COMP-17	

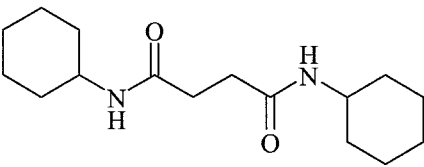COMP-18	
COMP-19	 <p>with n = 1-100</p>
COMP-20	
COMP-21	
COMP-22	
COMP-23	

[0045] The lithographic printing plate precursor according to the present invention is negative-working, i.e. after exposure and development the non-exposed areas of the coating are removed from the support and define hydrophilic (non-printing) areas, whereas the exposed coating is not removed from the support and defines oleophilic (printing) areas. The hydrophilic areas are defined by the support which has a hydrophilic surface or is provided with a hydrophilic layer. The hydrophobic areas are defined by the coating, hardened upon exposing, optionally followed by a heating step. Areas having hydrophilic properties means areas having a higher affinity for an aqueous solution than for an oleophilic ink; areas having hydrophobic properties means areas having a higher affinity for an oleophilic ink than for an aqueous solution.

[0046] "Hardened" means that the coating becomes insoluble or

non-dispersible for the developing solution and may be achieved through polymerization and/or crosslinking of the photosensitive coating, optionally followed by a heating step to enhance or to speed-up the polymerization and/or crosslinking reaction. In this  
5 optionally heating step, hereinafter also referred to as "pre-heat", the plate precursor is heated, preferably at a temperature of about 80°C to 150°C and preferably during a dwell time of about 5 seconds to 1 minute.

[0047] The coating has at least one layer including a  
10 photopolymerisable composition, said layer is also referred to as the "photopolymerisable layer". The coating may include an intermediate layer, located between the support and the photopolymerisable layer. Preferably, the coating comprises one layer - i.e. the photopolymerisable layer - which is the outermost  
15 layer. The compound according to the present invention may be present in the photopolymerisable layer or in an optional other layer. Preferably, the compound according to the present invention is present in the photopolymerisable layer.

[0048] The photopolymerisable layer includes, besides the  
20 compound according to the present invention, a polymerisable compound, optionally a binder, a polymerization initiator capable of hardening the polymerisable compound in the exposed areas, and optionally a sensitizer capable of absorbing light used in the image-wise exposing step. The photopolymerisable layer has a  
25 coating thickness preferably ranging between 0.4 and 5.0 g/m<sup>2</sup>, more preferably between 0.5 and 3.0 g/m<sup>2</sup>, most preferably between 0.6 and 2.2 g/m<sup>2</sup>.

[0049] According to a preferred embodiment, the polymerisable  
30 compound is a monomer or oligomer including at least one epoxy or vinyl ether functional group and the polymerisation initiator is a Brönsted acid generator capable of generating free acid, optionally in the presence of a sensitizer, upon exposure, hereinafter the Brönsted acid generator is also referred to as "cationic photoinitiator" or "cationic initiator".

[0050] Suitable polyfunctional epoxy monomers include, for  
35 example, 3,4-epoxycyclohexylmethyl-3,4-epoxycyclohexane carboxylate, bis-(3,4 -epoxycyclohexylmethyl) adipate, difunctional bisphenol A-epichlorohydrin epoxy resin and multifunctional

epichlorohydrinetetraphenylol ethane epoxy resin.

[0051] Suitable cationic photoinitiators include, for example, triarylsulfonium hexafluoroantimonate, triarylsulfonium hexafluorophosphate, diaryliodonium hexafluoroantimonate, and haloalkyl substituted s-triazine. It is noted that most cationic initiators are also free radical initiators because, in addition to generating Brönsted acid, they also generate free radicals during photo or thermal decomposition.

[0052] According to a more preferred embodiment of the present invention, the polymerisable compound is a polymerisable monomer or oligomer including at least one terminal ethylenic group, hereinafter also referred to as "free-radical polymerisable monomer", and the polymerisation initiator is a compound capable of generating free radicals upon exposure, optionally in the presence of a sensitizer, hereinafter said initiator is referred to as "free radical initiator". The polymerisation involves the linking together of the free-radical polymerisable monomers.

[0053] Suitable free-radical polymerisable monomers include, for example, multifunctional (meth)acrylate monomers (such as (meth)acrylate esters of ethylene glycol, trimethylolpropane, pentaerythritol, ethoxylated ethylene glycol and ethoxylated trimethylolpropane, multifunctional urethanated (meth)acrylate, and epoxylated (meth)acrylate), and oligomeric amine diacrylates. The (meth)acrylic monomers may also have other double bond or epoxide group, in addition to (meth)acrylate group. The (meth)acrylate monomers may also contain an acidic (such as carboxylic acid) or basic (such as amine) functionality.

[0054] Any free radical initiator capable of generating free radicals upon exposure directly or in the presence of a sensitizer, is according to this invention a suitable initiator. Suitable free-radical initiators are described in WO 2005/111727 from page 15 line 17 to page 16 line 11.

[0055] In a preferred embodiment of the present invention the photopolymerisable composition comprises a hexaaryl-bisimidazole compound (HABI; dimer of triaryl-imidazole) as polymerisation initiator, optionally in combination with further polymerisation initiators.

[0056] A procedure for the preparation of hexaarylbisimidazoles is described in DE 1470 154 and their use in photopolymerisable compositions is documented in EP 24 629, EP 107 792, US 4,410,621; EP 215 453 and DE 3 211 312. Preferred derivatives are e.g.

5 2,4,5,2',4',5'-hexaphenylbisimidazole, 2,2'-bis(2-chlorophenyl)-4,5,4',5'-tetraphenylbisimidazole, 2,2'-bis(2-chlorophenyl)-4,5,4',5'-tetrakis(3-methoxyphenyl)bisimidazole and 2,2'-bis(2-nitrophenyl)-4,5,4',5'-tetraphenylbisimidazole. The amount of the HABI polymerization initiator typically ranges from 0.01 to 30 % by weight, preferably from 0.5 to 20 % by weight, relative to the total weight of the non volatile components of the photopolymerisable composition.

[0057] A very high sensitivity can be obtained in the context of the present invention by the combination of an optical brightener as sensitizer and a hexaarylbisimidazole compound as polymerisation initiator.

[0058] Suitable classes of polymerisation initiators other than hexaarylbisimidazole compounds include aromatic ketones, aromatic onium salts, organic peroxides, thio compounds, ketoxime ester compounds, borate compounds, azinium compounds, metallocene compounds, active ester compounds and compounds having a carbon-halogen bond, but preferably the composition comprises a non-boron comprising polymerisation initiator and particularly preferred the polymerisation initiator comprises no boron compound. Many specific examples of initiators suitable for the present invention can be found in EP-A 1 091 247. Other preferred polymerization initiators are trihalo methyl sulphones.

[0059] Preferably hexaarylbisimidazole compounds and/or metallocene compounds are used alone or in combination with other suitable photoinitiators, in particular with aromatic ketones, aromatic onium salts, organic peroxides, thio compounds, ketoxime ester compounds, azinium compounds, active ester compounds or compounds having a carbon halogen bond.

[0060] In a preferred embodiment of the present invention the hexaarylbisimidazole compounds make more than 50 mol%, preferably at least 80 mol% and particularly preferred at least 90 mol% of all the photoinitiators used in the photopolymerisable composition of the present invention.

[0061] According to another embodiment of the present invention, the polymerisable monomer or oligomer may be a combination of a monomer or oligomer comprising at least one epoxy or vinyl ether functional group and a polymerisable ethylenically unsaturated compound having at least one terminal ethylenic group, and the polymerisation initiator may be a combination of a cationic initiator and a free-radical initiator. A monomer or oligomer comprising at least one epoxy or vinyl ether functional group and a polymerisable ethylenically unsaturated compound having at least one terminal ethylenic group, can be the same compound wherein the compound contains both the ethylenic group and the epoxy or vinyl ether group. Examples of such compounds include epoxy functional acrylic monomers, such as glycidyl acrylate. The free radical initiator and the cationic initiator can be the same compound if the compound is capable of generating both free radical and free acid. Examples of such compounds include various onium salts such as diaryliodonium hexafluoroantimonate, triarylsulfonium hexafluoroantimonate, and s-triazines such as 2,4-bis(trichloromethyl)-6-[(4-ethoxyethylenoxy)-phen-1-yl]-s-triazine which are capable of generating both free radical and free acid, preferably in the presence of a sensitizer.

[0062] The photopolymerisable layer may also comprise a multifunctional monomer. This monomer contains at least two functional groups selected from an ethylenically unsaturated group and/or an epoxy or vinyl ether group. Particular multifunctional monomers for use in the photopolymer coating are disclosed in US 6,410,205 , US 5,049,479 , EP 1 079 276 , EP 1 369 232 , EP 1 369 231, EP 1 341 040 , US 2003/0124460 , EP 1 241 002 , EP 1 288 720 and in the reference book including the cited references: Chemistry & Technology UV & EB formulation for coatings, inks & paints - Volume 2 -Prepolymers and Reactive Diluents for UV and EB Curable Formulations by N.S. Allen, M.A. Johnson, P.K.T. Oldring, M.S. Salim - Edited by P.K.T. Oldring - 1991 - ISBN 0 947798102. Particularly preferred are urethane (meth)acrylate multifunctional monomers, which can be used alone or in combination with other (meth)acrylate multifunctional monomers.

[0063] The photopolymerisable layer may also comprise a co-initiator. Typically, a co-initiator is used in combination with a

free radical initiator and/or a cationic initiator. Suitable co-initiators for use in the photopolymer coating are disclosed in US 6,410,205; US 5,049,479; EP 1 079 276, EP 1 369 232, EP 1 369 231, EP 1 341 040, US 2003/0124460, EP 1 241 002, EP 1 288 720 and in  
5 the reference book including the cited references: Chemistry & Technology UV & EB formulation for coatings, inks & paints - Volume 3 -Photoinitiators for Free Radical and Cationic Polymerisation by K.K. Dietliker - Edited by P.K.T. Oldring - 1991 - ISBN 0 947798161. Specific co-initiators, as described in EP 107  
10 792, may be present in the photopolymerizable layer to further increase the sensitivity. Preferred co-initiators are sulfur-compounds, especially thiols like e.g. 2-mercaptobenzothiazole, 2-mercaptobenzoxazole, 2-mercapto-benzimidazole, 4-methyl-3-propyl-1,2,4-triazoline-5-thione, 4-methyl-3-n-heptyl-1,2,4-triazoline-5-  
15 thione, 4-phenyl-3-n-heptyl-1,2,4-triazoline-5-thione, 4-phenyl-3,5-dimercapto-1,2,4-triazole, 4-n-decyl-3,5-dimercapto-1,2,4-triazole, 5-phenyl-2-mercapto-1,3,4-oxadiazole, 5-methylthio-1,3,4-thiadiazoline-2-thione, 5-hexylthio-1,3,4-thiadiazoline-2-thione, mercaptophenyltetrazole, pentaerythritol mercaptopropionate,  
20 butyric acid-3-mercapto-neopentane-tetra-yl ester, pentaerythritol tetra(thioglycolate).

[0064] Other preferred co-initiators are polythioles as disclosed in WO 2006/048443 and WO 2006/048445. These polythiols may be used in combination with the above described thiols, e.g. 2-  
25 mercaptobenzthiazole.

[0065] The photopolymerisable layer may also comprise particles which increase the resistance of the coating against manual or mechanical damage. The particles may be inorganic particles, such as for example silica, alumina, iron oxides, magnesium carbonate,  
30 titanium oxide and calcium carbonate. The particles may be organic particles or fillers, such as for example polymer particles, waxes, carbon black and silicone resins. The particles preferably have a particle size of about 0.01 to 2  $\mu\text{m}$ . More information on suitable particles is described in for example US 7,108,956.

[0066] The photopolymerisable layer may also comprise organic or inorganic spacer particles which increase the resistance of the coating against manual or mechanical damage. The spacer particles

have preferably a particle size larger than 0.5  $\mu\text{m}$ , more preferably a particle size larger than 0.8  $\mu\text{m}$ , most preferably equal to or larger than 1.0  $\mu\text{m}$ . The particle size is preferably comprised between 0.5  $\mu\text{m}$  and 15  $\mu\text{m}$ , more preferably between 0.5  $\mu\text{m}$  and 7  $\mu\text{m}$ , most preferably between 1  $\mu\text{m}$  and 5  $\mu\text{m}$ . The particle size refers to the average particle size and may be measured by a laser diffraction particle analyzer such as the Coulter LS Particle Size Analyzer, e.g. the Coulter LS-230, commercially available by Beckman Coulter Inc. The average particle size is defined as the mean or median of the volume distribution of particle size.

[0067] For obtaining a significant effect of improving the resistance of the coating against manual or mechanical damage, the spacer particles should extend the surface of the coating. The coating has preferably a layer thickness greater than 0.5  $\text{g}/\text{m}^2$ , more preferably the layer thickness is comprised between 0.6  $\text{g}/\text{m}^2$  and 2.8  $\text{g}/\text{m}^2$ . The particle size of the spacer particles is preferably comprised between one to two times the thickness of the coating.

[0068] Examples of inorganic spacer particles include silicium, titanium, aluminium, zinc, iron, chromium or zirconium containing particles, metal oxides or hydroxides thereof, aluminiumsilicates, and metal salts such as calcium carbonate, barium sulfate, barium titanate and strontium titanate.

[0069] Examples of organic spacer particles include optionally cross-linked polyalkyl(meth)acrylate such as polymethylmethacrylate, polystyrene, melamine, polyolefins such as polyethylene or polypropylene, halogenated polyolefins such as fluorinated polyolefins for example polytetrafluoroethylene, silicones such as cross-linked polysiloxane particles, or copolymers thereof. Examples of polysiloxane particles include cross-linked polyalkylsiloxanes such as polymethylsiloxane. Commercially available cross-linked polysiloxane particles are for example Tospearl from TOSHIBA SILICONE Co.,Ltd.

[0070] The photopolymerizable layer may also comprise an inhibitor. Particular inhibitors for use in the photopolymer coating are disclosed in US 6,410,205, EP 1 288 720 and EP 1 749

240. The photopolymerizable layer may further comprise an adhesion promoting compound. More information on suitable adhesion promoting compounds are described in EP 1 788 434 in [0010] and in the non-published patent application PCT/EP2013/055773.

5 [0071] Besides the compound according to the invention, the photopolymerizable layer may include a binder. The binder can be selected from a wide series of organic polymers. Compositions of different binders can also be used. Useful binders are described in WO2005/052298 page 17 line 21 to page 19 line 30, in EP 152 819 on  
10 page 2 line 50 to page 4 line 20, and in EP 1 043 627 in paragraph [0013].

[0072] The organic polymers used as binders have a typical mean molecular weight  $M_w$  between 1000 and 700 000, preferably between 1500 and 350 000. Preferably, the binders have a hydroxyl number  
15 between 0 and 750, more preferably between 10 and 500. Even more preferably the hydroxyl number is below 10, most preferably the hydroxyl number is 0. The amount of binder(s) generally ranges from 1 to 60 % by weight, preferably 5 to 50 % by weight, more  
20 preferably 10 to 35 % by weight and most preferably 15 to 25 % by weight relative to the total weight of the non-volatile components of the composition.

[0073] In another embodiment the polymeric binder comprises a backbone including pendant groups such as for example a hydrophilic poly(alkylene oxide) segment. The polymeric binder may also include  
25 pendant cyano groups attached to the backbone. A combination of such binders may also be employed. Generally the polymeric binder is solid at room temperature, and is typically a non-elastomeric thermoplastic. Generally the polymeric binder is characterized by a number average molecular weight ( $M_n$ ) in the range from about 500 to  
30 250000, more commonly in the range from about 1000 to 240000 or 1500 to 200000. The polymerisable composition may comprise discrete particles of the polymeric binder. Preferably the discrete particles are particles of the polymeric binder which are suspended in the polymerisable composition. The presence of discrete  
35 particles tends to promote developability of the unexposed areas. Specific examples of the polymeric binders according to this embodiment are described in US 6,899,994; US 2004/0260050, US

2005/0003285, US 2005/0170286 and US 2005/0123853. In addition to the polymeric binder of this embodiment the imageable layer may optionally comprise one or more co-binders. Typical co-binders are water-soluble or water-dispersible polymers, such as, cellulose derivatives, polyvinylalcohol, polyacrylic acid poly(meth)acrylic acid, polyvinylpyrrolidone, polylactide, polyvinylphosphonic acid, synthetic co-polymers, such as the co-polymer of an alkoxy polyethylene glycol (meth)acrylate. Specific examples of co-binders are described in US 2004/0260050, US 2005/0003285 and US 2005/0123853. Printing plate precursors, the imageable layer of which comprises a binder and optionally a co-binder according this embodiment and described in more detail in US 2004/0260050, US 2005/0003285 and US 2005/0123853, optionally comprising a topcoat and an interlayer.

[0074] Various surfactants may be added into the photopolymerisable layer to allow or enhance the developability of the precursor; especially developing with a gum solution. Both polymeric and small molecule surfactants can be used. Nonionic surfactants are preferred. Preferred nonionic surfactants are polymers and oligomers containing one or more polyether (such as polyethylene glycol, polypropylene glycol, and copolymer of ethylene glycol and propylene glycol) segments. Examples of preferred nonionic surfactants are block copolymers of propylene glycol and ethylene glycol (also called block copolymer of propylene oxide and ethylene oxide); ethoxylated or propoxylated acrylate oligomers; and polyethoxylated alkylphenols and polyethoxylated fatty alcohols. The nonionic surfactant is preferably added in an amount ranging between 0.1 and 30% by weight of the coating, more preferably between 0.5 and 20% by weight of the coating, and most preferably between 1 and 15% by weight of the coating or between 2 and 8% by weight of the coating.

[0075] Suitable examples of optical brighteners as sensitizers are described in WO 2005/109103 page 24, line 20 to page 39. The photocurable composition may also comprise other sensitizers.

Highly preferred sensitizers are violet light absorbing sensitizers, having an absorption spectrum between 350 nm and 450 nm, preferably between 370 nm and 420 nm, more preferably between 390 nm and 415 nm. Particular preferred sensitizers are disclosed

in EP 1 349 006 paragraph [0007] to [0009], EP 1 668 417 and WO 2004/047930, including the cited references in these patent applications. Other highly preferred sensitizers are infrared light absorbing dyes, having an absorption spectrum between 750 nm and 1300 nm, preferably between 780 nm and 1200 nm, more preferably between 800 nm and 1100 nm. Particular preferred sensitizers are heptamethinecyane dyes, especially the dyes disclosed in EP 1 359 008 paragraph [0030] to [0032]. Other preferred sensitizers are blue, green or red light absorbing sensitizers, having an absorption spectrum between 450 nm and 750 nm. Useful sensitizers can be selected from the sensitizing dyes disclosed in US 6,410,205; US 5,049,479; EP 1 079 276, EP 1 369 232, EP 1 369 231, EP 1 341 040, US 2003/0124460, EP 1 241 002 and EP 1 288 720.

[0076] The photopolymerisable layer or an optional other layer of the coating may also comprise a colorant. After processing, at least part of the colorant remains on the hardened coating areas, and a visible image can be produced on the support by removing the coating, including the colorant, at the non-exposed areas. The colorant can be a dye or a pigment. Various types of pigments can be used such as organic pigments, inorganic pigments, carbon black, metallic powder pigments and fluorescent pigments. Organic pigments are preferred.

[0077] Specific examples of organic pigments include quinacridone pigments, quinacridonequinone pigments, dioxazine pigments, phthalocyanine pigments, anthrapyrimidine pigments, anthanthrone pigments, indanthrone pigments, flavanthrone pigments, perylene pigments, diketopyrrolopyrrole pigments, perinone pigments, quinophthalone pigments, anthraquinone pigments, thioindigo pigments, benzimidazolone pigments, isoindolinone pigments, azomethine pigments, and azo pigments.

[0078] Specific examples and more detailed information of pigments suitable as colorant in the current invention are described in EP 2 278 404 in paragraphs [0064] to [0068].

[0079] Typically, the amount of pigment in the coating may be in the range of about  $0.005 \text{ g/m}^2$  to  $2 \text{ g/m}^2$ , preferably about  $0.007 \text{ g/m}^2$  to  $0.5 \text{ g/m}^2$ , more preferably about  $0.01 \text{ g/m}^2$  to  $0.2 \text{ g/m}^2$ , most

preferably about  $0.01 \text{ g/m}^2$  to  $0.1 \text{ g/m}^2$ .

[0080] The colorant can also be a dye. Any known dyes, such as commercially available dyes or dyes described in, for example, "Dye Handbook" (edited by the Organic Synthetic Chemistry Association, published in 1970) which are colored for the human eye, can be used as colorant in the photopolymerisable coating. Specific examples thereof are described in EP 2 278 404 in paragraph [0070].

[0081] Typically, the amount of dye in the coating may be in the range of about  $0.005 \text{ g/m}^2$  to  $2 \text{ g/m}^2$ , preferably about  $0.007 \text{ g/m}^2$  to  $0.5 \text{ g/m}^2$ , more preferably about  $0.01 \text{ g/m}^2$  to  $0.2 \text{ g/m}^2$ , most preferably about  $0.01 \text{ g/m}^2$  to  $0.1 \text{ g/m}^2$ .

[0082] The photopolymerisable layer or an optional other layer of the coating may include a printing-out agent, i.e. a compound which is capable of changing the color of the coating upon exposure. After image-wise exposing of the precursor, a visible image can be produced, hereinafter also referred to as "print-out image". The printing-out agent may be a compound as described in EP-A-1 491 356 paragraph [0116] to [0119] on page 19 and 20, and in US 2005/8971 paragraph [0168] to [0172] on page 17. Preferred printing-out agents are the compounds described in EP 1 765 592 from line 1 page 9 to line 27 page 20. More preferred are the IR-dyes as described in EP 1 736 312 from line 32 page 5 to line 9 page 32. The contrast of the image formed after image-wise exposure and processing is defined as the difference between the optical density at the exposed area to the optical density at the non-exposed area, and this contrast is preferably as high as possible. This enables the end-user to establish immediately whether or not the precursor has already been exposed and processed, to distinguish the different color selections and to inspect the quality of the image on the plate precursor. The contrast increases with increasing optical density in the exposed area and/or decreasing optical density in the non-exposed areas. The optical density in the exposed area may increase with the amount and extinction coefficient of the colorant remaining in the exposed areas and the intensity of color formed by the printing-out agent. In the non-exposed areas it is preferred that the amount of

colorant is as low as possible and that the intensity of color print-out agent is as low as possible. The optical density can be measured in reflectance using an optical densitometer, equipped with several filters (e.g. cyan, magenta, yellow). The difference in optical density in the exposed area and the non-exposed area has preferably a value of at least 0.3, more preferably at least 0.4, most preferably at least 0.5. There is no specific upper limit for the contrast value, but typically the contrast is not higher than 3.0 or even not higher than 2.0. In order to obtain a good visual contrast for a human observer the type of color of the colorant may also be important. Preferred colors for the colorant are cyan or blue colors, i.e. under blue color we understand a color that appears blue for the human eye.

[0083] The coating may include on the photopolymerisable layer, a toplayer or protective overcoat layer which acts as an oxygen barrier layer including water-soluble or water-swellaable binders; however, the coating preferably does not contain a toplayer or protective overcoat layer. Printing plate precursors which do not contain a toplayer or protective overcoat layer are also referred to as overcoat-free printing plate precursors. Preferred binders which can be used in the toplayer are polyvinyl alcohol and the polymers disclosed in WO 2005/029190, US 6,410,205 and EP 1 288 720, including the cited references in these patents and patent applications. The most preferred binder for the toplayer is polyvinylalcohol. The polyvinylalcohol has preferably a hydrolysis degree ranging between 74 mol % and 99 mol %, more preferably between 88-98%. The weight average molecular weight of the polyvinylalcohol can be measured by the viscosity of an aqueous solution, 4 % by weight, at 20°C as defined in DIN 53 015, and this viscosity number ranges preferably between 3 and 26, more preferably between 3 and 15, most preferably between 3 and 10.

[0084] The coating thickness of the optional toplayer is preferably between 0.25 and 1.75 g/m<sup>2</sup>, more preferably between 0.25 and 1.3 g/m<sup>2</sup>, most preferably between 0.25 and 1.0 g/m<sup>2</sup>. In a more preferred embodiment of the present invention, the optional toplayer has a coating thickness between 0.25 and 1.75 g/m<sup>2</sup> and

comprises a polyvinylalcohol having a hydrolysis degree ranging between 74 mol % and 99 mol % and a viscosity number as defined above ranging between 3 and 26.

[0085] The support is preferably a grained and anodized aluminium support, well known in the art. Suitable supports are for example disclosed in EP 1 843 203 (paragraphs [0066] to [0075]). The surface roughness, obtained after the graining step, is often expressed as arithmetical mean center-line roughness Ra (ISO 4287/1 or DIN 4762) and may vary between 0.05 and 1.5  $\mu\text{m}$ . The aluminum substrate of the current invention has preferably an Ra value below 0.45  $\mu\text{m}$ , more preferably below 0.40  $\mu\text{m}$  and most preferably below 0.30  $\mu\text{m}$ . The lower limit of the Ra value is preferably about 0.1  $\mu\text{m}$ . More details concerning the preferred Ra values of the surface of the grained and anodized aluminum support are described in EP 1 356 926. By anodising the aluminum support, an  $\text{Al}_2\text{O}_3$  layer is formed and the anodic weight ( $\text{g/m}^2$   $\text{Al}_2\text{O}_3$  formed on the aluminum surface) varies between 1 and 8  $\text{g/m}^2$ . The anodic weight is preferably  $\geq 3$   $\text{g/m}^2$ , more preferably  $\geq 3.5$   $\text{g/m}^2$  and most preferably  $\geq 4.0$   $\text{g/m}^2$ .

[0086] The grained and anodized aluminium support may be subjected to so-called post-anodic treatments, for example a treatment with polyvinylphosphonic acid or derivatives thereof, a treatment with polyacrylic acid, a treatment with potassium fluorozirconate or a phosphate, a treatment with an alkali metal silicate, or combinations thereof. Alternatively, the support may be treated with an adhesion promoting compound such as those described in EP 1 788 434 in [0010] and in the non-published patent application PCT/EP2013/055773. However, for a precursor optimized to be used without a pre-heat step it is preferred to use a grained and anodized aluminium support without any post-anodic treatment.

[0087] Besides an aluminium support, a plastic support, for example a polyester support, provided with one or more hydrophilic layers as disclosed in for example EP 1 025 992 may also be used.

[0088] The lithographic printing plate precursor of the present invention can be prepared by (i) applying on a support as described above the coating as described above and (ii) drying the precursor.

[0089] According to the present invention there is also provided a method for making a negative-working lithographic printing plate comprising the steps of imagewise exposing the

printing plate precursor followed by developing the imagewise exposed precursor so that the non exposed areas are dissolved in the developer solution. Optionally, after the imaging step, a heating step is carried out to enhance or to speed-up the polymerization and/or crosslinking reaction.

[0090] The image-wise exposing step can be carried out by a laser. Preferably, the image-wise exposing step is carried out off-press in a platesetter, i.e. an exposure apparatus suitable for image-wise exposing the precursor by a laser such as a laser diode, emitting around 830 nm, a Nd YAG laser, emitting around 1060 nm, a violet laser, emitting around 400 nm, or a gas laser such as an Ar laser, or with a digitally modulated UV-exposure set-up, using e.g. digital mirror devices, or by a conventional exposure in contact with a mask. In a preferred embodiment of the present invention, the precursor is image-wise exposed by a laser emitting IR-light or violet light.

[0091] During the optional heating step the plate precursor is heated, preferably at a temperature of about 80°C to 150°C and preferably during a dwell time of about 5 seconds to 1 minute. The preheating step is preferably carried out in a preheating unit which is preferably provided with heating elements such as IR-lamps, UV-lamps, heated air, a heated metal roll, etc.

[0092] After the exposing step or, when a preheating step is present, after the preheating step, the precursor may be washed in a prewashing station, whereby at least part of the toplayer, if present, can be removed by supplying a wash liquid, i.e. water or an aqueous solution, to the coating of the precursor. The washing liquid is preferably water, more preferably tap water. More details concerning the wash step are described in EP 1 788 434 in [0026].

[0093] After the exposure step, the optional heating step and the optional prewashing step, the precursor is preferably developed by means of immersing the precursor in a developing solution. The developing step is preferably carried out off-press with an aqueous alkaline developing solution or a gum solution. During the development step, the non-exposed areas of the image-recording layer are at least partially removed without essentially removing the exposed areas. The processing liquid can be applied to the plate e.g. by rubbing with an impregnated pad, by dipping,

immersing, (spin-)coating, spraying, pouring-on, either by hand or in an automatic processing apparatus. The treatment with a processing liquid may be combined with mechanical rubbing, e.g. by a rotating brush. The developed plate precursor can, if required, be post-treated with rinse water, a suitable correcting agent or preservative as known in the art. During the development step, any water-soluble protective layer present is preferably also removed. The development is preferably carried out at temperatures between 20 and 40 °C in automated processing units as customary in the art. More details concerning the development step can be found in for example EP 1 614 539 in [42] to [43]. Development in a gumming station comprising at least one gumming unit is for example described in WO 2007/057348 on page 40 line 34 to page 44 line 14.

[0094] The development step with an aqueous alkaline developing solution may be followed by a rinsing step and/or a gumming step.

[0095] Alternatively, the development step can be carried out by applying a gum solution thereby removing the non-exposed areas of the photopolymerisable layer from the support and gumming the plate in a single step. Preferably, the gumming unit is mechanically coupled to the platesetter by conveying means wherein the precursor is shielded from ambient light. A gum solution is typically an aqueous liquid which comprises one or more surface protective compounds that are capable of protecting the lithographic image of a printing plate against contamination, e.g. by oxidation, fingerprints, fats, oils or dust, or damaging, e.g. by scratches during handling of the plate. Suitable examples of such compounds are film-forming hydrophilic polymers or surfactants. The layer that remains on the plate after treatment with the gum solution preferably comprises between 0.005 and 20 g/m<sup>2</sup> of the surface protective compound, more preferably between 0.010 and 10 g/m<sup>2</sup>, most preferably between 0.020 and 5 g/m<sup>2</sup>. More details concerning the surface protective compounds in the gum solution can be found in WO 2007/057348 page 9 line 3 to page 11 line 6.

[0096] The gum solution preferably has a pH value between 3 and 11, more preferably between 4 and 10, even more preferably between 5 and 9, and most preferably between 6 and 8. A suitable gum

solution is described in for example EP 1 342 568 in [0008] to [0022]. The viscosity of the gum solution can be adjusted to a value of e.g. between 1.7 and 5 mPa.s, by adding viscosity increasing compounds, such as poly(ethylene oxide) or  
5 polyvinylalcohol, e.g. having a molecular weight between  $10^4$  and  $10^7$ . Such compounds can be present in a concentration of 0.01 to 10 g/l.

[0097] The gum solution may further comprise an inorganic salt, an anionic surfactant, a wetting agent, a chelate compound, an  
10 antiseptic compound, an anti-foaming compound and/or an ink receptivity agent and/or combinations thereof. More details about these additional ingredients are described in WO 2007/057348 page 11 line 22 to page 14 line 19.

[0098] Alternatively, the development step can be carried out  
15 on press by mounting the exposed precursor on a plate cylinder of a lithographic printing press and rotating the plate cylinder while feeding dampening liquid and/or ink to the coating.

[0099] After the processing step the plate may be dried in a drying unit. In a preferred embodiment the plate is dried by  
20 heating the plate in the drying unit which may contain at least one heating element selected from an IR-lamp, an UV-lamp, a heated metal roller or heated air. In a preferred embodiment of the present invention, the plate is dried with heated air as known in the drying section of a classical developing machine.


[00100] After drying the plate, the plate can optionally be  
25 heated in a baking unit. More details concerning the heating in a baking unit can be found in WO 2007/057348 page 44 line 26 to page 45 line 20.

[00101] The printing plate thus obtained can be used for  
30 conventional, so-called wet offset printing, in which ink and an aqueous dampening liquid is supplied to the plate. Another suitable printing method uses a so-called single-fluid ink without a dampening liquid. Suitable single-fluid inks have been described in US 4,045,232; US 4,981,517 and US 6,140,392. In a most preferred  
35 embodiment, the single-fluid ink comprises an ink phase, also called the hydrophobic or oleophilic phase, and a polyol phase as described in WO 00/32705.

## EXAMPLES


I. Synthesis of the inventive compounds.

5

**Synthesis of inventive compound COMP-1**Reaction scheme :Experimental procedure :

1 g diethyl oxalate (99% from ACROS) was dissolved in 5 ml ethanol. 1.03g 3-amino-1-propanol (99% from ACROS) was added dropwise to the solution. The mixture was stirred for 1 hour at room temperature. The product (white precipitate) was filtrated, washed with ethanol and dried. The compound was analyzed using TLC-chromatography (TLC Silica gel 60 F<sub>254</sub>; supplied by Merck, eluent: methylene chloride/ methanol 90/10, R<sub>f</sub>: 0.15).

20


**Synthesis of inventive compound COMP-2**Reaction scheme :Experimental procedure :

4 g N,N'-Bis(3-hydroxypropyl)oxamide was added to 25 ml of acetonitrile. 18.4 ml acetic anhydride was added to the mixture. The reaction was allowed to continue over night under reflux. The reaction mixture was evaporated under reduced pressure. The product was washed with methyl tert-butyl ether and dried. The compound was analyzed using TLC-chromatography (TLC RP-18 F<sub>254</sub>; supplied by Merck, eluent: methanol / 0.5M aqueous NaCl solution 80/20, R<sub>f</sub>: 0.85).

35

**Synthesis of inventive compound COMP-3**

Reaction scheme :



5


Experimental procedure :

5.1 g diethyl oxalate (99% from ACROS) was dissolved in 10 ml dichloromethane. 11.6 ml 2-ethylhexyl amine was added dropwise to the solution. The mixture was stirred 4 hours at room temperature.

10 The product (white precipitate) was filtrated, washed with n-hexane and dried. The crude product (white crystals) was used without further purification. The compound was analyzed using TLC-chromatography (TLC Silica gel 60 Partisil KC18F; supplied by Whatman, eluent: methanol / 0.5M aqeous NaCl solution 90/10, Rf: 15 0.35).

**Synthesis of inventive compound COMP-4**

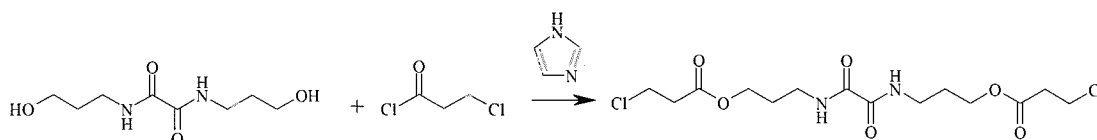Reaction scheme :



20

Experimental procedure :


10 g imidazole were dissolved in 130 ml methylene chloride and 25 the solution was cooled down to -10°C. 15.3 g 3-chloropropanoyl chloride was added dropwise to the reaction mixture while the temperature was kept below 0°C. After 30 minutes, the reaction mixture was brought to room temperature and 6.82 g N,N'-Bis(3-hydroxypropyl)oxamide was added to the reaction mixture. The 30 reaction was allowed to continue for 3 hours under reflux. The reaction mixture was filtered in order to remove salts and the filtrate was evaporated under reduced pressure. The crude product was washed with water. The compound was analyzed using TLC-

chromatography (TLC Silica gel 60 F<sub>254</sub>; supplied by Merck, eluent: methylene chloride/ methanol 90/10, R<sub>f</sub>: 0.85).

#### Synthesis of inventive compound COMP-5

5

##### Reaction scheme :




##### Experimental procedure :

10 10 g diethyl oxalate (99% from ACROS) was dissolved in 50 ml ethanol. 6.21 g 2-amino-1-ethanol (99% from Acros) was added dropwise to the solution. The mixture was stirred over night at room temperature. The product (white precipitate) was filtrated, washed with ethanol and dried. The compound was analyzed using TLC-  
15 chromatography (TLC Silica gel 60 F<sub>254</sub>; supplied by Merck, eluent: methylene chloride/ methanol 90/10, R<sub>f</sub>: 0.20).

#### Synthesis of inventive compound COMP-6

20

##### Reaction scheme :




##### Experimental procedure :

25 5 g diethyl oxalate (99% from ACROS) was dissolved in 50 ml acetone. 7.42g 5-amino-1-pentanol was added dropwise to the solution. The mixture was stirred for 1 hour at room temperature. The product (white precipitate) was filtrated, washed with acetone and dichloromethane and dried. The compound was analyzed using TLC-  
30 chromatography (TLC Silica gel 60 F<sub>254</sub>; supplied by Merck, eluent: methylene chloride/ methanol 90/10, R<sub>f</sub>: 0.30).

#### Synthesis of inventive compound COMP-7

35

##### Reaction scheme :



Experimental procedure:

10 g diethyl oxalate (99% from ACROS) was dissolved in 50 ml ethanol. 6.21 g 1-amino-2-propanol was added dropwise to the solution. The mixture was stirred over night at room temperature. The product (white precipitate) was filtrated, washed with ethanol and dried. The compound was analyzed using TLC-chromatography (TLC Silica gel 60 F<sub>254</sub>; supplied by Merck, eluent: methylene chloride/ methanol 90/10, R<sub>f</sub>: 0.15).

**Synthesis of inventive compound COMP-8**

Reaction scheme:



15


Experimental procedure:

1 g adipoyl chloride was added dropwise at 0°C to 5 g 3-amino-1-propanol. The reaction was allowed to continue over night at room temperature under mild stirring. 20 ml methoxypropanyl and 20 ml ethyl acetate were added to the reaction mixture. The product (white crystals) was filtrated, washed with ethyl acetate and dried under reduced pressure.

25

**Synthesis of inventive compound COMP-9**

Reaction scheme :



30


Experimental procedure :

8.77 g diethyl oxalate (99% from ACROS) was dissolved in 15 ml dichloromethane. 12 ml isobutyl amine was added dropwise to the

solution. The mixture was stirred 4 hours at room temperature. The product (white precipitate) was filtrated, washed with n-hexane and dried. The crude product (white crystals) was used without further purification. The compound was analyzed using TLC-chromatography  
 5 (TLC Silica gel 60 Partisil KC18F; supplied by Whatman, eluent: methanol / 0.5M aqeous NaCl solution 90/10, Rf: 0.65).

### Synthesis of inventive compound COMP-10

10 Reaction scheme :



Experimental procedure :













8.77 g diethyl oxalate (99% from ACROS) was dissolved in 15 ml  
 15 dichloromethane. 12.2 ml sec-butyl amine was added dropwise to the solution. The mixture was stirred 4 hours at room temperature. The product (white precipitate) was filtrated, washed with n-hexane and dried. The crude product (white crystals) was used without further purification. The compound was analyzed using TLC-chromatography  
 20 (TLC Silica gel 60 Partisil KC18F; supplied by Whatman, eluent: methanol / 0.5M aqeous NaCl solution 90/10, Rf: 0.65).





## II. Polymerisable compounds.

25

Table 1: Polymerisable compounds.

Polymerisable compounds	Structure	
FST510* commercially available from AZ ELECTRONICS MATERIALS	<p>The structure of FST510* is a long-chain molecule consisting of two diethyl oxalate units linked by a central amide bond. The central amide nitrogen is substituted with a sec-butyl group. The terminal groups are diethyl oxalate units, which are known to be polymerizable.</p>	M-1
EBECRYL 4858* commercially available from CYTEC INDUSTRIES BV	<p>The structure of EBECRYL 4858* is a long-chain molecule consisting of two diethyl oxalate units linked by a central amide bond. The central amide nitrogen is substituted with a sec-butyl group. The terminal groups are diethyl oxalate units, which are known to be polymerizable.</p>	M-2


<p>SR349 commercially available from SARTOMER</p>		M-3
<p>CD540 commercially available from SARTOMER</p>		M-4
<p>SR601E commercially available from SARTOMER</p>		M-5
<p>Synthesis see below</p>		M-6
<p>Synthesis see below</p>		M-7
<p>Synthesis see below</p>		M-8
<p>Synthesis see below</p>		M-9
<p>Synthesis see below</p>		M-10
<p>Synthesis see below</p>		M-11
<p>SR295 commercially available from SARTOMER</p>		M-12
<p>MIRAMER M600 commercially available from RAHN AG</p>		M-13
<p>SR350 commercially available from SARTOMER</p>		M-14

SR351 commercially available from SARTOMER		M-15
Tris (2- Methacryloxyethyl) Isocyanurate commercially available from DAJAC LABS		M-16
SR368 c commercially available from SARTOMER		M-17
N-CH <sub>3</sub> oxalyl amide Synthesis see below		M-18

\* Isomeric mixture

#### Synthesis of Compound M-6.

5 Reaction scheme:



Experimental procedure:

10 Experimental procedure:


13.7 g N,N'-carbonyldiimidazole was dissolved in 50 ml dichloromethane. 0.5 ml triethylamine and 23 g hydroxyethyl methacrylate were added to the solution. The mixture was stirred  
 15 over night under reflux. The major side products as well as non reacted reagents were extracted with water. The organic phase was dried with magnesium sulfate and filtrated. The organic phase was evaporated under reduced pressure. The crude product (white crystals) was used without further purification. The compound was  
 20 analyzed using TLC-chromatography (TLC Silica gel 60 Partisil KC18F;

supplied by Whatman, eluent: methanol / 1M aqueous NaCl solution 60/40, Rf: 0.40).

### Synthesis of Compound M-7.

5

#### Reaction scheme:



#### Experimental procedure:

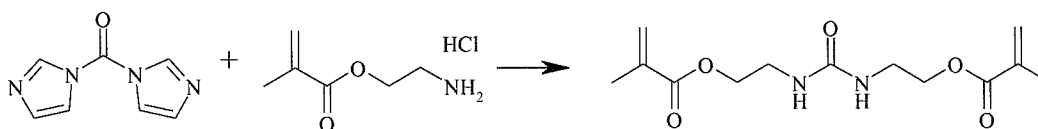
10

13.7 g N,N'-carbonyldiimidazole was dissolved in 50 ml dichloromethane. 10 g hydroxyethyl methacrylate was added to the solution. The mixture was stirred for 10 minutes at room temperature. In a separate flask, 13.2 g 2-aminoethyl methacrylate hydrochloride (90% from ALDRICH) and 11.8 ml triethylamine were dissolved in 100 ml dichloromethane. This solution was added to the reaction mixture. The reaction was stirred over night under reflux. The major side products as well as non reacted reagents were extracted with water. The organic phase was dried with magnesium sulfate and filtrated. The organic phase was evaporated under reduced pressure. The crude product (white crystals) was used without further purification. The compound was analyzed using TLC-chromatography (TLC Silica gel 60 Partisil KC18F; supplied by Whatman, eluent: methanol / 1M aqueous NaCl solution 60/40, Rf: 0.40).

25

### Synthesis of Compound M-8.

#### Reaction scheme:




30

#### Experimental procedure:

13.7 g N,N'-carbonyldiimidazole was dissolved in 50 ml dichloromethane. 13.5 ml triethylamine and 20 g 2-aminoethyl methacrylate hydrochloride (90% from ALDRICH) were added to the solution. The mixture was stirred over night under reflux. The major side products as well as non reacted reagents were extracted with water. The organic phase was evaporated under reduced pressure. The product was purified by column chromatography. The compound was analyzed using TLC-chromatography (TLC Silica gel 60 Partisil KC18F; supplied by Whatman, eluent: methanol / 1M aqueous NaCl solution 60/40, Rf: 0.40).

#### Synthesis of Compound M-9.

Reaction scheme :




Experimental procedure :

4g hydroxyethyl methacrylate was added to 2.17 g malonyl chloride (97% from ALDRICH). The reaction mixture was stirred over night at room temperature. The major side products as well as non reacted reagents were extracted with an aqueous solution of sodium bicarbonate. The product was extracted with methyl tert-butyl ether and purified by column chromatography using a Prochrom LC80 column, packed with Kromasil Si 60Å 10 µm and methylene chloride / ethyl acetate 30/70 as eluent. The compound was analyzed using TLC-chromatography (TLC Silica gel 60 F254; supplied by Merck, eluent: methylene chloride/ methanol 90/10, Rf: 0.80).

#### 30 Synthesis of Compound M-10.

Reaction scheme :




Experimental procedure :

4g hydroxyethyl methacrylate was added to 2.37 g succinyl chloride (95% from ALDRICH). The reaction mixture was stirred over night at room temperature. The major side products as well as non reacted reagents were extracted with an aqueous solution of sodium bicarbonate. The product was extracted with methyl tert-butyl ether and purified by column chromatography using a Prochrom LC80 column, packed with Kromasil Si 60Å 10 µm and methylene chloride / ethyl acetate 30/70 as eluent. The compound was analyzed using TLC-chromatography (TLC Silica gel 60 F254; supplied by Merck, eluent: methylene chloride/ methanol 90/10, Rf: 0.70).

**Synthesis of Compound M-11.**

15 Reaction scheme :


Experimental procedure :

20 4g hydroxyethyl methacrylate was added to 2.585 g glutaryl chloride (97% from ALDRICH). The reaction mixture was stirred over night at room temperature. The major side products as well as non reacted reagents were extracted with an aqueous solution of sodium bicarbonate. The product was extracted with methyl tert-butyl ether and purified by column chromatography using a Prochrom LC80 column, packed with Kromasil Si 60Å 10 µm and methylene chloride / ethyl acetate 30/70 as eluent. The compound was analyzed using TLC-chromatography (TLC Silica gel 60 F254; supplied by Merck, eluent: methylene chloride/ methanol 90/10, Rf: 0.65).

30

**Synthesis of Compound M-18.****Synthesis of N,N'-Bis(2-hydroxyethyl)-N,N'-dimethyloxalylamide.**

35 Reaction scheme:




Experimental procedure :

5           20.58 g 2-methylamino-1-ethanol was added dropwise to 20 g diethyl oxalate (99% from ACROS). The mixture was stirred over night at room temperature. The formed ethanol was evaporated and the crude product was used without further purification. The compound was analyzed using TLC-chromatography (TLC Silica gel 60 F<sub>254</sub>; supplied  
10 by Merck, eluent: methylene chloride/ methanol 90/10, R<sub>f</sub>: 0.30).

**Compound M-18.**

Reaction scheme:

15



Experimental procedure :

20           27.86 g N,N'-Bis(2-hydroxyethyl)-N,N'-dimethyloxalylamide was added to 200 ml of dichloromethane. 57.05 ml triethylamine and 1.67 g 4-dimethylaminopyridine were added to the mixture. 63.02 g methacrylic anhydride (>94% from ALDRICH) was added dropwise to the mixture. The reaction was allowed to continue over night at room  
25 temperature under mild stirring. The reaction mixture was evaporated under reduced pressure. The crude product was washed with methanol and successively purified by column chromatography using a Prochrom LC80 column, packed with Kromasil Si 60Å 10 µm and methylene chloride / ethyl acetate 30/70 as eluent. The compound was analyzed  
30 using TLC-chromatography (TLC Silica gel 60 F<sub>254</sub>; supplied by Merck, eluent: methylene chloride/ methanol 90/10, R<sub>f</sub>=0.90).

**III. Example 1: violet photopolymer printing plates.**

35

**1. Preparation of the aluminium support S-01**

A 0.3 mm thick aluminium foil was degreased by spraying with an aqueous solution containing 26 g/l NaOH at 65°C for 2 seconds and rinsed with demineralised water for 1.5 seconds. The foil was then electrochemically grained during 10 seconds using an alternating current in an aqueous solution containing 15 g/l HCl, 15 g/l SO<sub>4</sub><sup>2-</sup> ions and 5 g/l Al<sup>3+</sup> ions at a temperature of 37°C and a current density of about 100 A/dm<sup>2</sup>. Afterwards, the aluminium foil was then desmuted by etching with an aqueous solution containing 5.5 g/l of NaOH at 36°C for 2 seconds and rinsed with demineralised water for 2 seconds. The foil was subsequently subjected to anodic oxidation during 15 seconds in an aqueous solution containing 145 g/l of sulfuric acid at a temperature of 50°C and a current density of 17 A/dm<sup>2</sup>, then washed with demineralised water for 11 seconds and dried at 120°C for 5 seconds.

The support thus obtained was characterised by a surface roughness Ra of 0.35-0.4 µm (measured with interferometer NT1100) and had an anodic weight of 3.0 g/m<sup>2</sup>.

## 2. Preparation of the printing plates PP-01 to PP-34.

### Coating

Printing plate precursors PPP-01 to PPP-34 were produced by coating onto the above described support S-01 the components as defined in Table 2 (see below) dissolved in a mixture of 40% by volume of MEK and 60% by volume of Dowanol PM (1-methoxy-2-propanol, commercially available from DOW CHEMICAL Company). The coating solution was applied at a wet coating thickness of 30 µm and then dried at 120°C for 1 minute in a circulation oven.


Table 2: dry coating weight of the photopolymerisable layer PL-01.

INGREDIENT*	PL-01 g/m <sup>2</sup>
Fluomix (1)	0.075
PVA (2)	0.225
Polymerisable compound	

(3) and/or inventive compound (4)	0.900
Tegoglide 410 (5)	0.00225
HABI (6)	0.1125
Pig-disp-01 (7)	0.180
MBT (8)	0.030
Albritect CP30 (9)	0.036
Sipomer PAM100 (10)	0.195
<b>Dry coating weight</b>	<b>1.7558</b>


\* active components in the coating

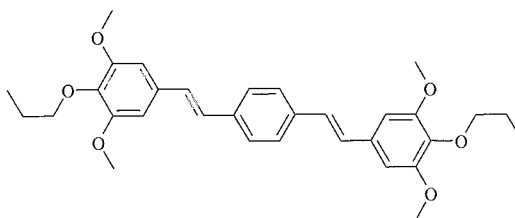(1) Fluomix is a violet sensitizer mixture consisting of the following compounds:




15 wt.%

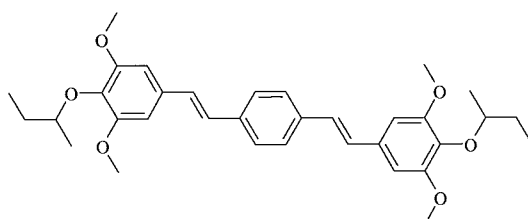5



38 wt.%

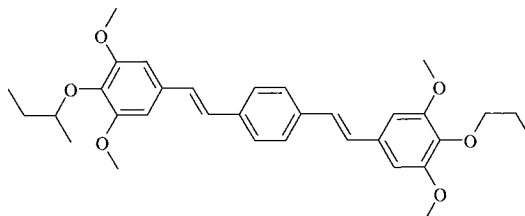

47 wt.%

10

(2) PVA is a poly(vinyl acetate) with Mw = 500.000 commercially available from ALDRICH;

(3) Polymerisable Compounds as given in Table 1 above and present in the coating in an amount specified in Table 3 below;

15

(4) Inventive Compounds as synthesized above and present in the coating in an amount specified in Table 3 below;

(5) Tegoglide 410<sup>TM</sup> is a surfactant commercially available from Evonik Tego Chemie GmbH;

5 (6) HABI is 2,2'-bis(o-chlorophenyl)-4,4',5,5'-tetraphenylbiimidazole commercially available from SUMITOMO;

(7) Pig-disp-01 contains in a 50/50 ratio Hostaperm Blue P-BFSTM commercially available from Clariant and Disperbyk 182 commercially available from BYK Chemie GmbH;

10 (8) MBT is 2-mercaptobenzthiazole;

(9) Albritect CP30 is a poly(acrylic acid) poly(vinylphosphonic acid) 70/30 copolymer from RHODIA;

(10) Sipomer PAM100 is a phosphate ester of polyethylene glycol monomethacrylate from RHODIA.

15

Table 3: Printing plate precursors PPP-01 to PPP-34

Printing plate Precursors	Inventive compound	mg/m <sup>2</sup>	%wt	Polymerisable compound	
				mg/m <sup>2</sup>	
PPP-01 <i>comparative</i>	-	0	0	M-1	600
PPP-02 <i>comparative</i>	COMP-2	60	5.1	M-1	540
PPP-03 <i>comparative</i>	COMP-2	90	7.7	M-1	510
PPP-04 <i>comparative</i>	COMP-2	105	9.0	M-1	495
PPP-05 <i>inventive</i>	COMP-2	120	10.3	M-1	480
PPP-06 <i>inventive</i>	COMP-2	210	17.9	M-1	390
PPP-07, <i>inventive</i>	COMP-2	300	25.6	M-1	300
PPP-08, <i>inventive</i>	COMP-2	390	33.3	M-1	210

<i>inventive</i>					
PPP-09, <i>comparative</i>	COMP-2	480	41.0	M-1	120
PPP-10 <i>inventive</i>	COMP-3	150	12.8	M-1	450
PPP-11 <i>inventive</i>	COMP-4	150	12.8	M-1	450
PPP-12 <i>comparative</i>	-	-	-	M-1	600
PPP-13 <i>comparative</i>	-	-	-	M-3	600
PPP-14 <i>comparative</i>	-	-	-	M-4	600
PPP-15 <i>comparative</i>	-	-	-	M-5	600
PPP-16 <i>comparative</i>	-	-	-	M-6	600
PPP-17 <i>comparative</i>	-	-	-	M-7	600
PPP-18 <i>comparative</i>	-	-	-	M-9	600
PPP-19 <i>comparative</i>	-	-	-	M-10	600
PPP-20 <i>comparative</i>	-	-	-	M-11	600
PPP-21 <i>comparative</i>	-	-	-	M-12	600
PPP-22 <i>comparative</i>	-	-	-	M-13	600
PPP-23 <i>comparative</i>	-	-	-	M-14	600
PPP-24 <i>comparative</i>	-	-	-	M-15	600
PPP-25	-	-	-	M-16	600

<i>comparative</i>				
PPP-26 <i>comparative</i>	-	-	-	M-6 + M-1 150 + 450
PPP-27 <i>comparative</i>	-	-	-	M-7 + M-1 150 + 450
PPP-28 <i>comparative</i>	-	-	-	M-8 + M-1 150 + 450
PPP-29 <i>comparative</i>	-	-	-	M-9 + M-1 150 + 450
PPP-30 <i>comparative</i>	-	-	-	M-10 + M-1 150 + 450
PPP-31 <i>comparative</i>	-	-	-	M-11 + M-1 150 + 450
PPP-32 <i>comparative</i>	-	-	-	M-17 + M-1 300 + 300
PPP-33 <i>comparative</i>	-	-	-	M-3 + M-1 300 + 300
PPP-34 <i>comparative</i>	-	-	-	M-18 + M-1 150 + 450

**Sensitivity Results**

5 Evaluation of the sensitivity of the overcoat-free printing plate precursors PPP-1 to PPP-34.

10 Exposure was carried out on an Agfa Polaris X violet platesetter at 1270 dpi through an UGRA Step Wedge (wedge constant of 0,15). The sensitivity, i.e. right exposure, was determined for each printing plate precursor. The sensitivity is defined as the exposure energy density (in  $\mu\text{J}/\text{cm}^2$ ) needed to obtain an optical density >97% of the maximum optical density that can be obtained on this plate after processing on the first three wedge steps. The obtained sensitivity results are given in Table 4.

15

Table 4: Sensitivity results of the printing plate precursors PPP-01 to PPP-34.

Printing plate precursors	Sensitivity $\mu\text{J}/\text{cm}^2$
PPP-01, comparative	no image
PPP-02, comparative	no image
PPP-03, comparative	very weak image
PPP-04, comparative	very weak image
PPP-05, inventive	150
PPP-06, <i>inventive</i>	142
PPP-07, <i>inventive</i>	127
PPP-08, <i>inventive</i>	350
PPP-09, comparative	no image
PPP-10, <i>inventive</i>	148
PPP-11, <i>inventive</i>	105
PPP-12 to PPP-34, <i>comparative</i>	no image

The results in Table 4 show that

- the overcoat-free printing plate precursors containing the inventive compound at a concentration above 10%wt and below 40%wt provide printing plate precursors with excellent sensitivity;
- the overcoat-free printing plate precursors containing a coating without the inventive compound (PPP-12 to PPP-34) do not provide an image.

Evaluation of the sensitivity of the printing plate precursors PPP-35 to PPP-40 with a toplayer.

#### **Preparation of the printing plate precursors.**

#### **Coating**

Printing plate precursors PPP-35 to PPP-40 were produced by first coating onto the above described support S-01 the components as defined in Table 5 (see below) dissolved in a mixture of 40% by volume of MEK and 60% by volume of Dowanol PM (1-methoxy-2-propanol,

commercially available from DOW CHEMICAL Company). The coating solution was applied at a wet coating thickness of 30  $\mu\text{m}$  and then dried at 120°C for 1 minute in a circulation oven.

5 Table 5: dry coating weight of the photopolymerisable layer PL-01.

INGREDIENT*	PL-01 g/m <sup>2</sup>
Fluomix (1)	0.075
PVA (2)	0.225
Inventive compound and polymerisable compound (3)	0.900
Tegoglide 410 (4)	0.00225
HABI (5)	0.1125
Pig-disp-01 (6)	0.180
MBT (7)	0.030
Albritect CP30 (8)	0.036
Sipomer PAM100 (9)	0.195
<b>Dry coating weight</b>	<b>1.7558</b>

\* active components in the coating

(1), (2), (4), (5), (6), (7), (8) and (9): see Table 1 above;  
(3) Compounds as synthesized above and combined as defined in  
Table 6 below;

10

Table 6: Printing plate precursors PPP-35 to PPP-40.

Printing plate precursor	Inventive compound (mg/cm <sup>2</sup> )	Comparative polymerisable compound (mg/cm <sup>2</sup> )
PPP-35, comparative	-	M-1 (600)
PPP-36, inventive	COMP-4 (150)	M-1 (450)
PPP-37, inventive	COMP-6 (150)	M-1 (450)
PPP-38, inventive	COMP-8 (150)	M-1 (450)
PPP-39, inventive	COMP-9 (150)	M-1 (450)
PPP-40, inventive	COMP-10 (150)	M-1 (450)

**Toplayer**

On top of the photosensitive layer a solution in water with the composition as defined in Table 7 was coated (40  $\mu\text{m}$ ) and subsequently dried at 120°C for 2 minutes. The so-formed protective toplayer OC-1 has a dry coating weight of 1.25 g/m<sup>2</sup>. Printing plate precursors PPP-35 to PPP-40 provided with a toplayer were obtained.

Table 7: Composition of the toplayer solution OC-01.

INGREDIENT (g)	OC-01
Mowiol 4-88 (1)	19.1
Mowiol 8-88 (1)	5.84
Luviskol K30 (2)	5.95
Acticide LA1206 (3)	0.06
Lutensol A8 (4)	0.30
Water	969

\* active components in the coating

- (1) Mowiol 4-88<sup>TM</sup> and Mowiol 8-88<sup>TM</sup> are partially hydrolyzed polyvinylalcohols commercially available from Kuraray;
- (2) Luviskol K30<sup>TM</sup> is polyvinylpyrrolidone homopolymer commercially available from BASF;
- (3) Acticide LA1206<sup>TM</sup> is a biocide commercially available from Thor;
- (4) Lutensol A8<sup>TM</sup> is a surface active agent commercially available from BASF.

### Sensitivity results

The sensitivity of the obtained printing plate precursors PPP-35 to PPP-40 was determined (as described above) and the results are summarized in Table 8 below.

Table 8: Sensitivity results of the printing plate precursors PPP-35 to PPP-40.

Printing plate precursor with a toplayer	Sensitivity $\mu\text{J}/\text{cm}^2$
PPP-35, comparative	150
PPP-36, inventive	79

PPP-37, <i>inventive</i>	91
PPP-38, <i>inventive</i>	77
PPP-39, <i>inventive</i>	87
PPP-40, <i>inventive</i>	86

### Processing

After imaging, the printing plate precursors were subjected to  
5 processing with Gum-1 (see below) in a CRF45 processor (dwell time  
30 s, at 21°C), available from Agfa Graphics, to remove the coating  
in the non-image areas from the support. Printing plates PP-01 to  
PP-40 are obtained.

10 Gum-1 is a solution prepared as follow:

To 650 ml demineralised water  
67 ml of Emulsogen TS 160<sup>TM</sup>, a non-ionic surfactant commercially  
available from Clariant;  
15 21.21 ml sodium n-octyl sulfate, commercially available from  
Henkel as a 42% solution in water;  
70 g of potato dextrine Avedex 37, commercially available Avebe  
BA;  
5 g of potassium hydrogen phosphate;  
20 2.35 g of sodium hydroxide (50 wt% aqueous solution) and  
9.5 ml phenoxypropanol, commercially available from BASF  
were added under stirring and demineralised water was further  
added to make 1000 ml.  
The pH is 7 at room temperature.

25

### Accelerated press life test

The accelerated press life test as described below was  
performed on printing plates PP-05 and PP-07 as described above  
30 and on PP-35 (with a toplayer). Since the Comparative Examples do  
not result in an image without a toplayer (see Table 4 above), the  
evaluation of the accelerated press life of the Comparative  
Example was performed with a toplayer. The Inventive Examples were  
performed without a toplayer.

Procedure for the accelerated presslife test:

A test field consisting of several patterns such as a uniform dot pattern with a theoretical dot coverage of 40% (at 200 lpi) was exposed on each printing plate at the right exposure in order to evaluate the dot loss on the printed sheet during printing. Printing was conducted on a Heidelberg GTO46 sheetfed press<sup>TM</sup> (available from Heidelberger Druckmaschinen AG) up to 30000 impressions, using a compressible rubber blanket ContiAir Entropia HC (trademark of Continental), K + E Novavit 800 Skinnex ink (trademark of BASF), to which 0.5 wt% of 15 micron CaCO<sub>3</sub> particles (K4Plus obtained from Manroland Benelux NV) was added, and 2% Agfa Prima FS404 fountain solution additive (trademark of Agfa Graphics). The dotloss % is a measure for the abrasive wear of the plate during printing and is defined as the difference between the dot coverage of the 40% pattern on printed page 1000 and the dot coverage of the 40% pattern on page 30000, divided by the dot coverage on page 1000, multiplied by 100. A high value of dotsize loss after the 30000 impressions reflects a high occurrence of abrasive wear on the plate during the test.

The accelerated presslife test results obtained for the inventive and comparative printing plates are given in Table 9.

Table 9: Results of the accelerated presslife test.

Printing plate	toplayer present before processing	Sensitivity ( $\mu\text{J}/\text{cm}^2$ )	Dotsize loss after accelerated presslife testing (%)
PP-05 <i>Inventive</i>	no	150	15
PP-07 <i>Inventive</i>	no	150	20
PP-35 <i>Comparative</i>	yes	150	55

The results of the accelerated presslife test show that the inventive printing plates which were not provided with a toplayer are characterized by - compared to the comparative printing plate which was provided with a toplayer - a significant improved  
5 presslife.

#### IV. Example 2: Thermal photopolymer printing plates.

##### Preparation of the printing plates PP-41 to PP-43

10

#### Coating

The printing plate precursors PPP-41 to PPP-43 were prepared by coating onto the above described support S-01 the components as  
15 defined in Table 10 below dissolved in a mixture of 40% by volume of MEK and 60% by volume of Dowanol PM (1-methoxy-2-propanol, commercially available from DOW CHEMICAL Company). The coating solution was applied at a wet coating thickness of 30  $\mu\text{m}$  and then dried at 120°C for 1 minute in a circulation oven.


20

Table 10: Composition and dry coating weight of the photopolymerisable layer PL-02.

INGREDIENT*	PL-02 g/m <sup>2</sup>
IR dye (1)	0.033
Poly(vinyl acetaat) (2)	0.225
Inventive compound and/or (3)	0.900
Polymerisable compound (4)	
Tegoglide 410 (5)	0.00225
131725-16-1 (6)	0.090
Pig-disp-01 (7)	0.180
Albritect CP30 (8)	0.036
Sipomer PAM100 (9)	0.195
<b>Dry coating weight</b>	<b>1.6613</b>

\*: active components in the coating

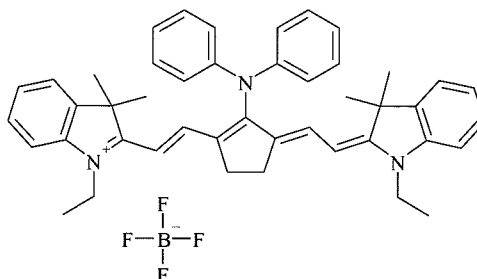(1) IR dye is an infrared absorbing dye commercially available from FEW CHEMICALS and has the following structure:



(2), (5), (7), (8) and (9): See Table 1;

5 (3) Polymerisable Compounds as given in Table 1 above and present in the coating in an amount specified in Table 10 below;

(4) Inventive Compounds as synthesized above and present in the coating in an amount specified in Table 11 below;

10 (6) Bis (4-tert-butylphenyl) iodonium tetraphenylborate from HAMPFORD RESEARCH.

### Sensitivity Results

15

Evaluation of the sensitivity of the printing plate precursors PPP-41 to PPP-43.

20 Exposure was carried out on a Creo 3244T thermal platesetter at 2400 dpi. The sensitivity, i.e. right exposure, was determined for each printing plate precursor. The sensitivity is defined as the exposure energy density (in mJ/cm<sup>2</sup>) needed to obtain (after processing) a dotgain value of 1 to 1.5% on a pattern consisting of (theoretical) 30% dot coverage.

25

Table 11: Sensitivity results of the overcoat-free printing plate precursors.

Printing plate precursor	Inventive compound (mg/cm <sup>2</sup> )	Polymerisable compound (mg/cm <sup>2</sup> )	Sensitivity (mJ/cm <sup>2</sup> )
PPP-41	COMP-1	M-3	30

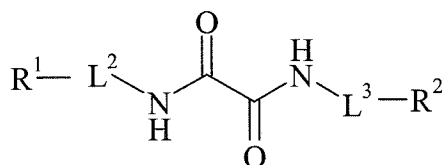
<i>Inventive</i>	(120)	(480)	
PPP-42 <i>comparative</i>	-	M-1 (600)	No image
PPP-43 <i>comparative</i>	-	M-3 (600)	No image

The results show that the overcoat-free printing plate precursors PPP-42 and PPP-43 which do not contain the inventive compound do not provide an image. The inventive, overcoat-free printing plate precursor PPP-41 containing a coating including a compound according to the present invention provides a printing plate precursor with an excellent sensitivity.



4. A precursor according to claims 1 or 3 wherein  $L^1$  represents an optionally substituted alkylene, cycloalkylene, arylene, or heteroarylene, -O-, -CO-, -CO-O-, -O-CO-, -CO-NH-,  
 5 -NH-CO-, -NH-CO-O-, -O-CO-NH-, -NH-CO-NH-, -NH-CS-NH-,  
 -CO-NR', -NR''-CO-, -NH-CS-NH-, -SO-, -SO<sub>2</sub>-, -SO<sub>2</sub>-NH-, -NH-SO<sub>2</sub>-, -CH=N-, -NH-NH-, -N<sup>+</sup>(CH<sub>3</sub>)<sub>2</sub>-, -S-, -S-S-, and/or combinations thereof and wherein R' and R'' each independently represent an optionally substituted alkyl, aryl, or  
 10 heteroaryl.

5. A precursor according to any of the preceding claims 1 to 3 wherein the compound is represented by Formula (III):




15 wherein R<sup>1</sup> and R<sup>2</sup> independently represent a terminal group; and L<sup>2</sup> and L<sup>3</sup> independently represent a divalent linking group.

6. A precursor according to claims 3 to 5 wherein the divalent linking groups L<sup>2</sup> and L<sup>3</sup> independently represent an optionally substituted alkylene or cycloalkylene group.  
 20

7. A precursor according to claims 3 to 6 wherein the terminal groups R<sup>1</sup> and R<sup>2</sup> independently represent hydrogen, an optionally substituted alkyl or cycloalkyl group, an optionally substituted aryl group, an optionally substituted aralkyl group or an optionally substituted heteroaryl group.  
 25

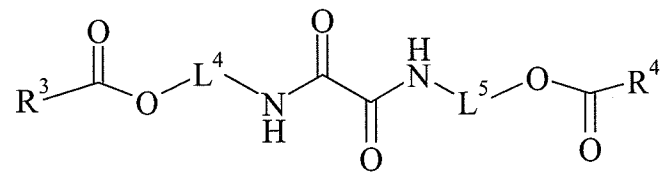8. A precursor according to any of the preceding claims herein the compound is represented by Formula (IV):  
 30



wherein wherein  $\text{R}^3$  and  $\text{R}^4$  independently represent a terminal group; and  
 $\text{L}^4$  and  $\text{L}^5$  independently represent a divalent linking group.

5

9. A precursor according to any of the preceding claims wherein the precursor does not include a protective overcoat layer.

10. A method of making a lithographic printing plate including the steps of

10

- providing a lithographic printing plate precursor according to any of the preceding claims 1 to 9;
- image-wise exposing the precursor with a laser emitting IR-light or violet light;
- developing the precursor off-press by treating the precursor with a gum solution thereby removing the non-exposed areas of the coating from the support and whereby the precursor is developed and gummied in one single step.

15  
20

INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2014/062227

A. CLASSIFICATION OF SUBJECT MATTER  
INV. G03F7/027 G03F7/038  
ADD.  
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED  
Minimum documentation searched (classification system followed by classification symbols)  
G03F  
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 288 720 A1 (FUJI PHOTO FILM CO LTD [JP] FUJIFILM CORP [JP]) 5 March 2003 (2003-03-05) paragraphs [0135], [0148], [0157] - [0160], [0182], [0184]; examples 1-4,9-11,15-19; compounds c-22, c-23,D-30,I-47,Z-1, Z-3, Z-4 -----	1,3,4,6, 7,9,10
A	US 4 782 005 A (EKLUND NILS [US] ET AL) 1 November 1988 (1988-11-01) the whole document -----	1-10
A	US 2008/311520 A1 (YU JIANFEI [US] ET AL) 18 December 2008 (2008-12-18) paragraphs [0111], [0114]; claims 10,13,14; examples 11,12 -----	1-10
	-/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>
---	---

Date of the actual completion of the international search  20 August 2014	Date of mailing of the international search report  27/08/2014
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Eggers, Karin
--	---

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2014/062227

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2009/142702 A1 (RAY KEVIN B [US] ET AL) 4 June 2009 (2009-06-04) paragraphs [0090] - [0095], [0114], [0115]; claims 1,4,6,10,20; examples 1,2 -----	1-10
X	EP 1 048 981 A1 (FUJI PHOTO FILM CO LTD [JP] FUJIFILM CORP [JP]) 2 November 2000 (2000-11-02) compounds: II-(b)-(iv)-5; II-(b)-(iv)-2; II-(b)-(iv)-3; II-(b)-(v)-10; II-(b)-(v)-11; II-(b)-(vi)-6; III-(b)-15 and III-(b)-21; paragraphs [0001], [0094] - [0108], [0146] - [0150]; claim 1; examples a-3,a-7,a-11,a-15,a-19,a-23,a-27-a-31,a-35 ; table 1 -----	1,3,4,9

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2014/062227
---

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1288720	A1	05-03-2003	AT 544095 T 15-02-2012
			EP 1288720 A1 05-03-2003
			US 2003190554 A1 09-10-2003
-----			
US 4782005	A	01-11-1988	NONE
-----			
US 2008311520	A1	18-12-2008	US 2008311520 A1 18-12-2008
			WO 2008156552 A1 24-12-2008
-----			
US 2009142702	A1	04-06-2009	NONE
-----			
EP 1048981	A1	02-11-2000	AT 440306 T 15-09-2009
			EP 1048981 A1 02-11-2000
			JP 2000314961 A 14-11-2000
			US 6416939 B1 09-07-2002
-----			