

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 June 2010 (24.06.2010)

(10) International Publication Number
WO 2010/071765 A1

(51) International Patent Classification:
C23C 28/00 (2006.01) F01D 5/28 (2006.01)

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:
PCT/US2009/067843

(22) International Filing Date:
14 December 2009 (14.12.2009)

(25) Filing Language:
English

(26) Publication Language:
English

(30) Priority Data:
12/340,115 19 December 2008 (19.12.2008) US

(71) Applicant (for all designated States except US): GENERAL ELECTRIC COMPANY [US/US]; 1 River Road, Schenectady, NY 12345 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KIRBY, Glen, Harold [US/US]; 6579 Michele Lane, Liberty Township, OH 45044 (US). BOUTWELL, Brett, Allen [US/US]; 4737 Silver Fox Court, West Chester, OH 45069 (US). ACKERMAN, John, Frederick [US/US]; 1514 Palomino Drive, Laramie, WY 82070 (US).

(74) Agents: GNIBUS, Michael, M. et al.; General Electric Company, Global Patent Operation, Po Box 861, 2 Corporate Drive, Suite 648, Shelton, CT 06484 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: ENVIRONMENTAL BARRIER COATINGS PROVIDING CMAS MITIGATION CAPABILITY FOR CERAMIC SUBSTRATE COMPONENTS

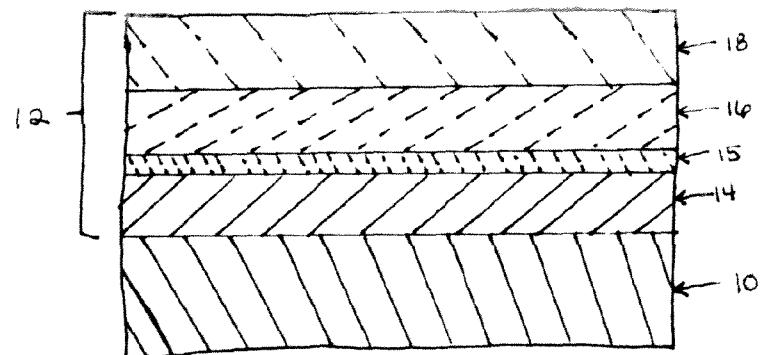


FIG. 1

(57) Abstract: Environmental barrier coatings having CMAS mitigation capability for silicon-containing components. In one embodiment, the barrier coating includes a bond coat layer comprising silicon or suicide, and an outer layer selected from the group consisting of $\text{Ln}_4\text{Al}_2\text{O}_9$ and $\text{Ln}_4\text{Ga}_2\text{O}_9$.

ENVIRONMENTAL BARRIER COATINGS PROVIDING CMAS MITIGATION CAPABILITY FOR CERAMIC SUBSTRATE COMPONENTS

TECHNICAL FIELD

Embodiments described herein generally relate to environmental barrier coatings (EBCs) providing CMAS mitigation capability for use with ceramic substrate components.

BACKGROUND OF THE INVENTION

Higher operating temperatures for gas turbine engines are continuously being sought in order to improve their efficiency. However, as operating temperatures increase, the high temperature durability of the components of the engine must correspondingly increase. Significant advances in high temperature capabilities have been achieved through the formulation of iron, nickel, and cobalt-based superalloys. While superalloys have found wide use for components used throughout gas turbine engines, and especially in the higher temperature sections, alternative lighter-weight substrate materials have been proposed.

Ceramic matrix composites (CMCs) are a class of materials that consist of a reinforcing material surrounded by a ceramic matrix phase. Such materials, along with certain monolithic ceramics (i.e. ceramic materials without a reinforcing material), are currently being used for higher temperature applications. Using these ceramic materials can decrease the weight, yet maintain the strength and durability, of turbine components. Furthermore, since these materials have higher temperature capability than metals, significant cooling air savings can be realized that increase the efficiency of a turbine engine. Therefore, such materials are currently being

considered for many gas turbine components used in higher temperature sections of gas turbine engines, such as airfoils (e.g. turbines, and vanes), combustors, shrouds and other like components that would benefit from the lighter-weight and higher temperature capability these materials can offer.

CMC and monolithic ceramic components can be coated with EBCs to protect them from the harsh environment of high temperature engine sections. EBCs can provide a dense, hermetic seal against the corrosive gases in the hot combustion environment.

In dry, high temperature environments, silicon-based (nonoxide) CMCs and monolithic ceramics undergo oxidation to form a protective silicon oxide scale. However, the silicon oxide reacts rapidly with high temperature steam, such as found in gas turbine engines, to form volatile silicon species. This oxidation/volatilization process can result in significant material loss, or recession, over the lifetime of an engine component. This recession also occurs in CMC and monolithic ceramic components comprising aluminum oxide, as aluminum oxide reacts with high temperature steam to form volatile aluminum species as well.

Currently, most EBCs used for CMC and monolithic ceramic components consist of a three-layer coating system generally including a bond coat layer, at least one transition layer applied to the bond coat layer, and an optional outer layer applied to the transition layer. Optionally, a silica layer may be present between the bond coat layer and the adjacent transition layer. Together these layers can provide environmental protection for the CMC or monolithic ceramic component.

More specifically, the bond coat layer may comprise silicon and may generally have a thickness of from about 0.5 mils to about 6 mils. For silicon-based nonoxide CMCs and monolithic ceramics, the bond coat layer serves as an oxidation barrier to prevent

oxidation of the substrate. The silica layer may be applied to the bond coat layer, or alternately, may be formed naturally or intentionally on the bond coat layer. The transition layer may typically comprise mullite, barium strontium aluminosilicate (BSAS), a rare earth disilicate, and various combinations thereof, while the optional outer layer may comprise BSAS, a rare earth monosilicate, and combinations thereof. There may be from 1 to 3 transition layers present, each layer having a thickness of from about 0.1 mils to about 6 mils, and the optional outer layer may have a thickness of from about 0.1 mils to about 40 mils.

Each of the transition and outer layers can have differing porosity. At a porosity of about 10% or less, a hermetic seal to the hot gases in the combustion environment can form. From about 10% to about 40% porosity, the layer can display mechanical integrity, but hot gases can penetrate through the coating layer damaging the underlying EBC. While it is necessary for at least one of the transition layer or outer layer to be hermetic, it can be beneficial to have some layers of higher porosity range to mitigate mechanical stress induced by any thermal expansion mismatch between the coating materials and the substrate.

Unfortunately, deposits of calcium magnesium aluminosilicate (CMAS) have been observed to form on components located within higher temperature sections of gas turbine engines, particularly in combustor and turbine sections. These CMAS deposits have been shown to have a detrimental effect on the life of thermal barrier coatings, and it is known that BSAS and CMAS chemically interact at high temperatures, i.e. above the melting point of CMAS (approximately 1150°C to 1650°C). It is also known that the reaction byproducts formed by the interaction of BSAS and CMAS are detrimental to EBCs as well as being susceptible to

volatilization in the presence of steam at high temperatures. Such volatilization can result in the loss of coating material and protection for the underlying component. Thus, it is expected that the presence of CMAS will interact with the EBC, thereby jeopardizing the performance of the component along with component life.

Accordingly, there remains a need for novel environmental barrier coatings that provide CMAS mitigation capability for use in conjunction with ceramic substrate components.

BRIEF DESCRIPTION OF THE INVENTION

Embodiments herein generally relate to environmental barrier coatings having CMAS mitigation capability for silicon-containing components, the barrier coating comprising: a bond coat layer comprising silicon or silicide; and an outer layer selected from the group consisting of $\text{Ln}_4\text{Al}_2\text{O}_9$, and $\text{Ln}_4\text{Ga}_2\text{O}_9$.

Embodiments herein also generally relate to environmental barrier coatings having CMAS mitigation capability for silicon-containing components, the barrier coating comprising: a bond coat layer comprising silicon or silicide; a transition layer comprising HfO_2 or LnPO_4 ; and an outer layer selected from the group consisting of $\text{Ln}_4\text{Al}_2\text{O}_9$, $\text{Ln}_4\text{Ga}_2\text{O}_9$, AeZrO_3 , AeHfO_3 , ZnAl_2O_4 , MgAl_2O_4 , $\text{Ln}_3\text{Ga}_5\text{O}_12$, $\text{Ln}_2\text{Al}_5\text{O}_12$, $\text{AeAl}_12\text{O}_19$, and Ga_2O_3 .

Embodiments herein also generally relate to environmental barrier coatings having CMAS mitigation capability for silicon-containing components, the barrier coating comprising: a bond coat layer comprising silicon or silicide; a transition layer comprising $\text{Ln}_4\text{Al}_2\text{O}_9$ or $\text{Ln}_4\text{Ga}_2\text{O}_9$; and an outer layer selected from the group consisting of Ln_2SiO_5 , AeZrO_3 , AeHfO_3 , ZnAl_2O_4 , MgAl_2O_4 , $\text{Ln}_3\text{Ga}_5\text{O}_12$, $\text{Ln}_2\text{Al}_5\text{O}_12$, $\text{AeAl}_12\text{O}_19$, Ga_2O_3 , BSAS, HfO_2 , and LnPO_4 .

Embodiments herein also generally relate to environmental barrier coatings having CMAS mitigation capability for silicon-containing components, the barrier coating comprising: a bond coat comprising silicon or silicide; a first transition layer selected from the group consisting of $\text{Ln}_4\text{Al}_2\text{O}_9$, and $\text{Ln}_4\text{Ga}_2\text{O}_9$; a second transition layer selected from the group consisting of $\text{AeAl}_1\text{O}_1\text{9}$, and BSAS; and an outer layer wherein when the second transition layer is $\text{AeAl}_1\text{O}_1\text{9}$ the outer layer is AeAl_4O_7 and wherein when the second transition layer is BSAS the outer layer is ZnAl_2O_4 , or MgAl_2O_4 .

Embodiments herein also generally relate to environmental barrier coatings having CMAS mitigation capability for silicon-containing components, the barrier coating comprising: a bond coat comprising silicon or silicide; a first transition layer selected from HfO_2 , or LnPO_4 ; a second transition layer comprising $\text{AeAl}_1\text{O}_1\text{9}$; and an outer layer comprising AeAl_4O_7 .

Embodiments herein also generally relate to environmental barrier coatings having CMAS mitigation capability for silicon-containing components, the barrier coating comprising: a bond coat layer comprising silicide; a first transition layer comprising $\text{Ln}_2\text{Si}_2\text{O}_7$; a second transition layer comprising BSAS; and an outer layer comprising ZnAl_2O_4 .

Embodiments herein also generally relate to environmental barrier coatings having CMAS mitigation capability for silicon-containing components, the barrier coating comprising: a bond coat layer comprising silicide; a transition layer comprising $\text{Ln}_2\text{Si}_2\text{O}_7$; and an outer layer selected from the group consisting of $\text{Ln}_4\text{Ga}_2\text{O}_9$, or $\text{Ln}_3\text{Ga}_5\text{O}_{12}$.

These and other features, aspects and advantages will become evident to those skilled in the art from the following disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

While the specification concludes with claims particularly pointing out and distinctly claiming the invention, it is believed that the embodiments set forth herein will be better understood from the following description in conjunction with the accompanying figures, in which like reference numerals identify like elements.

FIG. 1 is a schematic cross sectional view of one embodiment of an environmental barrier coating providing CMAS mitigation in accordance with the description herein.

DETAILED DESCRIPTION OF THE INVENTION

Embodiments described herein generally relate to EBCs providing CMAS mitigation capability for ceramic substrate components.

The environmental barrier coatings having CMAS mitigation capability described herein may be suitable for use in conjunction with substrates comprising CMCs, and monolithic ceramics. As used herein, “CMCs” refers to silicon-containing, or oxide-oxide, matrix and reinforcing materials. Some examples of silicon-containing CMCs acceptable for use herein can include, but should not be limited to, materials having a matrix and reinforcing fibers comprising non-oxide silicon-based materials such as silicon carbide, silicon nitride, silicon oxycarbides, silicon oxynitrides, and mixtures thereof. Examples include, but are not limited to, CMCs with silicon carbide matrix and silicon carbide fiber; silicon nitride matrix and silicon carbide fiber; and silicon carbide/silicon nitride matrix mixture and silicon carbide fiber. Furthermore, CMCs

can have a matrix and reinforcing fibers comprised of oxide ceramics. These oxide-oxide composites are described below.

Specifically, the “oxide-oxide CMCs” may be comprised of a matrix and reinforcing fibers comprising oxide-based materials such as aluminum oxide (Al_2O_3), silicon dioxide (SiO_2), aluminosilicates, and mixtures thereof. Aluminosilicates can include crystalline materials such as mullite ($3Al_2O_3 \cdot 2SiO_2$), as well as glassy aluminosilicates.

As used herein, “monolithic ceramics” refers to materials comprising only silicon carbide, only silicon nitride, only alumina, or only mullite. Herein, CMCs and monolithic ceramics are collectively referred to as “ceramics.”

As used herein, the term “barrier coating(s)” refers to environmental barrier coatings (EBCs). The barrier coatings herein may be suitable for use on ceramic substrate components 10 found in high temperature environments, such as those present in gas turbine engines. “Substrate component” or simply “component” refers to a component made from “ceramics,” as defined herein.

More specifically, as explained herein below, EBC 12 may comprise an optional bond coat layer 14, an optional silica layer 15, optionally at least one transition layer 16, and an outer layer 18, as shown generally in FIG. 1. The bond coat layer 14 may comprise silicon, silicide, aluminide, or aluminide with a thermally grown aluminide oxide scale (henceforth “aluminide-alumina TGO”). By “thermally grown” it is meant that the intermetallic aluminide layer is applied to the CMC, then an aluminum oxide layer forms on top of the deposited aluminide layer after subsequent thermal exposure. As used herein “silicide” may include, but is not limited to, niobium disilicide, molybdenum disilicide, rare earth (Ln) silicides, noble metal silicides,

chromium silicide (e.g. CrSi_3), niobium silicide (e.g. NbSi_2 , NbSi_3), molybdenum silicide (e.g. MoSi_2 , MoSi_3), tantalum silicide (e.g. TaSi_2 , TaSi_3), titanium silicide (e.g. TiSi_2 , TiSi_3), tungsten silicide (e.g. WSi_2 , W_5Si_3), zirconium silicide (e.g. ZrSi_2), hafnium silicide (e.g. HfSi_2),

As used herein, “Ln” refers to the rare earth elements of scandium (Sc), yttrium (Y), lanthanum (La), cerium (Ce), praseodymium (Pr), neodymium (Nd), promethium (Pm), samarium (Sm), europium (Eu), gadolinium (Gd), terbium (Tb), dysprosium (Dy), holmium (Ho), erbium (Er), thulium (Tm), ytterbium (Yb), lutetium (Lu), and mixtures thereof, while “Lna” refers to the rare earth elements of lanthanum (La), cerium (Ce), praseodymium (Pr), neodymium (Nd), promethium (Pm), samarium (Sm), europium (Eu), gadolinium (Gd), and mixtures thereof.

More particularly, as used herein, “rare earth silicides” may include scandium silicide (e.g. ScSi_2 , Sc_5Si_3 , Sc_3Si_5 , ScSi , Sc_3Si_4), yttrium silicide (e.g. YSi_2 , Y_5Si_3 , Y_3Si_5 , YSi , Y_3Si_4), lanthanum silicide (e.g. LaSi_2 , La_5Si_3 , La_3Si_5 , LaSi , La_3Si_4), cerium silicide (e.g. CeSi_2 , Ce_5Si_3 , Ce_3Si_5 , CeSi , Ce_3Si_4), praseodymium silicide (e.g. PrSi_2 , Pr_5Si_3 , Pr_3Si_5 , PrSi , Pr_3Si_4), neodymium silicide (e.g. NdSi_2 , Nd_5Si_3 , Nd_3Si_5 , NdSi , Nd_3Si_4), promethium silicide (e.g. PmSi_2 , Pm_5Si_3 , Pm_3Si_5 , PmSi , Pm_3Si_4), samarium silicide (e.g. SmSi_2 , Sm_5Si_3 , Sm_3Si_5 , SmSi , Sm_3Si_4), europium silicide (e.g. EuSi_2 , Eu_5Si_3 , Eu_3Si_5 , EuSi , Eu_3Si_4 , Eu_3Si_4), gadolinium silicide (e.g. GdSi_2 , Gd_5Si_3 , Gd_3Si_5 , GdSi , Gd_3Si_4), terbium silicide (e.g. TbSi_2 , Tb_5Si_3 , Tb_3Si_5 , TbSi , Tb_3Si_4), dysprosium silicide (DySi₂, Dy₅Si₃, Dy₃Si₅, DySi, Dy₃Si₄), holmium silicide (HoSi₂, Ho₅Si₃, Ho₃Si₅, HoSi, Ho₃Si₄), erbium silicide (ErSi₂, Er₅Si₃, Er₃Si₅, ErSi, Er₃Si₄), thulium silicide (TmSi₂, Tm₅Si₃, Tm₃Si₅, TmSi, Tm₃Si₄), ytterbium silicide (e.g. YbSi₂, Yb₅Si₃, Yb₃Si₅, YbSi, Yb₃Si₄), lutetium silicide (e.g. LuSi₂, Lu₅Si₃, Lu₃Si₅, LuSi,

Lu_3Si_4), and mixtures thereof. It should be noted that only non-oxide, silicon-based monolithic ceramics and composites require a bond coat.

Also, as used herein throughout, “aluminides” may include, but should not be limited to, ruthenium aluminide, platinum aluminide, nickel aluminide, titanium aluminide, or mixtures thereof.

When a silicon-containing component is selected, the bond coat layer 14 may comprise any of a silicon bond coat layer, a silicide bond coat layer, or an aluminide-alumina TGO bond coat layer, each of which is described herein below. As used herein throughout, “silicon-containing component” includes silicon-containing CMCs, monolithic silicon carbide ceramics and monolithic silicon nitride ceramics.

transition layer 16, and a $ZnAl_2O_4$ outer layer 18; a silicon bond coat layer 14, an optional silica layer 15, a HfO_2 transition layer 16, and a $MgAl_2O_4$ outer layer 18; a silicon bond coat layer 14, an optional silica layer 15, a $LnPO_4$ transition layer 16, and a $MgAl_2O_4$ outer layer 18; a silicon bond coat layer 14, an optional silica layer 15, a $Ln_4Al_2O_9$ transition layer 16, and a $MgAl_2O_4$ outer layer 18; a silicon bond coat layer 14, an optional silica layer 15, a $Ln_4Ga_2O_9$ transition layer, and a $MgAl_2O_4$ outer layer; a silicon bond coat layer 14, an optional silica layer 15, a $Ln_2Si_2O_7$ first transition layer, a Ln_2SiO_5 second transition layer, and a $Ln_3Ga_5O_{12}$ outer layer; a silicon bond coat layer 14, an optional silica layer 15, a HfO_2 transition layer, and a $Ln_3Ga_5O_{12}$ outer layer; a silicon bond coat layer 14, an optional silica layer 15, a $LnPO_4$ transition layer, and a $Ln_3Ga_5O_{12}$ outer layer; a silicon bond coat layer 14, an optional silica layer 15, a $Ln_4Al_2O_9$ transition layer, and a $Ln_3Ga_5O_{12}$ outer layer; a silicon bond coat layer 14, an optional silica layer 15, a $Ln_2Si_2O_7$ first transition layer, a Ln_2SiO_5 second transition layer, and a $Ln_3Al_5O_{12}$ outer layer; a silicon bond coat layer 14, an optional silica layer 15, a HfO_2 transition layer, and a $Ln_3Al_5O_{12}$ outer layer; a silicon bond coat layer 14, an optional silica layer 15, a $LnPO_4$ transition layer, and a $Ln_3Al_5O_{12}$ outer layer; a silicon bond coat layer 14, an optional silica layer 15, a $Ln_4Al_2O_9$ transition layer, and a $Ln_3Al_5O_{12}$ outer layer; a silicon bond coat layer 14, an optional silica layer 15, a $Ln_4Ga_2O_9$ transition layer, and a $Ln_3Al_5O_{12}$ outer layer; a silicon bond coat layer 14, an optional silica layer 15, a Ln_2SiO_5 second transition layer, and a $Ln_3Al_5O_{12}$ outer layer; a silicon bond coat layer 14, an optional silica layer 15, a HfO_2 transition layer, and a $Ln_3Al_5O_{12}$ outer layer; a silicon bond coat layer 14, an optional silica layer 15, a $AeAl_{12}O_{19}$ outer layer; a silicon bond coat layer 14, an optional silica layer 15, a $LnPO_4$ transition layer, and a $AeAl_{12}O_{19}$ outer layer; a silicon bond coat layer 14, an optional silica layer 15, a $Ln_4Al_2O_9$

237025-1

transition layer, and a $\text{AeAl}_{12}\text{O}_{19}$ outer layer; a silicon bond coat layer 14, an optional silica layer 15, a $\text{Ln}_{4}\text{Ga}_2\text{O}_9$ transition layer, and a $\text{AeAl}_{12}\text{O}_{19}$ outer layer; a silicon bond coat layer 14, an optional silica layer 15, a HfO_2 transition layer, a $\text{AeAl}_{12}\text{O}_{19}$ transition layer, and a AeAl_4O_7 outer layer; a silicon bond coat layer 14, an optional silica layer 15, a $\text{Ln}_{4}\text{Al}_2\text{O}_9$ first transition layer, a $\text{AeAl}_{12}\text{O}_{19}$ second transition layer, and a AeAl_4O_7 outer layer; a silicon bond coat layer 14, an optional silica layer 15, a $\text{Ln}_{4}\text{Ga}_2\text{O}_9$ first transition layer 16, a $\text{AeAl}_{12}\text{O}_{19}$ second transition layer 16, and a AeAl_4O_7 outer layer 18; a silicon bond coat layer 14, an optional silica layer 15, a HfO_2 transition layer 16, and a Ga_2O_3 outer layer 18; a silicon bond coat layer 14, an optional silica layer 15, a LnPO_4 transition layer 16, and a Ga_2O_3 outer layer 18; a silicon bond coat layer 14, an optional silica layer 15, a $\text{Ln}_{4}\text{Al}_2\text{O}_9$ transition layer 16, and a Ga_2O_3 outer layer 18; a silicon bond coat layer 14, an optional silica layer 15, a $\text{Ln}_{4}\text{Ga}_2\text{O}_9$ transition layer 16, and a Ga_2O_3 outer layer 18; a silicon bond coat layer 14, an optional silica layer 15, a $\text{Ln}_{4}\text{Al}_2\text{O}_9$ transition layer 16, and a BSAS outer layer 18; a silicon bond coat layer 14, an optional silica layer 15, a $\text{Ln}_{4}\text{Ga}_2\text{O}_9$ transition layer 16, and a BSAS outer layer 18; a silicon bond coat layer 14, an optional silica layer 15, a $\text{Ln}_{4}\text{Al}_2\text{O}_9$ first transition layer 16, a BSAS second transition layer 16, and a ZnAl_2O_4 outer layer 18; a silicon bond coat layer 14, an optional silica layer 15, a $\text{Ln}_{4}\text{Ga}_2\text{O}_9$ first transition layer 16, a BSAS second transition layer 16, and a ZnAl_2O_4 outer layer 18; a silicon bond coat layer 14, an optional silica layer 15, a $\text{Ln}_{4}\text{Al}_2\text{O}_9$ first transition layer 16, a BSAS second transition layer 16, and a MgAl_2O_4 outer layer 18; a silicon bond coat layer 14, an optional silica layer 15, a $\text{Ln}_{4}\text{Ga}_2\text{O}_9$ first transition layer 16, a BSAS second

transition layer 16, and a MgAl_2O_4 outer layer 18. As used herein, “Ae” represents the alkaline earth elements of magnesium (Mg), calcium (Ca), strontium (Sr), barium (Ba), and mixtures thereof. As used herein, “mullite/BSAS mixture” refers to a mixture comprising from about 1% to about 99% mullite and from about 1% to about 99% BSAS.

Similarly, in another embodiment, a silicon-containing component may comprise a silicide bond coat layer 14. In this instance, the EBC may comprise any of the previously listed architectures with the exception that the silicon bond coat layer is replaced with a silicide bond coat layer. In addition, when using a silicide bond coat layer 14, the EBC may comprise one of the following architectures: a silicide bond coat layer 14, an optional silica layer 15, a $\text{Ln}_2\text{Si}_2\text{O}_7$ first transition layer 16, a BSAS second transition layer 16, and a ZnAl_2O_4 outer layer 18; a silicide bond coat layer 14, an optional silica layer 15, a $\text{Ln}_2\text{Si}_2\text{O}_7$ transition layer 16, and a $\text{Ln}_4\text{Ga}_2\text{O}_9$ outer layer 18; a silicide bond coat layer 14, an optional silica layer 15, a $\text{Ln}_2\text{Si}_2\text{O}_7$ transition layer 16, and a $\text{Ln}_3\text{Ga}_5\text{O}_{12}$ outer layer 18.

Alternately, in another embodiment, a silicon-containing component may comprise an aluminide-alumina TGO bond coat layer 14. In this embodiment, the EBC does not need a silica layer and may comprise one of the following architectures: an aluminide-alumina TGO bond coat layer 14 and a $\text{AeAl}_2\text{O}_{19}$ outer layer 18; an aluminide-alumina TGO bond coat layer 14 and an HfO_2 outer layer; an aluminide-alumina TGO bond coat layer 14 and a LnPO_4 outer layer; an aluminide-alumina TGO bond coat layer 14, $\text{AeAl}_2\text{O}_{19}$ transition layer 16, and a AeAl_4O_7 outer layer 18; an aluminide-alumina TGO bond coat layer 14 and a AeHfO_3 outer layer 18; an aluminide-alumina TGO bond coat layer 14 and a AeZrO_3 outer layer 18; an aluminide-alumina TGO

bond coat layer 14 and a $ZnAl_2O_4$ outer layer 18; an aluminide-alumina TGO bond coat layer 14 and a $MgAl_2O_4$ outer layer 18; an aluminide-alumina TGO bond coat layer 14 and a $Ln_4Al_2O_9$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, and a $Ln_{a4}Ga_2O_9$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, and a $Ln_3Al_5O_{12}$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, and a $Ln_3Ga_5O_{12}$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, and a Ga_2O_3 outer layer 18; an aluminide-alumina TGO bond coat layer 14, a BSAS transition layer 16, and a $ZnAl_2O_4$ outer layer 18; or an aluminide-alumina TGO bond coat layer 14, a BSAS transition layer 16, and a $MgAl_2O_4$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a BSAS transition layer 16, and a $Ln_2Si_2O_7$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a BSAS transition layer 16, and a HfO_2 outer layer 18; an aluminide-alumina TGO bond coat layer 14, a BSAS transition layer 16, and a $LnPO_4$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a BSAS transition layer 16, and a Ln_2SiO_5 outer layer 18; an aluminide-alumina TGO bond coat layer 14, a HfO_2 transition layer 16, and a $AeAl_2O_{19}$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a HfO_2 transition layer 16, and a $AeHfO_3$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a HfO_2 transition layer 16, and a $AeZrO_3$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a HfO_2 transition layer 16, and a $ZnAl_2O_4$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a HfO_2 transition layer 16, and a $MgAl_2O_4$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a HfO_2 transition layer 16, and a $Ln_4Al_2O_9$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a HfO_2 transition layer 16, and a $Ln_{a4}Ga_2O_9$ outer layer 19; an aluminide-alumina TGO bond coat layer 14, a HfO_2

transition layer 16, and a $\text{Ln}_3\text{Al}_5\text{O}_{12}$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a HfO_2 transition layer 16, and a $\text{Ln}_3\text{Ga}_5\text{O}_{12}$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a HfO_2 transition layer 16, and a $\text{Ln}_2\text{Si}_2\text{O}_7$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a HfO_2 transition layer 16, and a Ln_2SiO_5 outer layer 18; an aluminide-alumina TGO bond coat layer 14, a HfO_2 transition layer 16, and a Ga_2O_3 outer layer 18; an aluminide-alumina TGO bond coat layer 14, a YPO_4 transition layer 16, and a $\text{AeAl}_2\text{O}_{19}$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a YPO_4 transition layer 16, and a AeHfO_3 outer layer 18; an aluminide-alumina TGO bond coat layer 14, a YPO_4 transition layer 16, and a AeZrO_3 outer layer 18; an aluminide-alumina TGO bond coat layer 14, a YPO_4 transition layer 16, and a ZnAl_2O_4 outer layer 18; an aluminide-alumina TGO bond coat layer 14, a YPO_4 transition layer 16, and a MgAl_2O_4 outer layer 18; an aluminide-alumina TGO bond coat layer 14, a YPO_4 transition layer 16, and a $\text{Ln}_4\text{Al}_2\text{O}_9$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a YPO_4 transition layer 16, and a $\text{Ln}_4\text{Ga}_2\text{O}_9$ outer layer 19; an aluminide-alumina TGO bond coat layer 14, a YPO_4 transition layer 16, and a $\text{Ln}_3\text{Al}_5\text{O}_{12}$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a YPO_4 transition layer 16, and a $\text{Ln}_3\text{Ga}_5\text{O}_{12}$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a YPO_4 transition layer 16, and a $\text{Ln}_2\text{Si}_2\text{O}_7$ outer layer 18; an aluminide-alumina TGO bond coat layer 14, a YPO_4 transition layer 16, and a Ln_2SiO_5 outer layer 18; an aluminide-alumina TGO bond coat layer 14, a YPO_4 transition layer 16, and a Ga_2O_3 outer layer 18.

In embodiments utilizing an oxide component, neither a bond coat, nor a silica layer, is needed. As used herein throughout, “oxide component” includes oxide-oxide

$\text{Ln}_2\text{Si}_2\text{O}_7$ outer layer 18; a YPO_4 transition layer 16, and a Ln_2SiO_5 outer layer 18; a YPO_4 transition layer 16, and a Ga_2O_3 outer layer 18.

Together, the previously described EBC layers can provide CMAS mitigation capability to high temperature ceramic components such as those present in gas turbine engines such as combustor components, turbine blades, shrouds, nozzles, heat shields, and vanes, which are exposed to temperatures of about 3000F (1649°C) during routine engine operations.

Any bond coat layer 14, silica layer 15, transition layer 16, and outer layer 18 present may be made using conventional methods known to those skilled in the art. More particularly, and regardless of the particular architecture of the EBC having CMAS mitigation capability, the substrate component can be coated using conventional methods known to those skilled in the art, including, but not limited to, plasma spraying, high velocity plasma spraying, low pressure plasma spraying, solution plasma spraying, suspension plasma spraying, chemical vapor deposition (CVD), electron beam physical vapor deposition (EBPVD), sol-gel, sputtering, slurry processes such as dipping, spraying, tape-casting, rolling, and painting, and combinations of these methods. Once coated, the substrate component may be dried and sintered using either conventional methods, or unconventional methods such as microwave sintering, laser sintering or infrared sintering.

Regardless of the architecture of the EBC having CMAS mitigation capability, the benefits are the same. Namely, the inclusion of the present CMAS mitigation compositions can help prevent the EBC from degradation due to reaction with CMAS in high temperature engine environments. More particularly, these CMAS mitigation compositions can help prevent or slow the reaction of CMAS with the barrier coating

that can form secondary phases that rapidly volatilize in steam. Additionally, the present CMAS mitigation compositions can help prevent or slow the penetration of CMAS through the barrier coating along the grain boundaries into a nonoxide, silicon-based substrate. Reaction of CMAS with substrates such as silicon nitrate and silicon carbide evolve nitrogen-containing and carbonaceous gases, respectively. Pressure from this gas evolution can result in blister formation within the EBC coating. These blisters can easily rupture and destroy the hermetic seal against water vapor provided by the EBC in the first instance.

The presence of the CMAS mitigation compositions described herein can help prevent or slow the attack of molten silicates on the EBC, thereby allowing the EBC to perform its function of sealing the ceramic component from corrosive attack in high temperature steam. Moreover, the CMAS mitigation compositions can help prevent recession of the ceramic component, and also any layers of the EBC that may be susceptible to steam recession if CMAS reacts with it, to form steam-volatile secondary phases. Dimensional changes of ceramic components due to steam recession can limit the life and/or functionality of the component in turbine engine applications. Thus, the CMAS mitigation compositions are important to allow the barrier coating to perform its functions; thereby allowing the ceramic component to function properly and for its intended time span. Additionally, any transition layers present can provide moderate to strong barriers to high temperature steam penetration. This can help reduce the occurrence of a reaction between the layers of the barrier coating. Multiple transition layers can be included to further help reduce the occurrence of interlayer reactions, which can arise after long-term thermal exposure of the barrier coating.

This written description uses examples to disclose the invention, including the best mode, and also to enable any person skilled in the art to make and use the invention. The patentable scope of the invention is defined by the claims, and may include other examples that occur to those skilled in the art. Such other examples are intended to be within the scope of the claims if they have structural elements that do not differ from the literal language of the claims, or if they include equivalent structural elements with insubstantial differences from the literal language of the claims.

CLAIMS

What is claimed is:

1. An environmental barrier coating having CMAS mitigation capability for silicon-containing components, the barrier coating comprising:

 a bond coat layer comprising silicon or silicide; and

 an outer layer selected from the group consisting of $\text{Ln}_4\text{Al}_2\text{O}_9$, and $\text{Ln}_{a4}\text{Ga}_2\text{O}_9$.

2. An environmental barrier coating having CMAS mitigation capability for silicon-containing components, the barrier coating comprising:

 a bond coat layer comprising silicon or silicide;

 a transition layer comprising HfO_2 or LnPO_4 ; and

 an outer layer selected from the group consisting of $\text{Ln}_4\text{Al}_2\text{O}_9$, $\text{Ln}_4\text{Ga}_2\text{O}_9$, AeZrO_3 , AeHfO_3 , ZnAl_2O_4 , MgAl_2O_4 , $\text{Ln}_3\text{Ga}_5\text{O}_12$, $\text{Ln}_2\text{Al}_5\text{O}_12$, $\text{AeAl}_12\text{O}_19$, and Ga_2O_3 .

3. The barrier coating of claim 3 wherein when the transition layer comprises LnPO_4 , the outer layer further comprises Ln_2SiO_5 or $\text{Ln}_2\text{Si}_2\text{O}_7$.

4. An environmental barrier coating having CMAS mitigation capability for silicon-containing components, the barrier coating comprising:

 a bond coat layer comprising silicon or silicide;

 a transition layer comprising $\text{Ln}_4\text{Al}_2\text{O}_9$ or $\text{Ln}_{a4}\text{Ga}_2\text{O}_9$; and

 an outer layer selected from the group consisting of Ln_2SiO_5 , AeZrO_3 , AeHfO_3 , ZnAl_2O_4 , MgAl_2O_4 , $\text{Ln}_3\text{Ga}_5\text{O}_12$, $\text{Ln}_2\text{Al}_5\text{O}_12$, $\text{AeAl}_12\text{O}_19$, Ga_2O_3 , BSAS , HfO_2 , and LnPO_4 .

5. An environmental barrier coating having CMAS mitigation capability for silicon-containing components, the barrier coating comprising:

a bond coat comprising silicon or silicide;
a first transition layer selected from the group consisting of $\text{Ln}_4\text{Al}_2\text{O}_9$, and
 $\text{Ln}_4\text{Ga}_2\text{O}_9$;
a second transition layer selected from the group consisting of Al_2O_3 ,
and BSAS; and
an outer layer

wherein when the second transition layer is Al_2O_3 the outer layer is Al_4O_7
and wherein when the second transition layer is BSAS the outer layer is ZnAlO_4 , or
 MgAl_2O_4 .

6. An environmental barrier coating having CMAS mitigation capability for silicon-containing components, the barrier coating comprising:

a bond coat comprising silicon or silicide;
a first transition layer selected from HfO_2 , or LnPO_4 ;
a second transition layer comprising Al_2O_3 ; and
an outer layer comprising Al_4O_7 .

7. An environmental barrier coating having CMAS mitigation capability for silicon-containing components, the barrier coating comprising:

a bond coat layer comprising silicide;
a first transition layer comprising $\text{Ln}_2\text{Si}_2\text{O}_7$;
a second transition layer comprising BSAS; and
an outer layer comprising ZnAl_2O_4 .

8. An environmental barrier coating having CMAS mitigation capability for silicon-containing components, the barrier coating comprising:

a bond coat layer comprising silicide;

a transition layer comprising $\text{Ln}_2\text{Si}_2\text{O}_7$; and

an outer layer selected from the group consisting of $\text{Ln}_4\text{Ga}_2\text{O}_9$, or $\text{Ln}_3\text{Ga}_5\text{O}_{12}$.

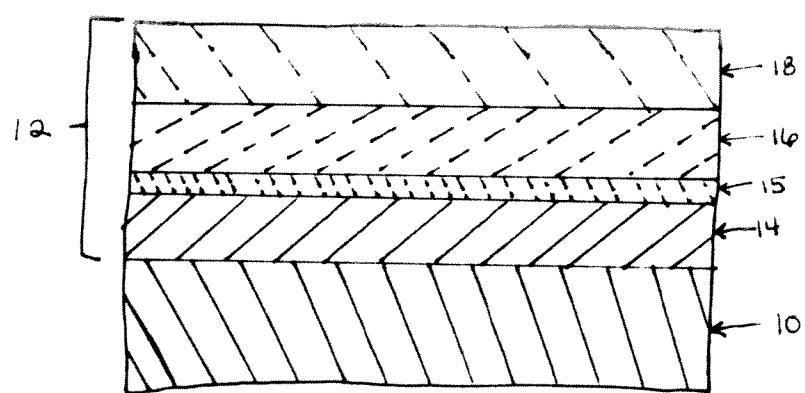


FIG. 1

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2009/067843A. CLASSIFICATION OF SUBJECT MATTER
INV. C23C28/00 F01D5/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C23C F01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2006/280954 A1 (SPITSBERG IRENE [US] ET AL) 14 December 2006 (2006-12-14) paragraphs [0029] - [0053]; figure 2	1-8
A	US 2006/280963 A1 (HAZEL BRIAN T [US] ET AL HAZEL BRIAN THOMAS [US] ET AL) 14 December 2006 (2006-12-14) paragraph [0016]	1-8
A	EP 1 683 773 A2 (GEN ELECTRIC [US]) 26 July 2006 (2006-07-26) paragraphs [0016], [0017], [0021], [0027]	1-8
A	US 5 851 678 A (HASZ WAYNE CHARLES [US] ET AL) 22 December 1998 (1998-12-22) claim 1; example 3	1-8
		-/-

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority, claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

3 February 2010

09/02/2010

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Hoyer, Wolfgang

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2009/067843

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2003/035907 A1 (CAMPBELL CHRISTIAN X [US] ET AL) 20 February 2003 (2003-02-20) paragraphs [0015] - [0018], [0021]; claims 1,2 -----	1-8
A	US 6 602 814 B1 (GADOW RAINER [DE] ET AL) 5 August 2003 (2003-08-05) column 2, line 20 - column 3, line 35 -----	1-8
A	US 2006/280952 A1 (HAZEL BRIAN T [US] ET AL HAZEL BRIAN THOMAS [US] ET AL) 14 December 2006 (2006-12-14) paragraph [0027] -----	1-8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2009/067843

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 2006280954	A1	14-12-2006	GB JP	2427203 A 2007008806 A		20-12-2006 18-01-2007
US 2006280963	A1	14-12-2006	GB JP	2427201 A 2006347872 A		20-12-2006 28-12-2006
EP 1683773	A2	26-07-2006	JP US	2006199574 A 2006166018 A1		03-08-2006 27-07-2006
US 5851678	A	22-12-1998		NONE		
US 2003035907	A1	20-02-2003		NONE		
US 6602814	B1	05-08-2003	AT DE WO EP ES JP PT	218626 T 19807163 C1 9942630 A1 1060281 A1 2177251 T3 2002504627 T 1060281 E		15-06-2002 28-10-1999 26-08-1999 20-12-2000 01-12-2002 12-02-2002 31-10-2002
US 2006280952	A1	14-12-2006	GB JP US	2427205 A 2006347870 A 2008124479 A1		20-12-2006 28-12-2006 29-05-2008