United States Patent [19]

Dowell

[11] **3,911,891**

[45] **Oct. 14, 1975**

[54] **COATING FOR METAL SURFACES AND METHOD FOR APPLICATION**

[76] Inventor: **Robert D. Dowell,** 23321 Falena Ave., Torrance, Calif. 90501

[22] Filed: **Aug. 13, 1973**

[21] Appl. No.: **387,717**

[52] **U.S. Cl.** ..... **123/191 A;** 92/213; 92/223; 92/224; 117/71 M

[51] **Int. Cl.** **F02f 3/12**

[58] **Field of Search** ..... 92/223, 224, 213; 123/191 A; 117/71 M, 94

[56] **References Cited**

UNITED STATES PATENTS

2,075,388	3/1937	DeCloud	92/223
3,006,782	10/1961	Wheildon, Jr.	117/71 M
3,010,480	11/1961	Ragsdale	117/71 M
3,203,321	8/1965	Rosen	123/191 A
3,459,167	8/1969	Briggs et al.	123/191 A
3,552,370	1/1971	Briggs	92/223
3,660,051	5/1972	Lee	28/62

FOREIGN PATENTS OR APPLICATIONS


1,460,183	11/1966	France	92/223

Primary Examiner—Charles J. Myhre
Assistant Examiner—Sheldon Richter
Attorney, Agent, or Firm—Lindenberg, Freilich, Wasserman, Rosen & Fernandez

[57] **ABSTRACT**

A coating is disclosed herein together with a method of forming that coating on metal surfaces of an internal combustion chamber. The coating is deposited for example, on the combustion surface of a piston to form a thermal barrier and thus enable higher temperatures to be sustained within the chamber. Combustion at higher temperatures achieves a more complete fuel burning thus increasing performance and reducing emissions. The coating is formed on the combustion surface by successively depositing layers of different materials preferably applied utilizing a plasma flame spray process. More particularly, the formation of the coating on the combustion surface involves preparing the surface as by grit blasting and then initially depositing a thin (approximately 0.001 – 0.003 inches) nickel aluminum alloy layer. Thereafter, a second thicker layer (approximately 0.003 – 0.006 inches) comprised primarily of said nickel aluminum alloy and refractory zirconium oxide is deposited followed by the deposition of a still thicker layer (approximately 0.008 – 0.010 inches) primarily of zirconium oxide.

11 Claims, 5 Drawing Figures

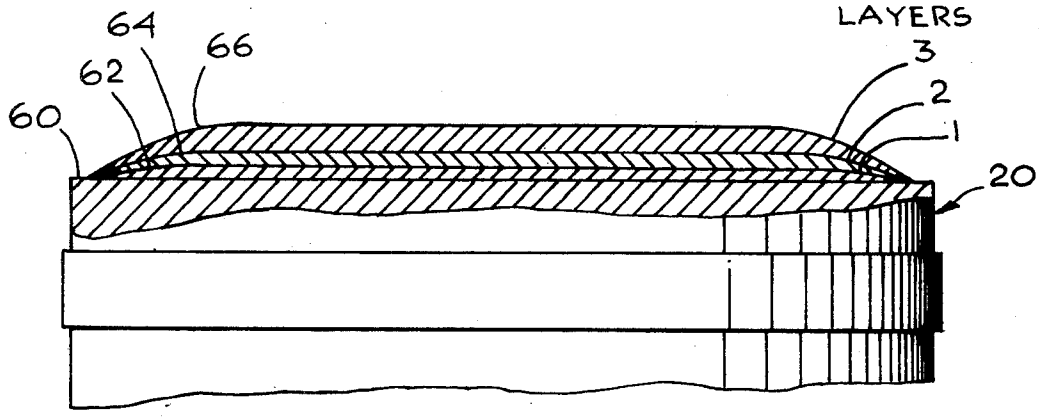

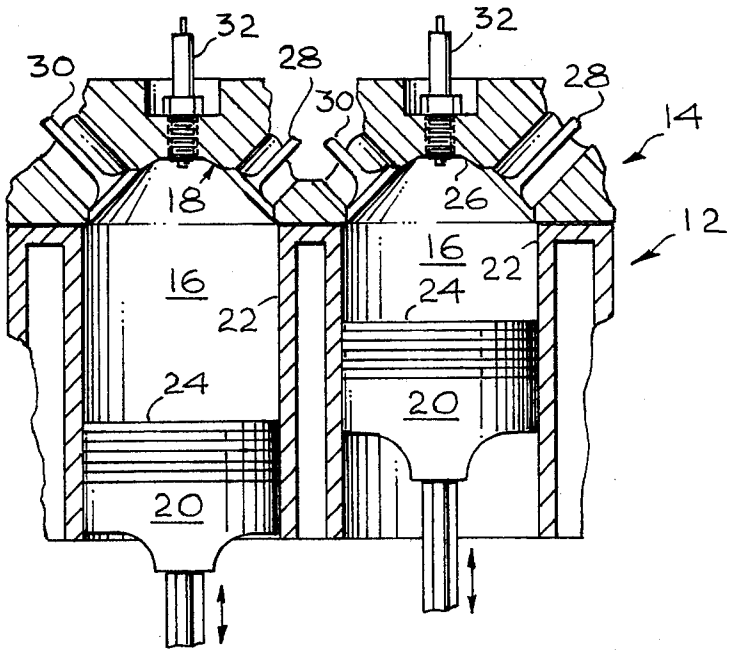


Fig. 1

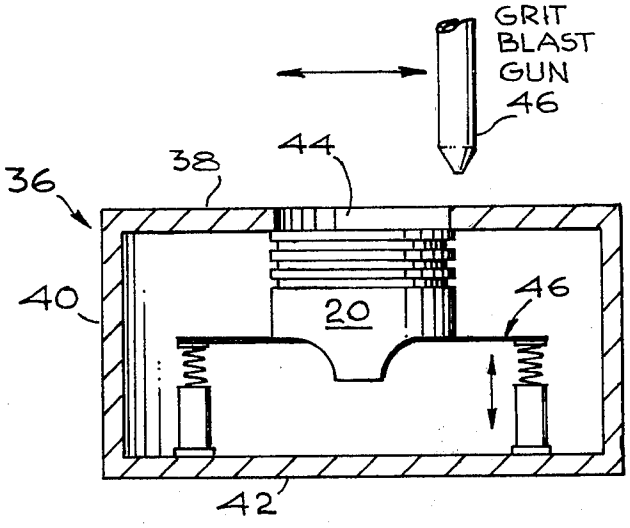


Fig. 2A

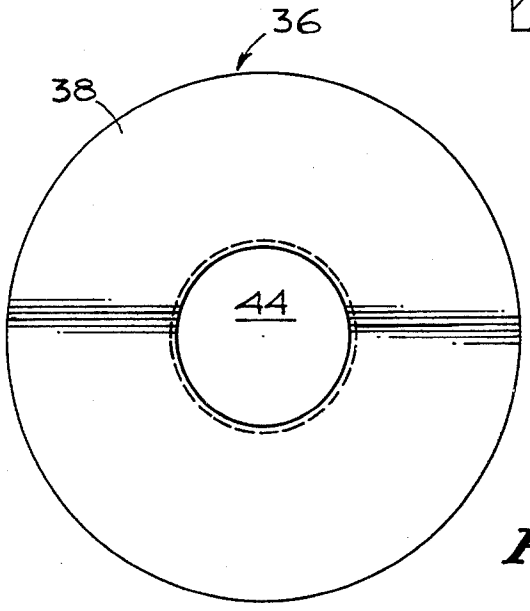


Fig. 2B

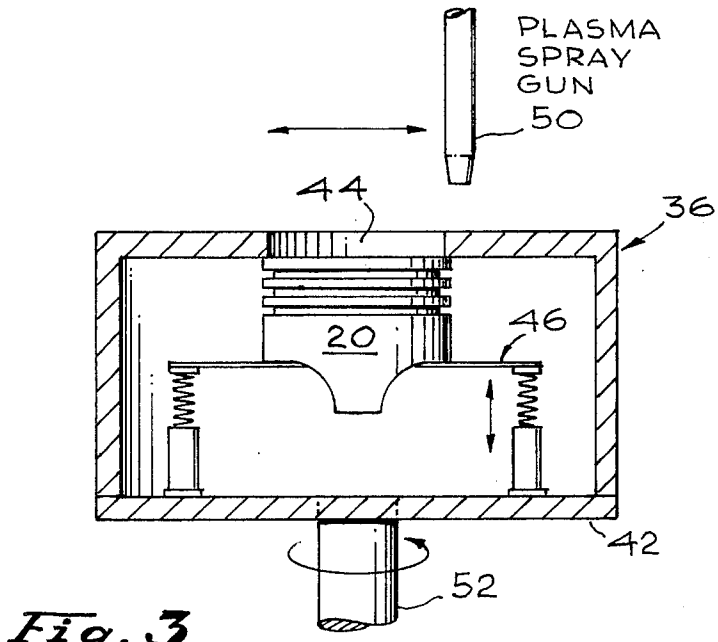


Fig. 3

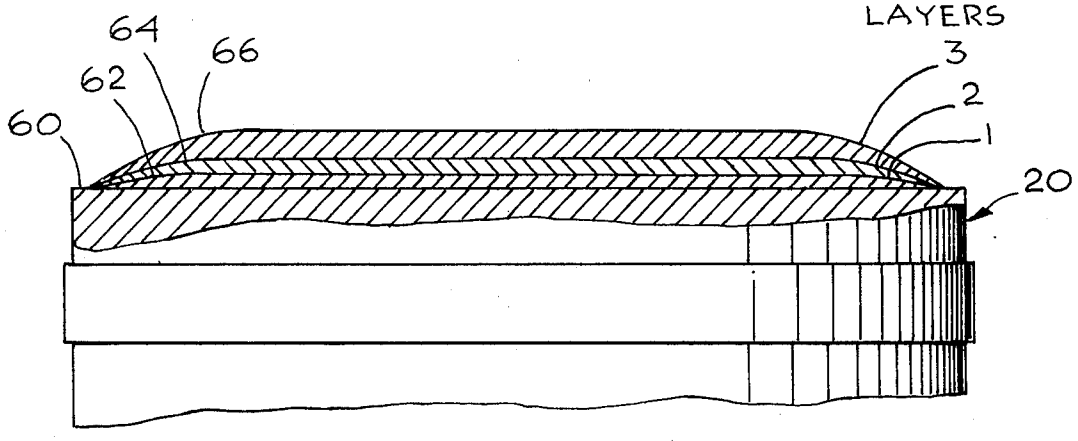


Fig. 4

COATING FOR METAL SURFACES AND METHOD FOR APPLICATION

BACKGROUND OF THE INVENTION

This invention relates generally to the art of coating and more specifically to a particular coating, and method of application thereof, suitable for coating the surfaces of an internal combustion chamber to enable operation thereof at temperatures greater than could otherwise be sustained.

It is generally known that more complete fuel burning can be achieved in an internal combustion engine if higher temperatures can be sustained within the combustion chambers. Since some heat loss occurs through all of the chamber surfaces, including the cylinder wall and head and piston combustion face, attempts have previously been made to form a coating on these surfaces to act as a thermal barrier to thus prevent heat flow out of the chamber. Such attempts have not, however, been successful due to various factors including the great difficulty of bonding suitable coatings to the surfaces in a manner which enables the bond to be maintained at elevated operating temperatures.

SUMMARY OF THE INVENTION

The present invention is directed to a coating suitable for application to metal surfaces of an internal combustion chamber and to a method for forming that coating on such surfaces.

Briefly, in accordance with the invention, the coating is formed by sucessively depositing layers of different materials preferably applied utilizing a plasma flame spray process. More particularly, the formation of the coating on the piston combustion face involves preparing the surface as by grit blasting and then initially depositing a thin (approximately 0.001 – 0.003 inches) metal layer, e.g. a nickel aluminum alloy, which exhibits a thermal expansion characteristic similar to that of the substrate. Thereafter, a second thicker layer (approximately 0.003 – 0.006 inches) comprised primarily of a mixture of said first metal layer and a refractory material such as zirconium oxide is deposited followed by the deposition of a still thicker layer (approximately 0.008 – 0.010 inches) of refractory material which last layer minimizes heat loss to the substrate. The middle or transition layer, preferably exhibits a thermal expansion characteristic between that of said first and third layers and as a consequence relieves stresses which might otherwise be created at elevated operating temperatures.

DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic illustration of a portion of an internal combustion engine showing the elements of two combustion chambers;

FIG. 2A is a schematic illustration showing a step in the method of applying a coating in accordance with the present invention to a piston;

FIG. 2B is a plan view of the apparatus shown in FIG. 2A;

FIG. 3 is a schematic illustration typical of a further step in the application of the coating in accordance with the invention to a piston; and

FIG. 4 is an enlarged cross-sectional view illustrating the various layers of the coating applied to the piston end face.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The present invention is directed to a coating and a method of applying that coating to metal surfaces, particularly metal surfaces forming the chamber of an internal combustion engine.

It is generally known that more complete fuel burning can be achieved in an internal combustion engine if higher temperatures can be sustained within the combustion chambers. Since the various surfaces exposed in the combustion chamber are generally formed of good heat conducting metal such as aluminum or iron alloys, significant amounts of heat are transferred via these elements out of the combustion chambers. The present invention is particularly directed to a coating applicable to the metal surfaces within the combustion chamber, particularly the piston end face, to considerably reduce heat loss and thereby enable the temperatures within the chambers to be sustained at higher levels than would otherwise be possible. In order for a coating to be suitable to the aforedescribed application, it is necessary that it be capable of being very tightly bonded to the metal surfaces, in addition to it, of course, having to exhibit a high thermal barrier characteristic. Refractory materials which generally exhibit suitable thermal barrier characteristics often cannot be adequately bonded to metal surfaces exposed to elevated temperatures because of the significant differences in thermal expansion characteristics.

In accordance with the present invention, a coating is disclosed comprised of three layers. The material selected for the first layer, which is bonded directly to the metal surface, has a thermal expansion characteristic close to that of the metal surface. A third, or outside layer material is selected which has excellent thermal barrier characteristics and a middle or intermediate layer is selected which exhibits a thermal expansion characteristic between that of the first and third layers for the purpose of relieving mechanical stresses therebetween which might otherwise be created in the presence of temperature gradients.

Prior to considering the specifics of the coating in accordance with the present invention and the method of applying it, attention is called to FIG. **1** which schematically illustrates the crosssection of a portion of a typical internal combustion engine. The engine is comprised of a block **12** and a head **14** mounted on and secured to the block. A plurality of cavities **16** extend inwardly from the upper surface of the block **12.** Dome portions **18** of the head **14** cover and closes the cavities **16.**

A piston **20** is mounted within the cylindrical cavity **16,** for reciprocal movement toward and away from the dome **18,** defining a combustion chamber formed essentially by the wall **22** of the cylindrical cavity, the substantially flat end face **24** of the piston, and the surface **26** of the dome. As is well known, the combustion chamber additionally normally includes an inlet valve **28** and an exhaust valve **30** as well as a spark plug **32.** Since heat loss can, and does, occur through all of the surfaces exposed to the combustion chamber, the thermal barrier coating in accordance with the present invention can be advantageously used on all of these surfaces, hereinafter referred to as the combustion surfaces. Although the coating can be advantageously utilized on all of the combustion surfaces, the detailed de-

scription herein of the method of applying the coating will be restricted to its application to the end face **24** of the piston **20.** However, it will be understood that the coating can be similarly applied to other surfaces.

Briefly, application of the coating in accordance with the present invention to the piston end face comprises primarily the steps of (1) initially preparing the piston end face surface for coating, (2) applying the first layer, (3) applying the second layer, (4) applying the third layer, and (5) cleaning and polishing.

The piston surface is prepared initially by cleaning it, preferably in a suitable vapor degreasing apparatus utilizing for example, perchlorethylene. After being cleaned, the portions of the piston to be coated are grit blasted. In order to do this, the piston **20** is loaded into a specially made fixture **36** illustrated in FIGS. **2A** and **2B.** The fixture **36** is comprised of a top plate **38** secured by fixed standards **40** to a turntable **42.** The plate **38** has a center opening **44** below which the piston **20** is supported on a mounting structure **46.** The mounting structure **46** can elongate as represented by the arrows, to press the piston **20** up into tight engagement with the underside of plate **38.** In order to remove the piston **20** from the fixture **36,** the mounting structure **46** is shortened so that the piston can be slid out.

The opening **44** and plate **38** is precisely dimensioned so as to have a diameter slightly smaller than the diameter of the piston end face. As an example, it is desirable to leave a narrow arcuate area, approximately one thirty-second inch in width, immediately adjacent the outer circumference of the piston end face, free of coating in order to establish a better bond between the coating and the piston end face.

With the piston **20** mounted in the fixture **36** as shown in FIG. **2A,** the piston end face surface is grit blasted using for example an aluminum oxide grit having a mesh size of 47/**70.** The grit blast gun **46** should be approximately 3 inches above the surface of the piston and discharge the grit at approximately **35** pounds per square inch. As represented by the arrow in FIG. **2A** adjacent the grit blast gun, the gun **46** is moved back and forth over the surface of the piston **20** to develop a substantially uniform surface roughness of 150/**300** RMS.

Subsequent to the preparation of the piston end face surface by cleaning and grit blasting, the surface is ready for application of the three successive coating layers. In accordance with the preferred method of applying the coating, all three layers are applied in substantially the same manner utilizing the same apparatus. More particularly, each of the coating layers is applied utilizing a plasma flame spray apparatus, for example, of the type shown in U.S. Pat. No. 3,145,287. This apparatus is capable of producing and controlling a high velocity, high temperature inert gas stream for long periods. Typically, gas velocities of 1,000 feet per second at 12,000 to 30,000 degrees Fareinheit can be produced. The hot gas stream is used to melt and accelerate at high velocities the material to be deposited which is usually introduced into the apparatus in powder form. When the molten particles impact on the surface to be coated (substrate), they form a dense high purity coating which does not metallurgically effect the substrate in that there is no heat effected zone and no distortion.

The coating layers are applied to the piston end face utilizing the fixture **36** as shown in FIG. **3.** Whereas, the grit blast gun was moved across the piston face in FIG. **2A** along two perpendicular axes, the preferred manner of depositing the coating material on the piston end face, as shown in FIG. **3,** involves moving the plasma spray gun **50** along one axis only while simultaneously rotating the entire fixture **36** by shaft **52** secured to turntable **42.** Alternatively, the spray gun **50** can be moved across the face of the piston along two perpendicular axes.

In describing the steps of applying the coating layers to the piston end face, various parameters will be recited with the assumption being made that a particular plasma flame spray gun and powder feeder, both sold commercially by Metco, Inc., is being employed. The gun type is 3MB. The powder feeder type is 3MP. The cathode type is 3MllA and the rectifier utilized is 4MR or 6MR.

The initial coating layer applied directly to the piston end face is a bonding layer, preferably a nickel aluminum alloy. The powder employed is comprised of approximately 95 percent nickel and 5 percent aluminum with a mesh size range from −170 to +325.

The various plasma spray parameters preferably employed in depositing the first coating layer are as follows:

CARRIER GAS
Nitrogen
ARC GAS

	Type	Regulator	Console	Flow
Primary	Nitrogen	50 ± 2PSI	50 ± 2PSI	150 SCFH
Secondary	Hydrogen	50 ± 1PSI	50 ± 1PSI	10 SCFH

POWER
Operating: 500 Amps: 65–67 Volts
POWDER FEEDER
Gas: 37 SCFH RPM: 16 Port No. 2
Amps: Spray Rate: 68 grams/min
Meter Wheel S
STANDOFF
Gun to Work Distance: 5 in.
NOZZLE
Type G
ADDITIONAL INSTRUCTIONS
Preheat to 150 F. Max. Part Temp. 350°F Steel
200°F Aluminum
Surface Speed: 150 ft/min.

It has previously been mentioned that a narrow arcuate area immediately adjacent the edge of the piston end face is left free of coating to assure better bonding of the coating to the piston. This area, which may have a width of approximately one thirty-second of an inch, is represented by numeral **60** in FIG. **4.** To further assure good bonding, the thickness of each layer is tapered gradually proximate to the edge thereof. The tapering of layer **1** in FIG. **4** is represented by number **62.** The variation in thickness of the layer to establish the tapering is achieved by varying the speed of the plasma spray gun as it moves across the piston end face or by varying the rotational speed of the turntable depending on the position of the gun. For example, if the plasma spray gun is moving faster adjacent the edge, it will deposit a lesser thickness of material than it will when it is moving more slowly toward the center of the piston. The number of passes of the gun across the piston determines the thickness of the coating layer applied. Preferably, the nickel aluminum alloy (layer **1**) should be applied to a thickness of approximately 0.001 – 0.003 inches.

After the first coating layer has been applied, a second coating layer is applied in the identical apparatus as illustrated in FIG. **3.** The powder utilized to apply the second coating layer in accordance with the present invention consists of a blend of approximately 35 percent of the nickel aluminum powder utilized in depositing the first layer and about 65 percent of a primarily zirconium oxide material, which as will be seen hereinafter, is utilized as the third layer.

The adjustable parameters for depositing the second layer are substantially as follows:

CARRIER GAS
Argon
ARC GAS

	Type	Regulator	Console	Flow
Primary	Nitrogen	50±2PSI	50±2PSI	75 SCFH
Secondary	Hydrogen	50±1PSI	50±1PSI	15 SCFH

POWER
Operating: 500 Amps 75–85 Volts
POWDER FEEDER
Gas 40 SCFH RPM 80 Port No. 2
AMPS Spray Rate 76 grams/min
Meter Wheel S
STANDOFF
Gun to Work Distance 5.5±0.5 in.
NOZZLE
Type G
ADDITIONAL INSTRUCTIONS
Preheat to 150F Max. Part Temp. 300 F
Surface Speed 150 ft/min.

The thickness of the second layer should also be tapered adjacent the edge thereof as shown at **64.** The thickness of the second layer is preferably somewhat greater than the first layer, i.e. approximately 0.003 – 0.006 inches.

Deposition of the third layer utilizes a powder comprised primarily of zirconium oxide (approximately 93%), calcium oxide (approximately 5%), aluminum oxide (approximately 5%) and silicon dioxide (approximately 0.4%) plus traces of other oxides and using a fully lime or yttria stabilizer. The powder mesh size is approximately –200 +325 RD. The thickness of the third layer is also tapered adjacent the edge thereof as shown at **66.** The thickness of the third layer should be somewhat greater than that of the second layer, i.e. approximately 0.008 – 0.010 inches.

The adjustable parameters for depositing the third layer are substantially as follows:

CARRIER GAS
Argon
ARC GAS

	Type	Regulator	Console	Flow
Primary	Nitrogen	50± 2PSI	50± 2PSI	75 SCFH
Secondary	Hydrogen	50± 1PSI	50± 1PSI	15 SCFH

POWER
Operating: 500 Amps 75–85 Volts
POWDER FEEDER
Gas 40 SCFH RPM 26 Port No. 2
AMPS Spray Rate 90 grams/min.
Meter Wheel S
STANDOFF
Gun to Work Distance 2.5±0.5 in.
NOZZLE
Type G
ADDITIONAL INSTRUCTIONS
Preheat to 150 F. Max Part Temp 300 F
Surface Speed 150 ft./min.

After the three layers have been deposited as shown in FIG. **4,** it is preferable to polish the piston face with an appropriate polishing wheel such as Tycro 904188 to remove any loose material.

Although the materials and parameters disclosed herein have been found to be preferred for coating aluminum pistons intended to operate in typical internal combustion chambers, it is recognized that selected different materials and parameters could also be used. For example, in lieu of the nickel aluminum alloy disclosed herein for use as layer **1,** a nickel chrome alloy could be substituted. Certain other refractory materials such as magnesium, zirconate could be substituted for zirconium oxide, disclosed herein, for the third layer with some degradation of effectiveness.

From the foregoing, it should be recognized that a coating, and a method of applying that coating to metal surfaces, particularly metal surfaces used within an internal combustion chamber, has been disclosed herein for enabling operating temperatures within the combustion chamber to be sustained at a higher level than would otherwise be feasible. The coating involves the application of three distinct layers; a first layer having a thermal expansion characteristic similar to that of the substrate so as to provide good bonding, a third layer exhibiting a very high thermal barrier characteristic, and a second layer having a thermal expansion characteristic intermediate that of the first and third layers to relieve mechanical stresses which might otherwise be encountered in the presence of temperature gradients. As a consequence of enabling higher temperatures to be sustained within the combustion chamber, more efficient fuel burning is achieved resulting in increased performance and better fuel economy along with a reduction in emissions.

What is claimed is:

1. A piston for use in an internal combustion engine comprising:
- a substantially cylindrical member formed of metal and having a substantially flat end face; and
- a coating bonded to said flat end face, said coating comprising:
  - a first layer of material bonded directly to said flat end face having a thermal characteristic substantially the same as that of said cylindrical member metal;
  - a second layer of material bonded to said first layer; and
  - a third layer of bonded to said second layer and having a thermal barier characteristic substantially greater than that of said cylindrical member metal, said second layer of material having a thermal expansion characteristic between that of said first and third layer materials.

2. The piston of claim **1** wherein said first layer constitutes an alloy comprising of approximately 95 percent nickel and 5 percent aluminum and said third layer material is comprised primarily of zirconium oxide.

3. The piston of claim **9** wherein said second layer material is a blend comprised substantially two thirds of said third layer material and one third of said first layer material.

4. The piston of claim **3** wherein said third layer is thicker than said second layer and said second layer is thicker than said first layer.

5. An internal combustion engine comprising:
- a block including a plurality of cylindrical cavities extending inwardly from one surface thereof;

a head mounted in said block closing said cavities;

a plurality of cylindrical pistons each having a substantially flat end face and each disposed in a different one of said cylindrical cavities for reciprocal movement therein, each piston forming a combustion chamber between the flated face thereof, the cylindrical wall of the cavity and the portion of said head surface closing the cavity; and

a thermal barrier coating bonded to at least a portion of the surfaces forming said combustion chambers, said coating including:

a first layer of metal bonded directly to said combustion chamber surfaces and exhibiting a thermal expansion characteristic substantially the same as that of said combustion chamber surface material;

a second layer of material bonded to said first layer; and

a third layer of refractory material bonded to said second layer and exhibiting a thermal barrier characteristic substantially greater than that of said combustion chamber surface said second layer of material exhibiting a thermal expansion characteristic between that of said first and third layers.

6. The engine of claim **5** wherein said thermal barrier coating is bonded to the flat end faces of said pistons; and

wherein the thickness of the coating on each of said piston end faces is tapered proximate to the edge thereof.

7. The engine of claim **6** wherein the edge of the coating on each of the pistons is spaced from the edge of the end face thereof.

8. The engine of claim **5** wherein said first layer constitutes an alloy comprised of approximately 95 percent nickel and 5 percent aluminum.

9. The engine of claim **5** wherein said third layer material is comprised primarily of zirconium oxide.

10. The engine of claim **5** wherein said second layer material is a blend comprised of substantially two thirds of said third layer material and one third of said first layer material.

11. The engine of claim **5** wherein said third layer is thicker than said second layer and said second layer is thicker than said first layer.

* * * * *