



(11) **EP 1 753 667 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
27.04.2011 Bulletin 2011/17

(21) Application number: **05745758.2**

(22) Date of filing: **11.05.2005**

(51) Int Cl.:
B65D 25/00 (2006.01)

(86) International application number:
PCT/NL2005/000359

(87) International publication number:
WO 2005/108221 (17.11.2005 Gazette 2005/46)

(54) **GRIPPING DEVICE FOR USE ON A PAINT RECEPTACLE, IN PARTICULAR A TIN OF PAINT**

GREIFVORRICHTUNG ZUR VERWENDUNG AN EINEM FARBBEHÄLTNIS, INSBESONDERE
EINER FARBDOSE

DISPOSITIF DE PREHENSION UTILISE SUR UN SUPPORT DE PEINTURE, EN PARTICULIER UNE
BOITE DE PEINTURE

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **11.05.2004 NL 1026162**
08.06.2004 NL 1026353
03.09.2004 NL 1026965

(43) Date of publication of application:
21.02.2007 Bulletin 2007/08

(73) Proprietors:
• **Cornelissen, Rudolphus Johannes Adrianus
Maria
5374 JT Schaijk (NL)**
• **Van Den Boom, Marcus Carolus Adrianus
5473 AG Heeswijk-Dinther (NL)**
• **Rijpert, Elisabeth Petronella Maria
5374 JT Schaijk (NL)**
• **Verhees, Godefridus Josephus Maria
5708 AE Helmond (NL)**

(72) Inventor: **CORNELISSEN, Rudolphus, Johannes,
Adrianus, Maria
NL-5374 JT Schaijk (NL)**

(74) Representative: **Verhees, Godefridus Josephus
Maria
Brabants Octrooibureau,
De Pinckart 54
5674 CC Nuenen (NL)**

(56) References cited:
DE-A1- 3 200 889 DE-U1- 9 309 975
DE-U1- 29 519 786 FR-A- 974 500
US-A- 1 349 457

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 753 667 B1

Description

BACKGROUND OF THE INVENTION:

Field of the invention.

[0001] The invention relates to a gripping device for use on a paint receptacle, in particular a tin of paint, comprising a U-shaped grip with a middle section that functions as a handgrip and two arms that are connected to it, the free outer ends of which are provided with a means of coupling for coupling to a paint receptacle in such a way that it is detachable, where at least the free outer ends of the arms can move with respect to the middle section. By U-shaped is meant any shape having two arms and a middle section in between them, where each of the arms has a free outer end.

Prior art.

[0002] Such a gripping device is known from the American patent US 2.628.858. The coupling elements of this known gripping device are two hooks on the free outer ends of the grip, which can be hooked under the inward protruding rim of a tin of paint and two locking elements that can slide along the grip's arms which can be slid in front of the hooks' openings in order to close off the rim of the paint tin. The grip of the known gripping device is flexible as a result of which the free outer ends of the grip's arms can be bent towards each other in order to be able to get the hooks under the rim of a paint tin. The disadvantage of this known gripping device is that in order to fit it on a paint tin two hands are usually necessary to push the free outer ends of the grip's arms towards each other and in any case, it is difficult to fit the gripping device on a paint tin with one hand. DE-U-29 519 786 discloses a gripping device according to the preamble of claim 1.

Summary of the invention.

[0003] An objective of the invention is to provide a gripping device of the type described in the preamble, that can be fitted on a paint receptacle more easily. To this end, the gripping device is characterized in that the means of moving is a second U-shaped element constituting a handle with a middle section and two legs that are connected to it, which handle is situated between the grip's arms, in which the handle's middle section is situated near the grip's middle section, and in which the free outer ends of the handle's legs are coupled to the grip's arms. With the moving means of the gripping device according to the invention the free outer ends of the arms can be moved in a direction towards each other. Because of this, it is not necessary to grasp the free outer ends of the arms and push them towards each other, for which two hands are usually needed, but the free outer ends of the grip's arms can simply be brought towards each other with the help of the means of moving.

[0004] The handle's middle section is here situated at a distance from the grip's middle section. By pulling the middle section of the handle towards the middle section of the grip, which can easily be done with one hand, the free outer ends of the grip's arms are pulled towards each other and the free outer ends can be brought into the opening of a tin of paint. In case the grip is made of a flexible elastic material, the grip will bend back because of its elasticity as soon as the handle is released, as a result of which the means of coupling will couple to the paint tin's rim. In case the grip is not flexible (for example, the arms are connected to the middle section by means of hinges) the middle section of the handle will have to be pushed back in order to bring the free outer ends of the grip's arms away from each other again.

[0005] An embodiment of the handle according to the invention is characterized in that the free outer ends of the handle's legs are attached to the grip's arms.

[0006] Another embodiment of the handle according to the invention is characterized in that the free outer ends of the handle's legs can slide along the grip's arms, and the grip's arms are provided with stops that limit sliding of the free outer ends of the handle's legs in a direction towards the middle section of the grip.

[0007] The grip's arms can be connected to the middle section in such a way that they can hinge, however, it is preferable for the grip to be made from one piece and that the material is elastic. The handle's legs can also be connected to the middle section so that they can hinge, however, it is preferable for the handle to be made from one whole piece and from an elastic material.

[0008] Still a further embodiment of the handle according to the invention is characterized in that each free end of the grip's arms is provided with a hook-shaped part that is a part of the means of coupling, in which the opening of the hook is turned outwards. Because of this, the hook-shaped part can be hooked under the paint tin's rim which projects inwards. By a hook-shaped part is meant each part that is provided with an opening in which a part of a paint receptacle's rim can be received.

[0009] In order to be able to fit the gripping device firmly on paint tins having rims of varying thicknesses, each free end of the grip's arms in addition to the hook-shaped part may be provided with an additional hook-shaped part of a different size than the hook-shaped part mentioned above.

[0010] Again a further embodiment of the handle according to the invention is characterized in that the gripping device, furthermore, comprises two locking elements which can be brought in front of the openings of the hook-shaped parts. Due to the locking elements it is possible to prevent the rim of the paint receptacle from unintentionally coming loose from the hook's opening and, therefore, from the gripping device as well. The locking elements are preferably two locking strips that can slide along the grip's arms.

[0011] In case the free outer ends of the handle's legs can slide along the grip's arms, the locking elements are

preferably attached to the free outer ends of the handle's legs, so that by moving the handle both locking elements will slide.

[0012] Furthermore, the locking elements on the side turned toward the grip are preferably provided with an opening for receiving an outward projecting rim on the periphery at the top of the tin of paint when the gripping device is being fitted on a paint tin. Because of this, the locking elements are clicked into the locked position on the rim of the tin and more force is needed to pull the locking elements up into the unlocked position. The risk that here the locking elements will unintentionally slide into the unlocked position is greatly reduced because of this.

Brief description of the drawings.

[0013] The invention will be elucidated more fully below on the basis of drawings in which embodiments of the gripping device according to the invention are shown.

[0014] In these drawings:

Figure 1 shows a side-view of a first embodiment of the gripping device according to the invention with the handle in a first position;

Figure 2 shows a side-view of the gripping device with the handle in a second position;

Figure 3 shows a side-view of the gripping device with the free outer ends of the grip's arms pulled towards each other;

Figure 4 shows the gripping device fitted on a tin of paint;

Figure 5 shows a perspective view of a second embodiment of the gripping device provided with larger hooks;

Figure 6 shows a perspective view of a third embodiment of the gripping device provided with double hooks;

Figure 7 shows a perspective view of a fourth embodiment of the gripping device situated on a paint tin.

Detailed description of the drawings.

[0015] In figures 1, 2 and 3, a first embodiment of the gripping device according to the invention is shown in a side-view with the handle in different positions. The gripping device 1 has a U-shaped grip 3 made out of one piece of an elastic material, for example plastic, with a middle section 5 that is provided with a handgrip 7 and two flexible arms 9, 11. The free outer ends 13, 15 of the arms 9, 11 are made as hook-shaped parts 17, 19 with the openings 21, 23 turned outwards and which are a means of coupling for coupling to a paint tin in such a way that it is detachable.

[0016] Furthermore, the gripping device 1 has a means of moving with which the arms can be moved in a direction towards each other. This means of moving is made up

of a U-shaped handle 25 with a middle section 27 and two legs 29, 31 which are connected to it. This handle 25 is situated between the arms of the grip 3, where the handle's middle section 27 is situated at a distance from, but is near the grip's middle section 5. The free outer ends 33, 35 of the handle's legs are provided with sleeves 37, 39 which are situated on the arms 9, 11 of the grip 3 and can be slid along those arms. There are strips situated on the free outer ends 33, 35 of the legs, which are locking elements 41, 43 and can be slid in front of the openings 21, 23 of the hook-shaped parts, see figure 1.

[0017] The arms 9, 11 of the grip 3 are provided with stops 45, 47 which limit sliding of the free outer ends 33, 35 of the handle's legs in a direction P towards the middle section 5 of the grip, see figure 2. By pulling the middle section 27 of the handle 25 from this position towards the middle section 5 of the grip 3, the arms 9, 11 bend as a result of which the free outer ends 13, 15 of the arms come towards each other, see figure 3.

[0018] In figure 4, the gripping device 1 is shown once again but now on a paint tin 49. The hook-shaped parts 17, 19 are situated here about the rim 48 of a paint tin 49, which rim projects inwards, and the locking elements 41, 43 are situated on the exterior side of the paint tin 49 and close off the rim 48.

[0019] The locking elements 41, 43 on the side turned toward the grip 3 preferably are provided with an opening 42, 44 (see figures 1- 3 also) for receiving an outward projecting rim 48b on the periphery at the top of the tin of paint when the gripping device 1 fitted on the paint tin. Because of this, the locking elements are clicked in the locked position on the rim 48b of the tin and more force is needed to pull the locking elements up into the unlocked position.

[0020] In figure 5, a second embodiment of the gripping device 51 according to the invention is shown in perspective. All parts of this gripping device 51 that are the same as those in the drawings of the gripping device 1 shown in figures 1- 4, are indicated by the same reference number. This gripping device 51 is provided with hooks 53, 55 with a larger opening 57, 59 for use on paint tins with a thicker rim.

[0021] In order to fit well on paint tins with a thin as well as those with a thick rim, a third embodiment of the gripping device 61 is shown in figure 6. provided with double hooks 63, 65 and 67, 69 with a small and a large opening 71, 75 and 73, 77 respectively. All parts of this gripping device 61 that are the same as those in the drawings of the gripping device 1 shown in figures 1- 4, are indicated by the same reference number.

[0022] Finally, in figure 7 a fourth embodiment of the gripping device 81 is shown in perspective on a paint tin 83. Here as well, all parts of this gripping device 81 that are the same as those in the drawings of the gripping device 1 shown in figures 1-4, are indicated by the same reference number. The handle 85 of this gripping device 81 is provided with an opening 87 in the middle of which a brush 89 can be hung.

[0023] Although in the above the invention is explained on the basis of the drawings, it should be noted that the invention is in no way limited to the embodiments shown in the drawings. The invention also extends to all embodiments deviating from the embodiments shown in the drawings within the context defined by the claims. Thus the free outer ends of the handle's legs may also be attached to the grip's arms instead of sliding along the arms and the locking elements may be separate from the handle or even, if necessary, omitted.

Claims

1. Gripping device (1;61;81) for use on a paint receptacle (49;83), in particular a tin of paint, comprising a first U-shaped element constituting a grip (3) with a middle section (5) that functions as a handgrip (7) and two arms (9,11) that are connected to it, the free outer ends of which are provided with a means of coupling in order to couple to a paint receptacle, in which at least the free outer ends (13,15) of the arms can move with respect to the middle section (5), which gripping device comprises a means of moving in order to move the free outer ends (13,15) of the arms (9,11) in a direction towards each other, **characterized in that** the means of moving is made up of a second U-shaped element constituting a handle (25) with a middle section (27) and two legs (29,31) that are connected to it, which handle is situated between the grip's arms (9,11), in which the middle section (17) of the handle is situated near the middle section (5) of the grip, and where the free outer ends (33,35) of the handle's legs are coupled to the grip's arms (9,11).
2. Gripping (1;61;81) device according to claim 1, **characterized in that** the free outer ends (33,35) of the handle's legs (29,31) are attached to the grip's arms (9,11).
3. Gripping device (1;61;81) according to claim 2, **characterized in that** the free outer ends (33,35) of the handle's legs (29,31) can slide along the grip's arms (9,11), and the grip's arms are provided with stops (45,47) that limit sliding of the free outer ends of the handle's legs in a direction (P) towards the middle section of the grip.
4. Gripping device (1;61;81) according to one of the previous claims, **characterized in that** each free end (13,15) of the grip's arms (9,11) is provided with a hook-shaped part (17,19;63,65) that is a part of the means of coupling, in which the hook with the opening (21,23;71,73) is turned outwards.
5. Gripping device (61) according to claim 4, **characterized in that** each free outer end (13,15) of the

grip's arms (9,11) in addition to the hook-shaped part (63,67) is provided with an additional hook-shaped part (65,69) with other dimensions than the hook-shaped part mentioned above.

6. Gripping device (1;61;81) according to claim 4 or 5, **characterized in that** the gripping device furthermore comprises two locking elements (41,43) which can be brought in front of the openings (21,23; 71,73,75,77) of the hook-shaped parts (17,19; 63,65,67,69).
7. Gripping device (1;61;81) according to claims 3 and 6, **characterized in that** the locking elements (41,43) are attached to the free outer ends (33,35) of the handle's legs (29,31).
8. Gripping device (1 ;61 ;81) according to claim 6 or 7, **characterized in that** the locking elements (41,43) are locking strips that can slide along the grip's arms (9,11).
9. Gripping device (1;61;81) according to one of the preceding claims 6 through 8 inclusive, **characterized in that** the locking elements (41,43) on the side turned towards the grip are provided with an opening (42,44) for receiving an outward projecting rim (48b) on the periphery of the rim on the topside of a paint tin when fitting the gripping device to a paint tin.

Patentansprüche

1. Henkel (1; 61; 81) für die Anbringung an einem Farbbehälter (49; 83), insbesondere einer Farbdose, bestehend aus einem ersten U-förmigen Element, das einen Tragegriff (3) bildet, mit einem Mittelteil (5), das einen Haltegriff (7) bildet, und zwei damit verbundenen Armen (9, 11), deren freie Enden mit Verbindungsmitteln für eine lösbare Verbindung mit einem Farbbehälter versehen sind, wobei zumindest die freien Enden (13, 15) der Arme gegenüber dem Mittelteil beweglich angeordnet sind, welcher Henkel Verschiebemittel mit dem Zweck umfasst, die freien Enden (13, 15) der Arme in einer Richtung zueinander hin zu bewegen, **dadurch gekennzeichnet, dass** die Verschiebemittel durch ein zweites U-förmiges Element gebildet werden, das einen Griff (25) mit einem Mittelteil (27) und zwei damit verbundenen Beinen (29, 31) bildet, wobei sich der Griff zwischen den Armen (9, 11) des Bügels befindet und das Mittelteil (27) des Griffs in der Nähe des Mittelteils (5) des Bügels angeordnet ist und wobei die freien Enden (33, 35) der Beine des Griffs mit den Armen (9, 11) des Bügels verbunden sind.
2. Henkel (1; 61; 81) nach Anspruch 1, **dadurch gekennzeichnet, dass** die freien Enden (33, 35) der

Beine (29, 31) des Griffs an den Armen (9, 11) des Bügels befestigt sind.

3. Henkel (1; 61; 81) nach Anspruch 2, **dadurch gekennzeichnet, dass** die freien Enden (33, 35) der Beine (29, 31) des Griffs verschiebbar entlang den Armen (9, 11) des Bügels angeordnet und die Arme des Bügels mit Anschlägen (45, 47) versehen sind, die den Verschiebeweg der freien Enden der Beine des Griffs in einer Richtung (P) zum Mittelteil des Bügels hin begrenzen. 5 10
4. Henkel (1; 61; 81) nach einem der vorangegangenen Ansprüche, **dadurch gekennzeichnet, dass** jedes freie Ende (13, 15) der Arme (9, 11) des Bügels mit einem hakenförmigen Teil (17, 19; 63, 65) versehen ist, der Teil der Verbindungsmittel ist, wobei die Öffnung (21, 23; 71, 73) des Hakens nach außen zeigt. 15
5. Henkel (61) nach Anspruch 4, **dadurch gekennzeichnet, dass** jedes freie Ende (13, 15) der Arme (9, 11) des Bügels neben dem hakenförmigen Teil (63, 67) mit einem weiteren hakenförmigen Teil (65, 69) mit einer anderen Abmessung als das erwähnte hakenförmige Teil versehen ist. 20 25
6. Henkel (1; 61; 81) nach einem der Ansprüche 4 oder 5, **dadurch gekennzeichnet, dass** der Henkel ferner zwei Verriegelungselemente (41, 43) umfasst, die vor die Öffnungen (21, 23; 71, 73; 75, 77) der hakenförmigen Teile (17, 19; 63, 65, 67, 69) gebracht werden können. 30
7. Henkel (1; 61; 81) nach einem der Ansprüche 3 und 6, **dadurch gekennzeichnet, dass** die Verriegelungselemente (41, 43) an den freien Enden (33, 35) der Beine (29, 31) des Griffs befestigt sind. 35
8. Henkel (1; 61; 81) nach einem der Ansprüche 6 oder 7, **dadurch gekennzeichnet, dass** die Verriegelungselemente (41, 43) durch entlang den Armen (9, 11) des Bügels verschiebbare Verriegelungslaschen geformt werden. 40
9. Henkel (1; 61; 81) nach einem der vorangegangenen Ansprüche 6 bis 8, **dadurch gekennzeichnet, dass** die Verriegelungselemente (41, 43) auf der dem Bügel zugewandten Seite mit einer Aussparung (42, 44) für die Aufnahme einer umlaufenden, nach außen überstehenden Kante (48b) an der Oberseite einer Farbdose bei der Anbringung des Henkels an einer Farbdose versehen sind. 45 50

Revendications

1. Poignée (1; 61; 81) à fixer à un récipient de peinture (49; 83), en particulier un pot de peinture, compre-

nant un premier élément en U formant une prise (3) avec une partie centrale (5) formant une prise (7) reliée à deux bras (9, 11), dont les extrémités libres sont dotées de dispositifs d'accouplement pour un accouplement amovible avec un récipient de peinture, où au moins les extrémités libres (13, 15) des bras sont mobiles par rapport à la partie centrale, laquelle poignée comprend des dispositifs de déplacement pour rapprocher les extrémités libres (13, 15) des bras dans un sens, **caractérisés en ce que** les dispositifs de déplacement sont formés d'un deuxième élément en U qui forme un levier (25) avec une partie centrale (27) reliée à deux pieds (29, 31), lequel levier se situe entre les bras (9, 11) du collier, où la partie centrale (27) du levier se trouve près de la partie centrale (5) du collier, et où les extrémités libres (33, 35) des pieds du levier sont accouplés aux bras (9, 11) du collier.

2. Poignée (1; 61; 81) selon la revendication 1, **caractérisée en ce que** les extrémités libres (33, 35) des pieds (29, 31) du levier sont fixées aux bras (9, 11) du collier.
3. Poignée (1; 61; 81) selon la revendication 2, **caractérisée en ce que** les extrémités libres (33, 35) des pieds (29, 31) du levier sont coulissants le long des bras (9, 11) du collier, et les bras du collier sont dotés de butées (45, 47) qui limitent le déplacement des extrémités libres des pieds du levier dans un sens (P) vers la partie centrale du collier.
4. Poignée (1; 61; 81) selon l'une des revendications précédentes, **caractérisée en ce que** chaque extrémité libre (13, 15) des bras (9, 11) du collier est dotée d'une pièce en forme de crochet (17, 19; 63, 65) qui fait partie des dispositifs d'accouplement, où le crochet avec l'ouverture (21, 23; 71, 73) est tourné vers l'extérieur.
5. Poignée (61) selon la revendication 4, **caractérisée en ce que** chaque extrémité libre (13, 15) des bras (9, 11) du collier, outre la pièce en forme de crochet, est dotée d'une autre pièce en forme de crochet (65, 69) d'une autre dimension que la pièce en forme de crochet citée.
6. Poignée (1; 61; 81) selon la revendication 4 ou 5, **caractérisée en ce qu'elle** comprend également deux éléments de verrouillage (41, 43) pouvant être amenés devant les ouvertures (21, 23; 71, 73, 75, 77) des pièces en forme de crochet (17, 19; 63, 65, 67, 69).
7. Poignée (1; 61; 81) selon les revendications 3 et 6, **caractérisée en ce que** les éléments de verrouillage (41, 43) sont fixés aux extrémités libres (33, 35) des pieds (29, 31) du levier.

8. Poignée (1; 61; 81) selon la revendication 6 ou 7, **caractérisée en ce que** les éléments de verrouillage (41, 43) sont formés de bandes de verrouillage coulissantes le long des bras (9, 11) du collier.

5

9. Poignée (1; 61; 81) selon l'une des revendications précédentes de 6 à 8 comprise, **caractérisée en ce que** les éléments de verrouillage (41, 43) sont dotés du côté tourné vers le collier d'une découpe (42, 44) pour l'insertion d'un bord orienté vers l'extérieur (48b) à la périphérie supérieure d'un pot de peinture en posant la poignée sur un pot de peinture.

10

15

20

25

30

35

40

45

50

55

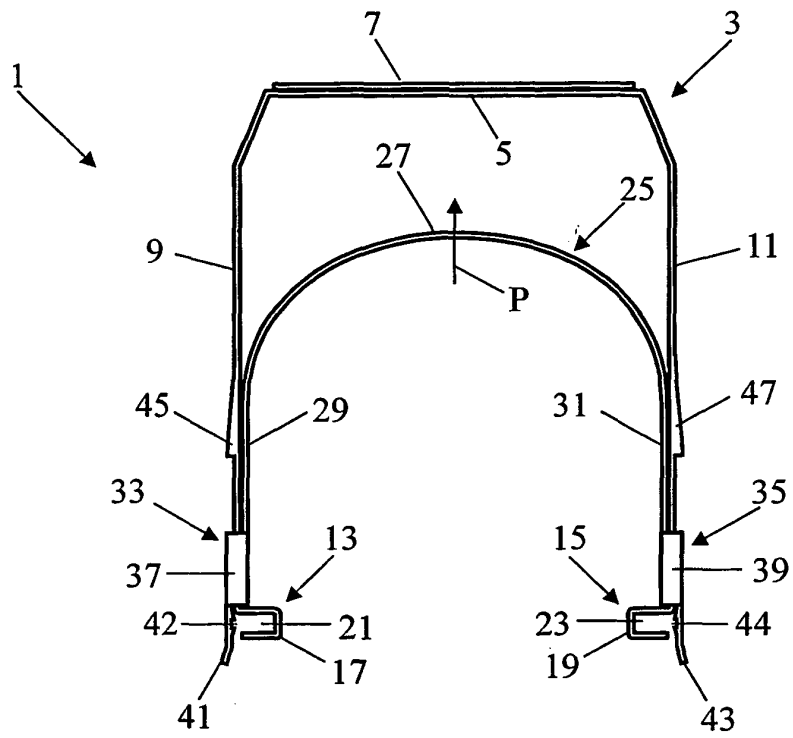


FIG. 1

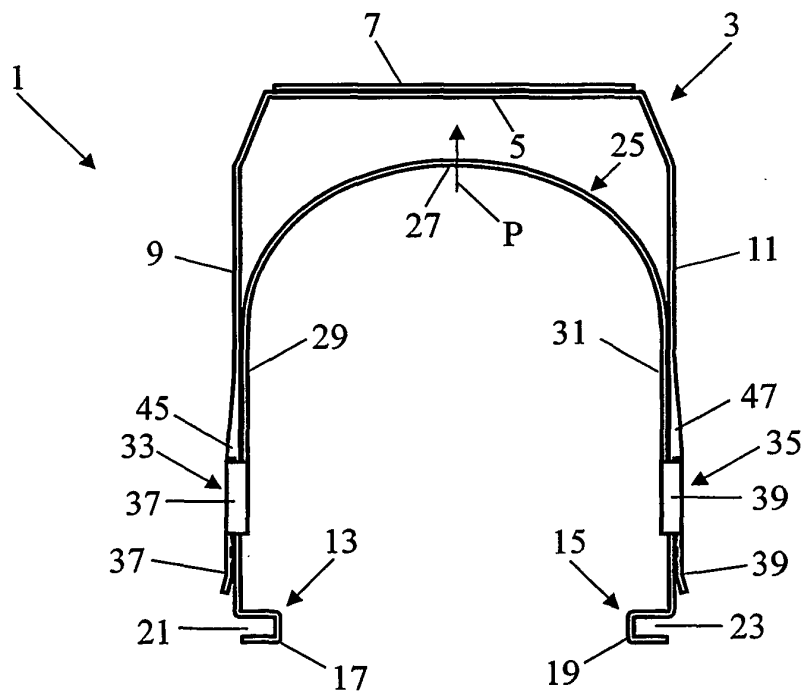


FIG. 2

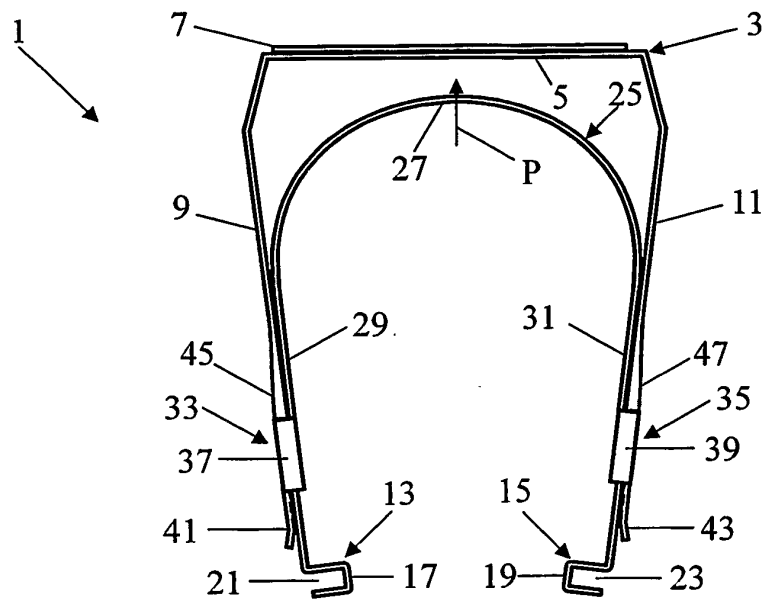


FIG. 3

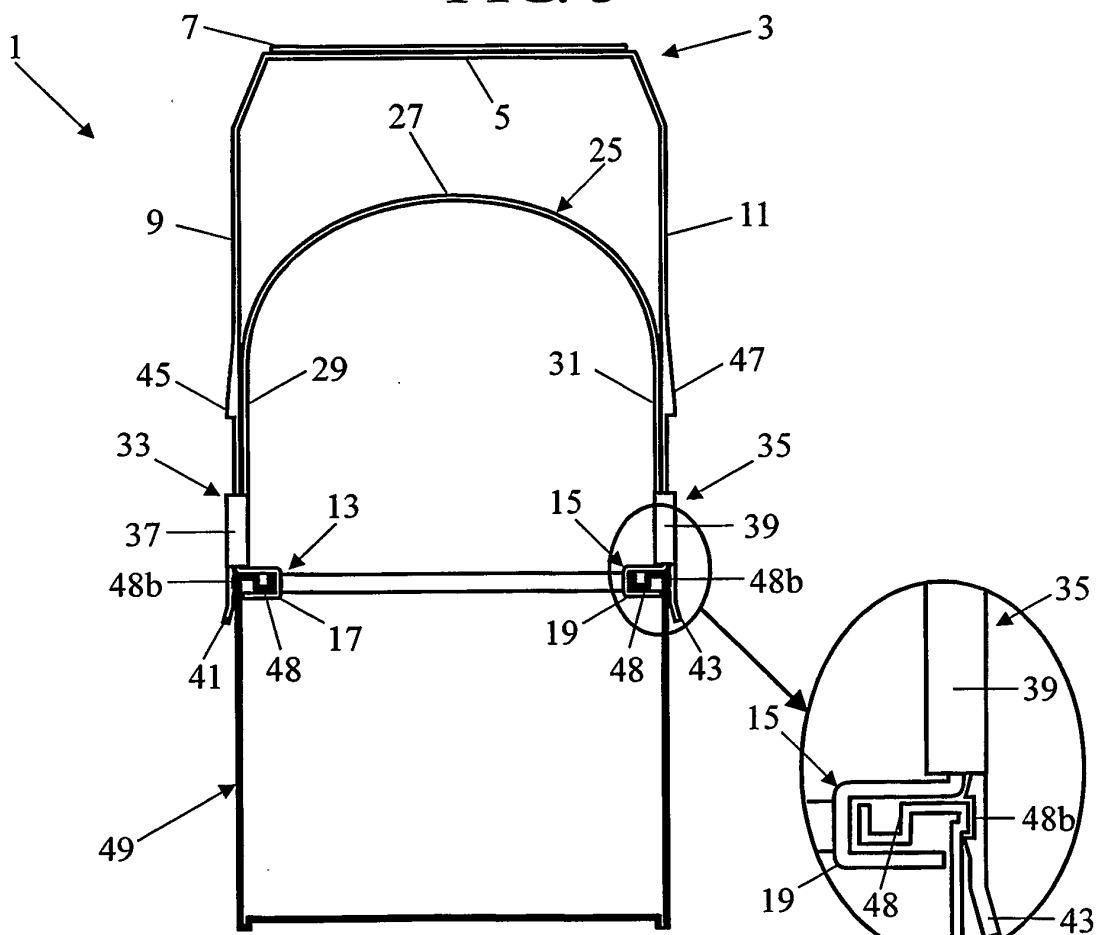


FIG. 4

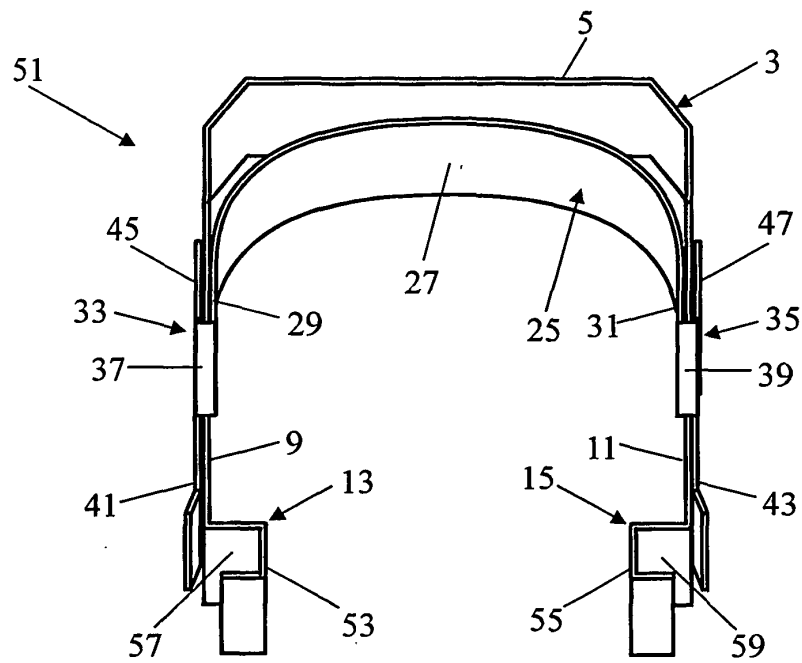


FIG. 5

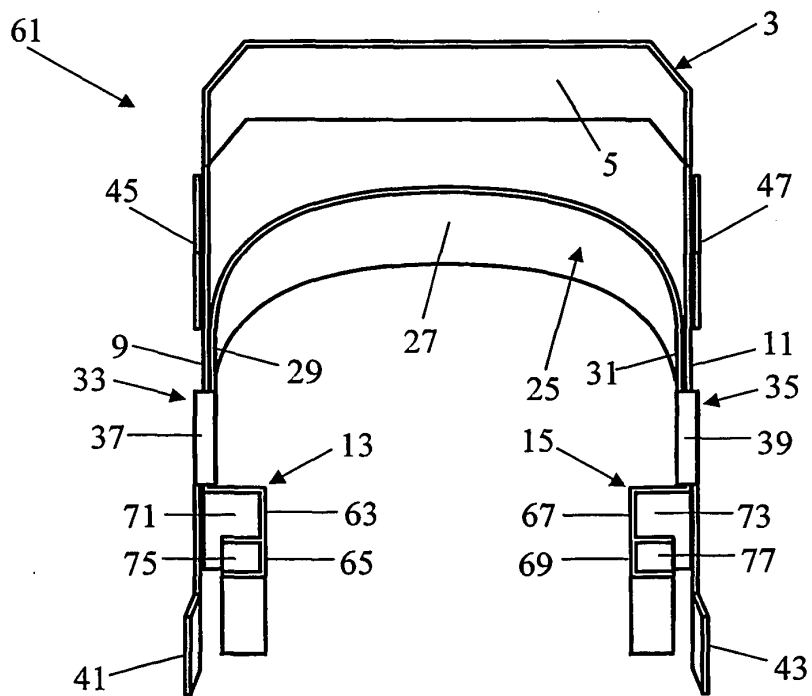


FIG. 6

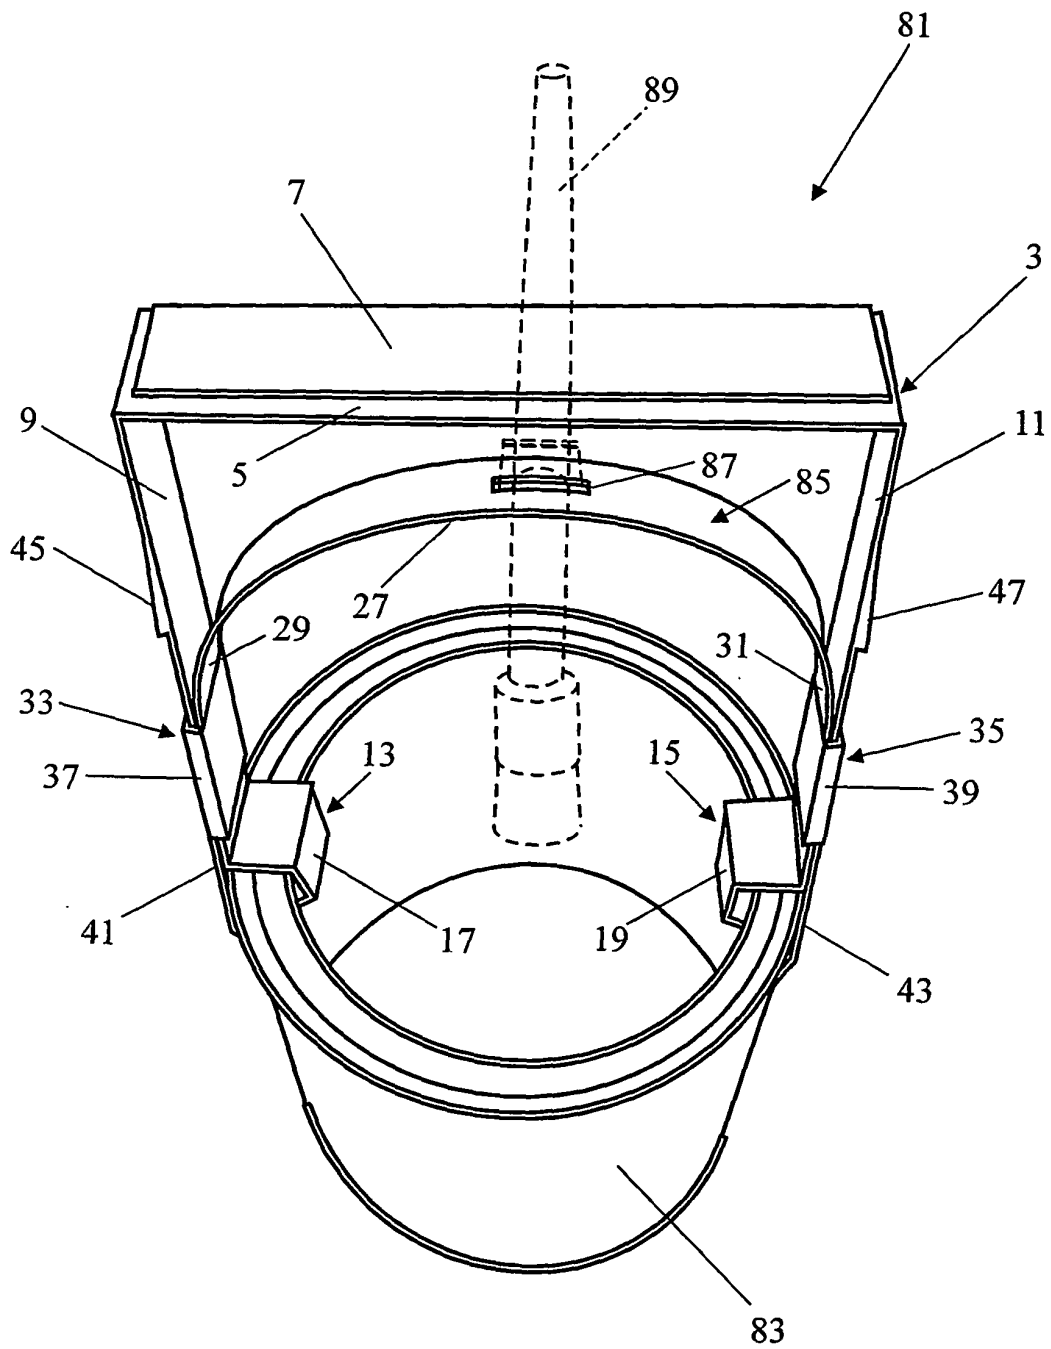


FIG. 7

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2628858 A [0002]
- DE U29519786 [0002]