

(19)



(11)

EP 4 088 604 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
22.05.2024 Bulletin 2024/21

(51) International Patent Classification (IPC):
A41D 13/11 ^(2006.01) **A41D 31/102** ^(2019.01)
A41D 31/14 ^(2019.01)

(21) Application number: **22173275.3**

(52) Cooperative Patent Classification (CPC):
A41D 13/018; A41D 13/02; A41D 2400/24;
A41D 2600/102

(22) Date of filing: **13.05.2022**

(54) **PROTECTIVE GARMENT**

SCHUTZKLEIDUNG

VÊTEMENT DE PROTECTION

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(72) Inventor: **ZORZIN, Giovanni**
36064 Colceresa (Vicenza) (IT)

(30) Priority: **14.05.2021 IT 202100012506**

(74) Representative: **Manfrin, Marta**
Società Italiana Brevetti S.p.A.
Stradone San Fermo 21 sc. B
37121 Verona (VR) (IT)

(43) Date of publication of application:
16.11.2022 Bulletin 2022/46

(56) References cited:
EP-A1- 2 939 555 EP-A1- 3 704 981
DE-A1- 19 703 805 US-A1- 2008 235 854
US-B1- 6 298 487

(73) Proprietor: **Dainese S.p.A.**
36064 Colceresa (Vicenza) (IT)

EP 4 088 604 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates in general to the sector of providing protection by means of an inflatable element for protecting a user from falls and/or impacts during use of a vehicle, preferably a two-wheeled vehicle. More particularly, the present disclosure relates to a protective garment, preferably for motorcycling, for example a motorcycle suit, containing an inflation device for inflating an inflatable element designed to protect a user in the event of falls and/or impacts of various types.

[0002] In particular, in the motorcycling sector it is known to use personal protection devices which include inflatable elements. A personal protection device normally includes an inflatable element or inflatable bag, an inflation device, sensors for detecting the fall or the impact and at least one control unit for managing the activation of the inflation device in order to inflate the inflatable element. The inflatable element is placed in fluid communication with the inflation device, which is configured to inflate the inflatable element in the event of an impact or fall.

[0003] Generally, such an inflation device is formed by a fluid source, such as a canister which contains pressurised gas and which is opened by means of a punch or a small explosion which is managed by means of an electric activation signal. Any form of fluid source intended to determine the outflow of pressurised gas into an inflatable element is referred to in the continuation of the present disclosure by the term "gas generator".

[0004] Relevant prior art is described by the following documents: EP2939555A1, which discloses the preamble of claim 1, US20080235854A1, US6298487B1, DE19703805A1 and EP3704981A1 Normally, the gas generator is arranged inside the inflatable element, for reasons of convenience, so as to facilitate the fluid connection with the inflatable element. The entire protection device is then associated with the protective garment, inside which it is integrally inserted.

[0005] In other words, the inflatable element and the gas generator are housed together inside the protective garment, for example inside an internal pocket of the same protective garment, underneath an external protection layer.

[0006] Such a garment, although advantageous from many points of view, has a number of drawbacks.

[0007] It has been noted that, in particular in the present protective garments, for example in existing motorcycle suits, the protection device is arranged so that its components are in a zone or region of the protective garment which are difficult for the user to access, and this condition requires the user to perform many operations in order to change, if necessary, the inflatable element or other components.

[0008] Consequently, one of the drawbacks consists in the fact that, for example, in the event of an impact or fall and consequently activation of the inflation device intended to inflate the inflatable device, in order to be

able to restore the garment to its working condition and continue to ensure the protection by the inflatable element, the protection device must be fully replaced before it can be used again.

[0009] In particular, it is generally required to replace the entire protection device formed by inflatable element and inflation device.

[0010] For the reasons listed above, in the event of having to replace the protection device, it is required to seek the services of a specialized technician who is able to deal with the delicate operations involving removal and replacement of the said device, and also provide the certification regarding correct positioning of the inflatable element. It is clear that this procedure is time-consuming and is not an operation which can be performed by the average user of such a garment.

[0011] The problem underlying the invention described below is therefore that of providing a protective garment, for example a motorcycling suit, which allows a user to restore the protection device to its working condition in a simplified manner, for example following initial inflation, and/or which is able to provide further advantages.

[0012] This is obtained by means of a protective garment including a protection device according to the independent Claim 1. Secondary characteristics of the subject of the present invention are defined in the corresponding dependent claims.

[0013] The present invention is based on the recognition by the inventor that it is possible to incorporate a gas generator inside a special container so as to form a single body, which results in simple and safe handling by the user, and that the single body formed by the gas generator and the container may be easily coupled and uncoupled together with/from the inflatable element by means of a removable coupling device.

[0014] Furthermore, it is possible to insert the single body, formed by the gas generator and container, which is in fact an inflation device, inside the aerodynamic hump present in the protective garments, in particular in motorcycle suits, for example inside a housing cavity. In this way, after initial activation of the inflatable element, it is merely required to change the single body and to access the latter inside the garment with the aerodynamic hump, without changing the inflatable element.

[0015] Preferably, it is possible to gain access to the aerodynamic hump from the inside of the protective garment, for example via a lining, so that access to the inflation device by the user is simplified.

[0016] "Inside" is understood as meaning the side of the protective garment which faces the user's body.

[0017] The access to the aerodynamic hump therefore allows a user to disconnect and reconnect easily the inflation device from/to the inflatable element, owing to the removable coupling device, in such a way as to allow rapid replacement of the gas generator, while the inflatable element may be configured to be used again for several successive inflation operations, without having to be replaced. It follows that a condition for removal of

said inflation device corresponds to a condition for access to the aerodynamic hump from the internal surface of said garment.

[0018] The main advantage of the invention consists in having a protective garment, for example a motorcycle suit, which contains the inflatable element inside it and in which the aerodynamic hump of the garment accommodates the inflation device inside the housing cavity so that it can be handled independently of the inflatable element, in such a way that the inflation device is easily accessible for a user by means of access to the aerodynamic hump, preferably from the inside of the garment.

[0019] If the inflation device needs to be replaced, a user may easily access the housing cavity of the aerodynamic cage by means of, for example, an internal lining and disconnect the inflatable element, being then able to connect it up again easily once the gas generator has been replaced.

[0020] Even more preferably, the protective garment, for example a motorcycle suit, includes a support plate arranged inside the housing cavity and configured to support the inflation device and, if necessary, other components. The support plate preferably has a mechanical coupling component for allowing mechanical coupling with the inflation device, for example consisting of a clip-action coupling. Mechanical coupling is performed preferably together with the gas generator container.

[0021] In other words, the housing cavity of the aerodynamic hump houses a support plate able to be connected to the inflation device by means of a mechanical coupling component. The mechanical coupling component is positioned in a coupling portion of the support plate. The mechanical coupling component may be clip or more than one clip for example with a C shape and elastic behaviour, which receives between the arms of the C the container of the inflation device.

[0022] Gripping elements, for example in the form of a ribbon or strip, may be provided, being connected to the container, in order to facilitate removal of the inflation device.

[0023] Preferably, the housing cavity of the aerodynamic hump also houses the electronic control unit, which has the function of controlling activation of the personal protection device and therefore inflation of the inflatable element by the gas generator. The control unit may be arranged on the support plate, for example alongside the inflation device, and may be connected to the support plate in a fixed manner, for example by means of screws.

[0024] Even more preferably, the garment includes a container or reservoir for drinkable liquids, referred to as "drinking bottle", which is arranged inside the housing cavity. In other words, the housing cavity of the aerodynamic hump also houses a liquids container. Preferably, the liquids container is configured to occupy inside the housing cavity the space around the inflation device.

[0025] For example, in one embodiment the liquids container has an arc shape, or a curved shape along an

arc trajectory, which defines a concavity. In this way, the empty zone defined by the concavity of said arc shape may accommodate the inflation device.

[0026] Preferably, the embodiment of the liquids container described above allows the container to be inserted inside the housing cavity by means of a rotational movement about the inflation device, wherein the liquids container passes through a receiving cavity of the support plate. This allows the container to be extracted and inserted back inside the aerodynamic hump, in order to fill it and/or empty it, without necessarily having to remove or displace the other components contained inside the housing cavity. In other words, the liquids container may be inserted inside the housing cavity of the aerodynamic hump by means of rotation about an axis which coincides with the longitudinal axis of the inflation device, when the latter is already positioned on the support plate and is located inside the housing cavity, passing through a receiving cavity of the support plate.

[0027] Further advantages, characteristic features and modes of use forming the subject of the present disclosure will become clear from the following detailed description of a number of preferred examples of embodiment thereof, provided by way of a non-limiting example.

[0028] It is nevertheless evident that each embodiment may have one or more of the advantages listed above; in any case it is nevertheless not necessary that each embodiment should have simultaneously all the advantages listed.

[0029] Reference will be made to the figures of the attached drawings in which:

- Figure 1 shows a lateral perspective view from above of an embodiment of a personal protection device for a garment according to Figure 7;
- Figure 2 shows a top plan view of the personal protection device according to Figure 1;
- Figure 3 shows a side view of the personal protection device according to Figure 1;
- Figure 4 shows a view from another side of the personal protection device according to Figure 1;
- Figure 5 shows another view of the protection device corresponding to a view from the inside of the garment;
- Figure 6a shows an exploded view of the personal protection device according to Figure 1;
- Figure 6b shows an exploded view of an alternative embodiment of the personal protection device according to Figure 1;
- Figure 7 shows a front view of a garment according to the present disclosure, in which the garment is

partially cut so that the housing cavity of the aerodynamic hump is visible from the inside of the suit;

- Figure 8 shows a shoulder view of the garment according to Figure 7, in which the garment is partially cut so that the aerodynamic hump is visible from the outside of the suit;
- Figure 9 shows a shoulder view of the garment according to Figure 7, in which the garment is partially cut so that the housing cavity of the aerodynamic hump is visible from the outside of the suit;
- Figure 10 shows a detailed view from the inside of the suit of the housing cavity of the aerodynamic hump of the garment according to Figure 7, in which the access zone is completely open;
- Figure 11 shows a detailed view from the inside of the suit of the housing cavity of the aerodynamic hump of the garment according to Figure 7, in which the access zone is partially closed;
- Figures 12a and 12b show a container according to the embodiment of Figure 6b.

[0030] With reference to the attached figures, the reference number 1000 indicates a protective garment such as a motorcycle suit, containing the personal protection device 100 according to an embodiment of the present invention and an aerodynamic hump 70.

[0031] The term "aerodynamic hump" is understood as meaning a component - known in the motorcycling sector - which is shaped in the manner of a protuberance and used in the high part of the back with an aerodynamic function since it stabilizes a rider at high speeds. The aerodynamic hump 70 may be made with any form known to the person skilled in the art.

[0032] What is of importance for the present disclosure is that the aerodynamic hump defines a cavity 71 which is accessible for a user, as will be explained below.

[0033] The personal protection device 100 includes an inflatable element 50 which is configured to assume a deflated condition and an inflated condition and which is inflated when necessary, for example in the event of danger or an impact, or a fall. The term "inflatable element" is understood as meaning any body, member, device (also formed by several units) which may be inflated if necessary between the deflated condition and the inflated condition. The inflatable element may be realized using any technology known to the person skilled in the art.

[0034] The personal protection device 100 further comprises an inflation device 10 able to inflate the inflatable element 50 and an electronic control unit 42. In particular, in the event of a fall or an impact, the inflation device 10 inflates the inflatable element 50, under the control of the electronic unit 42 which is in turn operatively connected to impact detection sensors. More particular-

ly, with regard to inflation of the inflatable element 50, in the event of a fall and/or sliding and/or sudden impact involving a user or a vehicle being ridden, the protection device 100 is adapted to cooperate with special activation means (normally consisting of the aforementioned control unit and sensors) which are operatively connected for example to the inflation device. It should also be noted that the activation modes, although being an aspect of particular importance for effective operation of the device, will not be further described in greater detail since they are methods which are essentially already known to a person skilled in the art of protection of an individual from sudden impacts.

[0035] More preferably, the protective garment 1000 further includes a support plate 30 and a container or reservoir for drinkable liquids, referred to hereinbelow as "drinking bottle 60".

[0036] The inflatable element 50 is intended to protect the upper zone of the torso of a user wearing the protective garment 1000.

[0037] Preferably, the inflation device 10, the support plate 30, the control unit 42 and the drinking bottle 60 are positioned inside the housing cavity 71 of the aerodynamic hump 70 of the protective garment 1000.

[0038] According to the invention, the garment 1000 comprises an access zone 15 which allows a user wearing the suit 1000 to access the housing cavity 71 from the inside 80 of the said suit. The access zone 15 is identified for example by a zip 20 or other opening zip fastener, formed on a lining of the garment 1000.

[0039] The electronic unit 42 is located preferably on one side of the inflation device in order to optimize the space inside the housing cavity 71.

[0040] Preferably, the access zone 15 is located in the vicinity of the aerodynamic hump 70. In particular, the access zone 15 is located on an inner surface or inner side 80 of the housing cavity 71.

[0041] The inner side 80 is a side facing the zone which accommodates the body of a user when the protective garment 1000 is worn. In other words, it consists of a side facing a hidden zone of the protective garment 100 which is not visible when the garment is closed or worn.

[0042] The access zone 15 may be configured to open or close in a simple manner the access to the housing cavity 71 by a user of the garment 1000, for example by means of a zip fastener or zip 20 associated with a lining of the garment 1000. In other words, the access zone 15 allows a user wearing the garment 1000 to access easily the housing cavity 71 of the aerodynamic hump from the inside of the protective garment 1000, so as to handle the components inserted inside the said cavity. for example in order to extract or reinsert them.

[0043] It is also pointed out that the inflation device 10 includes at least one gas generator 12 and a container 14 for containing said at least one gas generator 12. The gas generator 12 is provided with a region 16 intended for the passage of gas, namely a region which, when the gas generator 12 is activated, allows gas to pass towards

the inflatable element 50. In said region 16, the gas generator 12 may be provided, as is known, with a shut-off valve, not visible in the drawings.

[0044] The gas generator 12 may be a canister containing compressed cold gas, such as helium. Alternatively, the gas generator 12 may be a gas generator of the pyrotechnic or hybrid type or of other types known in the state of the art.

[0045] According to one aspect of the present disclosure, the container 14 and the at least one gas generator 12 form a structurally independent assembly configured to be handled as a single body with respect to said inflatable element 50. Even more particularly, the inflation device 10 comprises a coupling component 18 configured to be removably coupled with a coupling counter-component 52 associated with said inflatable element 50.

[0046] Such an inflation device 10 may be positioned on the support plate 30 to which it is coupled by means of a mechanical type coupling. In other words, the support plate 30 has a coupling portion 31 inside which the inflation device 10 may be housed. The coupling between the inflation device 10 and the support plate 30 is a mechanical type coupling which allows the two components to be easily disconnected and connected together again, for example consisting of a clip-action coupling. The clip has a C-shaped form with arms which are able to stably receive the container of the inflation device 10. The presence of the container allows a stable mechanical coupling to be obtained.

[0047] A gripping element, for example of a flexible nature, may be provided in order to facilitate removal of the container 14 with the gas generator 12 contained therein.

[0048] Preferably, the container 14 has the form of a tubular shell body defining an internal housing chamber 130 for housing the gas generator 12. In other words it consists of a body which may be easily gripped by a user. In order to allow easy opening of the container 14, and replacement of the gas generator 12, the container 14 includes two half-shells coupled together by means of conventional mechanical connection means so as to form said shell.

[0049] In an alternative embodiment, the container 14 may comprise a main body 31, having a tubular shape, and a shell in the form of a closing cover 232, configured to close off the main body in the manner of a hood. It therefore consists of an end shell for closing off the main body 231 of the container 14. The container 14 may in turn comprise an end cover which closes off an end zone of the main body 231. The end cover may be a slider body configured to be able to slide in at least one insertion guide positioned in the proximity of the end zone of the main body 231.

[0050] Consequently, in this embodiment, the main body 231 defines preferably a first open end 221, which may accommodate the coupling component 18 of the gas generator 12, and an opening in the vicinity of the end region, namely a second open end 222.

[0051] According to a preferred aspect of the present

embodiment, the main body 231 and the closing cover 232 are, as mentioned, initially connected together to form one piece, as shown in Figure 12a. In other words, the container 14 is a closed single-piece body and connection means may be provided between the main body 231 and the closing cover 232. For example, the connection means may be calibrated breakage bridge-pieces, also called breakable bridge-pieces. These calibrated breakage bridge-pieces may be broken by a user by means of relative rotation of the main body 231 and the closing cover 232 in opposite directions. For example, a user who is holding the container 14 may rotate at least one of the main body 231 and the closing cover 232 in order to break the calibrated bridge-pieces so as to be able to separate the main body 231 and the closing cover 232, as shown in Figure 12b.

[0052] In this way, it is possible to ensure safe management of the closed gas generator and allow access thereto only when needed for coupling with the inflatable element 50.

[0053] The mechanical coupling between the inflation device 10 and the support plate 30 is therefore configured to allow easy connection and disconnection of the container 14 to/from the coupling portion 31 of the support plate 30. For example, the coupling portion 31 has a housing with a form suitable for accommodating the tubular form of the container 14 and allowing the aforementioned clip-action coupling.

[0054] Preferably, the shell is made of rigid material. The rigid material facilitates the screw-type closure or generally mechanical coupling together with the coupling counter-component of the inflatable element 50. Preferably, the support plate 30 is also made of rigid material, so as to favour the mechanical coupling between the support plate 30 and the inflation device 10.

[0055] Preferably, the coupling which is formed between the inflation device 10 and the inflatable element 50 is a mechanical coupling, for example a so-called quick-release coupling, quick-fit coupling, screw connection or a similar mechanical coupling which is known to the person skilled in the art. More preferably, it consists of a mechanical coupling of the male/female type. The inflation device therefore comprises either one of the male coupling component or a female coupling counter-component. The advantage of the male/female coupling is that a user is able to perform a connection in a quick and easy manner. Another advantage of a male/female coupling is that it is able to provide a high-pressure seal.

[0056] Preferably, the coupling component 18 is placed in the region 16 of the gas generator 12 intended for the outflow of the inflation gas. The coupling component 18, for example the aforementioned male or female component, may surround the region 16 intended for the gas outflow and be coupled with the other coupling component 52 which in turn may surround a gas intake opening of the inflatable element. In this way, as soon as the inflation device 10 is coupled together with the inflatable element 50, it is possible to establish fluid communication

between the gas generator 12 and the inflatable element 50 when the gas generator 12 is activated.

[0057] Preferably, the gas generator 12 comprises said coupling component 18. In other words, the gas generator 12 is suitably modified to allow coupling. This solution ensures a greater pressure-tightness, considering the fact that the pressure comes from the gas generator. Even more preferably, the gas generator 12 is shaped to comprise said coupling component as one piece or integrally. The coupling component 18 and the gas generator 12 therefore preferably form a single piece, namely they are components which are integrally made as a single body.

[0058] Preferably, the gas generator 12 is canister-shaped and, as mentioned above, said container 14 has a tubular form for accommodating the gas generator 12, and even more preferably the gas generator 12 is modified to include the coupling component 18 which, in the embodiment, is a male engaging component.

[0059] As is visible in the figures, the container 14 has a first open end 21, wherein said first open end 21 accommodates said coupling component 18 of the gas generator 12. Owing to the configuration of the aforementioned parts the gas generator 12 may be inserted inside the container 14 and then, together with the latter, may be handled as a single body by a user. The gas generator 12 may then be coupled to the coupling counter-component 52 of the inflatable element 50 by means of direct gripping of the container 14. The container 14 therefore acts as a handle or gripping body for the gas generator 12.

[0060] It is pointed out that the container 14 may be advantageously configured to include a second open end 22.

[0061] The second open end 22 may accommodate a component 40 for electrical connection with the control unit 42, so as to control activation of the gas generator 12. The container 14 may therefore be designed so as not to hinder, on the one hand, coupling with the inflatable element 50 and, on the other hand, connection with the control unit 42. In particular, the inflatable element 50 may project partially inside the aerodynamic hump 70 so as to allow connection together with the inflation device 10. In other words, a portion of the inflatable element, in particular the portion associated with the coupling counter-component 52, may be positioned partially inside the aerodynamic hump 70 so as to allow connection together of the coupling component 18, associated with the inflation device 10, and the coupling counter-component 52, associated with the inflatable element 50.

[0062] Preferably, the control unit 42 is positioned in the vicinity of the inflation device 10 and inside the housing cavity 71 of the aerodynamic hump 70. Even more preferably, the control unit 42 is positioned on the support plate 30, to which it is coupled by means of a fixed coupling. For example, the fixed coupling is a screw-type coupling. In other words, screws may be present for connecting in a fixed manner the control unit 42 and the support plate 30. Preferably, the control unit 42 is positioned

on the support plate 30 alongside the inflation device 10, along the longitudinal direction of the latter.

[0063] Preferably, the drinking bottle 60 is positioned inside the housing cavity 71 of the aerodynamic hump 70. Furthermore the drinking bottle 60 has an arc shape or a curved shape along an arc trajectory. Even more preferably, the shape of the drinking bottle 60 is comparable to the shape of the external surface of the aerodynamic hump 70, which has a curved shape along an arc trajectory.

[0064] The aforementioned shape allows the drinking bottle 60 to occupy at least partially the space inside the housing cavity 71 situated between the inflation device 10 and the external surface of the aerodynamic hump 70. In other words, the drinking bottle 60 is positioned inside the housing cavity 71 in an intermediate space between the inflation device 10 and the external wall of the aerodynamic hump 70 of the protective garment 1000.

[0065] As can be seen in the figures, the support plate 30 may have a receiving cavity 32 through which the drinking bottle 60 may be passed so as to be inserted into (or extracted from) the housing cavity 71. Said receiving cavity 32 is located in the vicinity of the inflation device 10, in particular is located alongside it, relative to the longitudinal direction of the inflation device 10. In particular, the receiving cavity 32 is located on the opposite side to the control unit 42, relative to the inflation device 10. In other words, the inflation device 10 is located in the centre of the support plate and is situated between the control unit 42 and the receiving cavity 32.

[0066] Preferably, in order to insert (or extract) the drinking bottle 60 into/from the housing cavity 71, the drinking bottle is rotated about the inflation device 10 so as to pass between a position outside the housing cavity 71 into a position inside the latter. In other words, the drinking bottle 60 is rotated about an axis corresponding to the longitudinal axis of the inflation device 10, when the latter is positioned in the coupling portion 31 of the support plate 30. In this way, the drinking bottle 60 may be easily inserted inside (or removed from) the housing cavity 71 of the aerodynamic hump 70 in order to be emptied or filled, without having to displace or extract the other components present inside the same housing cavity 71.

Claims

1. Protective garment (1000) having a visible external surface and an internal surface (80) suitable for facing, during use, the body of a user; the protective garment (1000) comprising an inflatable element (50) intended to protect at least partially an area of the body of a user and an inflation device (10) configured to inflate said inflatable element (50), said protective garment (1000) further comprising an aerodynamic hump (70) configured to at least partially

- protect an area on the back of a user and defining a housing cavity (71) facing said internal surface (80) and configured to accommodate said inflation device (10), wherein said inflation device (10) comprises at least one gas generator (12) and a container (14) for containing said at least one gas generator (12), wherein the container (14) and the at least one gas generator (12) define a structurally independent assembly, and are configured to be handled as a single body, with respect to said inflatable element (50), and wherein the inflation device (10) comprises a coupling component (18) and the inflatable element (50) has a coupling counter-component (52), wherein the coupling component (18) is configured to be coupled in a removable manner with the coupling counter-component (52) associated with said inflatable element (50), **characterized in that**, said garment comprises an access zone (15) configured to allow access to said housing cavity (71).
2. Protective garment (1000) according to the preceding claim, wherein said protective garment (1000) comprises a lining and said access zone (15) is an opening formed in the lining of said garment.
 3. Protective garment (1000) according to any one of the preceding claims, wherein said container (14) has the shape of a tubular shell defining an internal housing chamber (130) for housing said gas generator (12).
 4. Protective garment (1000) according to the preceding claim, wherein said container (14) includes a main body (231) and a closing cover (232) for said main body (231), wherein the main body (231) has the form of a tubular shell defining an internal housing chamber (230) for housing the gas generator (12) and wherein the main body (231) has a first open end (221), wherein said first open end (221) accommodates said coupling component (18) of the gas generator (12).
 5. Protective garment (1000) according to the preceding claim, wherein said main body (231) and said closing cover (232) are joined together as one piece and can be detached from each other only once or in an irreversible manner or are connected by calibrated breakage means.
 6. Protective garment (1000) according to any one of the preceding claims, wherein said coupling component (18) is configured to be coupled with the coupling counter-component (52) associated with said inflatable element (50) in said aerodynamic hump (70).
 7. Protective garment (1000) according to any one of the preceding claims, wherein said coupling counter-
- component (52) is arranged in said housing cavity (71) of the aerodynamic hump (70).
8. Protective garment (1000) according to the preceding claim, wherein a portion of said inflatable element (50), fixed to said coupling counter-component (52), is arranged in said housing cavity (71) of the aerodynamic hump (70).
 9. Protective garment (1000) according to any one of the preceding claims, wherein said protective garment (1000) comprises a support plate (30) arranged in said housing cavity (71) of the aerodynamic hump (71) and wherein said support plate (30) comprises a coupling portion (31) configured for a connection with the inflation device (10).
 10. Protective garment (1000) according to the preceding claim, wherein a connection between said coupling portion (31) of the support plate (30) and the inflation device (10) is a mechanical coupling.
 11. Protective garment (1000) according to claim 9 or 10, wherein said container (14) and said support plate (30) are made of rigid material.
 12. Protective garment (1000) according to any one of the preceding claims, comprising a control unit (42) operatively associated with said inflation device (10) for controlling activation of the gas generator (12).
 13. Protective garment (1000) according to the preceding claim, wherein said control unit (42) is arranged inside the housing cavity (71) of the aerodynamic hump (70).
 14. Protective garment (1000) according to the preceding claim in combination with claim 9, 10 or 11, wherein said control unit (42) is associated with said support plate (30) on one side of said inflation device (10).
 15. Protective garment (1000) according to any one of the preceding claims, wherein said housing cavity (71) of said aerodynamic hump further comprises a container for drinkable liquids (60).
 16. Protective garment (1000) according to the preceding claim, wherein said container for drinkable liquids (60) has an arc shape, or a curved shape along an arc trajectory, and wherein the inflation device (10) is positioned inside a concavity formed by the container for drinkable liquids (60).
 17. Protective garment (1000) according to claim 16 in combination with any one of claims 9, 10, 11 or 14, wherein the support plate (30) comprises a passage cavity (32) configured to allow a passage of the con-

tainer for drinkable liquids (60) towards the inside and towards the outside of the housing cavity (71) of the aerodynamic hump (70).

18. Protective garment (1000) according to any one of the preceding claims, wherein said protective garment (1000) is a motorcycle garment or a motorcycle suit.
19. Protective garment (1000) according to any one of the preceding claims, wherein a condition for removal of said inflation device corresponds to a condition for access to the aerodynamic hump from the internal surface of said garment (1000).

Patentansprüche

1. Schutzkleidung (1000) mit einer sichtbaren Außenfläche und einer Innenfläche (80), die geeignet ist, während des Gebrauchs dem Körper eines Benutzers zugewandt zu sein; wobei die Schutzkleidung (1000) ein aufblasbares Element (50) umfasst, das dazu bestimmt ist, zumindest teilweise einen Bereich des Körpers eines Benutzers zu schützen, und eine Aufblasvorrichtung (10), die konfiguriert ist, um das aufblasbare Element (50) aufzublasen, wobei die Schutzkleidung (1000) ferner einen aerodynamischen Höcker (70) umfasst, der konfiguriert ist, um zumindest teilweise einen Bereich auf dem Rücken eines Benutzers zu schützen, und der einen Aufnahmehohlraum (71) definiert, der der Innenfläche (80) zugewandt und konfiguriert ist, um die Aufblasvorrichtung (10) aufzunehmen, wobei die Aufblasvorrichtung (10) mindestens einen Gasgenerator (12) und einen Behälter (14) zum Aufnehmen des mindestens einen Gasgenerators (12) umfasst, wobei der Behälter (14) und der mindestens eine Gasgenerator (12) eine strukturell unabhängige Anordnung definieren und konfiguriert sind, um in Bezug auf das aufblasbare Element (50) als ein einziger Körper gehandhabt zu werden, und wobei die Aufblasvorrichtung (10) eine Kupplungskomponente (18) umfasst und das aufblasbare Element (50) eine Kupplungsgegenkomponente (52) aufweist, wobei die Kupplungskomponente (18) konfiguriert ist, um auf abnehmbare Weise mit der Kupplungsgegenkomponente (52), die dem aufblasbaren Element (50) zugehörig ist, gekoppelt zu werden, **dadurch gekennzeichnet, dass** die Kleidung eine Zugangszone (15) umfasst, die konfiguriert ist, um Zugang zu dem Aufnahmehohlraum (71) zu ermöglichen.
2. Schutzkleidung (1000) nach dem vorstehenden Anspruch, wobei die Schutzkleidung (1000) ein Futter umfasst und die Zugangszone (15) eine im Futter der Kleidung ausgebildete Öffnung ist.

3. Schutzkleidung (1000) nach einem der vorstehenden Ansprüche, wobei der Behälter (14) die Form einer rohrförmigen Schale aufweist, die eine innere Aufnahmekammer (130) zur Aufnahme des Gasgenerators (12) definiert.
4. Schutzkleidung (1000) nach dem vorstehenden Anspruch, wobei der Behälter (14) einen Hauptkörper (231) und eine Verschlussabdeckung (232) für den Hauptkörper (231) aufweist, wobei der Hauptkörper (231) die Form einer rohrförmigen Schale aufweist, die eine innere Aufnahmekammer (230) zur Aufnahme des Gasgenerators (12) definiert, und wobei der Hauptkörper (231) ein erstes offenes Ende (221) aufweist, wobei das erste offene Ende (221) die Kupplungskomponente (18) des Gasgenerators (12) aufnimmt.
5. Schutzkleidung (1000) nach dem vorstehenden Anspruch, wobei der Hauptkörper (231) und die Verschlussabdeckung (232) einstückig miteinander verbunden sind und nur einmal oder irreversibel voneinander gelöst werden können oder durch kalibrierte Bruchmittel verbunden sind.
6. Schutzkleidung (1000) nach einem der vorstehenden Ansprüche, wobei die Kupplungskomponente (18) konfiguriert ist, um mit der dem aufblasbaren Element (50) zugeordneten Kupplungsgegenkomponente (52) in dem aerodynamischen Höcker (70) gekoppelt werden kann.
7. Schutzkleidung (1000) nach einem der vorstehenden Ansprüche, wobei die Kupplungsgegenkomponente (52) in dem Aufnahmehohlraum (71) des aerodynamischen Höckers (70) angeordnet ist.
8. Schutzkleidung (1000) nach dem vorstehenden Anspruch, wobei ein Abschnitt des aufblasbaren Elements (50), das an der Kupplungsgegenkomponente (52) befestigt ist, in dem Aufnahmehohlraum (71) des aerodynamischen Höckers (70) angeordnet ist.
9. Schutzkleidung (1000) nach einem der vorstehenden Ansprüche, wobei die Schutzkleidung (1000) eine Trägerplatte (30) umfasst, die in dem Aufnahmehohlraum (71) des aerodynamischen Höckers (71) angeordnet ist, und wobei die Trägerplatte (30) einen Kupplungsabschnitt (31) umfasst, der für eine Verbindung mit der Aufblasvorrichtung (10) konfiguriert ist.
10. Schutzkleidung (1000) nach dem vorstehenden Anspruch, wobei eine Verbindung zwischen dem Kupplungsabschnitt (31) der Trägerplatte (30) und der Aufblasvorrichtung (10) eine mechanische Kupplung ist.

11. Schutzkleidung (1000) nach Anspruch 9 oder 10, wobei der Behälter (14) und die Trägerplatte (30) aus starrem Material hergestellt sind.
12. Schutzkleidung (1000) nach einem der vorstehenden Ansprüche, umfassend eine Steuereinheit (42), die mit der Aufblasvorrichtung (10) in Wirkverbindung steht, um die Aktivierung des Gasgenerators (12) zu steuern.
13. Schutzkleidung (1000) nach dem vorstehenden Anspruch, wobei die Steuereinheit (42) im Inneren des Aufnahmehohlraums (71) des aerodynamischen Höckers (70) angeordnet ist.
14. Schutzkleidung (1000) nach dem vorstehenden Anspruch in Kombination mit Anspruch 9, 10 oder 11, wobei die Steuereinheit (42) der Trägerplatte (30) auf einer Seite der Aufblasvorrichtung (10) zugehörig ist.
15. Schutzkleidung (1000) nach einem der vorstehenden Ansprüche, wobei der Aufnahmehohlraum (71) des aerodynamischen Höckers ferner einen Behälter für trinkbare Flüssigkeiten (60) aufweist.
16. Schutzkleidung (1000) nach dem vorstehenden Anspruch, wobei der Behälter für trinkbare Flüssigkeiten (60) eine Bogenform oder eine gekrümmte Form entlang einer Bogenbahn aufweist und wobei die Aufblasvorrichtung (10) innerhalb einer durch den Behälter für trinkbare Flüssigkeiten (60) gebildeten Aushöhlung positioniert ist.
17. Schutzkleidung (1000) nach Anspruch 16 in Kombination mit einem der Ansprüche 9, 10, 11 oder 14, wobei die Trägerplatte (30) einen Durchgangshohlraum (32) umfasst, der konfiguriert ist, um einen Durchgang des Behälters für trinkbare Flüssigkeiten (60) zur Innenseite und zur Außenseite des Aufnahmehohlraums (71) des aerodynamischen Höckers (70) hin zu ermöglichen.
18. Schutzkleidung (1000) nach einem der vorstehenden Ansprüche, wobei die Schutzkleidung (1000) eine Motorradkleidung oder ein Motorradanzug ist.
19. Schutzkleidung (1000) nach einem der vorstehenden Ansprüche, wobei eine Bedingung für das Entfernen der Aufblasvorrichtung einer Bedingung für den Zugang zum aerodynamischen Höcker von der Innenfläche der Kleidung (1000) aus entspricht.

Revendications

1. Vêtement de protection (1000) ayant une surface externe visible et une surface interne (80) adaptée

pour faire face, pendant l'utilisation, au corps d'un utilisateur ; le vêtement de protection (1000) comprenant un élément gonflable (50) destiné à protéger au moins partiellement une zone du corps d'un utilisateur et un dispositif de gonflage (10) conçu pour gonfler ledit élément gonflable (50), ledit vêtement de protection (1000) comprenant en outre une bosse aérodynamique (70) conçue pour protéger au moins partiellement une zone du dos d'un utilisateur et définissant une cavité de logement (71) faisant face à ladite surface interne (80) et conçue pour accueillir ledit dispositif de gonflage (10), dans lequel ledit dispositif de gonflage (10) comprend au moins un générateur de gaz (12) et un contenant (14) permettant de contenir ledit au moins un générateur de gaz (12), dans lequel le contenant (14) et l'au moins un générateur de gaz (12) définissent un ensemble structurellement indépendant, et sont conçus pour être manipulés comme un seul corps, par rapport audit élément gonflable (50), et dans lequel le dispositif de gonflage (10) comprend un composant d'accouplement (18) et l'élément gonflable (50) a un contre-composant d'accouplement (52), dans lequel le composant d'accouplement (18) est conçu pour être accouplé de manière amovible avec le contre-composant d'accouplement (52) associé audit élément gonflable (50), **caractérisé en ce que** ledit vêtement comprend une zone d'accès (15) conçue pour permettre l'accès à ladite cavité de logement (71).

2. Vêtement de protection (1000) selon la revendication précédente, dans lequel ledit vêtement de protection (1000) comprend une doublure et ladite zone d'accès (15) est une ouverture formée dans la doublure dudit vêtement.
3. Vêtement de protection (1000) selon l'une quelconque des revendications précédentes, dans lequel ledit contenant (14) a la forme d'une coque tubulaire définissant une chambre de logement interne (130) permettant de loger ledit générateur de gaz (12).
4. Vêtement de protection (1000) selon la revendication précédente, dans lequel ledit contenant (14) comporte un corps principal (231) et un couvercle de fermeture (232) pour ledit corps principal (231), dans lequel le corps principal (231) a la forme d'une coque tubulaire définissant une chambre de logement interne (230) permettant de loger le générateur de gaz (12) et dans lequel le corps principal (231) a une première extrémité ouverte (221), dans lequel ladite première extrémité ouverte (221) loge ledit composant d'accouplement (18) du générateur de gaz (12).
5. Vêtement de protection (1000) selon la revendication précédente, dans lequel ledit corps principal (231) et ledit couvercle de fermeture (232) sont as-

- semblés en une seule pièce et ne peuvent être détachés l'un de l'autre qu'une seule fois ou de manière irréversible ou sont reliés par des moyens de rupture calibrés.
6. Vêtement de protection (1000) selon l'une quelconque des revendications précédentes, dans lequel ledit composant d'accouplement (18) est conçu pour être accouplé avec le contre-composant d'accouplement (52) associé audit élément gonflable (50) dans ladite bosse aérodynamique (70). 5
7. Vêtement de protection (1000) selon l'une quelconque des revendications précédentes, dans lequel ledit contre-composant d'accouplement (52) est disposé dans ladite cavité de logement (71) de la bosse aérodynamique (70). 10
8. Vêtement de protection (1000) selon la revendication précédente, dans lequel une partie dudit élément gonflable (50), fixée audit contre-composant d'accouplement (52), est disposée dans ladite cavité de logement (71) de la bosse aérodynamique (70). 15
9. Vêtement de protection (1000) selon l'une quelconque des revendications précédentes, dans lequel ledit vêtement de protection (1000) comprend une plaque de support (30) disposée dans ladite cavité de logement (71) de la bosse aérodynamique (71) et dans lequel ladite plaque de support (30) comprend une partie d'accouplement (31) conçue pour une liaison avec le dispositif de gonflage (10). 20
10. Vêtement de protection (1000) selon la revendication précédente, dans lequel la liaison entre ladite partie d'accouplement (31) de la plaque de support (30) et le dispositif de gonflage (10) est un accouplement mécanique. 25
11. Vêtement de protection (1000) selon la revendication 9 ou 10, dans lequel ledit contenant (14) et ladite plaque de support (30) sont faits d'un matériau rigide. 30
12. Vêtement de protection (1000) selon l'une quelconque des revendications précédentes, comprenant une unité de commande (42) associée de manière fonctionnelle audit dispositif de gonflage (10) permettant de commander l'activation du générateur de gaz (12). 35
13. Vêtement de protection (1000) selon la revendication précédente, dans lequel ladite unité de commande (42) est disposée à l'intérieur de la cavité de logement (71) de la bosse aérodynamique (70). 40
14. Vêtement de protection (1000) selon la revendication précédente en combinaison avec la revendication 9, 10 ou 11, dans lequel ladite unité de commande (42) est associée à ladite plaque de support (30) sur un côté dudit dispositif de gonflage (10). 45
15. Vêtement de protection (1000) selon l'une quelconque des revendications précédentes, dans lequel ladite cavité de logement (71) de ladite bosse aérodynamique comprend en outre un contenant pour liquides buvables (60). 50
16. Vêtement de protection (1000) selon la revendication précédente, dans lequel ledit récipient pour liquides buvables (60) a une forme d'arc, ou une forme incurvée le long d'une trajectoire d'arc, et dans lequel le dispositif de gonflage (10) est positionné à l'intérieur d'une concavité formée par le contenant pour liquides buvables (60). 55
17. Vêtement de protection (1000) selon la revendication 16 en combinaison avec l'une quelconque des revendications 9, 10, 11 ou 14, dans lequel la plaque de support (30) comprend une cavité de passage (32) conçue pour permettre un passage du contenant pour liquides buvables (60) vers l'intérieur et vers l'extérieur de la cavité de logement (71) de la bosse aérodynamique (70).
18. Vêtement de protection (1000) selon l'une quelconque des revendications précédentes, dans lequel ledit vêtement de protection (1000) est un vêtement de moto ou une combinaison de moto.
19. Vêtement de protection (1000) selon l'une quelconque des revendications précédentes, dans lequel une condition de retrait dudit dispositif de gonflage correspond à une condition d'accès à la bosse aérodynamique depuis la surface interne dudit vêtement (1000).

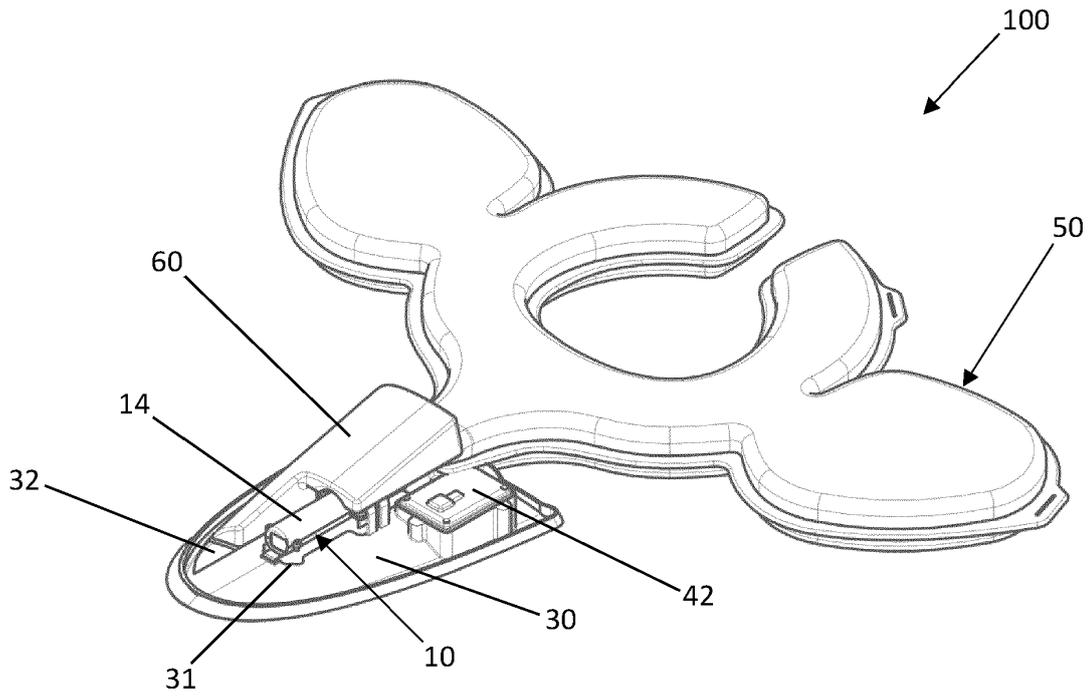


FIG. 1

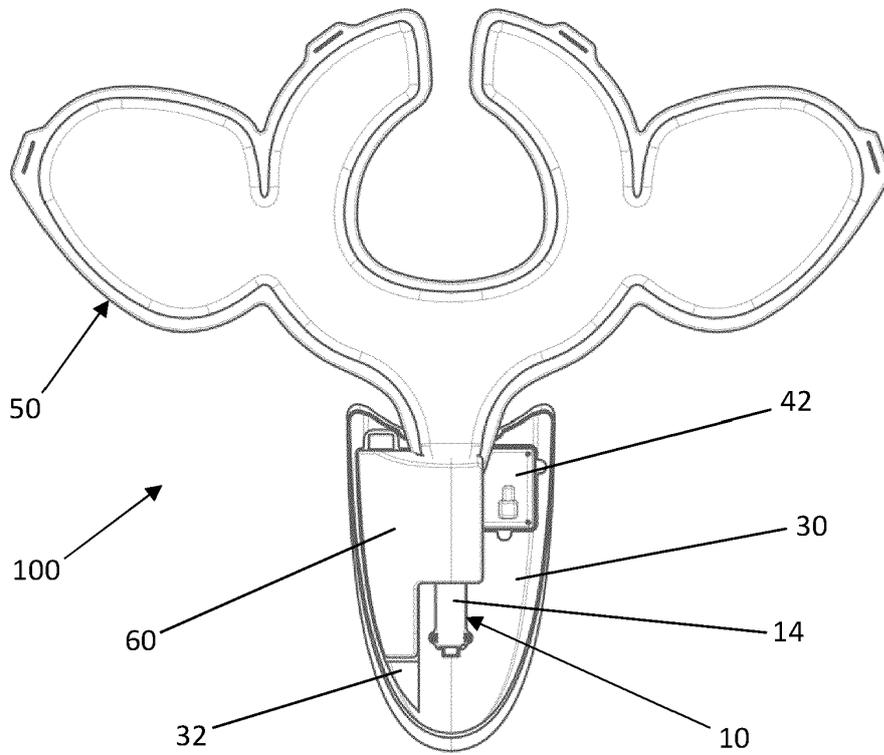


FIG. 2

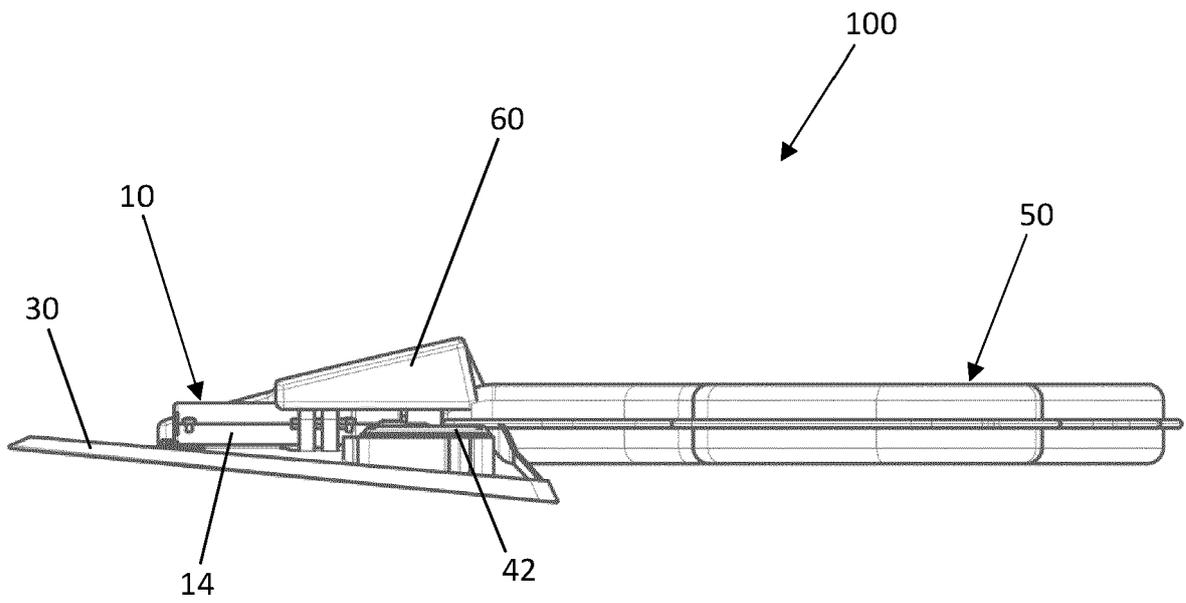


FIG. 3

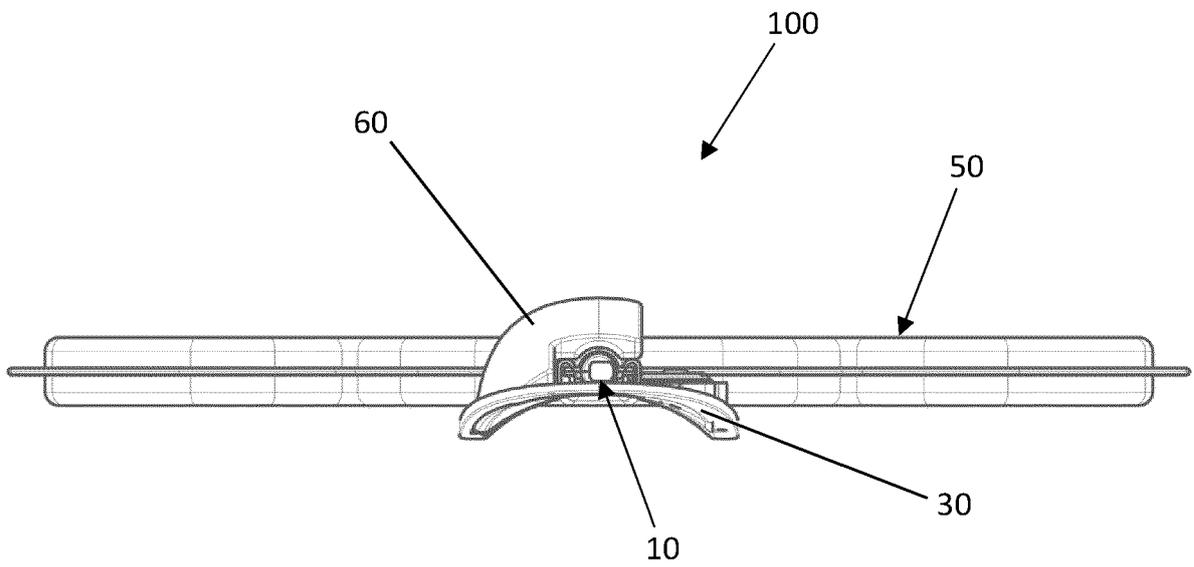


FIG. 4

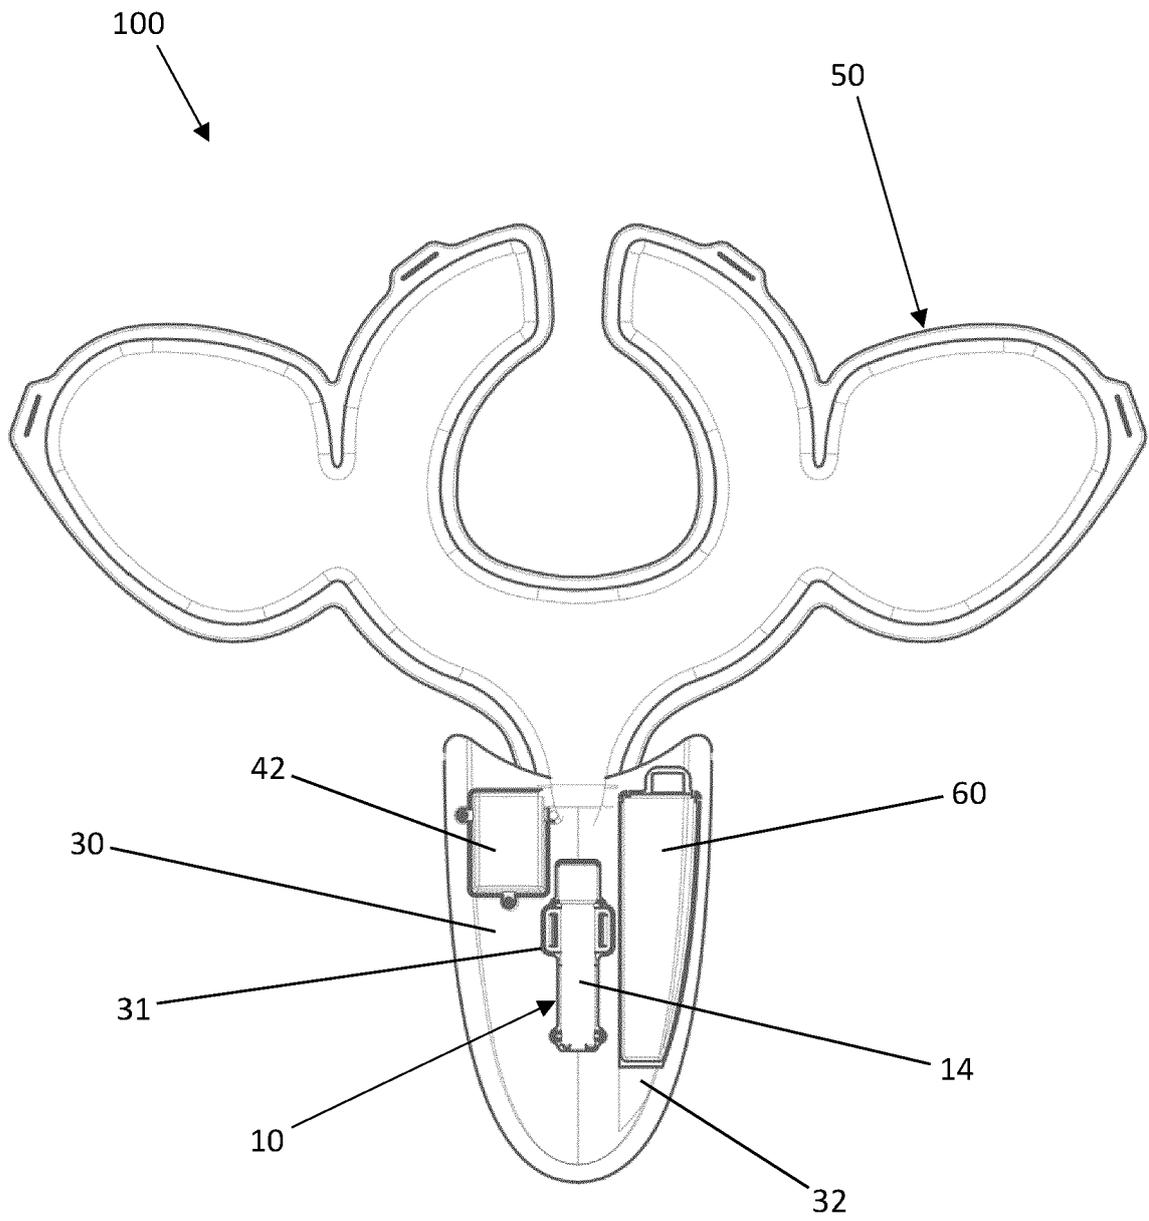


FIG. 5

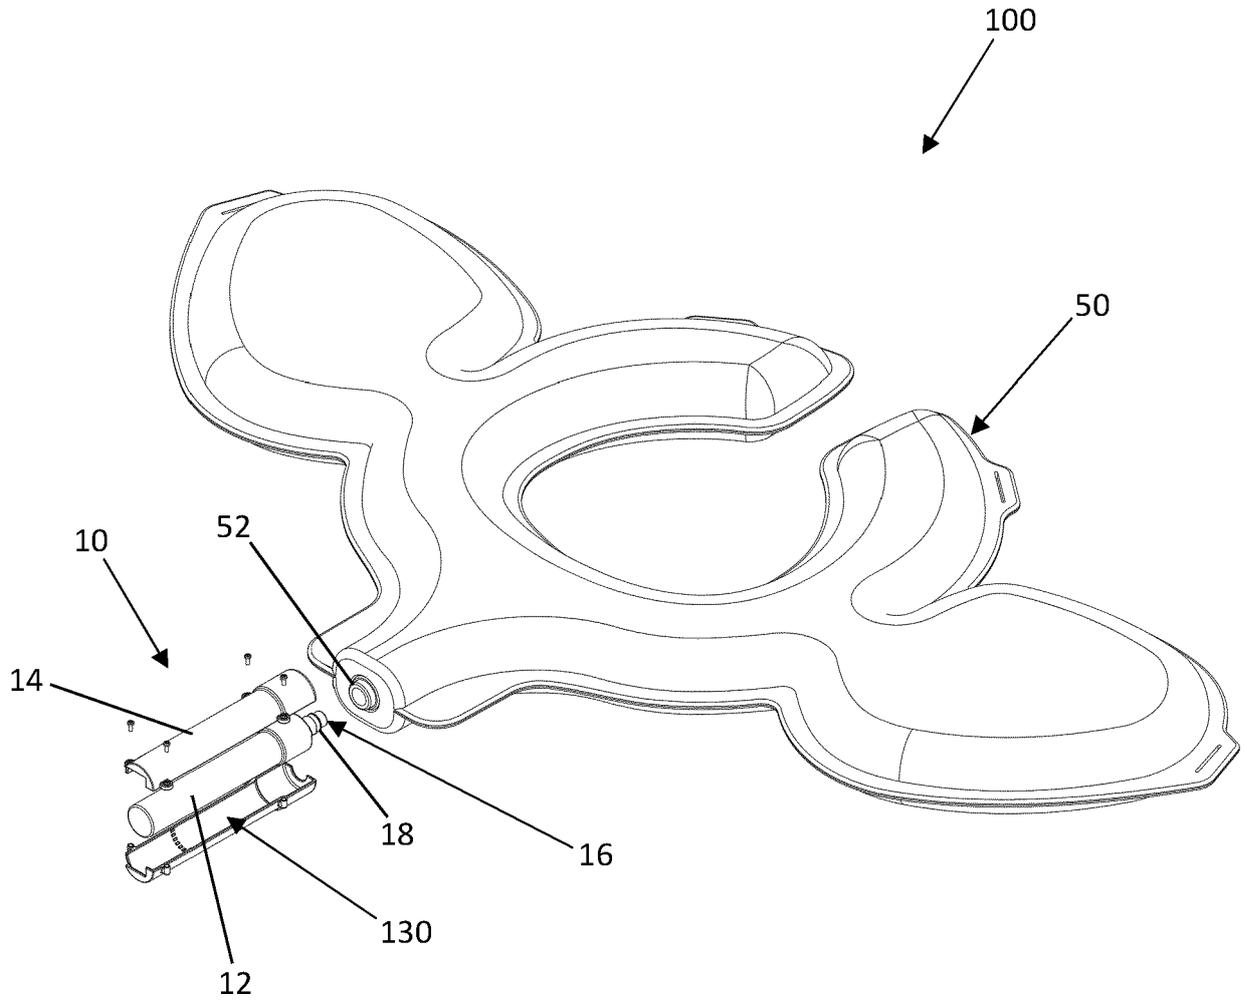


FIG. 6a

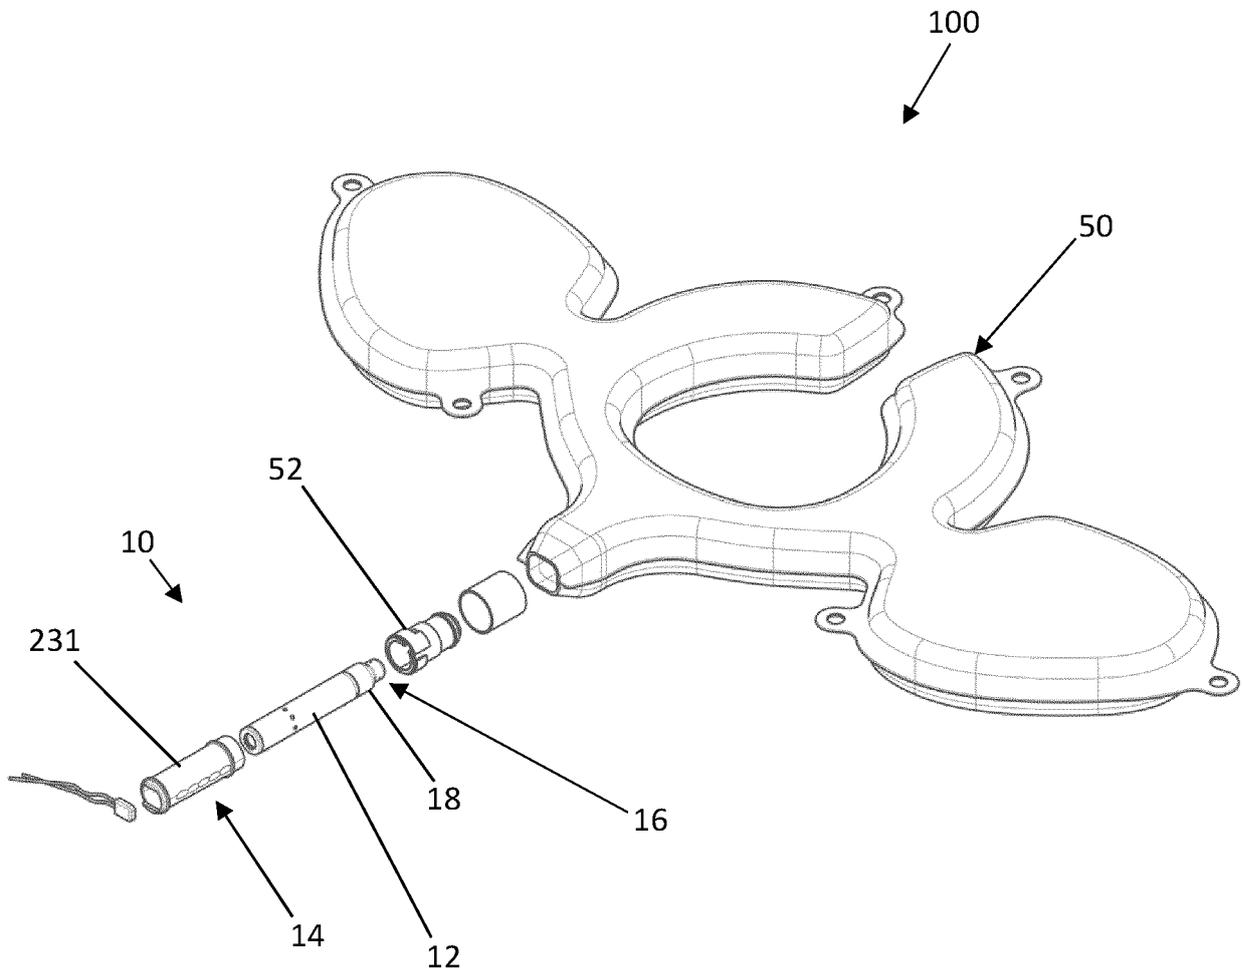


FIG. 6b

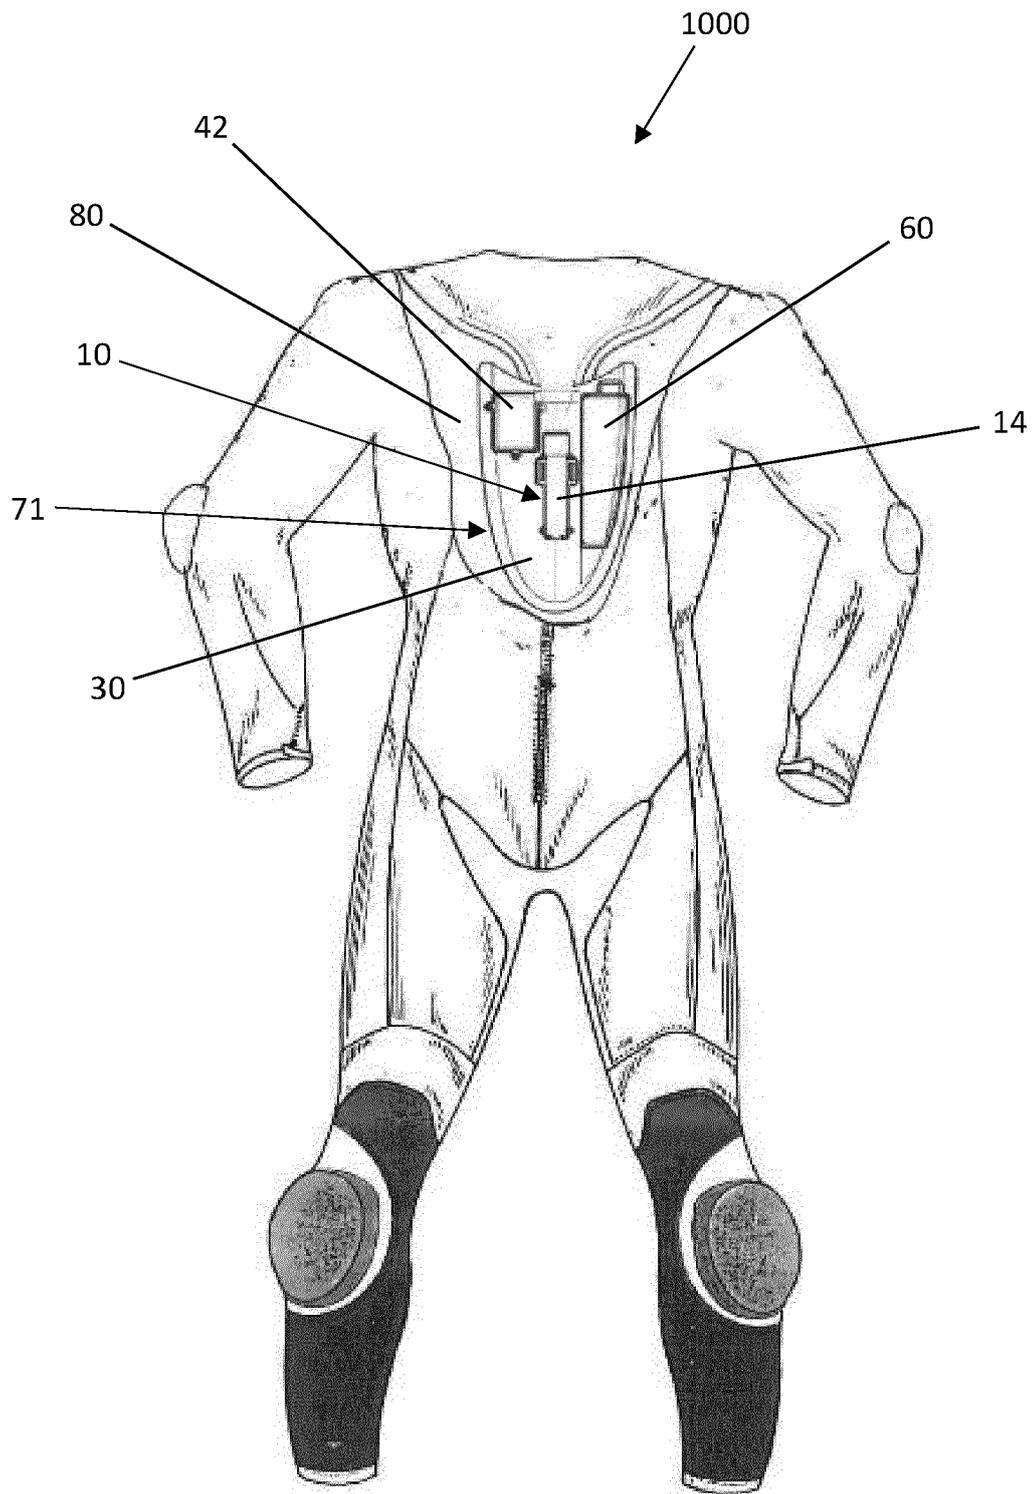


FIG. 7

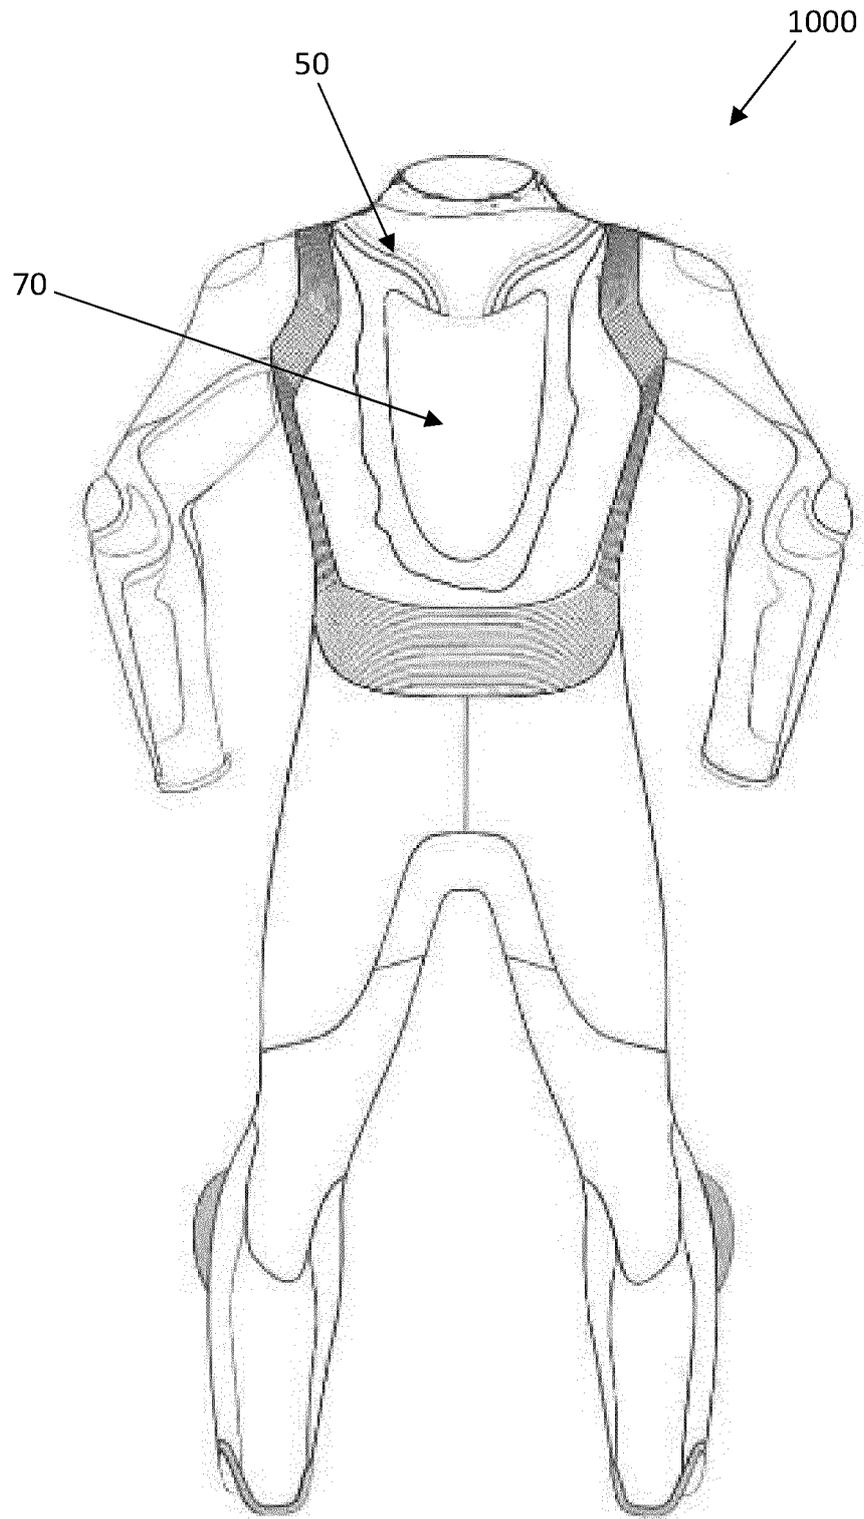


FIG. 8

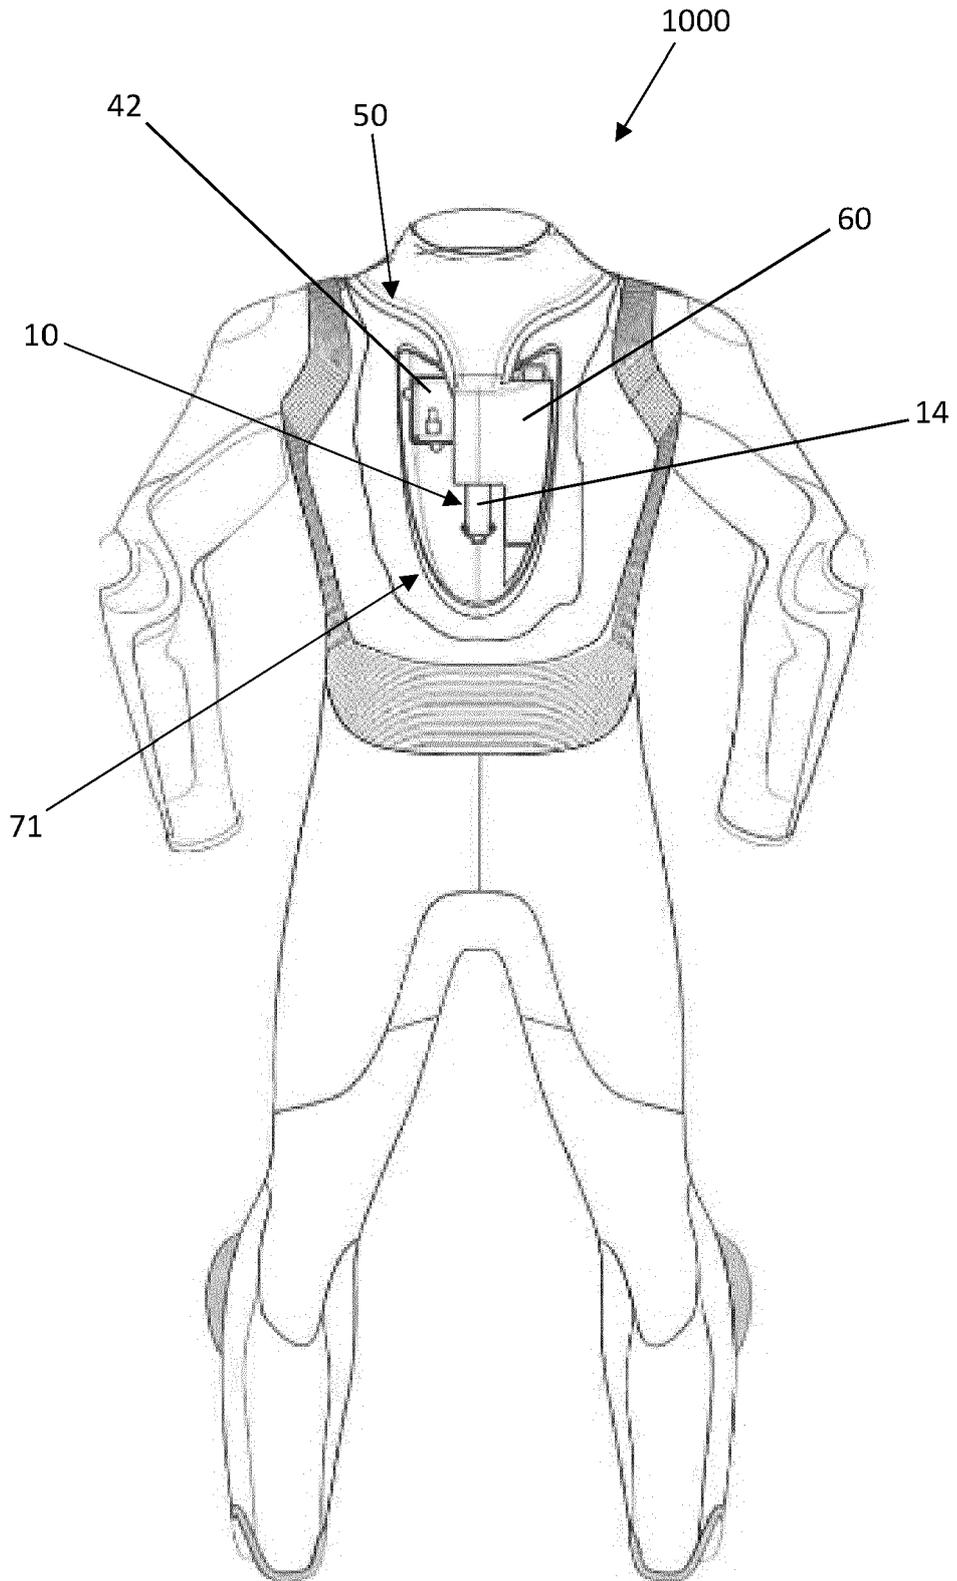


FIG. 9

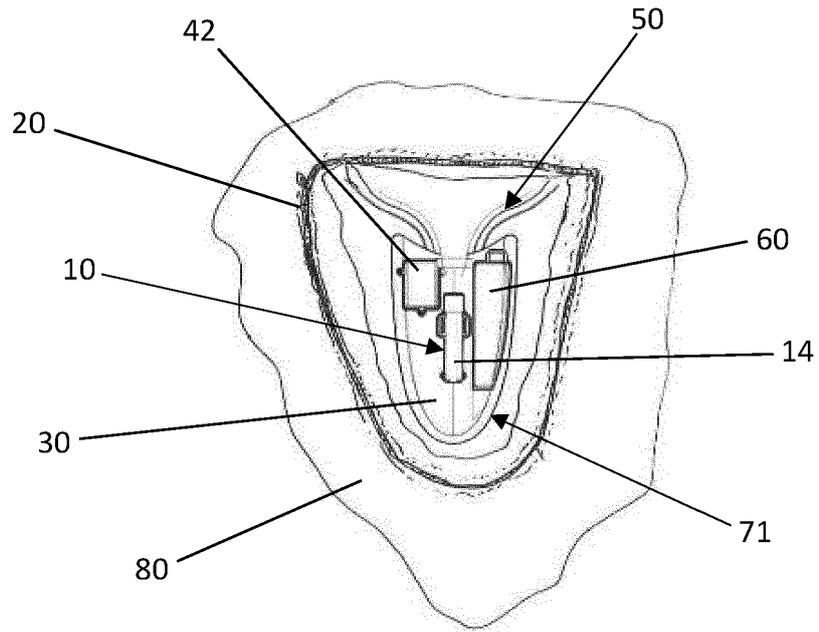


FIG. 10

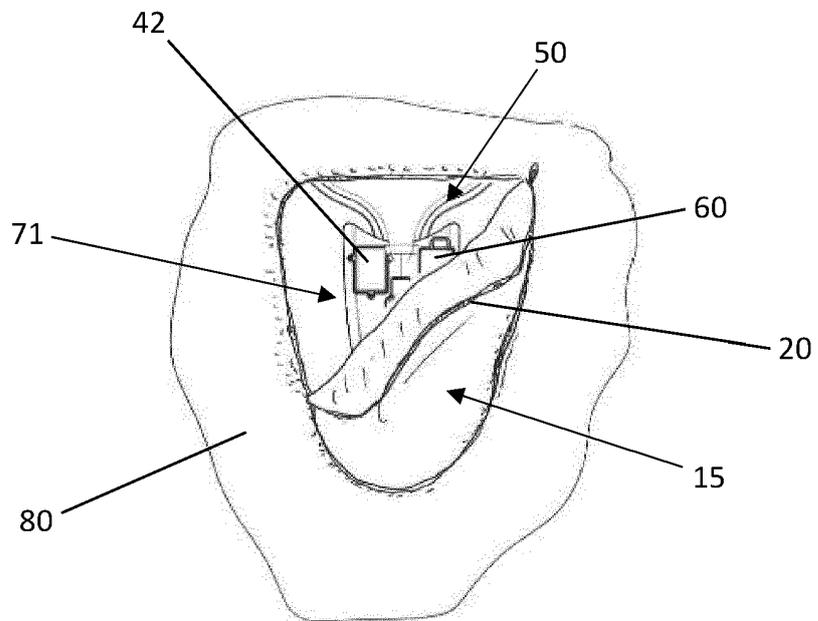


FIG. 11

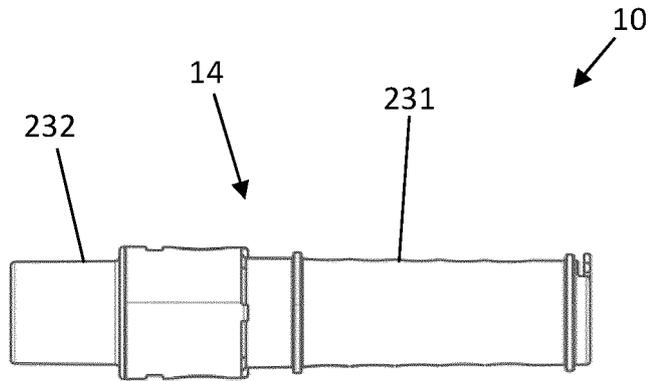


FIG. 12a

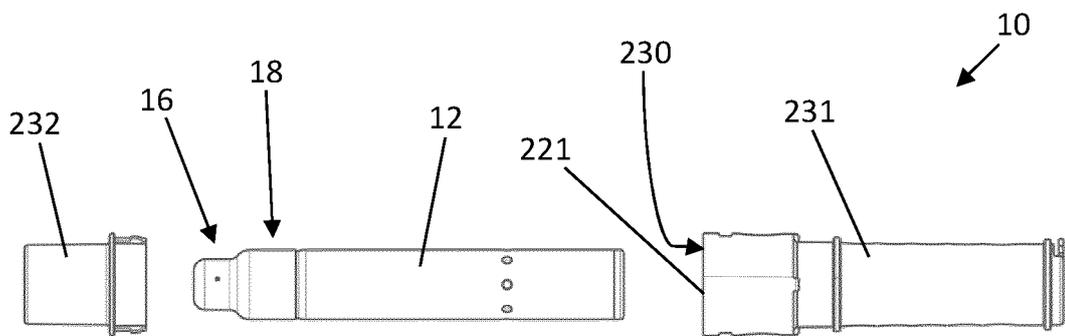


FIG. 12b

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2939555 A1 [0004]
- US 20080235854 A1 [0004]
- US 6298487 B1 [0004]
- DE 19703805 A1 [0004]
- EP 3704981 A1 [0004]