

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 199965446 B2**
(10) Patent No. **760880**

(54) Title
Positive engagement-disengagement catheter sleeve

(51)⁶ International Patent Classification(s)
A61M 025/16 A61M 025/00

(21) Application No: 199965446 (22) Application Date: 1999 . 12 . 22

(30) Priority Data

(31) Number (32) Date (33) Country
09/222573 1998 . 12 . 28 US

(43) Publication Date : 2000 . 06 . 29
(43) Publication Journal Date : 2000 . 06 . 29
(44) Accepted Journal Date : 2003 . 05 . 22

(71) Applicant(s)
Ethicon, Inc.

(72) Inventor(s)
Joseph J. Chang; Cathy J. Myers; Mark A. Panzera

(74) Agent/Attorney
FREEHILLS CARTER SMITH BEADLE,Level 43,101 Collins
Street,MELBOURNE VIC 3000

(56) Related Art
US 4573981
US 4790827




AUSTRALIA

Patents Act 1990

**COMPLETE SPECIFICATION
FOR A STANDARD PATENT**

ORIGINAL



Name of Applicant:	ETHICON, INC.
Actual Inventors:	Joseph J. CHANG, Cathy J. MYERS and Mark A. PANZERA
Address for service in Australia:	CARTER SMITH & BEADLE 2 Railway Parade Camberwell Victoria 3124 Australia
Invention Title:	POSITIVE ENGAGEMENT-DISENGAGEMENT CATHETER SLEEVE

The following statement is a full description of this invention, including the best method of performing it known to us

ABSTRACT

A positive engagement/disengagement catheter sleeve (10) to reduce risks of needle sticks. The sleeve has a base (11) and a body (13) which define a pair of grooves (12). The grooves define a deformable region (14) of the sleeve therebetween. At least one detent (18, 20) is provided inside the base within the deformable region. A mechanism is provided to cause the detent to disengage when the mechanism is actuated.



BACKGROUND

(1) Field of the Invention


The invention relates to catheters. More specifically, the invention relates to
5 a sleeve that positively engages an introducer to reduce the risk of unintentional
needle sticks.

(2) Background

Catheters and sleeves therefor have been ubiquitous in the medical supplies
market for some time. A typical catheter assembly arrives in sterile packaging and
10 comprises a catheter, the introducer, and a sleeve. The purpose of the sleeve is to
protect the needle tip during shipping and to prevent unintentional needle sticks as
the catheter and introducer are removed from the sterile packaging. To that end,
the sleeve needs to have sufficient retention force that it does not unintentionally
become disengaged from the introducer as the sterile packaging is removed.
15 However, if the retention force is too great, the incidence of needle pricks in the
course of removing the sleeve actually increases. By way of example, a user typically
grabs the sleeve in one hand and the introducer in the other, then pulling the
sleeve in one direction and the introducer in the opposite direction, when the
introducer snaps free, the arms of the user recoil, causing the user to inadvertently
20 stick themselves. This has been an area of substantial concern.

One common way of retaining the sleeve on the introducer is to mold three
detents into the sleeve to engage an annular flange on the introducer. This works
adequately for certain types of catheters. However, catheters have been developed
that have wings that permit the catheter to be more easily secured to a patient after
25 introduction. These wings necessitate grooves in the sleeve to accommodate the
wings while the catheter is sleeved. With the introduction of the grooves, the

structural integrity of the sleeve is such that disengagement from the detents is highly likely, as only a very loose hold is possible. Attempts to accommodate this problem by increasing the size of the detent between the grooves has resulted in cases of both an unreliable hold and too strong a hold, both resulting in increased risk for unintentional needle sticks.



BRIEF SUMMARY OF THE INVENTION

A positive engagement/disengagement catheter sleeve to reduce risks of needle sticks is disclosed. The sleeve has a base and a body which define a pair of slots. The slots define a deformable region of the sleeve therebetween. At least one detent is provided inside the base within the deformable region. A mechanism is provided to cause the detent to disengage when the mechanism is actuated.



BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of a catheter with introducer and sleeve of one embodiment of the invention.

5 Figure 2 is a perspective view of the sleeve of the embodiment of Figure 1.

Figure 3 is a partial cross-section view of the catheter assembly and sleeve of the embodiment of Figure 1.

Figure 4 is a partial sectional view of a sleeve and catheter assembly of Figure 3 with the arm depressed, thus releasing the detent.

10

Figure 5 is a perspective view of an alternative embodiment of the invention.

Figure 6 is a partial cross-sectional view of the sleeve of Figure 5 with a catheter assembly inserted therein.

Figure 7 is a partial sectional view of a third alternative embodiment of the sleeve installed on a catheter assembly.

10

10

10

10

10

10

10

10

10

10

10

10

10

DETAILED DESCRIPTION

Figure 1 is a perspective view of a catheter with introducer and sleeve of one embodiment of the invention. The catheter 22 is coupled to a catheter hub 26. Hub 26 has wings 24 formed as part thereof. Introducer 30 has an annular flange 28 as part thereof to engage sleeve 10. Sleeve 10 has a pair of grooves or slots 12 disposed to receive the wings 24 of catheter hub 26. Sleeve 10 has a base 11 at an insertion end and a body 13 terminating in a distal end. The grooves define a deformable region 14 therebetween. Attached to the deformable region 14 is an arm 16. Arm 16 has a first end where it attaches to the deformable region 16 and a free end down the sleeve from the base. Pressure on the arm 16 at its distal end causes the deformable region at the base to move away from an axis of the sleeve.

Figure 2 is a perspective view of the sleeve of the embodiment of Figure 1. A plurality of detents 18, 20 are disposed within base 11. While only two of the detents are shown in the figure, a third detent is typically positioned symmetrically on the base 11 across from the detent 20. Detent 18 is disposed on deformable region 14 between grooves 12 on the base 11. The detents 18, 20 engage the annular flange (28 of Figure 1) when the introducer 30 is seated in the sleeve 10. Because the grooves 12 reduce the structural integrity, in some embodiments, it may be necessary to make detent 18 larger than detents 20 to ensure engagement even if the flexibility caused by the grooves 12 results in deformable region 14 holding less tightly against the annular flange 28. Notably, even with grooves 12, sleeve 10 would be suitable for a wingless catheter provided that the detents 18, 20 provide sufficient holds so that the sleeve 10 does not easily become unintentionally disengaged.

Figure 3 is a partial cross-section view of the catheter assembly and sleeve of the embodiment of Figure 1. As shown in Figure 1, detent 18 engages annular

flange 28, and the wings 24 are seated in the slot 12 such that pressure on the distal end of arm 16 results in maximum translation away from the axis of the sleeve 10. Arm 16 has a thickness 40, which is greater than the distance 42 between the arm 16 and the body 13 of sleeve 10. In one embodiment, the arm 16 is approximately
5 aligned with detent 18. By keeping the distance between the arm 16 and the body 13 of the sleeve, less than the thickness of the arm, inadvertent nesting, or interlocking of sleeves during manufacture is prevented.

Figure 4 is a partial sectional view of a sleeve and catheter assembly of Figure 3 with the arm depressed, thus releasing the detent. In this view, pressure is shown
10 as being applied to the distal end of arm 16, thereby releasing the engagement of detent 18 from annular flange 28. Once detent 18 releases annular flange 28, the remaining detents 20 provide little or no holding force and the catheter assembly may be easily withdrawn from the sleeve without the recoil risk present in the prior art.

Figure 5 is a perspective view of an alternative embodiment of the invention. Sleeve 60 has a base 61 coupled to a shaft 63, and a pair of grooves 62 define a
15 deformable region 64 therebetween. A thin or flexible region 66 is provided partway down the deformable region 64. Flexible region 66 is flexible relative to the remainder of deformable region 64. This may be accomplished by making flexible region 66 of the same material as the rest of the deformable region 64, only thinner. Alternatively, different material having different rigidities may be used. The
20 detents (not shown) within the base 61 are as previously described.

Figure 6 shows a partial cross-sectional view of the sleeve of Figure 5 with a catheter assembly inserted therein. Pressure on the deformable region 64 distal to
25 the thin region 66 causes detent 68 on the base within the deformable region to translate away from the axis of the sleeve and disengage from annular flange 28 of the introducer 30.

Figure 7 is a partial sectional view of a third alternative embodiment of the sleeve installed on a catheter assembly. This embodiment is similar to the embodiment of Figures 5 and 6, except that a pivot protrusion 86 is provided on the inner surface of the sleeve within the deformable region 84. The pivot protrusion 86 contacts the catheter hub, such that pressure on the deformable region 84 distal to the pivot protrusion 86 causes the deformable region 84 to act like a teeter-totter about the pivot protrusion, such that the detent 88 translates away from the axis of the sleeve and disengages from annular flange 28.

Each of the described embodiments permits the introducer catheter assembly to be withdrawn from the sleeve with little or no resistance. The sleeve could be injection molded or formed in any other conventional means. In one embodiment, the entry sleeve is integrally formed as one continuous unit. Notably, the sleeves described above with the grooves, are suitable for many types of catheters, including both winged and wingless catheters. Thus, a single sleeve design can be used for a wide variety of different catheters, thereby reducing the tooling and manufacturing costs which would otherwise be necessary to produce the several different sleeve types.

In the foregoing specification, the invention has been described with reference to specific embodiments thereof. It will, however, be evident that various modifications and changes can be made thereto without departing from the broader spirit and scope of the invention as set forth in the appended claims. The specification and drawings are, accordingly, to be regarded in an illustrative rather than a restrictive sense. Therefore, the scope of the invention should be limited only by the appended claims.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. An apparatus for housing a catheter comprising:

a sleeve having a body portion at a distal end and a base at an insertion end, the sleeve and base defining two slots at the insertion end, the slots along the two sides of a deformable region of the sleeve;

a shoulder portion disposed in said base wherein the passageway through the sleeve narrows towards the distal end at said shoulder portion;

a plurality of detents disposed on an inside of the base, the plurality of detents to engage an annular flange of the catheter; and

an arm coupled to the sleeve between the slots and approximately aligned with one detent of the plurality of detents.

2. The apparatus of claim 1 wherein the arm is coupled to the deformable region at a first end adjacent to the base and has a free end more distant from the base along the sleeve.

3. The apparatus of claim 1 wherein the apparatus is integrally formed as a single unit.

4. The apparatus of claim 2 wherein the arm has a thickness and wherein a gap between the arm and the deformable region is less than the thickness of the arm.

5. The apparatus of claim 1 wherein the plurality of detents define vertices of the triangle, with one vertex located on the base between the slots.

6. A catheter sleeve comprising:

a base at an insertion end;

a body coupled to the base and extending therefrom a distal end, the body and the base defining a first slot and a second slot;

a shoulder portion disposed in said base wherein the passageway in the sleeve narrows towards the distal end at said shoulder portion;

a first detent disposed on the inside of the base between the first slot and the second slot; and

means for releasing the first detent from an engagement position.

7. The catheter sleeve of claim 6 wherein the means for releasing comprises:

an arm adjacent to the base coupled between the slots and extending toward the distal end of the body, a free end of the arm separated from the body by a gap.

8. The catheter sleeve of claim 7 wherein the arm has a thickness and wherein the gap is less than the thickness.

9. The catheter sleeve of claim 6 wherein the means for releasing comprises:

a stiff region between the grooves adjacent to the base; and

a flexible region between the slots adjacent to the stiff region and remote from the base.

10. The catheter sleeve of claim 6 wherein the means for releasing comprises:

a pivot protrusion disposed between the slots within the body, the pivot protrusion to contact a hub of a catheter when a catheter is within the sleeve, such that pressure applied between the slots and distal to the pivot protrusion causes the first detent to translate away from an annular flange of an introducer.

11. Apparatus for housing a catheter substantially as hereinbefore described with reference to the accompanying drawings.


12. A catheter sleeve substantially as hereinbefore described with reference to the accompanying drawings.

Dated: 20 February 2003

FREEHILLS CARTER SMITH BEADLE
Patent Attorneys for the Applicant:

ETHICON, INC.

000000 000000

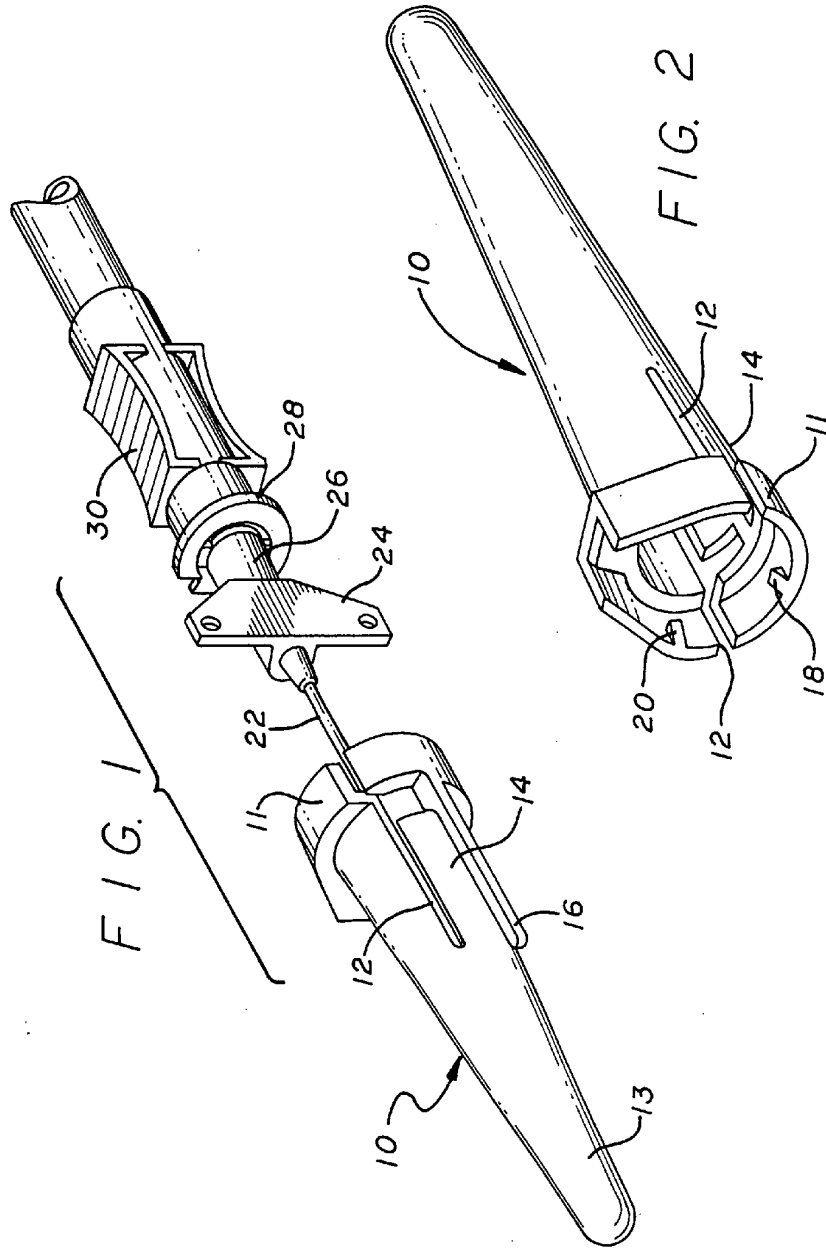

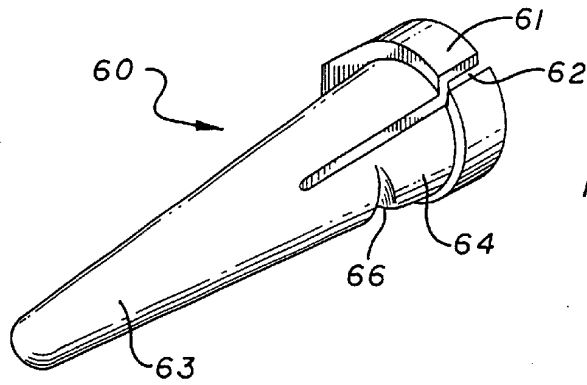


FIG. 5

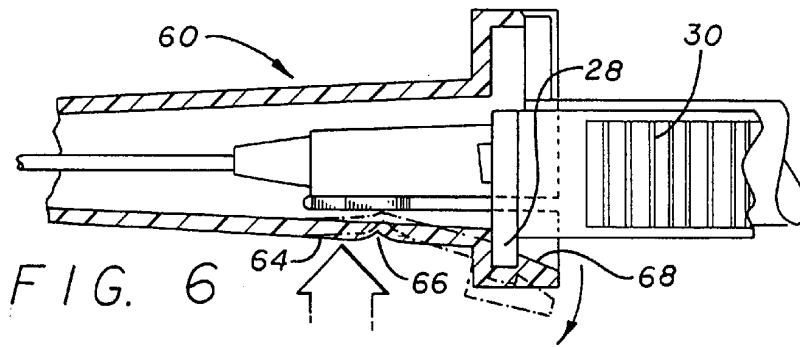


FIG. 6

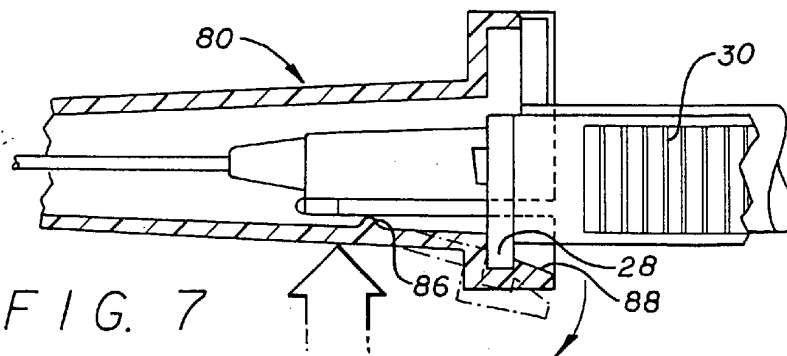


FIG. 7

3000000