



(51) International Patent Classification:

*F02B 39/14* (2006.01) *F01D 25/18* (2006.01)  
*F02B 39/00* (2006.01) *F01D 25/16* (2006.01)

(21) International Application Number:

PCT/US2012/031792

(22) International Filing Date:

2 April 2012 (02.04.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10 2011 016 916.4 13 April 2011 (13.04.2011) DE

(71) Applicant (for all designated States except US):

**BORGWARNER INC.** [US/US]; Patent Department,  
3850 Hamlin Road, Auburn Hills, Michigan 48326 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HORNBACH, Jo-**  
**hannes** [DE/DE]; Fontanesistrasse 8, 67227 Frankenthal  
(DE).

(74) Agents: **PENDORF, Stephan A.** et al.; Patent Central

LLC, 1401 Hollywood Boulevard, Hollywood, Florida  
33020-5237 (US).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,  
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,  
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,  
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,  
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,  
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,  
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,  
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU,  
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,  
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,  
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,  
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a  
patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the  
earlier application (Rule 4.17(iii))
- of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: EXHAUST-GAS TURBOCHARGER

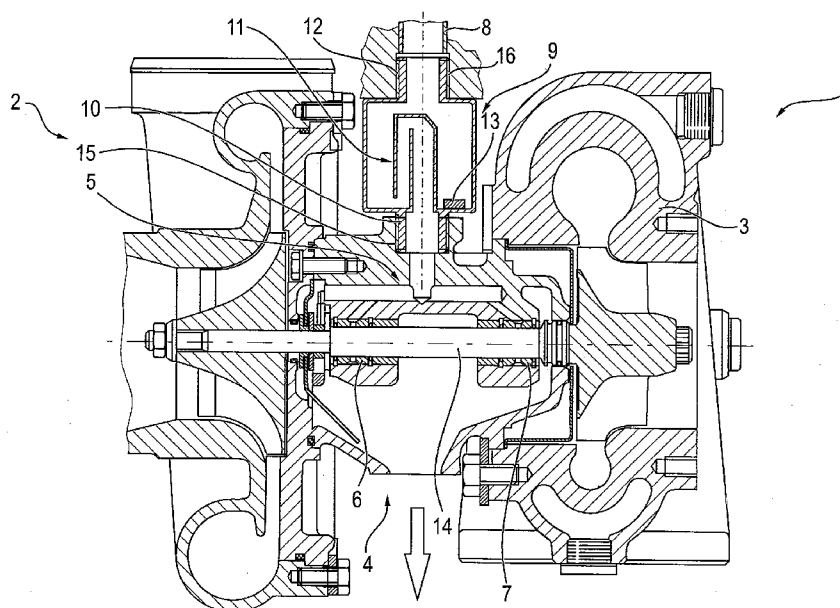


FIG. 1

(57) Abstract: The invention relates to an exhaust-gas turbocharger (1) having a compressor (2); having a turbine (3); and having a bearing housing (4) which has a lubricant device (5) for shaft bearings (6, 7), which lubricant device can be connected via a lubricant feed line (8) to an engine lubricant circuit, wherein a lubricant storage vessel (9) is connected between the lubricant feed line (8) and the lubricant device (5) of the bearing housing (4).



---

**Published:**

- *without international search report and to be republished  
upon receipt of that report (Rule 48.2(g))*

- 1 -

## EXHAUST-GAS TURBOCHARGER

## DESCRIPTION

5           The invention relates to an exhaust-gas turbocharger as per the preamble of claim 1.

          During a cold start of an engine equipped with an exhaust-gas turbocharger, there can be relatively long delays in the supply of oil to the bearing arrangement of the bearing housing of the turbocharger. As a result of long and unfavorably laid lines, 10 there is the risk of the turbocharger initially running without lubrication. This can be exacerbated at sub-zero temperatures in that the oil is viscous or solid, and the supply of oil is further delayed or the rotor seizes. Wear phenomena owing to deficient lubrication may also arise during the shut-down of the engine, as a result of afterrunning of the rotor.

15           It is therefore an object of the present invention to provide an exhaust-gas turbocharger of the type specified in the preamble of claim 1, which makes it possible to eliminate the problems, explained in the introduction, during cold start and during afterrunning.

          Said object is achieved by means of the features of claim 1.

20           By virtue of the fact that an additional oil storage vessel is connected between the lubricant feed line and the lubricant device of the bearing housing, it is possible for an oil store to be provided in the direct vicinity of the bearing arrangement, which oil store can supply the required oil quantity to the bearing arrangements without a time delay during a cold start and during afterrunning. When a pressure prevails in the 25 lubricant feed line, the lubricant (oil) is forced out of the oil storage vessel into the bearing housing.

          The subclaims relate to advantageous refinements of the invention.

          If the oil storage vessel is formed as a separate component which can be mounted, preferably screwed onto the bearing housing, retrofitting of exhaust-gas 30 turbochargers is also possible without technical problems, because it is necessary merely for the lubricant feed line to be relocated upward by the height of the oil storage vessel.

          The oil storage vessel preferably has a siphon via which the lubricant can be forced into the bearing housing when an adequate lubricant pressure prevails.

35           It is furthermore possible for a heating element (for example in the form of a heating foil or a heating rod) to be integrated in the lubricant vessel. In this way, the lubricant can be pre-heated by the engine controller and also accelerate the breakaway of the shaft assembly, or enable said breakaway before the starting of the engine.

- 2 -

Further details, advantages and features of the present invention will emerge from the following description of an exemplary embodiment on the basis of the drawing, in which:

Figure 1 shows a sectional illustration through an exhaust-gas turbocharger according to the invention, and

Figure 2 shows a schematically highly simplified perspective diagrammatic illustration of a lubricant vessel of the exhaust-gas turbocharger according to the invention.

Figure 1 illustrates an exhaust-gas turbocharger 1 according to the invention which has a compressor 2 and a turbine 3. Arranged between the compressor 2 and turbine 3 is a bearing housing 4. The bearing housing 4 has a lubricant device 5 for shaft bearings 6 and 7 of a rotor shaft 14. In the particularly preferred embodiment illustrated in Figure 1, a lubricant storage vessel (oil storage vessel) 9 is connected between a lubricant feed line 8, which leads from the engine oil circuit, and the lubricant device 5 of the bearing housing 4. For this purpose, the lubricant vessel 9 has an oil feed connector 10 which, in the example, is provided with an external thread 15 which is screwed into a corresponding internal thread of the bearing housing 4. The lubricant storage vessel 9 is connected to the lubricant feed line 8 via a line port 12 which, in the example, has an internal thread 16 which interacts with a corresponding external thread of the lubricant feed line 8, such that after the above-described assembly has taken place, the lubricant device 5 of the bearing housing 4 is flow-connected to the lubricant feed line 8 via the lubricant storage vessel 9.

As can be seen from Figures 1 and 2 viewed together, there is arranged in the interior of the lubricant storage vessel 9 a siphon 11 via which, when pressure is exerted (symbolized in Figure 2 by the arrows P), lubricant, in particular oil, is forced into the lubricant device 5 of the bearing housing 4. Since the lubricant storage vessel 9 is arranged directly on the bearing housing 4, the distance that the supplied lubricant (oil) must cover to reach the bearings 6, 7 is shortened considerably, such that the problems during a cold start or during the afterrunning of the charger, as mentioned in the introduction, can be eliminated through the provision of the lubricant storage vessel 9.

To possibly pre-heat the oil, the lubricant vessel 9 can be provided with a heating element which is symbolized in Figure 1 by the block 13.

In addition to the above written disclosure of the invention, reference is hereby explicitly made, to supplement said disclosure, to the illustration of the invention in Figures 1 and 2.

- 3 -


## LIST OF REFERENCE SYMBOLS

|    |      |                          |
|----|------|--------------------------|
|    | 1    | Exhaust-gas turbocharger |
|    | 2    | Compressor               |
| 5  | 3    | Turbine                  |
|    | 4    | Bearing housing          |
|    | 5    | Lubricant device         |
|    | 6, 7 | Shaft bearings           |
|    | 8    | Lubricant feed line      |
| 10 | 9    | Lubricant storage vessel |
|    | 10   | Lubricant feed connector |
|    | 11   | Siphon                   |
|    | 12   | Line port                |
|    | 13   | Heating element          |
| 15 | 14   | Rotor shaft              |
|    | 15   | External thread          |
|    | 16   | Internal thread          |
|    | P    | Pressure arrows          |

- 4 -

## CLAIMS

1. An exhaust-gas turbocharger (1)  
- having a compressor (2);  
5 - having a turbine (3); and  
- having a bearing housing (4) which has a lubricant device (5) for shaft bearings (6, 7), which lubricant device can be connected via a lubricant feed line (8) to an engine lubricant circuit,  
wherein  
10 - a lubricant storage vessel (9) is connected between the lubricant feed line (8) and the lubricant device (5) of the bearing housing (4).
2. The exhaust-gas turbocharger as claimed in claim 1, wherein the lubricant storage vessel (9) is mounted on the bearing housing (4).  
15
3. The exhaust-gas turbocharger as claimed in claim 1 or 2, wherein the lubricant storage vessel (9) has a feed connector (10) which is screwed into the bearing housing (4).
- 20 4. The exhaust-gas turbocharger as claimed in one of claims 1 to 3, wherein the lubricant storage vessel has a line port (12) which can be connected to the lubricant feed line (8).
5. The exhaust-gas turbocharger as claimed in one of claims 1 to 4,  
25 wherein the lubricant storage vessel (9) has a siphon (11).
6. The exhaust-gas turbocharger as claimed in one of claims 1 to 5, wherein the lubricant storage vessel (9) is provided with at least one heating element (13).  
30
7. A lubricant storage vessel (9) for an exhaust-gas turbocharger (1), characterized by at least one of the features of claims 3 to 6.

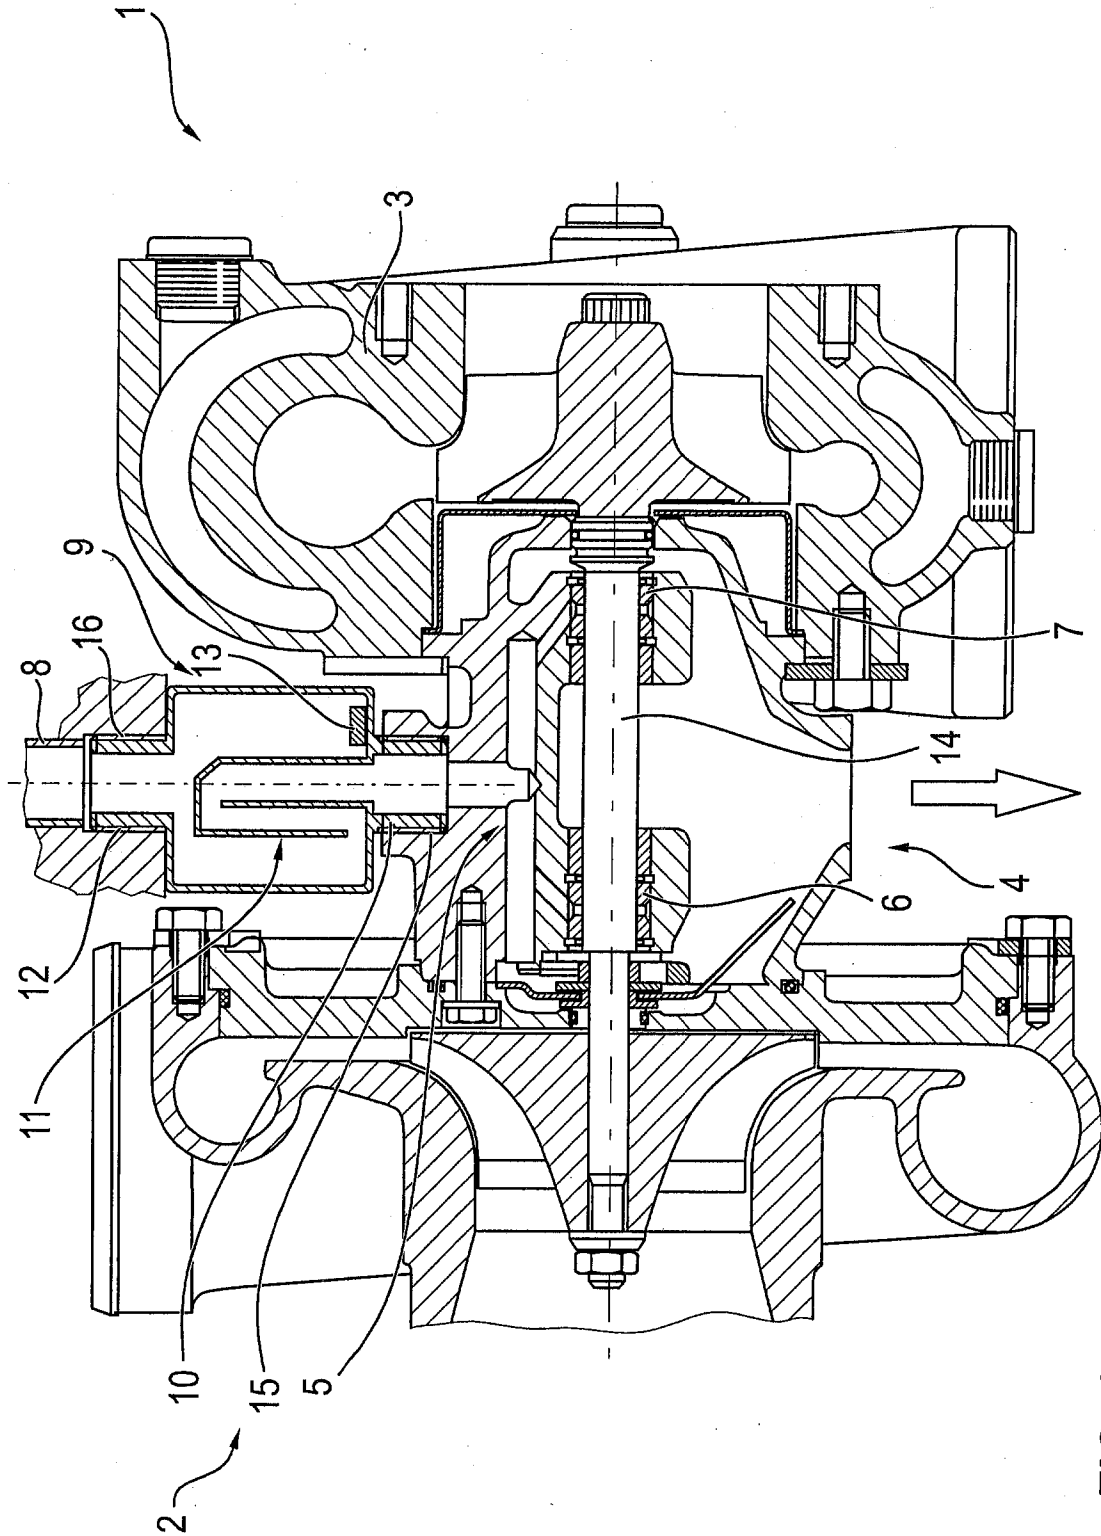$\frac{1}{2}$ 

2/2

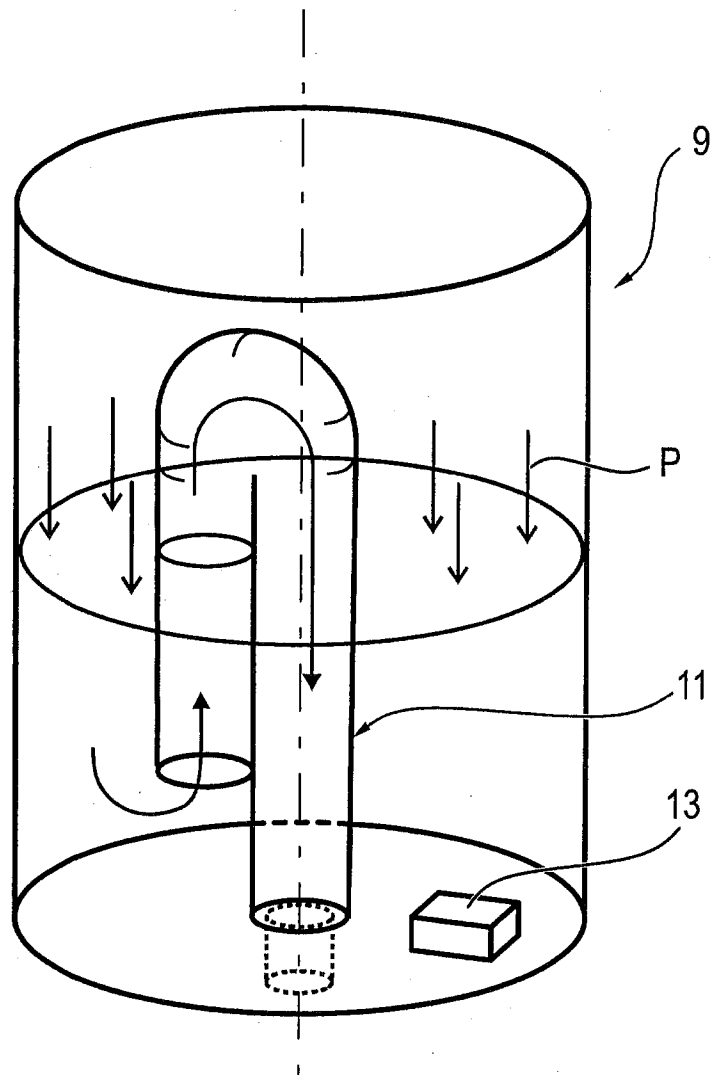


FIG. 2