



(51) International Patent Classification:

G06F 3/02 (2006.01) H03K 17/96 (2006.01)

(21) International Application Number:

PCT/US2017/047065

(22) International Filing Date:

16 August 2017 (16.08.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/351,397 14 November 2016 (14.11.2016) US

(71) Applicant: **GOOGLE LLC** [US/US]; 1600 Amphitheatre Parkway, Mountain View, California 94043 (US).(72) Inventors: **KWONG, Kelvin**; 1600 Amphitheatre Parkway, Mountain View, California 94043 (US). **MUKHERJEE, Debanjan**; 1600 Amphitheatre Parkway, MountainView, California 94043 (US). **COOPER, James Aaron**; 1600 Amphitheatre Parkway, Mountain View, California 94043 (US).(74) Agent: **HENRY, Joel** et al.; Fish & Richardson P.C., P.O. Box 1022, Minneapolis, Minnesota 55440-1022 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(54) Title: APPARATUS FOR SENSING USER INPUT

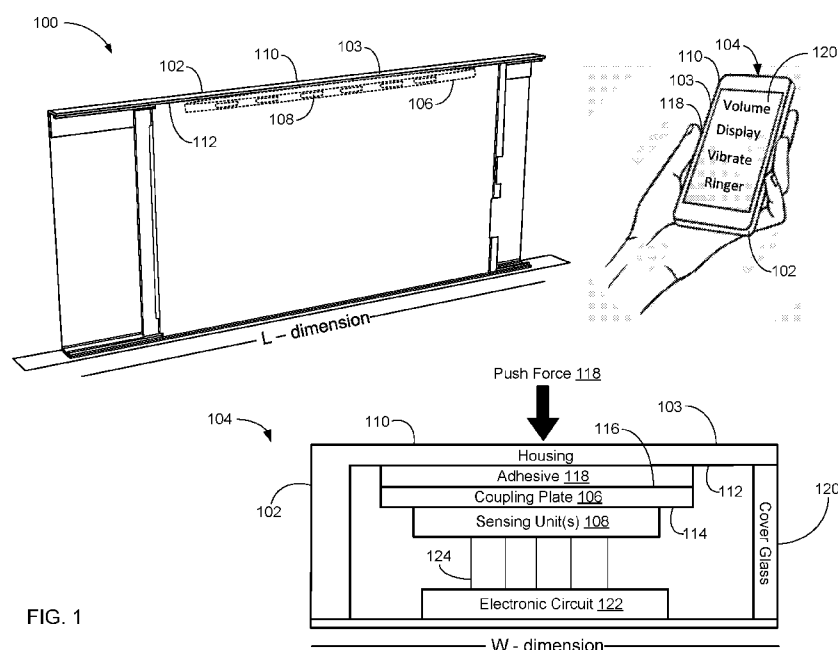


FIG. 1

(57) **Abstract:** An apparatus for sensing user input includes a first strain gauge grouping at an inner surface of a housing of a device, and a second strain gauge grouping at the inner surface of the housing. The apparatus includes a circuit coupled to the first and second strain gauge groupings. The circuit: (i) receives a first signal from the first strain gauge grouping in response to user input at the housing over a location of the first strain gauge grouping, (ii) indicates a first type of user input has been received in response to receipt of the first parameter signal, (iii) receives a second signal from the second strain gauge grouping in response to user input at the housing over a location of the second strain gauge grouping, and (iv) indicates that a second type of user input has been received in response to receipt of the second parameter signal.



(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

APPARATUS FOR SENSING USER INPUT

FIELD

[0001] The present specification is related to sensing user input to a device.

BACKGROUND

[0002] Consumer electronic devices sometimes include buttons that protrude from an outer or exterior surface of a housing of the electronic device. In general, the buttons are used as physical inputs to cause changes to device functions, such as volume control, display activation/deactivation, switching to/from vibrate mode, etc. The buttons are typically positioned on the sides of electronic devices such as smartphones, mobile cellular devices, tablet computers, notebook computers, desktop computer, Google Chromecast devices, Google home. Current design practices relative to electronic devices include reducing the quantity of buttons that protrude from the exterior surfaces of the device housing.

SUMMARY

[0003] An apparatus for sensing user input to an electronic device is described. The apparatus utilizes multiple strain gauge (SG) sensing units which are each disposed adjacent an inner surface of the device housing. The SG sensing units sense a particular type of user input to the device based on at least one of: the magnitude of applied strain, the relative location of the applied strain, and the duration of the applied strain. The sensing units can be arranged in particular configurations to sense applied strain along, for example, a lengthwise dimension of the device and/or a widthwise dimension of the device. Hence, the described sensing apparatus provides an approach for receiving user input to an electronic device while also replacing physical buttons that protrude above an exterior surface of the device.

[0004] In one innovative aspect of the specification, an apparatus for sensing user input provided on an exterior surface of an electronic device is described. The apparatus includes a first strain gauge grouping attached to an inner surface of a housing of the electronic device and a second strain gauge grouping attached to the inner surface of the housing of the electronic device. The apparatus further includes an electronic circuit electrically coupled to the first

[0005] strain gauge grouping and the second strain gauge grouping, the electronic circuit configured to: (i) receive a first parameter signal from the first strain gauge grouping in response to user input that interacts with the housing over a location of the first strain gauge grouping, (ii) indicate that a first type of user input has been received in response to receipt of the first parameter signal, (iii) receive a second parameter signal from the second strain gauge grouping in response to user input that interacts with the housing over a location of the second strain gauge grouping, and (iv) indicate that a second type of user input has been received in response to receipt of the second parameter signal.

[0006] In some implementations, the first strain gauge grouping includes: a first strain gauge set of multiple strain gauges that indicates a first voltage value when voltage is applied to the first strain gauge set of multiple strain gauges; a second strain gauge set of multiple strain gauges that indicates a second voltage value when voltage is applied to the second strain gauge set of multiple strain gauges; and wherein the first voltage value and the second voltage value are indicated concurrently in response to the user input that interacts with the housing over the location of the first strain gauge grouping. In some implementations, the electronic circuit determines a differential voltage value in response to receiving the first parameter signal corresponding to the first type of user input, the differential voltage value corresponding to a difference between the first voltage value of the first strain gauge set and the second voltage value of the second strain gauge set.

[0007] In some implementations, the second strain gauge grouping includes: a first strain gauge set of multiple strain gauges that indicates a first voltage value when voltage is applied to the first strain gauge set of multiple strain gauges; a second strain gauge set of multiple strain gauges that indicates a second voltage value when voltage is applied to the second strain gauge set of multiple strain gauges; and wherein the first voltage value and the second voltage value are indicated concurrently in response to the user input that interacts with the housing over the location of the second strain gauge grouping. In some implementations, the electronic circuit determines a differential voltage value in response to receiving the second parameter signal corresponding to the second type of user input, the differential voltage value corresponding to a difference between the first voltage value of the first strain gauge set and the second voltage value of the second strain gauge set.

[0008] In some implementations, at least one of the first or second strain gauge groupings includes multiple strain gauge sets, each strain gauge set including at least two strain gauges. Generally, the first strain gauge grouping may include at least a first strain

gauge having a first orientation and a second strain gauge having a second orientation that differs from the first orientation. Likewise, the second strain gauge grouping may include at least a first strain gauge having a first orientation and a second strain gauge having a second orientation that differs from the first orientation.

[0009] In some implementations, the apparatus further includes a third strain gauge grouping, which may be attached to the inner surface of the housing of the electronic device as well. In such an implementation, the third strain gauge grouping may include at least a first strain gauge having a first orientation and a second strain gauge having a second orientation that differs from the first orientation. In some implementations, the first strain gauge grouping, the second strain gauge grouping, and the third strain gauge grouping, of an apparatus, are attached longitudinally along the inner surface of the housing, e.g., by way of an adhesive material. In some implementations, the first strain gauge grouping is configured to allow the electronic device to sense user input to the electronic device, the sensed user input being of a plurality of different types.

[0010] In some implementations, the first strain gauge grouping interacts with the second strain gauge grouping to allow the electronic device to sense user input corresponding to at least one of: a particular magnitude of physical force applied to the outer surface of the housing; a particular time period associated with physical force applied to the outer surface of the housing; and a particular magnitude of physical force that is applied to the outer surface of the housing for a particular time period.

[0011] In some implementations, the first strain gauge grouping cooperates with the electronic circuit to form a resistor bridge that indicates a parameter signal associated with changes in a resistance attribute of the first strain gauge grouping, the changes occurring based on a particular type of user input. In some implementations, the second strain gauge grouping cooperates with the electronic circuit to form a resistor bridge that indicates a parameter signal associated with changes in a resistance attribute of the second strain gauge grouping, the changes occurring based on a particular type of user input.

[0012] In some implementations, in response to user input detected by one of the first strain gauge grouping and the second strain gauge grouping, the electronic circuit amplifies a characteristic of the parameter signal indicated by the resistor bridge. In some implementations, the resistor bridge includes: (i) a first strain gauge set of multiple strain gauges that includes a first strain gauge affixed in a first orientation, and (ii) a second strain gauge set of multiple strain gauges that includes a second strain gauge affixed in a second orientation that differs from the first orientation. In some implementations, the first

orientation and the second orientation are perpendicular to each other. In some implementations, the parameter signal indicates a differential voltage value, and wherein the resistance attribute changes in response to tension applied concurrently to each of the first strain gauge of the resistor bridge and the second strain gauge of the resistor bridge.

[0013] In one innovative aspect of the specification, an apparatus for sensing user input provided on an area of a device is described. The apparatus includes a first strain gauge grouping configured to be attached to a first surface, the first strain gauge grouping including a first strain gauge having a first orientation and a second strain gauge having a second orientation that differs from the first orientation. The apparatus further includes a second strain gauge grouping configured to be attached to the surface, the second strain gauge grouping including a first strain gauge having a first orientation and a second strain gauge having a second orientation that differs from the first orientation. The apparatus further includes a third strain gauge grouping configured to be attached to the surface, the third strain gauge grouping including a first strain gauge having a first orientation and a second strain gauge having a second orientation that differs from the first orientation. Each strain gauge grouping is configured to couple to an electrical conductor, the electrical conductor being configured to provide parameter signals to an electronic circuit that detects user input of a particular type in response to a user interacting with an area of the device.

[0014] In some implementations, the first strain gauge grouping interacts with at least the second strain gauge grouping to allow the device to sense user input corresponding to at least one of: a particular magnitude of physical force applied to the surface; a particular time period associated with physical force applied to the surface; and a particular magnitude of physical force that is applied to the surface for a particular time period. In some implementations, the first strain gauge grouping cooperates with the electronic circuit to form a resistor bridge that indicates a parameter signal associated with changes in a resistance attribute of the first strain gauge grouping, the changes occurring based on a particular type of user input. In some implementations, the resistor bridge includes a first strain gauge set that includes a first strain gauge affixed in a first orientation and a second strain gauge set that includes a second strain gauge affixed in a second orientation that differs from the first orientation.

[0015] In some implementations, each strain gauge grouping includes: a first strain gauge set configured to indicate a first voltage value; a second strain gauge set configured to indicate a second voltage value; and wherein the first voltage value and the second voltage value are indicated concurrently in response to the user interacting with an area of

the device. In some implementations, the first, second, and third strain gauge groupings are each attached to the surface by way of an adhesive material and in a parallel configuration, the surface corresponding to the surface of a plate.

[0016] The subject matter described in this specification can be implemented in particular embodiments and can result in one or more of the following advantages. The apparatus of this specification allows device manufacturers to produce electronic devices that have a reduced quantity of buttons protruding from an exterior surface of the device housing. More particularly, reducing the number of buttons can minimize steps required during execution of manufacturing and/or machining operations when producing device housings in substantial volumes. Furthermore, use of the strain gauge sensing units described in this specification can reduce the amount circuit components (wires, capacitors, etc.) and reduce power consumption typically required to enable sensing functions provided by mechanical buttons.

[0017] The details of one or more implementations of the subject matter described in this specification are set forth in the accompanying drawings and the description below. Other features, aspects, and advantages of the subject matter will become apparent from the description, the drawings, and the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 illustrates diagrams associated with an apparatus for sensing user input to an example electronic device.

[0019] FIG. 2 illustrates diagrams that include multiple strain gauges that can be used in the apparatus of FIG. 1.

[0020] FIG. 3 illustrates diagrams that include resistor configurations and an example bridge circuit that can be implemented to sense user input to an electronic device.

[0021] FIG. 4 illustrates a diagram of multiple strain gauge sensors and corresponding graphical data associated with individual sensor measurements.

[0022] Like reference numbers and designations in the various drawings indicate like elements.

DETAILED DESCRIPTION

[0023] An apparatus for sensing user input to an electronic device is described. The apparatus utilizes multiple strain gauge (SG) sensing units which are each disposed adjacent an inner surface of a housing of the electronic device. The apparatus includes an

electronic circuit that electrically couples to each SG sensing unit. The electronic circuit is generally configured to receive parameter signals in response to user input that interacts with the housing.

[0024] User input to the device can include strain applied to an area of the outer surface of the housing. The area can be either adjacent to, or substantially adjacent to, a particular SG sensing unit that is affixed to an inner surface of the housing on the other side of a housing wall that defines the inner and outer surfaces. In response to the applied strain, the SG sensing unit senses a particular type of user input to the device based on at least one of: a magnitude of the applied strain, the relative location and of the applied strain, or a duration of the applied strain.

[0025] In general, each SG sensing unit includes multiple individual strain gauges that each have a particular resistance attribute. The SGs can be arranged in a particular configuration to form a single SG sensing unit and each SG sensing unit can receive a voltage signal of a predefined voltage value. One or more output voltage signals received from each SG sensing unit are then measured by the electronic circuit and then converted into an example parameter signal. The output voltage signals are measured to detect any shifts or changes to the corresponding voltage value of the applied signal.

[0026] Applied strain to the outer surface of the housing can cause slight physical changes (e.g., expansion or contraction) to at least one SG of a SG sensing unit. The physical changes can cause a change in a resistance attribute of a SG. The change in the resistance attribute causes a corresponding change in the measured output voltage value and, thus, indicates a differential voltage signal that is received and measured by the electronic circuit. A range of differential output voltage signal values can be mapped to individual user input types. The mapped values can be used by the electronic device to detect or determine particular user input types based on a characteristic of the applied strain and the corresponding signal value caused by the applied strain.

[0027] FIG. 1 depicts diagrams associated with an apparatus 100 for sensing user input to an example electronic device. Apparatus 100 generally includes a housing 102 that can later receive multiple electronic components to form user device 104. In general, user device 104 can include smartphones, mobile devices, cellular devices, smart televisions, laptop computers, tablet computers, notebook computers, desktop computers, electronic readers, Google Chromecast devices, Google home or a variety other types of computing devices or consumer electronic devices.

[0028] Apparatus 100 further includes coupling plate 106 and multiple (SG) sensing units 108 (hereinafter “sensing unit 108”). As discussed in more detail below, each sensing unit 108 can include multiple strain gauges that can form sets of strain gauges that are arranged in a particular configuration within the unit. As generally shown, housing 102 can include a housing wall having an outer surface 110 corresponding to a first side of the wall and an inner surface 112 corresponding to a second side of the wall that is opposite the first side. Similarly, plate 106 can have a first side 114 and a second side 116 that is opposite the first side 114.

[0029] In some implementations, plate 106 can include multiple sensing units 108 affixed to first side 114. As shown, plate 106 can be affixed or bonded to inner surface 112 by adhesive 118 that can be disposed generally intermediate second side 116 and housing wall 103. Plate 106 can be formed from a variety of different materials such as steel, fiberglass, hardened plastic or other materials having properties that enable plate 106 to be affixed to wall 103. Adhesive 118 can be any adhesive material or compound such as glue, epoxy resin, bonding agent, or other materials suitable to securely affix/attach plate 106 to inner surface 112 of housing wall 103. Additionally, although identified as an adhesive, a variety of mechanical based fastening means suitable to securely affix/attach or couple plate 106 to inner surface 112 can also be utilized.

[0030] Housing 102 can receive multiple electronic components to form user device 104, which includes cover glass 120. Hence, apparatus 100 can include an example electronic circuit 122 that is disposed internally within device 104. Wire(s)/conductor(s) 124 can electrically couple, to circuit 122, one or more strain gauge sets within sensing unit 108. Wires 124 can be electrical conductors (e.g., copper, gold, other conductive elements) that are used to provide parameter signals to electronic circuit 122 for detecting particular types of user input that correspond to a user interacting with an area of device 104.

[0031] As discussed in more detail below, an example user can provide a particular type of user input to device 104 by applying a push force 118 that can vary in push force magnitude and push force duration and/or frequency. Push force 118 provides a corresponding strain force that is applied to a particular SG set in respective sensing units 108 affixed to inner surface 112 of housing wall 103. In general, sensing units 108 can be arranged in particular configurations to sense/detect applied strain along, for example, a lengthwise (L) dimension of device 104 and/or a widthwise (W) dimension of device 104.

[0032] The applied strain can be detected by a parameter signal received by one or more components of circuit 122. A value of the detected parameter signal can correspond

to a particular type of user input. In some implementations, the type of user input can be viewable via a display device through cover glass 120. Different input types can include, for example, user input to adjust an audio volume output of user device 104, user input to activate or deactivate a display device of user device 104, user input to activate or deactivate a vibrate mode of user device 104, and/or user input to adjust the volume of a ring tone of user device 104. In alternative implementations, a variety of different user input types can be detected based, at least in part, on a particular value of the detected parameter signal.

[0033] As an example, apparatus 100 can be used in the following implementation. A user, Frank, wants to change the volume on a computing device, e.g., Frank's smartphone. Apparatus 100 can be implemented within Frank's smartphone such that sensing units 108 are disposed along, for example, a lengthwise edge of Frank's smartphone. When Frank presses a part of the smartphone housing associated with a volume setting a particular strain gauge within sensing unit 108 is strained.

[0034] In response to the press applied by Frank, a change in a differential voltage value is detected by an electronic circuit disposed within Frank's smartphone. The smartphone can be configured to detect the differential voltage value and associate particular values with, for example, a volume press because the detected voltage change exceeds a threshold voltage change. A duration of the voltage change is measured, and the electronic circuit (which can be part of a microprocessor) outputs a value which indicates to the microprocessor that it is to change the volume of an audio signal that is being output by a speaker of Frank's smartphone.

[0035] FIG. 2 illustrates diagrams that include multiple strain gauge units that can be used in sensing units 108 of apparatus 100. As shown, the implementation of FIG. 2 includes multiple technical features described above with reference to FIG. 1. In particular, FIG. 2 illustrates, in part: 1) an isolation (ISO) view that generally depicts multiple individual sensing units 108 attached to plate 106 that is affixed to inner surface 110 of housing wall 103; and 2) a cross-section (X-sec) view that depicts plate 106 attached/affixed to inner surface 110 of housing wall 103.

[0036] Each sensing unit 108 can include multiple strain gauge (SG) units 208 that form sets of strain gauges that are arranged in a particular configuration within sensing unit 108. In some implementations, at least two SGs units 208 can form a SG set 208a/b and multiple SG sets 208a/b can form a SG grouping 210. When disposed against, or affixed to, inner surface 110, multiple SG sets 208a/b can be arranged in particular orientations relative to each other. For example, a first SG set 208a can be arranged in a first orientation

corresponding to a first dimension so as to detect or measure applied strain along the first dimension. Likewise, a second SG set 208b can be arranged in a second orientation corresponding to a second dimension so as to detect or measure applied strain along the second dimension. The different SG sets 208a/b of a SG grouping 210 may furthermore be displaced with respect to each other at the inner surface 110.

[0037] In general, the first orientation and the first dimension can be different from the second orientation and the second dimension. In some implementations, when user device 104 is positioned generally longitudinally upright (e.g., when held by a user), the first orientation can correspond to a vertical orientation and the first dimension can correspond to a lengthwise (L) dimension. Further, when in this longitudinally upright position, the second orientation can correspond to a horizontal orientation and the second dimension can correspond to a widthwise (W) dimension.

[0038] In the implementation of FIG. 2, when disposed within user device 104, SG grouping 210 can have a SG set 208a that includes two SGs 208 disposed in a horizontal orientation (when the device is upright) to measure applied strain to surface 112 in the widthwise dimension. Moreover, SG grouping 210 can also have a SG set 208b that includes two SG units 208 disposed in a vertical orientation (when the device is upright) to measure applied strain in the lengthwise dimension. As shown, SGs 208 of SG grouping 210 can each be arranged in a parallel configuration, relative to each other, and can be disposed generally along the lengthwise dimension of a wall 103 (e.g., a sidewall) of housing 102.

[0039] When installed within user device 104, each SG grouping 210 of sensing unit 108 can be used to detect or sense user input in the form of applied force to surface 112. The applied force can cause SGs 208 to change in electrical characteristics, to cause the electronic circuit 122 to sense an increased strain. User device 104 can be configured to recognize the increased strain as corresponding to different user input types such as a user pushing, swiping, tapping, squeezing or otherwise touching a particular area on a sidewall wall of user device 104.

[0040] For example, when a user pushes on an edge or sidewall of housing 102 that is adjacent a SG 208, the housing and plate 106 can bend or flex, causing SG 208 to change in electrical characteristics (e.g., the resistance of resistors change within a particular strain gauge), which affects the voltage of an electrical signal applied to the SG 208 and which causes the electronic circuit 122 (analyzing the electrical signal) to sense an increased strain along, for example, the lengthwise dimension of device 104. Accordingly, user device 104

senses a push on the edge of housing 102 and can indicate to the user, via an example display device (protected by cover glass 120), the particular input type associated with the user's push/touch. In some implementations, multiple sensing units 108 can be disposed or positioned along an edge or sidewall of housing 102 in order to sense or detect the particular input type and/or the proximate location of the push applied along the length of device 104. The electronic circuit 122 can analyze the electrical signal that is received from each of the SG set 208a and SG set 208b.

[0041] As an overview of the terminology used herein, user device 104 may include multiple sensors or sensing units 108. Each sensing unit 108 may include two strain gauge sets indicated as features 208a and 208b. As an example, strain gauge set 208a can be oriented vertically and strain gauge set 208b can be oriented horizontally. Each strain gauge set 208a or 208b includes two individual strain gauge units 208. More particularly, and stated another way, each sensing unit 108 includes four strain gauge units 208 or resistors 208 (discussed below with reference to FIG. 3) which form the two strain gauge sets 208a/b or circuit branches (discussed below with reference to FIG. 3). Reference feature 210 refers to a strain gauge grouping that includes the four individual strain gauges 208 that collectively form a single sensor 108.

[0042] FIG. 3 illustrates diagrams that include resistor configurations and an example bridge circuit 302 that can be used to sense user input to an electronic device. As discussed above, each sensing unit 108 includes multiple individual SGs 208 that each have a particular resistance attribute. Hence, as shown in FIG. 3, in alternative implementations SG 208 can be depicted as one of resistors (R1-R4) that each have a predefined resistance value or resistance attribute. In particular, sensing unit 108 can be modeled or depicted as bridge circuit 302 that includes positive (voltage polarity) output 308 and negative (voltage polarity) output 310.

[0043] As shown, in some implementations, resistor orientation 304 can include resistors R2 and R4 having a horizontal orientation so as to measure applied strain in the widthwise (W) dimension, while resistors R1 & R3 (vertical orientation) remain relatively fixed when strain is applied due to their orientation and, thus, do not measure applied strain. In contrast, resistor orientation 306 can include resistors R2 and R4 having a vertical orientation so as to measure applied strain in the lengthwise (L) dimension while resistors R1 & R3 (horizontal orientation) remain relatively fixed when strain is applied due to their orientation and, thus, do not measure applied strain.

[0044] In general, when a particular set of resistors are disposed perpendicular to a particular strain direction, that particular resistor set will generally not measure strain associated with that particular strain direction. For example, as shown in resistor orientation 304, for a strain force applied in the widthwise (W) dimension/direction, SG set 208a is perpendicular to the strain direction and, thus, will generally not measure applied strain. However, SG set 208b is parallel to the strain direction and will measure applied strain. Further, as shown in resistor orientation 306, for a strain force applied in the lengthwise (L) dimension/direction, SG set 208b is perpendicular to the strain direction and, thus, will generally not measure applied strain. However, SG set 208a is parallel to the strain direction and will measure applied strain.

[0045] In general, bridge circuit 302 includes two branches. A first branch is indicated by R1 & R3 and the output node (for output 308) intermediate R1 & R3. A second branch is indicated by R2 & R4 and the output node (for output 310) intermediate R2 & R4. Bridge circuit 302 can receive an applied voltage (VCC). Electronic circuit 122 can receive or detect a differential voltage signal 312 in response to a change in the resistance attribute of any one of resistors R1-R4. In some implementations, circuit 122 provides the VCC voltage signal and can then execute a basic comparator circuit to analyze signal 312 relative to the VCC signal. The analysis can enable circuit 122 to detect or determine the extent to which the measured value of signal 312 indicates a deviation from the initially applied VCC voltage value.

[0046] During operation, and when disposed along inner surface 110 within user device 104, sensing unit 108 can detect applied strain in response to a touch force that is applied to a certain location of housing wall 103 (e.g., an edge/sidewall of user device 104). For example, and as noted above, user input in the form of applied strain to the edge of device 104 can cause parameter signals to be received by electronic circuit 122. The parameter signals can be received in response to user input detected by sensing unit 108, e.g., SG grouping 210, and can indicate a user input of a particular type, e.g., volume adjustment, activate vibrate mode, etc. Hence, detection of the user input can cause a corresponding response from device 104, e.g., indication on the display device associated with a volume level increasing or decreasing.

[0047] For example, and with reference to bridge circuit 302, sensing unit 108 can include SG set 208a (resistors R1 & R3) that indicates a parameter signal having a first voltage value (via output node 308). Sensing unit 108 can further include SG set 208b (resistors R2 & R4) that indicates a parameter signal having a second voltage value (via

output node 310). The first voltage value and the second voltage value can be indicated concurrently in response to the user input of a particular type that causes a particular corresponding response from user device 104.

[0048] In some examples, applied strain in the W-dimension can cause physical changes to SG set 208b that in turn causes the resistance attribute of resistors R2 & R4, measured in ohms, to change (either increase or decrease) by a predefined amount based on the magnitude of the applied force. Accordingly, presuming all resistance values in circuit 302 are generally the same, the change in a resistance attribute of R2 & R4 will cause a corresponding change in the voltage value measured at output 310. Thus, a differential voltage signal 312, relative to outputs 308 and 310, will be measured or detected by electronic circuit 122. In some implementations, measured parameter signals can be, for example, in the microvolt or the millivolt range. Thus, measured signals can be amplified by an example amplification circuit associated with electronic circuit 122.

[0049] FIG. 4 illustrates a diagram 404 of multiple strain gauges 208 arranged in a diamond configuration to form multiple sensing units 108 as well as corresponding graphical data 402 associated with individual sensor measurements that indicate a particular strain force for respective sensors. The implementation of FIG. 4 further illustrates example data parameters 406 associated with the technical features of apparatus 100. As shown, each sensing unit/sensor 108 can have a SG set 208a that includes a SG 208 in the top point position and a SG 208 in the bottom point position. Likewise, each sensor 108 can also have a SG set 208b that includes a SG 208 in the left point position and a SG 208 in the right point position. The diamond configuration of the SGs 208 depicted in the embodiment of FIG. 4 differs slightly from the parallel configuration of the SGs 208 depicted in the embodiment of FIG. 2.

[0050] In general, a diamond configuration can be used to form a sensing unit 108 that is more compact (relative to the parallel configuration) along a length of device 104. Use of the diamond configuration can provide increased precision relative to the location of push and potentially higher signal 312 for the same applied load. Alternatively, in some implementations, the parallel configuration, discussed above, can use a smaller width such that sensing units that include strain gauges arranged in the parallel configuration can be utilized on thinner electronic devices. Moreover, the parallel configuration can provide a simplified installation process when being placed within electronic devices that have limited space.

[0051] In general, a variety of different strain gauge orientations can be used for apparatus 100 depending on a device manufacturer's desired level of precision, the manufacturer's desired accuracy regarding the ability to detect the particular location of an electronic device that a user is pushing, and the available space within the electronic device that apparatus 100 will be installed.

[0052] As noted above, applied strain/force to an edge/sidewall surface associated with housing wall 103 can cause slight physical changes (e.g., expansion or contraction) to at least one SG 208 of sensor(s) 108. The physical changes can cause a change in a resistance attribute of SG 208. The change in the resistance attribute can cause a corresponding change in the measured output voltage value, thereby causing differential voltage signal 312. In some implementations, equation 402a indicates that, for the strain gauge diamond orientation of FIG. 4, total top & bottom voltage values can be subtracted from total left & right voltage values to obtain a differential voltage value. For example, differential voltage signal 312 can correspond to adding the measured voltage values associated with SG set 208b (positive polarity) and subtracting the measured voltage values associated with SG set 208a (negative polarity) to obtain a differential voltage value that can be mapped to a particular strain force.

[0053] In some implementations, a particular strain force can be mapped to a particular voltage value associated with differential voltage signal 312. The applied strain force can be measured in strain units and a particular strain value can correspond to a particular resistance attribute change for each individual SG 208. For example, a magnitude of applied force provided as user input to device 104 can be indicated as one micro-strain (μS). Hence, $1\mu\text{S}$ can correspond to a $1\text{m}\Omega$ change in the resistance value/attribute associated with a single SG 208 (e.g., resistor R2 of FIG. 3). In particular, for an example resistance value of $500\ \Omega \pm 10\%$, an applied strain of $6.5\ \mu\text{S}$ (see sensor 6 of graph 402) can result in a modified resistance value of $506.5\ \Omega \pm 10\%$. In some implementations, a range of differential output voltage signal values can be mapped to individual user input types. The mapped values can be used by user device 104 to determine particular user input types based on the duration and/or magnitude (in units of strain-force) of the applied strain.

[0054] Embodiments of the subject matter and the functional operations described in this specification can be implemented in digital electronic circuitry, in tangibly-embodied computer software or firmware, in computer hardware, including the structures disclosed in this specification and their structural equivalents, or in combinations of one or more of them. Embodiments of the subject matter described in this specification can be

implemented as one or more computer programs, i.e., one or more modules of computer program instructions encoded on a tangible non-transitory program carrier for execution by, or to control the operation of, data processing apparatus.

[0055] Alternatively, or in addition, the program instructions can be encoded on an artificially-generated propagated signal, e.g., a machine-generated electrical, optical, or electromagnetic signal that is generated to encode information for transmission to suitable receiver apparatus for execution by a data processing apparatus. The computer storage medium can be a machine-readable storage device, a machine-readable storage substrate, a random or serial access memory device, or a combination of one or more of them.

[0056] The processes and logic flows described in this specification can be performed by one or more programmable computers executing one or more computer programs to perform functions by operating on input data and generating output. The processes and logic flows can also be performed by, and apparatus can also be implemented as, special purpose logic circuitry, e.g., an FPGA (field programmable gate array) or an ASIC (application-specific integrated circuit). Various implementations of the systems and techniques described here can be realized in digital electronic circuitry, integrated circuitry, specially designed ASICs, computer hardware, firmware, software, and/or combinations thereof. These various implementations can include implementation in one or more computer programs that are executable and/or interpretable on a programmable system including at least one programmable processor, which may be special or general purpose, coupled to receive data and instructions from, and to transmit data and instructions to, a storage system, at least one input device, and at least one output device.

[0057] To provide for interaction with a user, the systems and techniques described here can be implemented on a computer having a display device, e.g., a CRT (cathode ray tube) or LCD (liquid crystal display) monitor, for displaying information to the user and a keyboard and a pointing device, e.g., a mouse or a trackball, by which the user can provide input to the computer. Other kinds of devices can be used to provide for interaction with a user as well; for example, feedback provided to the user can be any form of sensory feedback, e.g., visual feedback, auditory feedback, or tactile feedback; and input from the user can be received in any form, including acoustic, speech, or tactile input.

[0058] A number of embodiments have been described. Nevertheless, it will be understood that various modifications may be made without departing from the spirit and scope of the invention. For example, various forms of the flows shown above may be used, with steps re-ordered, added, or removed. Also, although several applications of the

payment systems and methods have been described, it should be recognized that numerous other applications are contemplated. Accordingly, other embodiments are within the scope of the following claims.

[0059] While this specification contains many specific implementation details, these should not be construed as limitations on the scope of what may be claimed, but rather as descriptions of features that may be specific to particular embodiments. Certain features that are described in this specification in the context of separate embodiments can also be implemented in combination in a single embodiment. Conversely, various features that are described in the context of a single embodiment can also be implemented in multiple embodiments separately or in any suitable subcombination. Moreover, although features may be described above as acting in certain combinations and even initially claimed as such, one or more features from a claimed combination can in some cases be excised from the combination, and the claimed combination may be directed to a subcombination or variation of a subcombination.

[0060] Similarly, while operations are depicted in the drawings in a particular order, this should not be understood as requiring that such operations be performed in the particular order shown or in sequential order, or that all illustrated operations be performed, to achieve desirable results. In certain circumstances, multitasking and parallel processing may be advantageous. Moreover, the separation of various system modules and components in the embodiments described above should not be understood as requiring such separation in all embodiments, and it should be understood that the described program components and systems can generally be integrated together in a single software product or packaged into multiple software products.

[0061] Particular embodiments of the subject matter have been described. Other embodiments are within the scope of the following claims. For example, the actions recited in the claims can be performed in a different order and still achieve desirable results. As one example, the processes depicted in the accompanying figures do not necessarily require the particular order shown, or sequential order, to achieve desirable results. In some cases, multitasking and parallel processing may be advantageous.

CLAIMS

1. An apparatus for sensing user input provided on an exterior surface of an electronic device, comprising:
 - a first strain gauge grouping attached to an inner surface of a housing of the electronic device;
 - a second strain gauge grouping attached to the inner surface of the housing of the electronic device; and
 - an electronic circuit electrically coupled to the first strain gauge grouping and the second strain gauge grouping, the electronic circuit configured to:
 - (i) receive a first parameter signal from the first strain gauge grouping in response to user input that interacts with the housing over a location of the first strain gauge grouping,
 - (ii) indicate that a first type of user input has been received in response to receipt of the first parameter signal,
 - (iii) receive a second parameter signal from the second strain gauge grouping in response to user input that interacts with the housing over a location of the second strain gauge grouping, and
 - (iv) indicate that a second type of user input has been received in response to receipt of the second parameter signal.
2. The apparatus of claim 1, wherein the first strain gauge grouping comprises:
 - a first strain gauge set of multiple strain gauges that indicates a first voltage value when voltage is applied to the first strain gauge set of multiple strain gauges;
 - a second strain gauge set of multiple strain gauges that indicates a second voltage value when voltage is applied to the second strain gauge set of multiple strain gauges; and
 - wherein the first voltage value and the second voltage value are indicated concurrently in response to the user input that interacts with the housing over the location of the first strain gauge grouping.
3. The apparatus of claim 2, wherein the electronic circuit determines a differential voltage value in response to receiving the first parameter signal corresponding to the first type of user input, the differential voltage value corresponding to a difference between the

first voltage value of the first strain gauge set and the second voltage value of the second strain gauge set.

4. The apparatus of claim 1, wherein the second strain gauge grouping comprises:
 - a first strain gauge set of multiple strain gauges that indicates a first voltage value when voltage is applied to the first strain gauge set of multiple strain gauges;
 - a second strain gauge set of multiple strain gauges that indicates a second voltage value when voltage is applied to the second strain gauge set of multiple strain gauges; and
 - wherein the first voltage value and the second voltage value are indicated concurrently in response to the user input that interacts with the housing over the location of the second strain gauge grouping.
5. The apparatus of claim 4, wherein the electronic circuit determines a differential voltage value in response to receiving the second parameter signal corresponding to the second type of user input, the differential voltage value corresponding to a difference between the first voltage value of the first strain gauge set and the second voltage value of the second strain gauge set.
6. The apparatus of claim 1, wherein at least one of the first and second strain gauge groupings comprises multiple strain gauge sets each strain gauge set comprising at least two strain gauges.
7. The apparatus of claim 1, wherein
 - the first strain gauge grouping includes a first strain gauge having a first orientation and a second strain gauge having a second orientation that differs from the first orientation; and
 - the second strain gauge grouping includes a first strain gauge having a first orientation and a second strain gauge having a second orientation that differs from the first orientation.
8. The apparatus of claim 1, wherein the apparatus comprises a third strain gauge grouping attached to the inner surface of the housing of the electronic device.

9. The apparatus of claim 8, wherein the third strain gauge grouping includes a first strain gauge having a first orientation and a second strain gauge having a second orientation that differs from the first orientation.

10. The apparatus of claim 8, wherein the first strain gauge grouping, the second strain gauge grouping, and the third strain gauge grouping are attached longitudinally along the inner surface of the housing.

11. The apparatus of claim 10, wherein the first strain gauge grouping, the second strain gauge grouping, and the third strain gauge grouping are attached longitudinally along the inner surface of the housing by way of an adhesive material.

12. The apparatus of claim 11, wherein the first strain gauge grouping is configured to allow the electronic device to sense user input to the electronic device, the sensed user input being of a plurality of different types.

13. The apparatus of claim 12, wherein the first strain gauge grouping interacts with the second strain gauge grouping to allow the electronic device to sense user input corresponding to at least one of:

- a particular magnitude of physical force applied to the outer surface of the housing;

- a particular time period associated with physical force applied to the outer surface of the housing; and

- a particular magnitude of physical force that is applied to the outer surface of the housing for a particular time period.

14. The apparatus of claim 1, wherein the first strain gauge grouping cooperates with the electronic circuit to form a resistor bridge that indicates a parameter signal associated with changes in a resistance attribute of the first strain gauge grouping, the changes occurring based on a particular type of user input.

15. The apparatus of claim 14, wherein the second strain gauge grouping cooperates with the electronic circuit to form a resistor bridge that indicates a parameter signal

associated with changes in a resistance attribute of the second strain gauge grouping, the changes occurring based on a particular type of user input.

16. The apparatus of claim 15, wherein in response to user input detected by one of the first strain gauge grouping and second strain gauge grouping, the electronic circuit amplifies a characteristic of the parameter signal indicated by the resistor bridge.

17. The apparatus of claim 16, wherein the resistor bridge includes:

- (i) a first strain gauge set of multiple strain gauges that includes a first strain gauge affixed in a first orientation, and
- (ii) a second strain gauge set of multiple strain gauges that includes a second strain gauge affixed in a second orientation that differs from the first orientation.

18. The apparatus of claim 17, wherein the first orientation and the second orientation are perpendicular to each other.

19. The apparatus of claim 17, wherein the parameter signal indicates a differential voltage value, and wherein the resistance attribute changes in response to tension applied concurrently to each of the first strain gauge of the resistor bridge and the second strain gauge of the resistor bridge.

20. An apparatus for sensing user input provided on an area of a device, comprising:
a first strain gauge grouping configured to be attached to a surface, the first strain gauge grouping including a first strain gauge having a first orientation and a second strain gauge having a second orientation that differs from the first orientation;

a second strain gauge grouping configured to be attached to the surface, the second strain gauge grouping including a first strain gauge having a first orientation and a second strain gauge having a second orientation that differs from the first orientation;

a third strain gauge grouping configured to be attached to the surface, the third strain gauge grouping including a first strain gauge having a first orientation and a second strain gauge having a second orientation that differs from the first orientation; and

wherein each strain gauge grouping is configured to couple to an electrical conductor, the electrical conductor being configured to provide parameter signals to an

electronic circuit that detects user input of a particular type in response to a user interacting with an area of the device.

21. The apparatus of claim 20, wherein the first strain gauge grouping interacts with at least the second strain gauge grouping to allow the device to sense user input corresponding to at least one of:

- a particular magnitude of physical force applied to the surface;
- a particular time period associated with physical force applied to the surface; and
- a particular magnitude of physical force that is applied to the surface for a particular time period.

22. The apparatus of claim 20, wherein the first strain gauge grouping cooperates with the electronic circuit to form a resistor bridge that indicates a parameter signal associated with changes in a resistance attribute of the first strain gauge grouping, the changes occurring based on a particular type of user input.

23. The apparatus of claim 22, wherein the resistor bridge includes a first strain gauge set that includes a first strain gauge affixed in a first orientation and a second strain gauge set that includes a second strain gauge affixed in a second orientation that differs from the first orientation.

24. The apparatus of claim 20, wherein each strain gauge grouping comprises:

- a first strain gauge set configured to indicate a first voltage value;
- a second strain gauge set configured to indicate a second voltage value; and
- wherein the first voltage value and the second voltage value are indicated concurrently in response to the user interacting with an area of the device.

25. The apparatus of claim 20, wherein the first, second, and third strain gauge groupings are each attached to the surface by way of an adhesive material and in a parallel configuration, the surface corresponding to the surface of a plate.

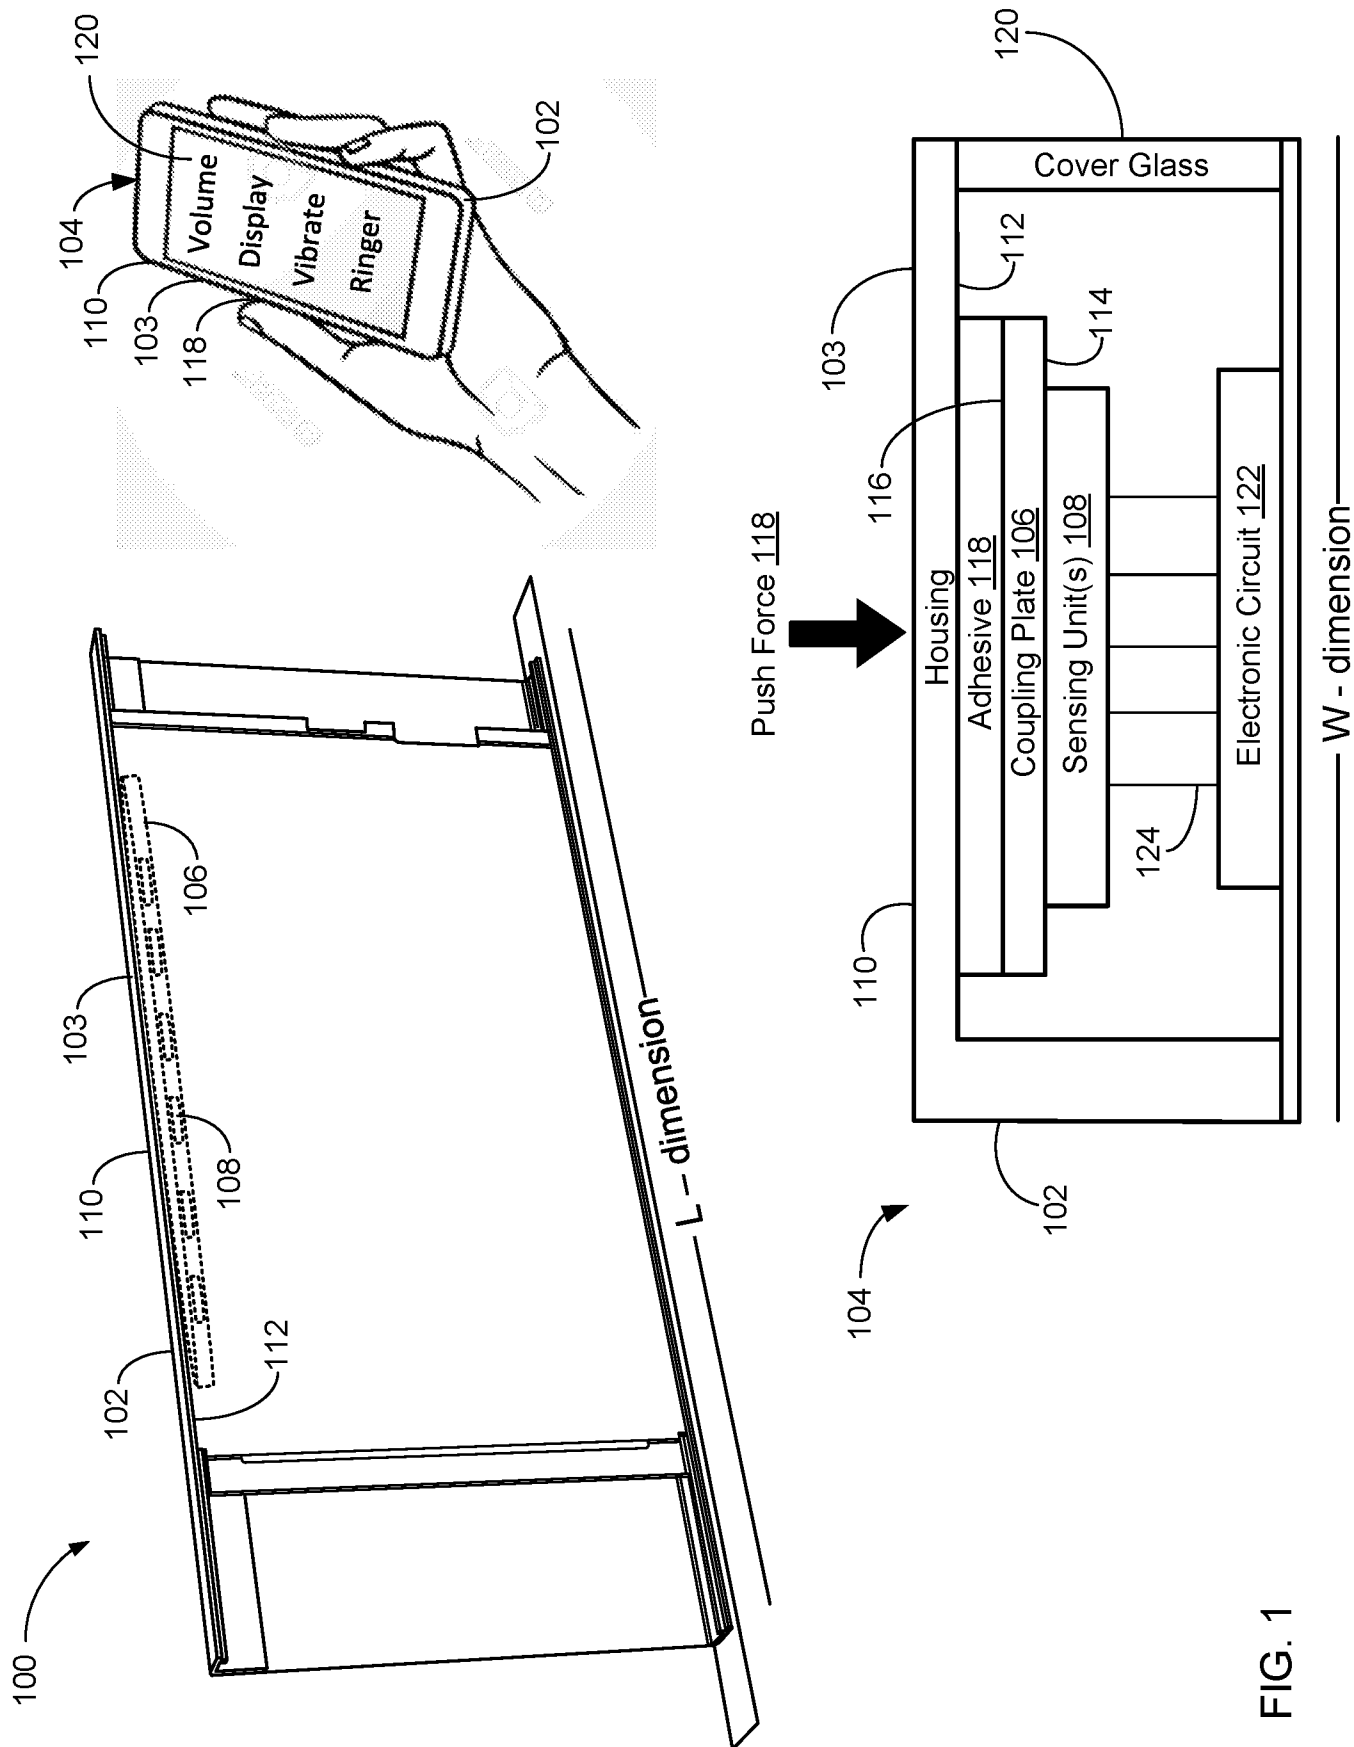


FIG. 1

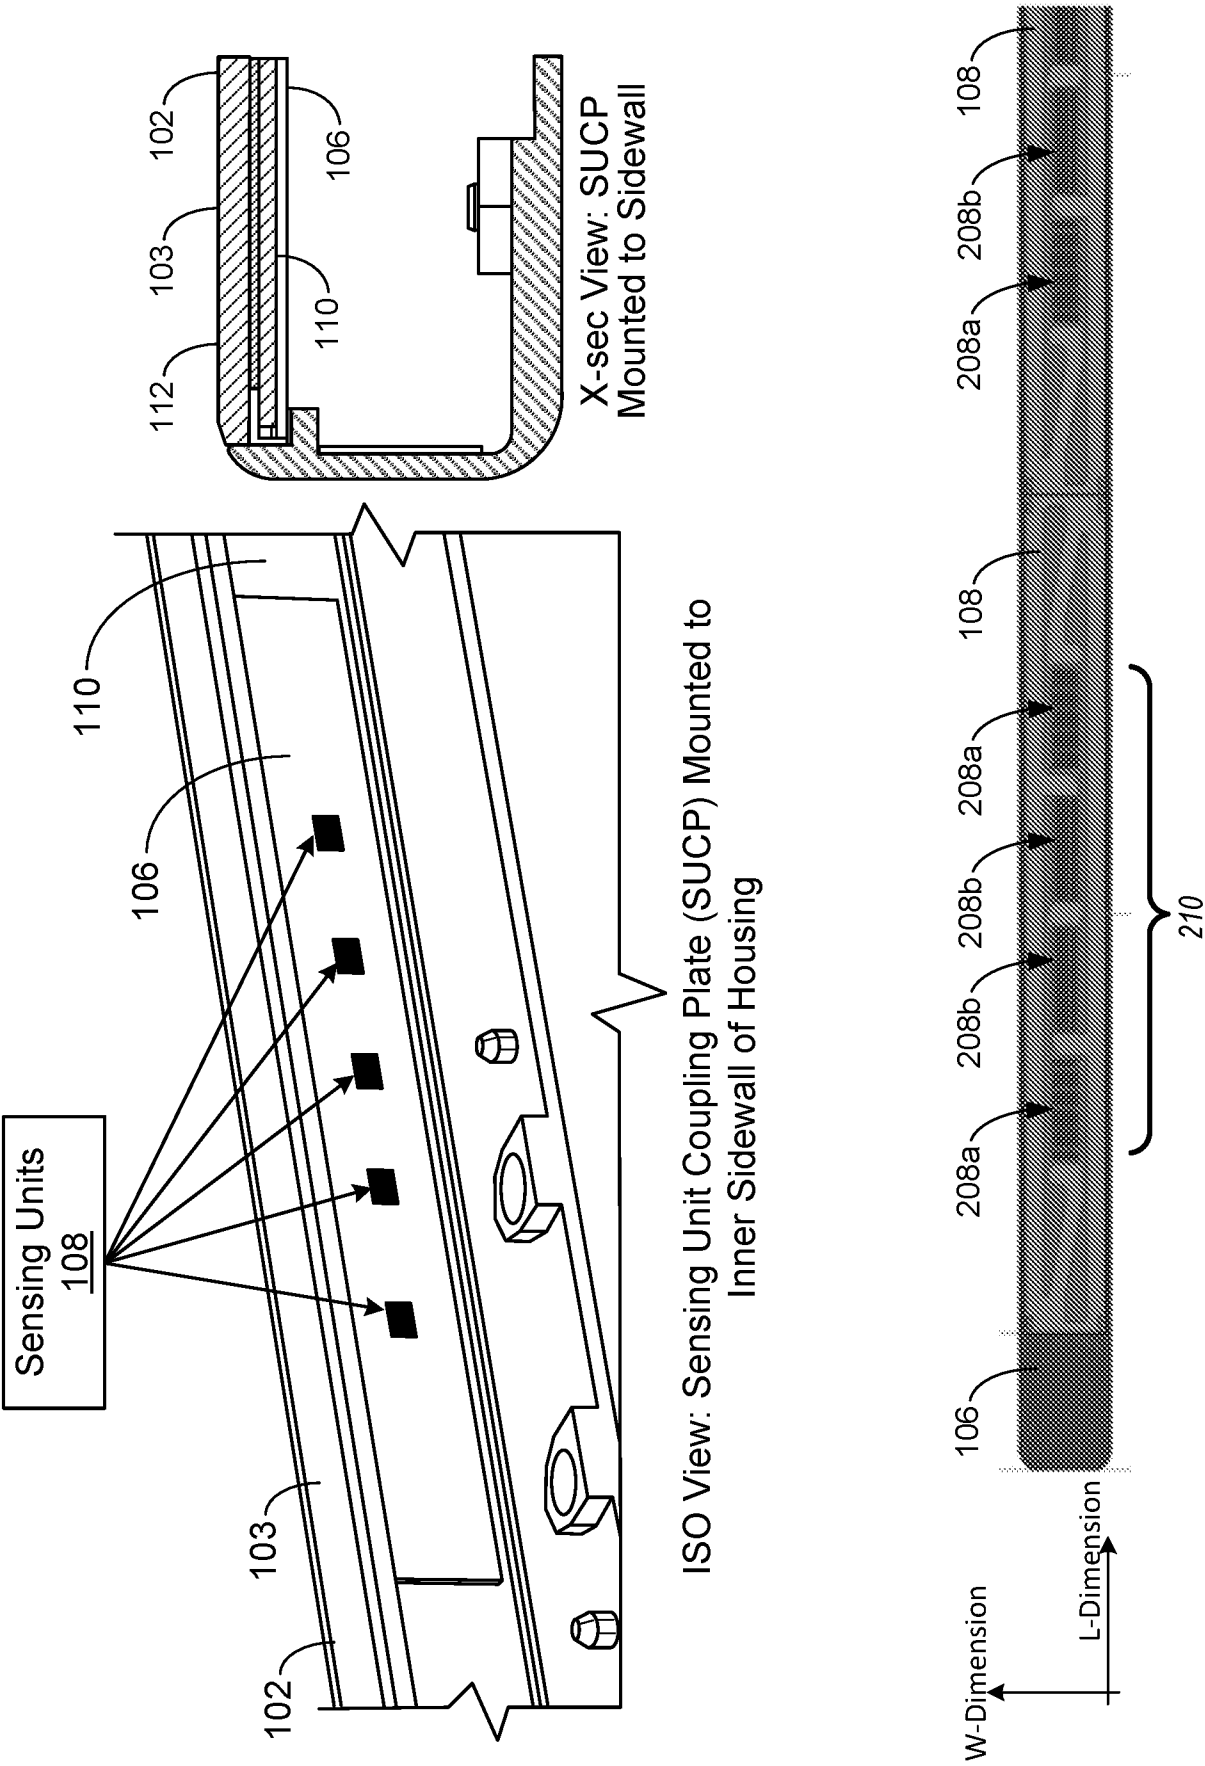


FIG. 2

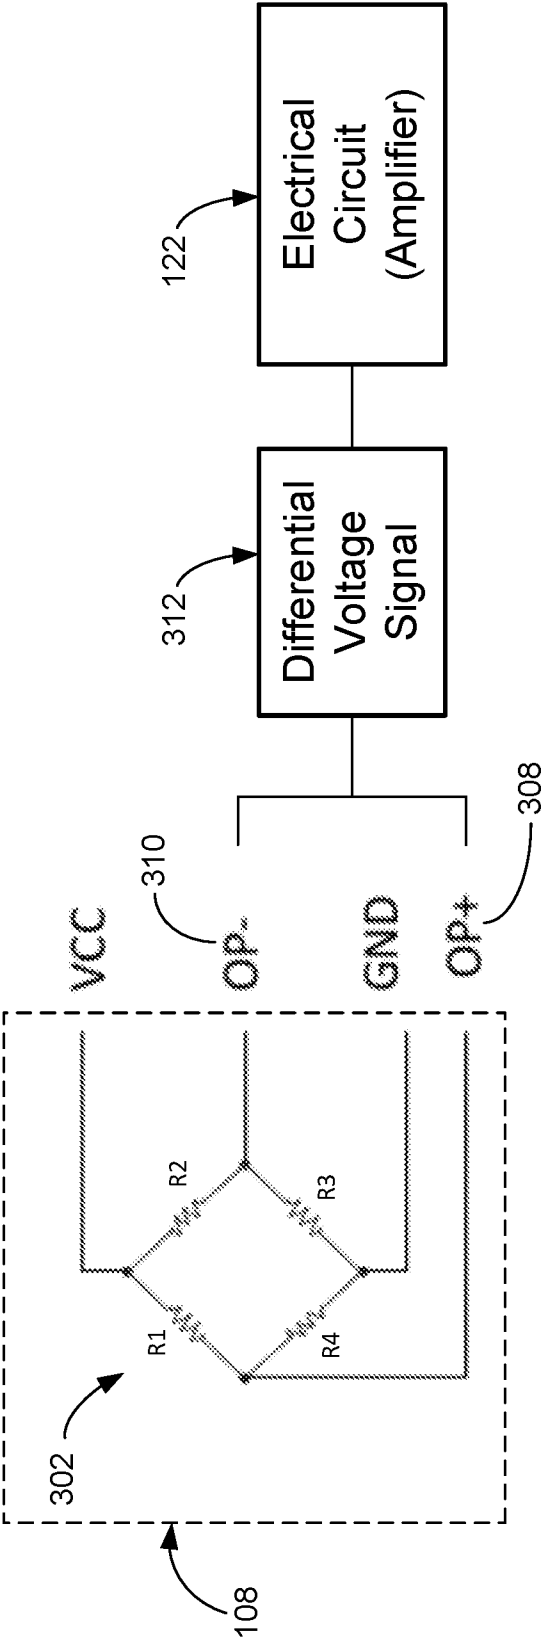
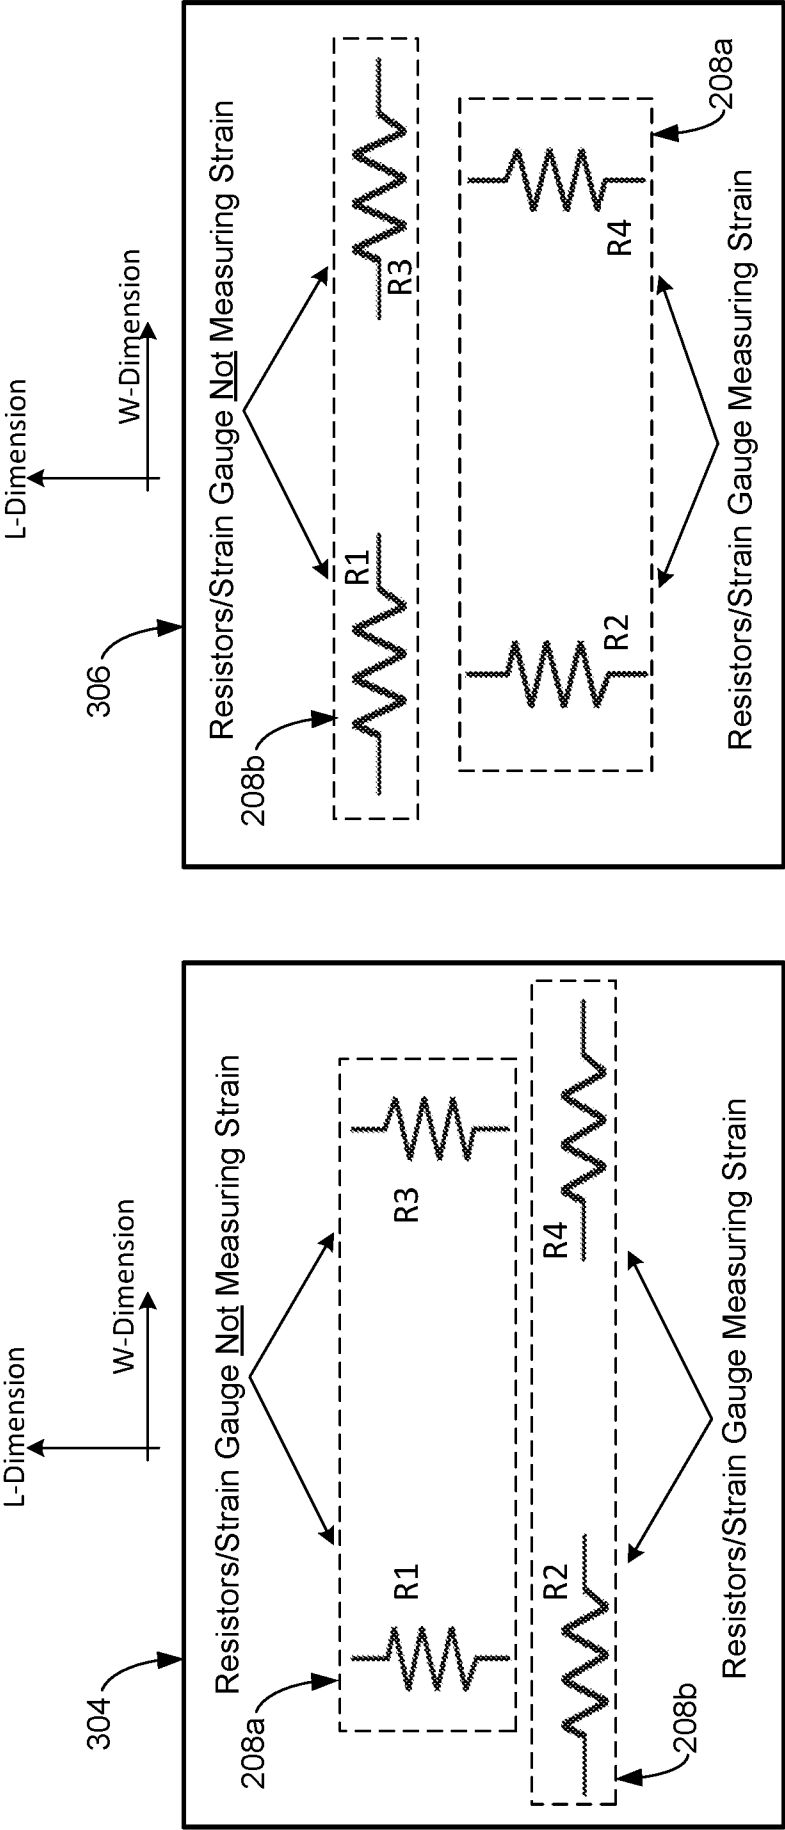


FIG. 3

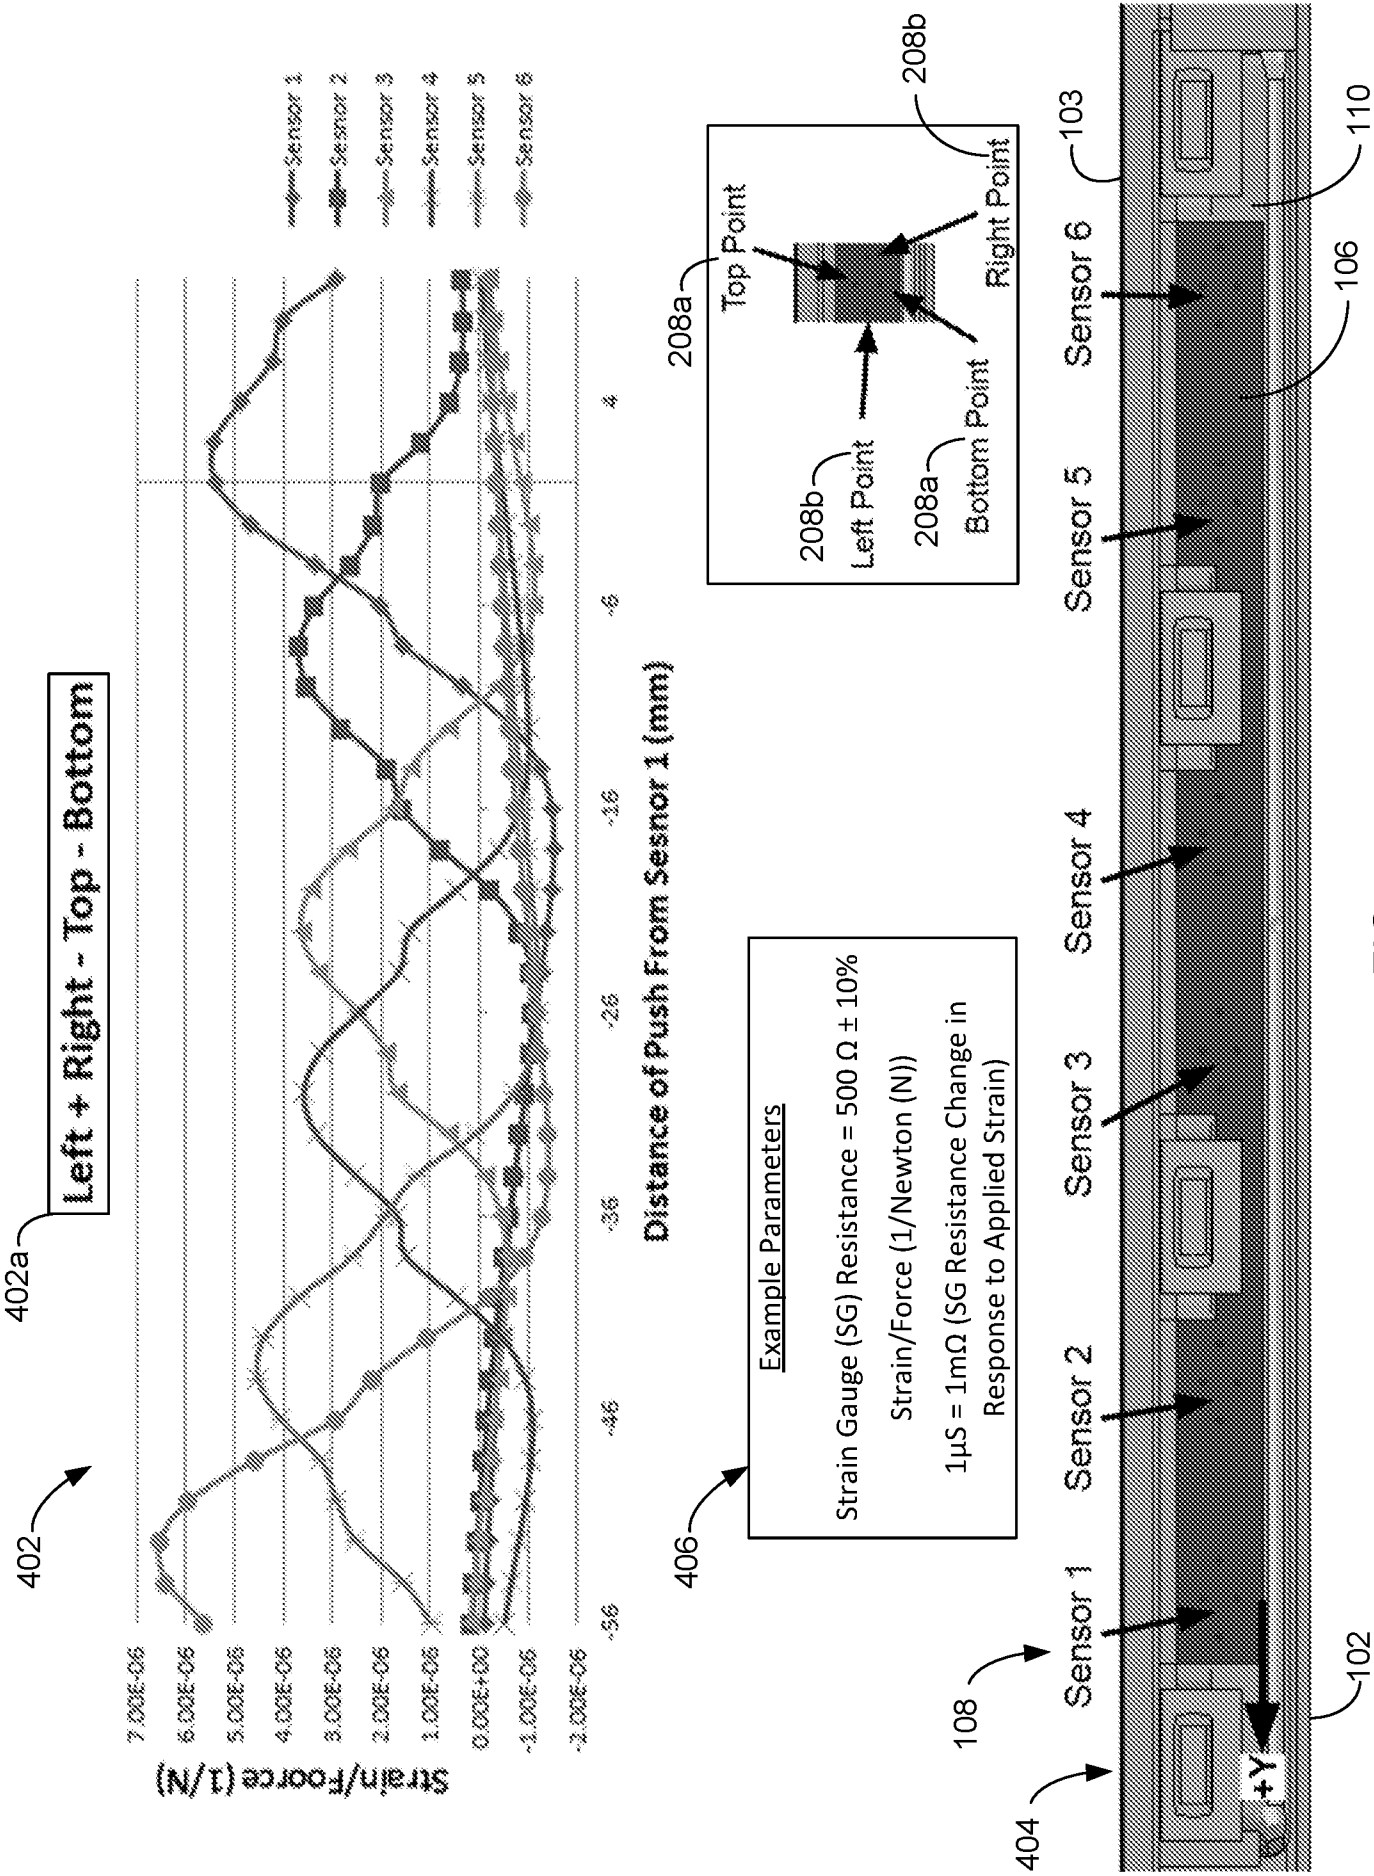


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2017/047065

A. CLASSIFICATION OF SUBJECT MATTER
 INV. G06F3/02 H03K17/96
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06F H03K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2015/047616 A1 (APPLE INC) 2 April 2015 (2015-04-02) page 1 - page 3, line 9 page 6, line 6 - page 7, line 7; figure 3 page 12, line 10 - page 15, line 19; figures 8-13 -----	1-25
X	US 2014/008999 A1 (PREST CHRISTOPHER D [US] ET AL) 9 January 2014 (2014-01-09) paragraph [0073] - paragraph [0080] -----	1-25
X	GB 1 391 830 A (WELWYN ELECTRIC LTD) 23 April 1975 (1975-04-23) sentences 1-96 -----	1-25
X	US 2015/296622 A1 (JIANG TONGBI T [US] ET AL) 15 October 2015 (2015-10-15) paragraph [0001] - paragraph [0009] paragraph [0077] -----	1-25



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 October 2017

Date of mailing of the international search report

10/11/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Anticoli, Claud

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/047065

Patent document cited in search report			Publication date	Patent family member(s)			Publication date
WO 2015047616	A1	02-04-2015	US	2016358737	A1	08-12-2016	
			WO	2015047616	A1	02-04-2015	

US 2014008999	A1	09-01-2014	US	2014008999	A1	09-01-2014	
			US	2016252413	A1	01-09-2016	

GB 1391830	A	23-04-1975	NONE				

US 2015296622	A1	15-10-2015	NONE				
