


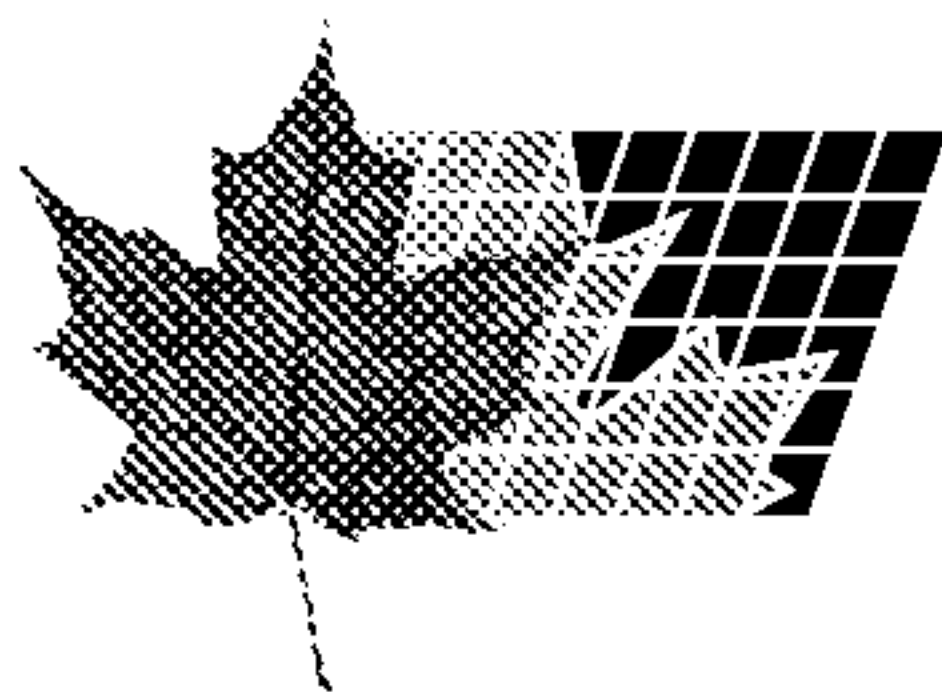

(72) CLUTTERBUCK, THIMOTHY A., US


(71) JOHNSON & JOHNSON VISION PRODUCTS, INC., US

(51) Int.Cl.⁶ G02C 7/04

(30) 1998/08/10 (09/131,928) US

(54) **LENTILLES CORNEENNES A STABILISATION DYNAMIQUE**

(54) **DYNAMICALLY STABILIZED CONTACT LENSES**

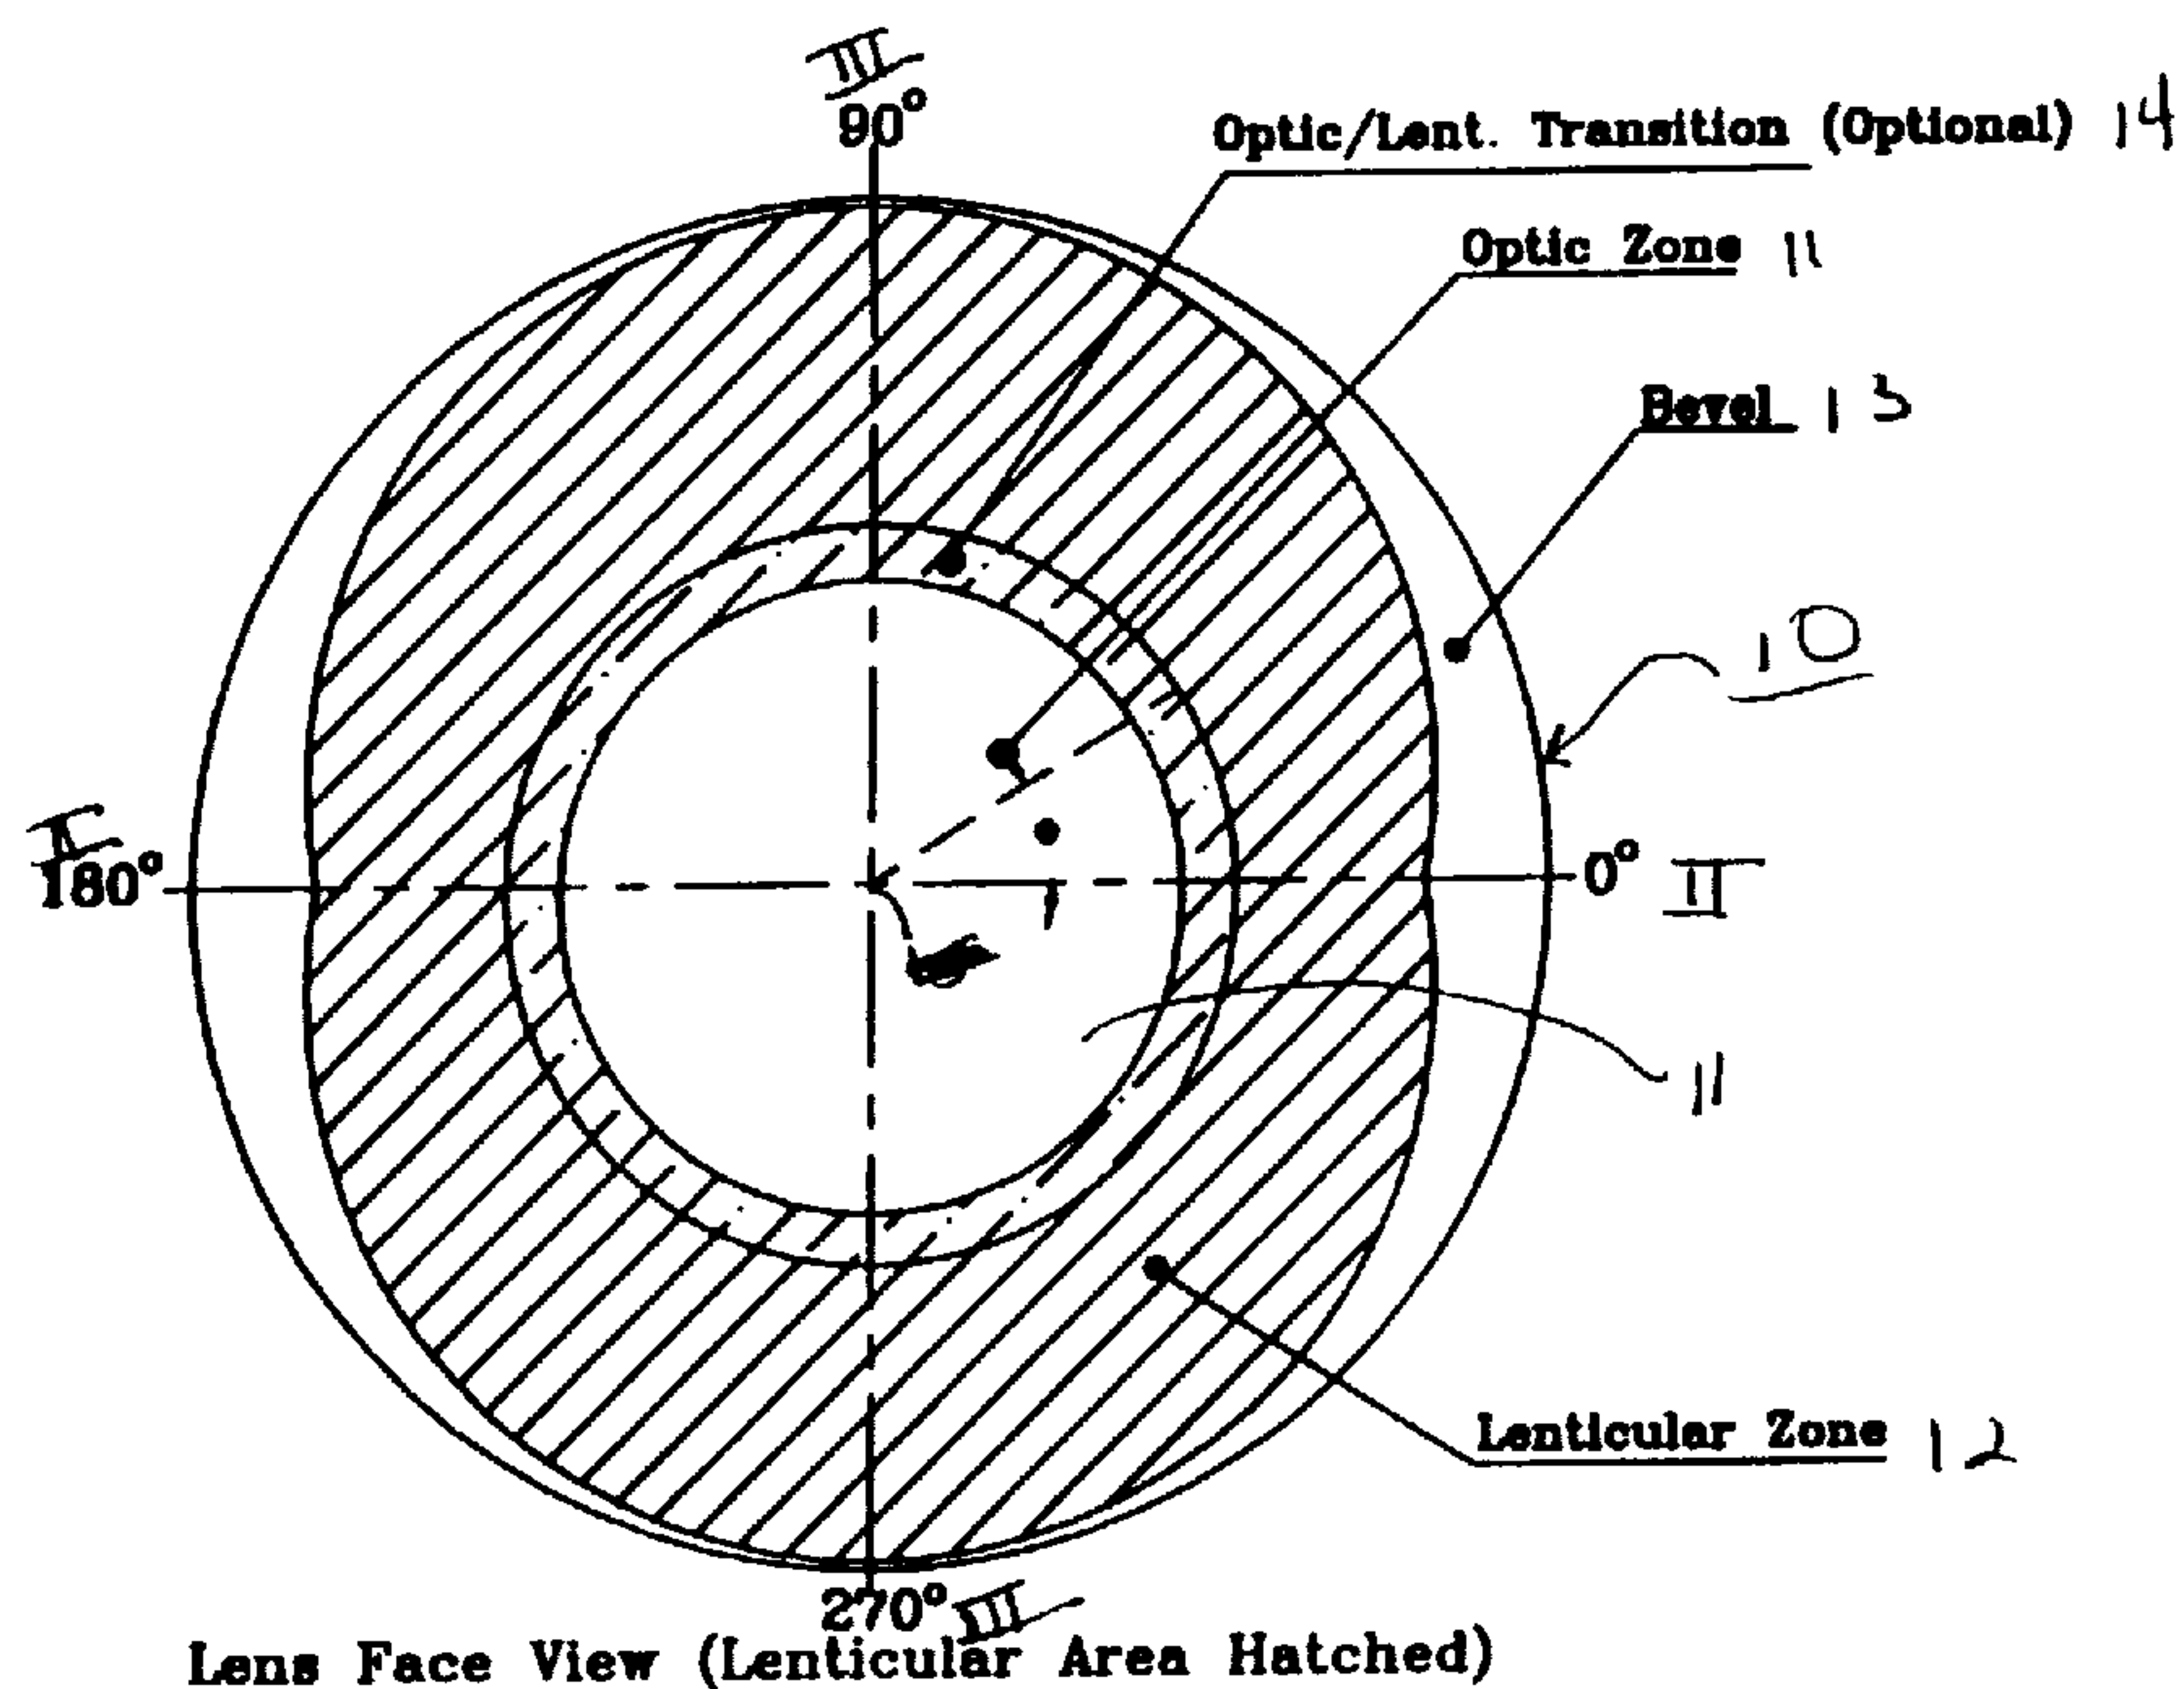

(57) The invention provides a dynamically stabilized contact lenses that uses a variably-shaped lenticular zone to stabilize the angular orientation of the lens in relation to the eye.

DYNAMICALLY STABILIZED CONTACT LENSES

ABSTRACT

The invention provides a dynamically stabilized contact lenses that uses a
5 variably-shaped lenticular zone to stabilize the angular orientation of the lens in
relation to the eye.

10

15

20

25

30

35

40

DYNAMICALLY STABILIZED CONTACT LENSES

5 Field of the Invention

The invention relates to dynamically stabilized contact lenses. In particular, the invention provides contact lenses that use a variably-shaped lenticular zone to stabilize the angular orientation of the lens in relation to the eye.

10 Background of the Invention

It is known that the correction of certain optical defects can be accomplished by imparting non-spherical corrective characteristics to a contact lens, such as cylindrical, bifocal, or multifocal characteristics. The use of contact lenses with these characteristics is problematic in that the lens must be maintained at a specific
15 angular orientation in relation to the eye to be effective. However, the lens will rotate on the eye due to blinking as well as eyelid and tear fluid movement.

Lenses designed to maintain their angular orientation typically are of two general types. One type uses static stabilization to maintain the lens orientation.
20 Examples of static stabilization methods include prismatic balancing, thickening of the lower lens edge, supporting the lens on the lower eyelid, forming depressions or elevations on the lens' surface, and truncating the lens edge.

A second type, dynamically stabilized lenses, use the movement of the
25 eyelids to maintain lens orientation. Dynamic stabilization methods include reducing the thickness of the lens' outer surface at two symmetrically lying regions, thickening two outer regions in the horizontal center axis, and thinning, or slabbing off, top and bottom zones on the lens.

30 The known methods for maintaining lens orientation suffer from a number

of disadvantages. One disadvantage is that specialized tooling is required to produce the lens. Additionally, a number of these methods results in a lens that is uncomfortable to wear. For example, the use of slab offs results in the formation of sharp junctions on the lens surface that produce wearer discomfort. Thus, a need exists for a method of maintaining angular orientation that overcomes some of these disadvantages.

Brief Description of the Drawings

FIG. 1 illustrates a plan view of an embodiment of the invention.
FIG. 2 illustrates a plan view of an embodiment of the invention.
FIG. 3 illustrates a plan view of an embodiment of the invention.
FIG. 4 is a horizontal section taken through line II-II of FIG. 1.
FIG. 5 is a vertical section taken through line III-III of FIG. 1.

Detailed Description of the Invention and Preferred Embodiments

It is a discovery of the invention that dynamically stabilized contact lenses may be obtained by providing a lens with a variably-shaped lenticular zone. The lens of the invention is advantageous in that it may be produced without any specialized tooling and provides a lens that is comfortable to wear.

By "variably-shaped" is meant that each meridian or angular departure from the lens apex is of varying spherical or non-spherical curvature. More specifically, variably-shaped means that the lenticular zone of the lens is shaped so that its shape changes between 0° horizontal and 90° vertical, 180° horizontal and 90° vertical, 180° horizontal and 270° vertical and 360° horizontal and 270° vertical, or any combination thereof. Any suitable shape may be used such as sinusoidal, linear, aspherical, ellipsoidal, polynomial form changes in curvature, or a combination of one or more of these forms.

In one embodiment, the invention provides a contact lens comprising, consisting essentially of, and consisting of a contact lens having an outer convex surface and an inner concave surface, the convex surface comprising a variably-shaped lenticular zone. The variably-shaped lenticular zone of the lens of the invention provides a lens profile that allows the lens to be stabilized in the desired orientation with respect to the eye by the blinking action of the eye.

Contact lenses useful in the invention may be either hard or soft lenses. However, soft contact lenses are preferably used. The lenses of the invention may have any of a variety of corrective optical characteristics incorporated onto the surfaces. For example, the lens may have any one or more of spheric, aspheric, bifocal, multifocal, prismatic, or cylindric corrections. These corrections may be on either or both the convex or concave surface. The invention will find its greatest utility in lenses in which at least one of the corrective characteristics requires that the angular orientation of the lens with respect to the eye remain stable. In a preferred embodiment, the lens of the invention is a toric soft contact lens, meaning that the soft contact has a cylindrical optical surface, or power, to correct for the wearer's astigmatism.

20

Referring now to FIGS 1 to 5, the contact lens of the invention is shown. The lens 10 has a convex outer surface 16 and concave inner surface 15, which concave surface 15 is seated on the cornea of the wearer.

The convex, or outer, surface 16 of the lens has a central optical zone 11 the center of which is the lens center 15. The optical zone 11 may be of any desired geometry, such as spherical, spherical multifocal, toric, toric multifocal, aspherical, or the like that corresponds to the wearer's required prescriptive optical power. The optical zone of the concave, or inner, surface of the lens, similarly may be of any desired geometry, but preferably is a toric, or cylindrical, surface centered about a toric axis that corrects for the wearer's astigmatism.

25
30

A non-optical lenticular zone 12 surrounds the central optical zone 11. The lenticular zone, preferably the convex surface lenticular zone, is variably-shaped.

- 5 Illustrative of useful shapes that all or a portion of the lenticular zone may take include, without limitation, sinusoidal, linear, aspherical, ellipsoidal, polynomial form changes in curvature, or any combination thereof. Preferably, a sinusoidal, or spline, relationship between the 0° horizontal and the 90° vertical, or other degrees, producing a toroidal lenticular zone is preferred.

10

- The junction of the central optical zone 11 and the lenticular zone 12 may be of any convenient shape depending on the form of the lenticular zone used. In a preferred embodiment, the lens is designed so that the mid-periphery and edges
15 remain the same regardless of the optical correction of the lens.

- In cases in which the lenticular zone is kept parametrically constant the junction of the optic and lenticular zones may produce a small, optically and mechanically undesirable area. Thus, in such lenses, it is preferable to use a
20 transition zone 14 located between the central optical zone 11 and the lenticular zone 12 to compensate for the undesirable area.

- The lens of the invention may be made by any convenient method. For example, a computer-controlled lathe with a reciprocating z-axis function may be
25 used. One ordinarily skilled in the art will recognize that changes in shape of the lenticular zone may be employed either or both along each lens meridian or concentric to the lens' central axis. With reference to FIGS. 4 and 5, the cutting radius r will vary as :

$$r = f(\Theta, \Phi)$$

30

Thus, the horizontal meridian II-II is such that the thickest region of the lens surface is at the meridian's periphery. The vertical meridian III-III is such that the thinnest

region of the surface is at the vertical meridian's periphery. In a preferred embodiment, the horizontal meridian periphery has a bevel 13.

5

The lens of the invention may be produced by any conventional method for producing contact lenses. For example, the lens design may be cut into a metal and the metal used to produce plastic mold inserts for the concave and convex surfaces of the lens. A suitable liquid resin is placed between the inserts, the inserts
10 compressed, and the resin cured. Alternatively, the lens of the invention may be produced by cutting the lens on a lathe.

The lens of the invention is advantageous in that the use of varying
15 curvatures in its design allows for more degrees of freedom in design than prior art dynamically stabilized lenses. The change in curvature of the lenticular zone may be a continuous or interrupted pattern depending on the lens meridian angle from the horizontal and distance from the center to achieve the desired lens thickness profile. Thus, it will be apparent to one ordinarily skilled in the art that the invention
20 encompasses any one of a number of alternative designs.

CLAIMS:

- 5 1. A contact lens comprising an outer convex surface and an inner concave surface, the convex surface comprising a variably-shaped lenticular zone.
2. The lens of claim 1 wherein the shape of the variably-shaped lenticular zone changes between the extreme meridians in a form selected from the group consisting
10 of sinusoidal, linear, ellipsoidal, aspherical, polynomial changes in curvature, and combinations thereof.
3. The lens of claim 1 wherein the shape of variably-shaped lenticular zone is toroidal.
- 15 4. The lens of claim 1 wherein the lens is a toric soft contact lens.
5. The lens of claim 1 wherein the convex surface further comprises a transition zone.
- 20 6. The lens of claim 1 wherein the convex surface further comprises a bevel.
7. The lens of claim 1 wherein the convex surface has a geometry that is spherical and the concave surface has a geometry that is toric.
- 25 8. The lens of claim 1 wherein the convex surface has a geometry that is spherical and the concave surface has a geometry that is toric.
9. The lens of claim 1 wherein at least one of the surfaces has a geometry that is
30 toric multifocal.
10. The lens of claim 1 wherein at least one of the surfaces has a geometry that is multifocal spherical.



11. A toric soft contact lens comprising an outer convex surface and an inner concave surface, the convex surface comprising a variably-shaped lenticular zone,
5 wherein the shape of the variably-shaped lenticular zone changes between the extreme meridians in a form selected from the group consisting of sinusoidal, linear, ellipsoidal, aspherical, polynomial changes in curvature and combinations thereof.
12. The lens of claim 11 wherein the shape of variably-shaped lenticular zone is
10 toroidal.
13. The lens of claim 11 wherein the convex surface further comprises a transition zone.
- 15 14. The lens of claim 11 wherein the convex surface further comprises a bevel.
15. The lens of claim 11 wherein the convex surface has a geometry that is spherical and the concave surface has a geometry that is toric.
- 20 16. The lens of claim 11 wherein the convex surface has a geometry that is spherical and the concave surface has a geometry that is toric.
17. The lens of claim 11 wherein at least one of the surfaces has a geometry that is toric multifocal.
25
18. The lens of claim 11 wherein at least one of the surfaces has a geometry that is multifocal spherical.
19. A toric soft contact lens comprising an outer convex surface and an inner
30 concave surface, the convex surface comprising a variably-shaped lenticular zone, wherein the shape of the variably-shaped lenticular zone is toroidal.

20. The lens of claim 19 wherein at least one of the surfaces has a geometry that is toric multifocal.

5

21. The lens of claim 11 wherein at least one of the surfaces has a geometry that is multifocal spherical.


10

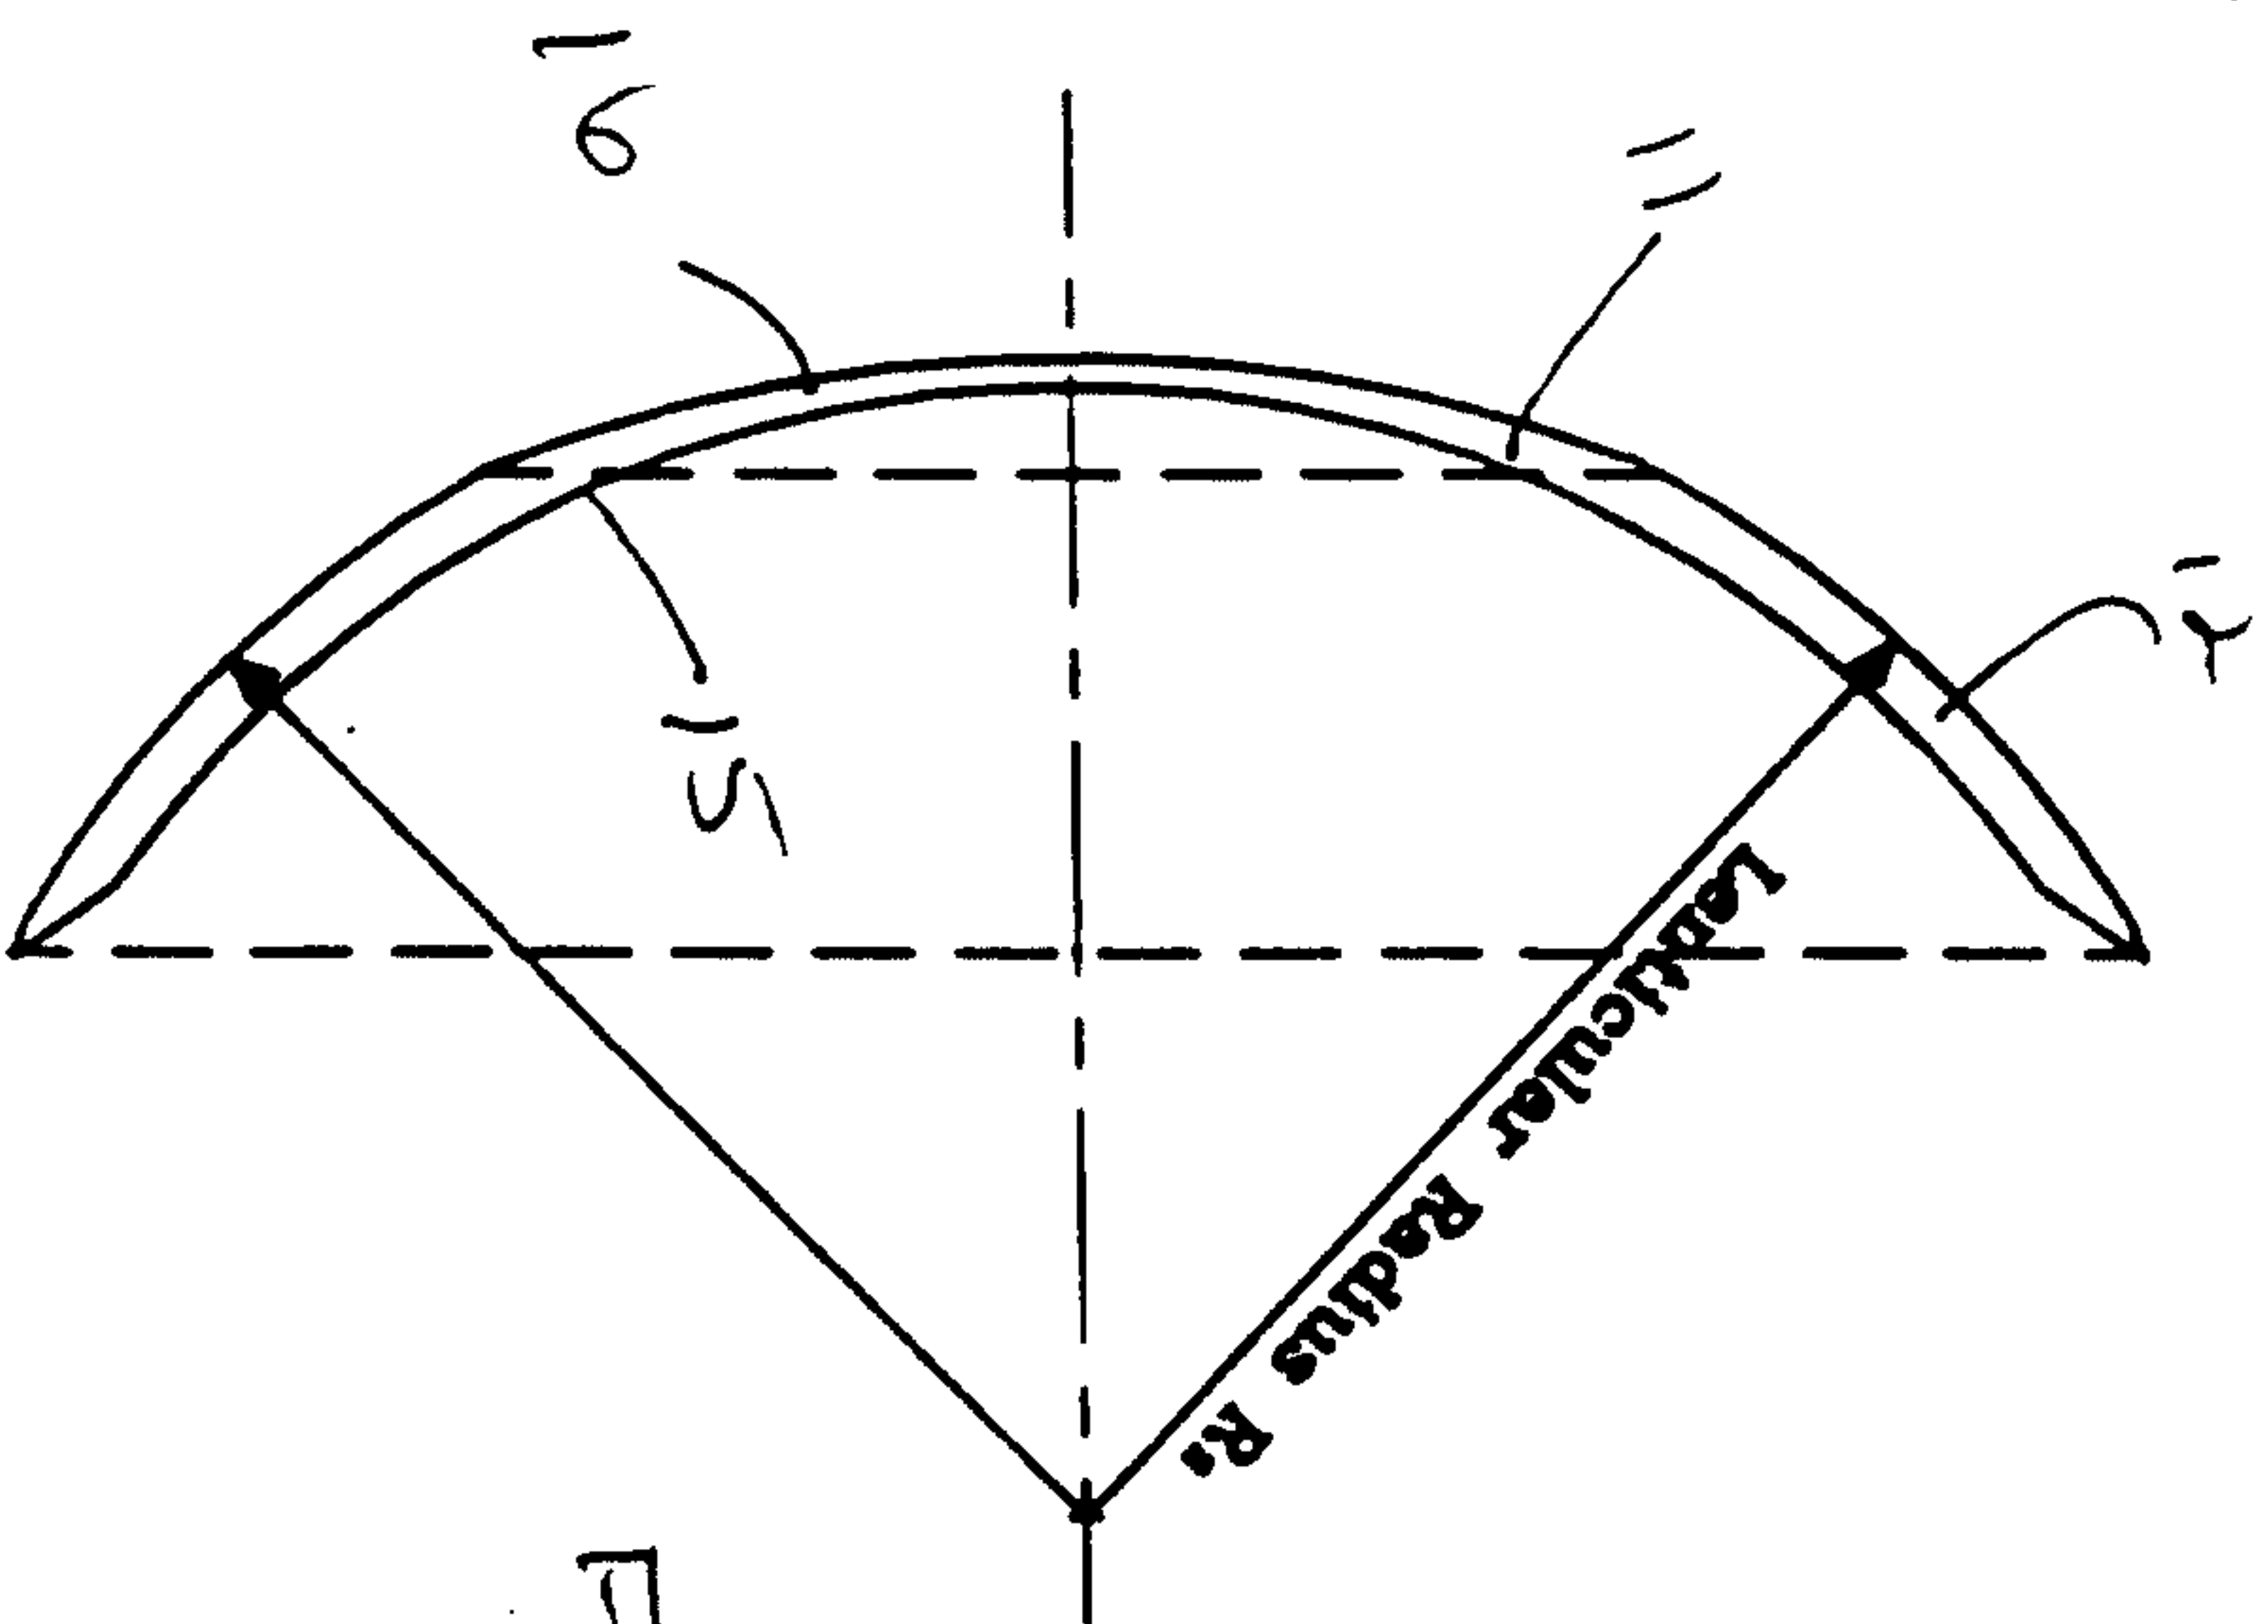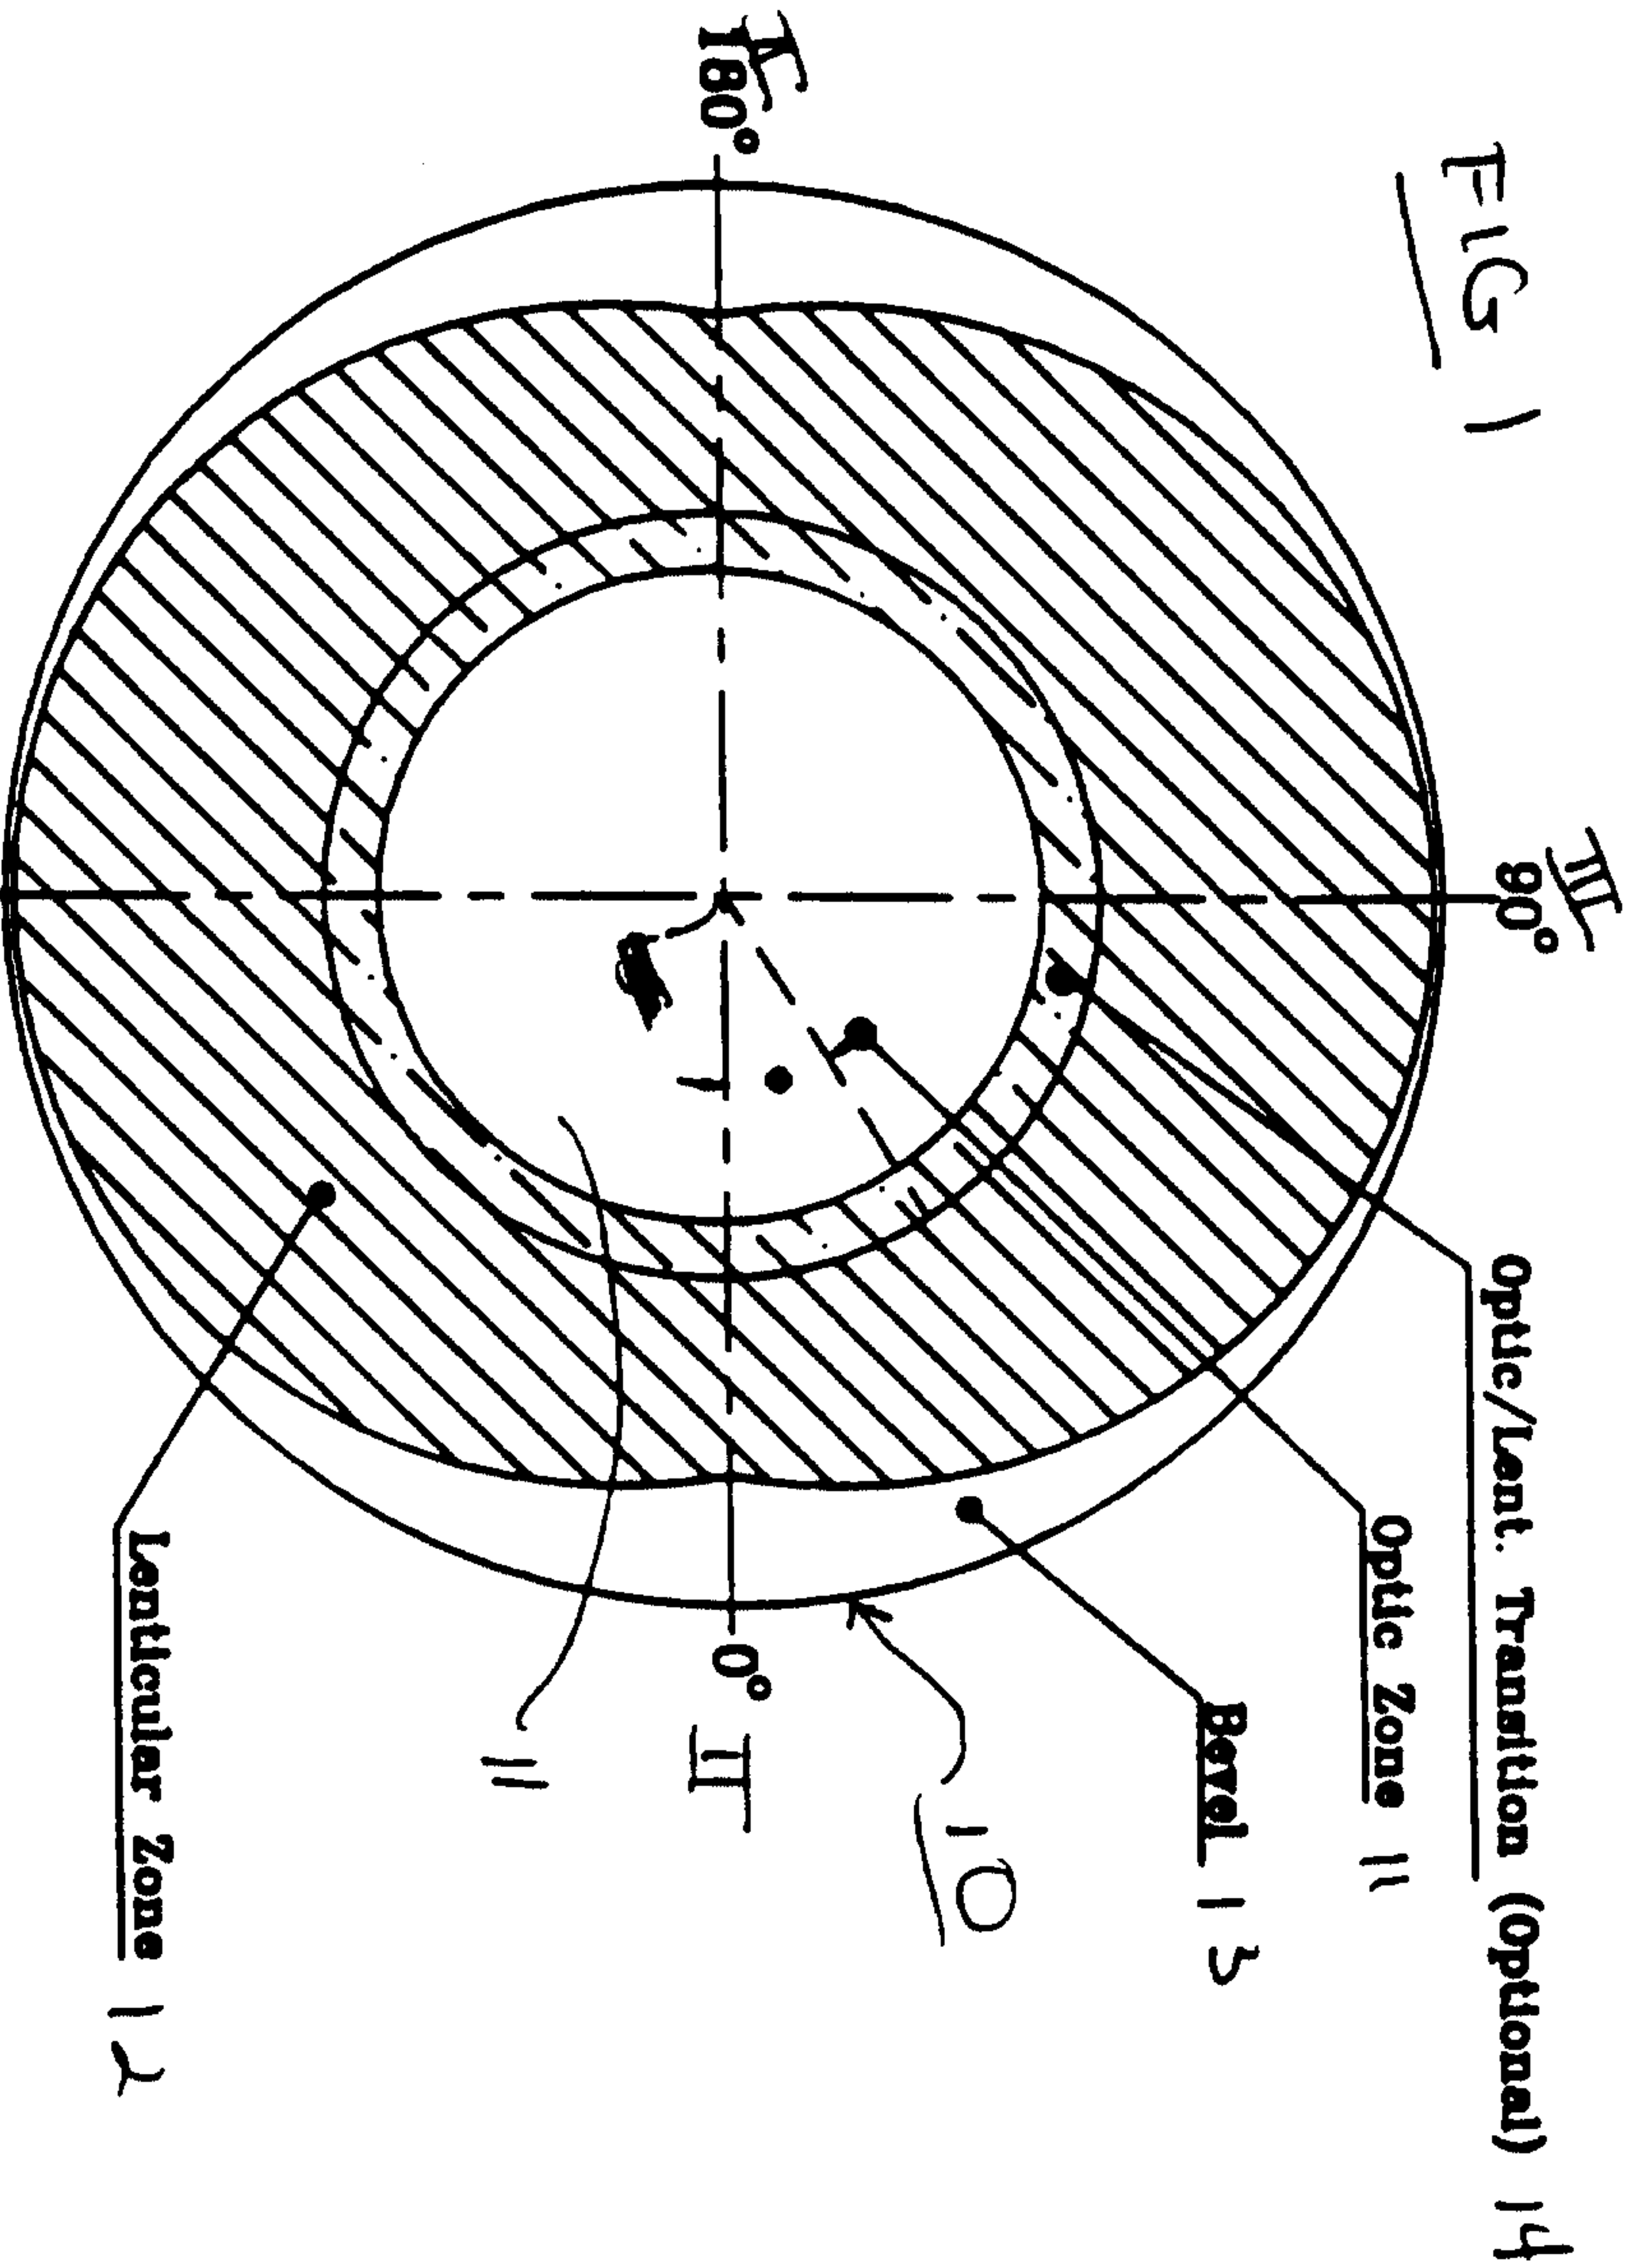

Lens Face View (Lenticular Area Hatched)

Lens Section Through 90°-270°

Cutting Radius R Is A Function Of Φ And Θ

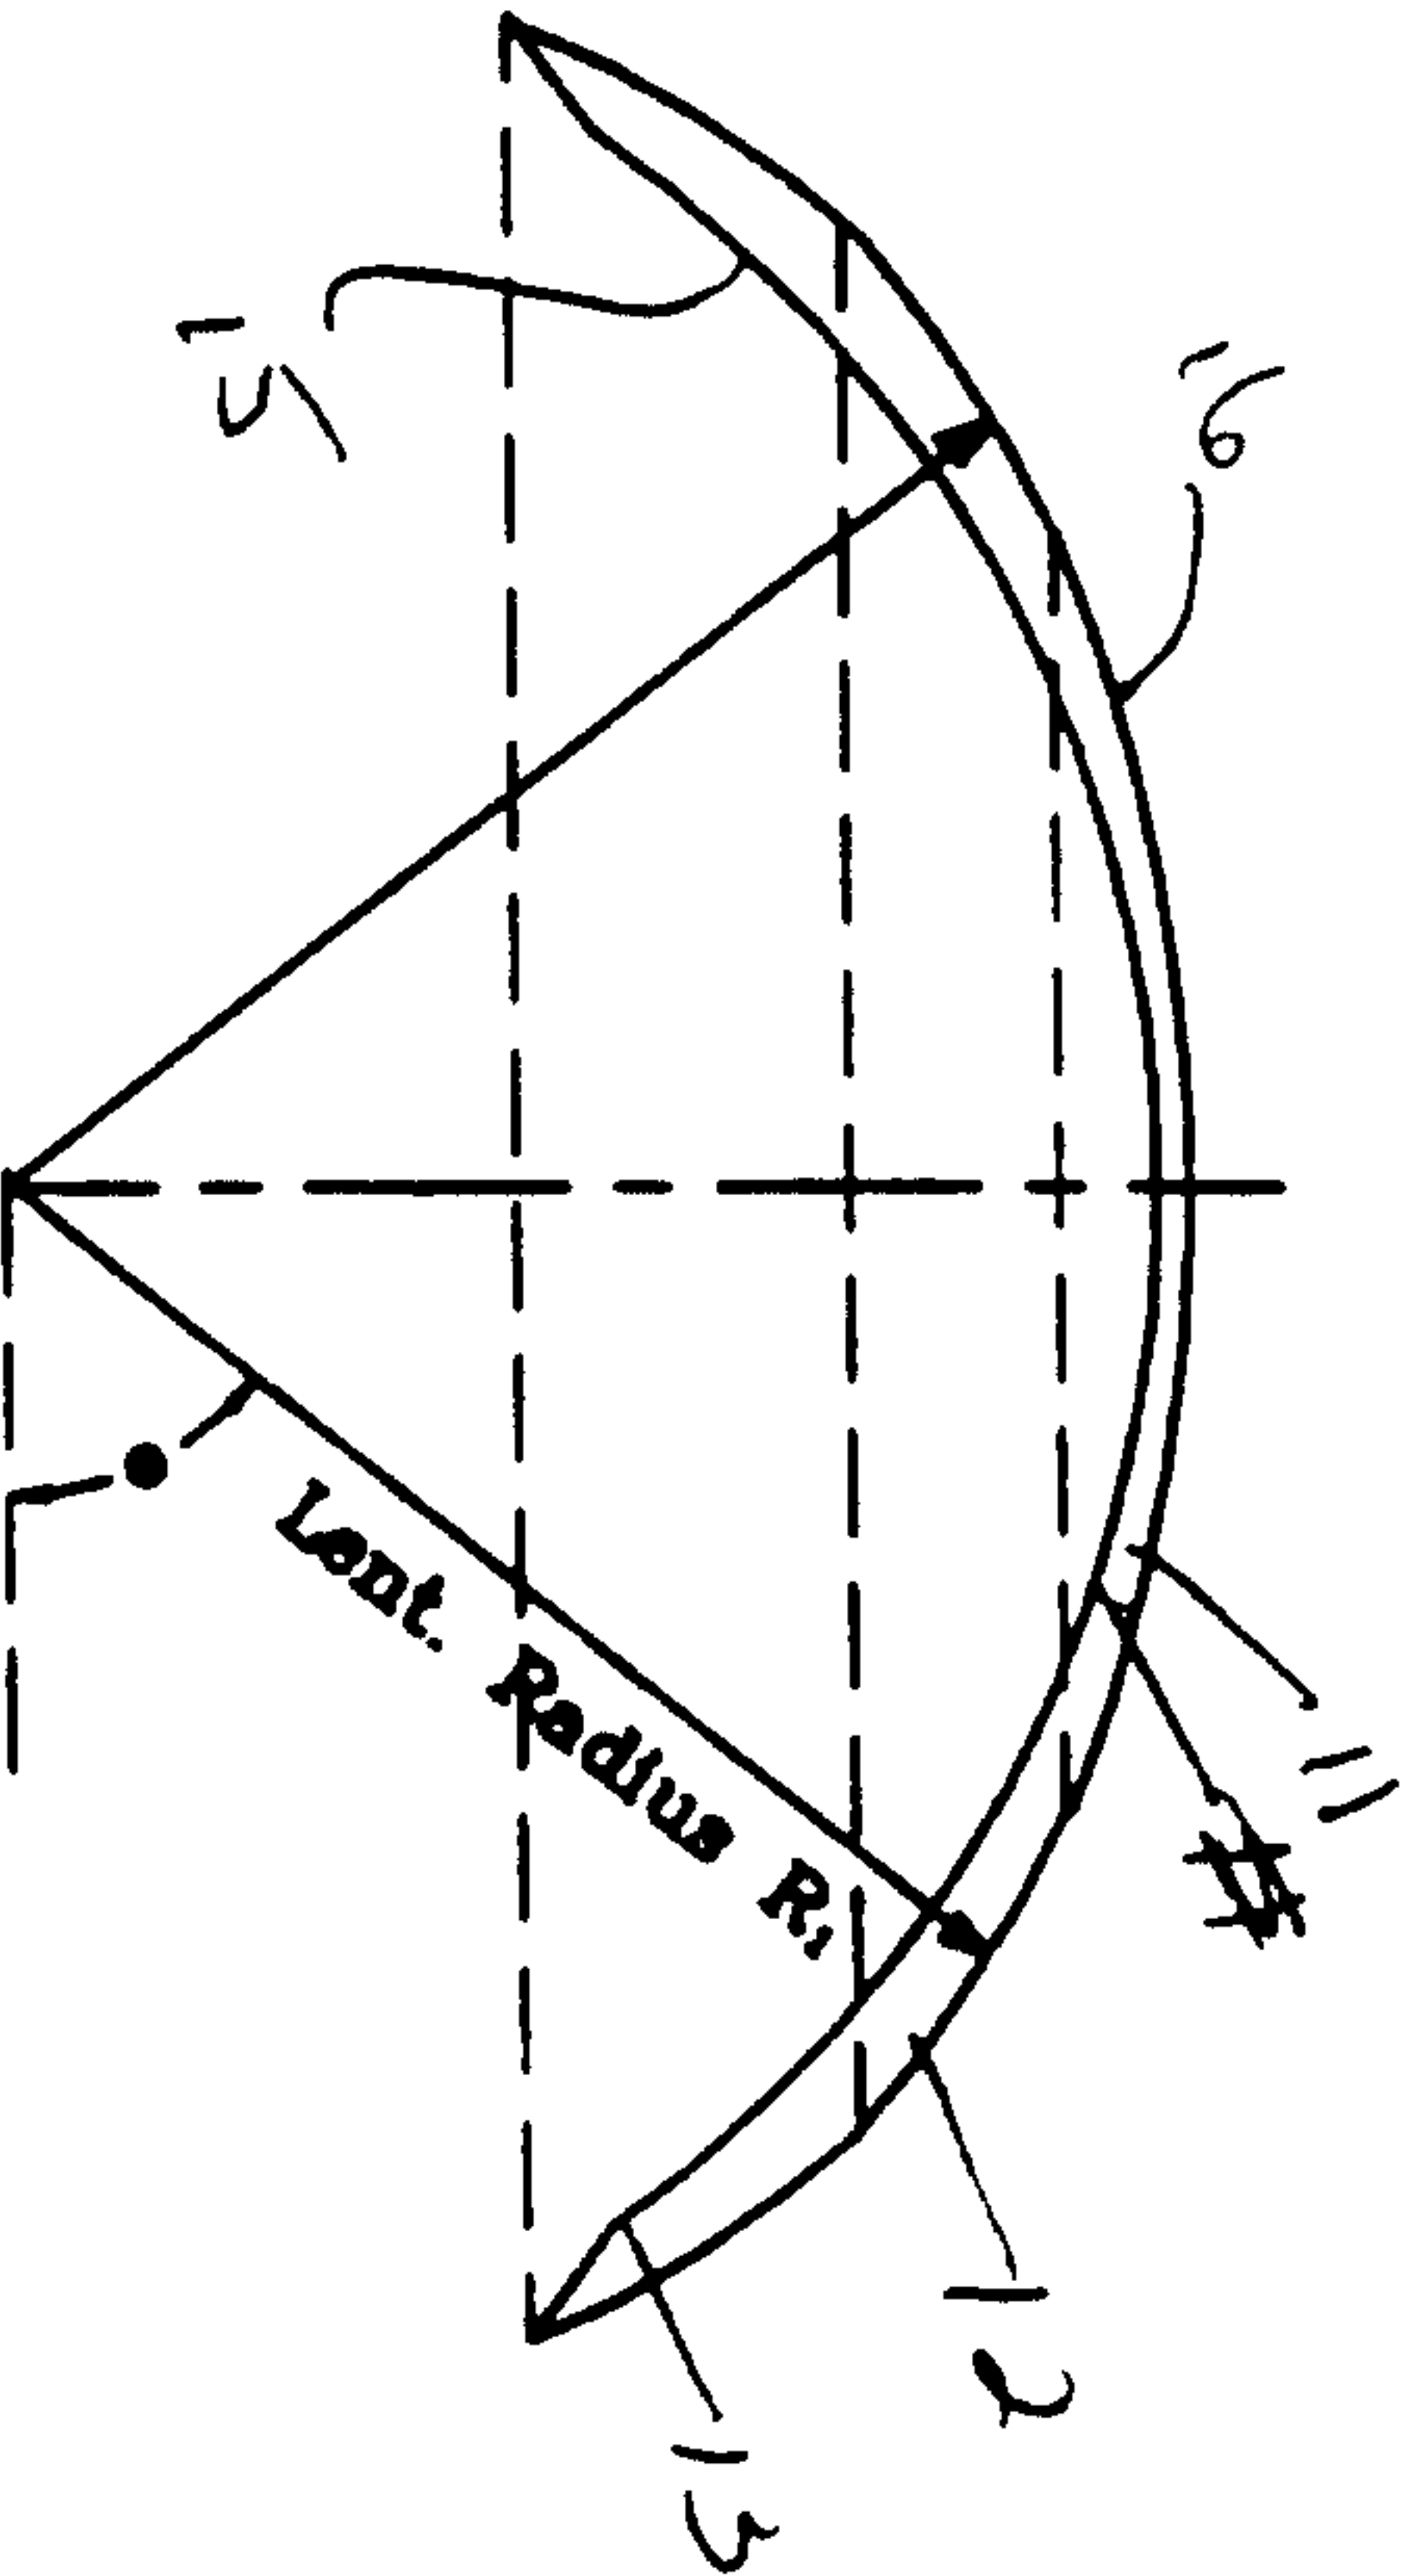

Lens Section Through 0°-180°

FIG 4

F162

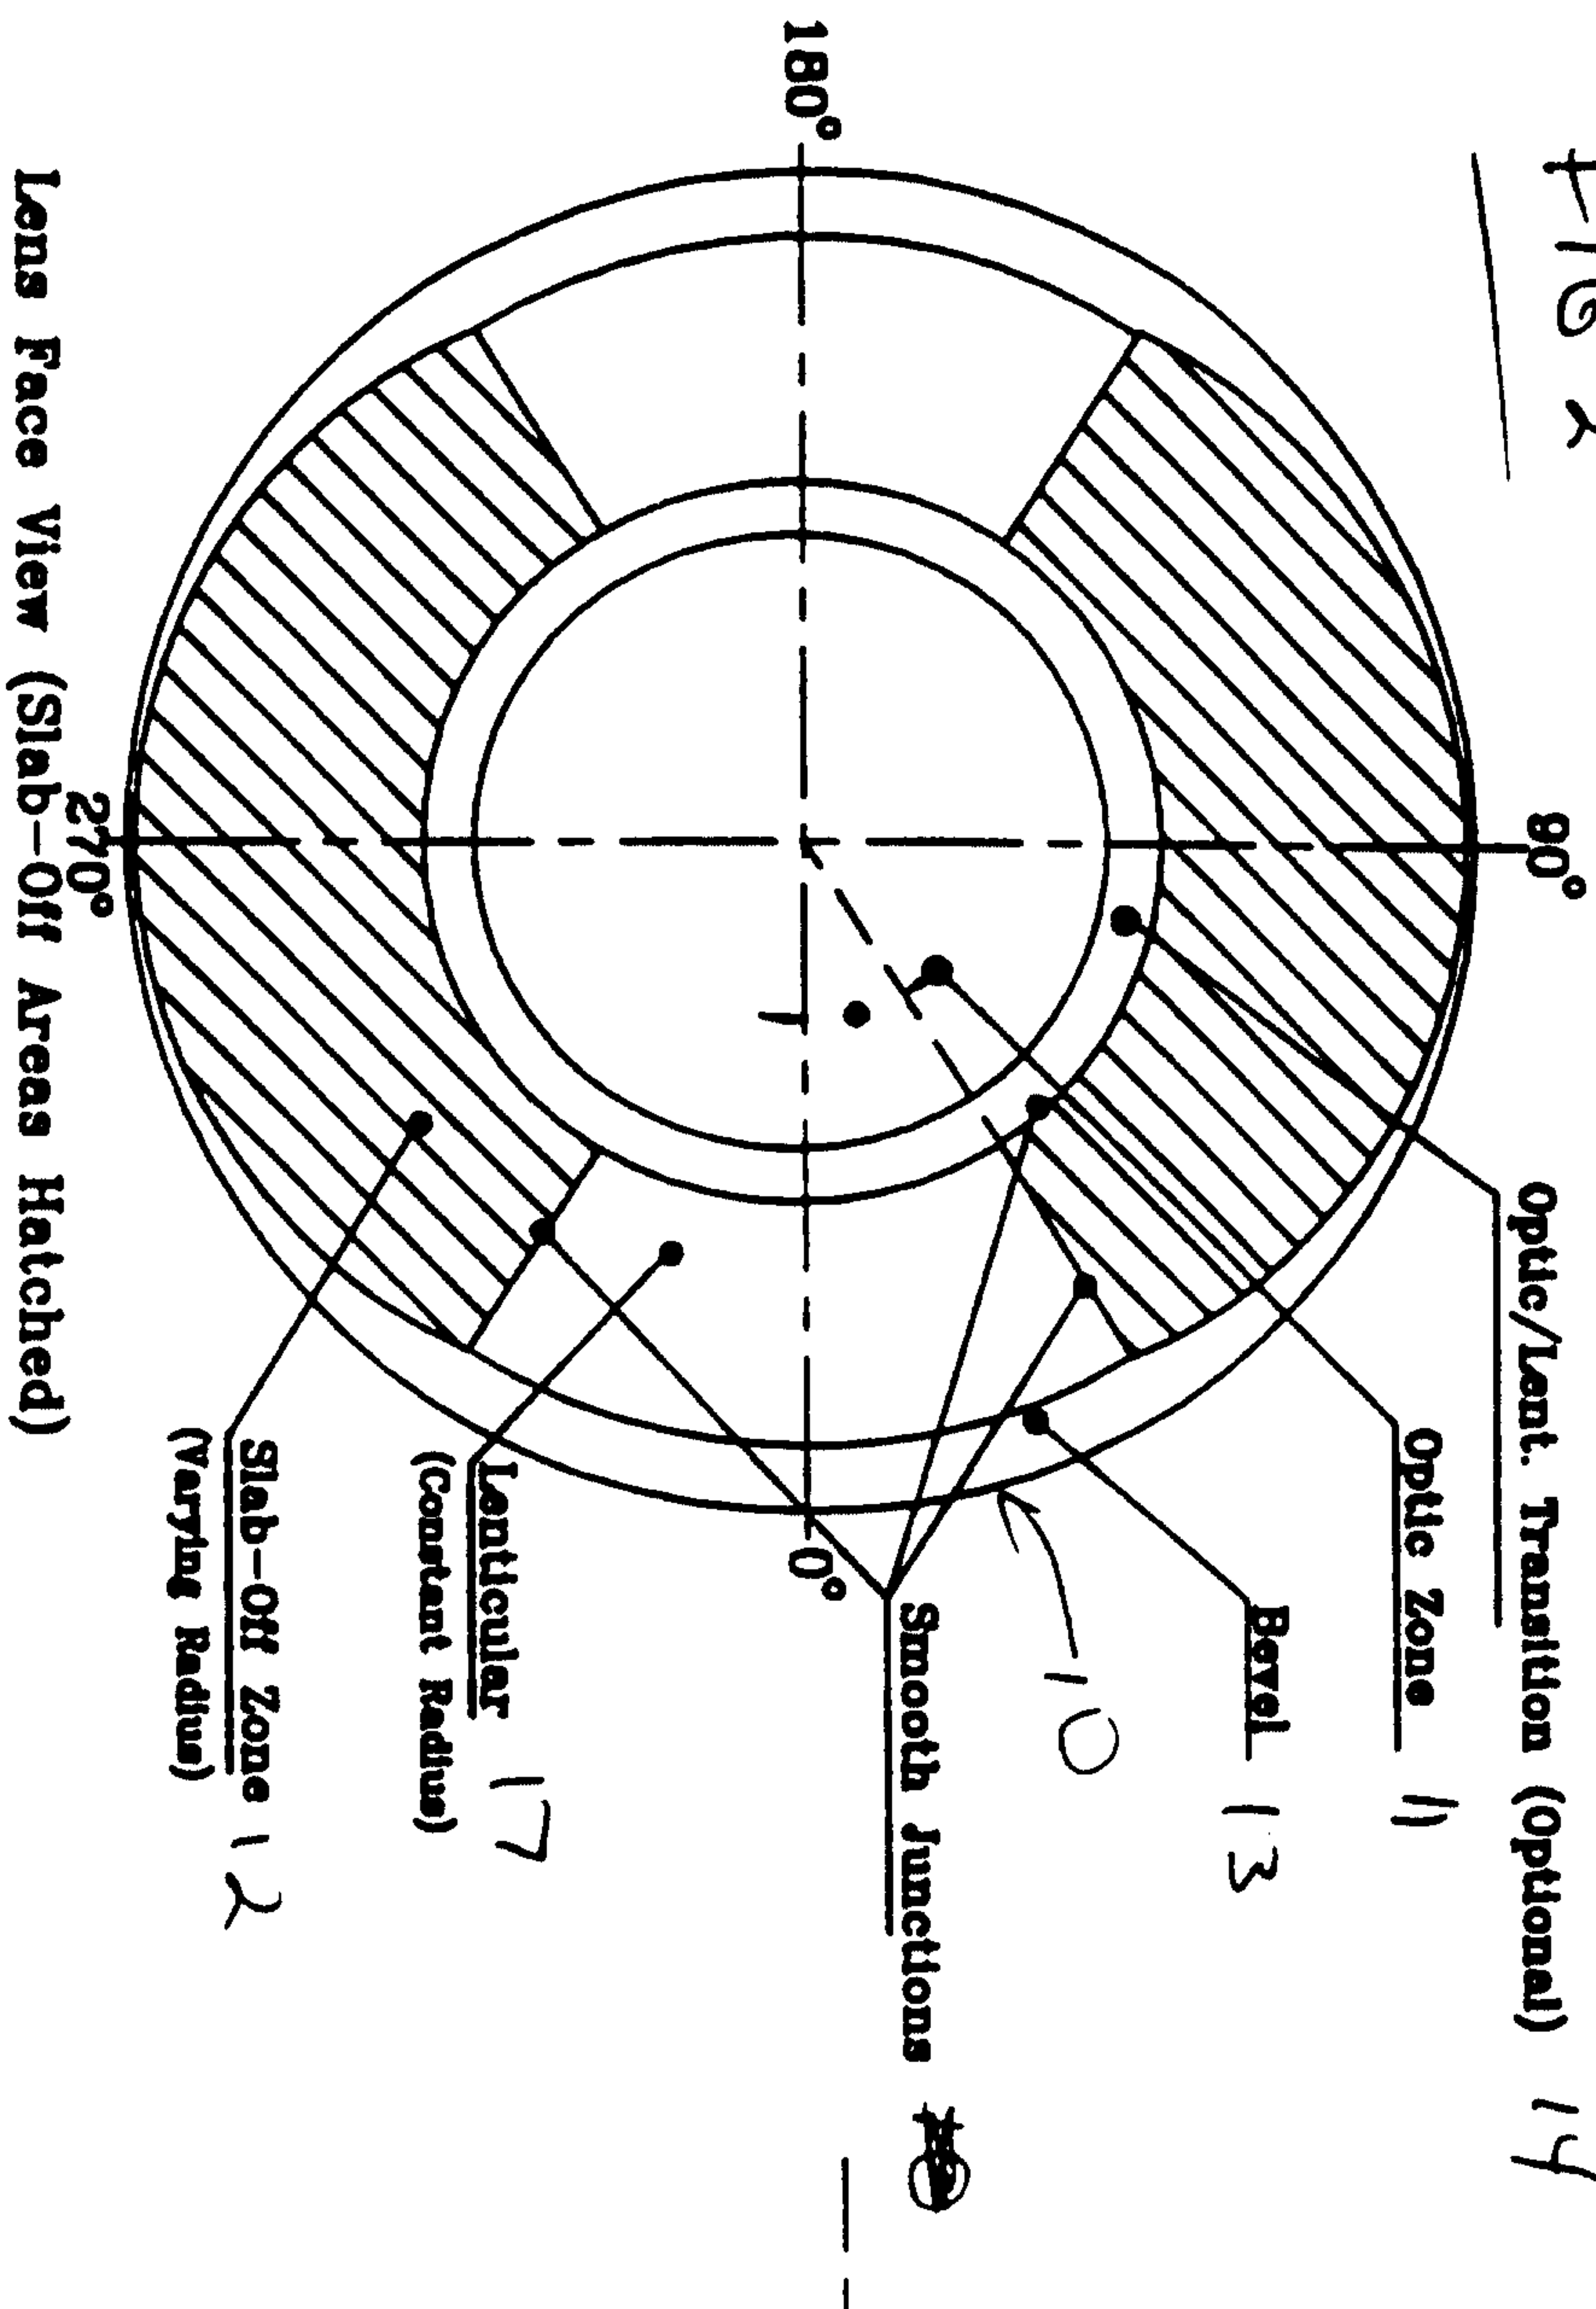


FIG 3

