



HU000033641T2

(19) **HU**(11) Lajstromszám: **E 033 641**(13) **T2****MAGYARORSZÁG****Szellemi Tulajdon Nemzeti Hivatala**

EURÓPAI SZABADALOM SZÖVEGÉNEK FORDÍTÁSA

(21) Magyar ügyszám: **E 13 792440**(22) A bejelentés napja: **2013. 08. 26.**(51) Int. Cl.: **H05B 3/84** (2006.01)**H05B 3/03** (2006.01)**B23K 3/03** (2006.01)**H05B 3/02** (2006.01)(96) Az európai bejelentés bejelentési száma:
EP 20130792440(97) Az európai bejelentés közzétételi adatai:
EP 2888926 A1 **2014. 03. 06.**

(86) A nemzetközi (PCT) bejelentési szám:

PCT/IB 13/056891(97) Az európai szabadalom megadásának meghirdetési adatai: **EP 2888926 B1** **2016. 12. 28.**

(87) A nemzetközi közzétételi szám:

WO 14033612

(30) Elsőbbségi adatok:

RM20120422	2012. 08. 27.	IT
RM20120423	2012. 08. 27.	IT

(73) Jogosult(ak):

Easy Automation S.r.l., 00071 Pomezia (IT)

(72) Feltaláló(k):

Vincenzi, Augusto, 00125 Roma (IT)

(74) Képviselő:

**Danubia Szabadalmi és Jogi Iroda Kft.,
Budapest**

(54)

Összeállítás és eljárás bevonatelem hordozófelületre való felhordására

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 888 926 B8**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Bibliography INID code(s) 73

(48) Corrigendum issued on:
31.05.2017 Bulletin 2017/22

(45) Date of publication and mention
of the grant of the patent:
28.12.2016 Bulletin 2016/52

(21) Application number: **13792440.3**

(22) Date of filing: **26.08.2013**

(51) Int Cl.:
H05B 3/84 (2006.01) **H05B 3/03** (2006.01)
H05B 3/02 (2006.01) **B23K 3/03** (2006.01)

(86) International application number:
PCT/IB2013/056891

(87) International publication number:
WO 2014/033612 (06.03.2014 Gazette 2014/10)

(54) **SYSTEM AND METHOD FOR APPLYING OF A COATING ELEMENT TO A BEARING SURFACE**
SYSTEM UND VERFAHREN ZUM AUFBRINGEN EINES BESCHICHTUNGSELEMENTS AUF EINER
TRAGEFLÄCHE
SYSTÈME ET PROCÉDÉ D'APPLICATION D'UN ÉLÉMENT DE REVÊTEMENT SUR UNE SURFACE
D'APPUI

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **27.08.2012 IT RM20120422**
27.08.2012 IT RM20120423

(43) Date of publication of application:
01.07.2015 Bulletin 2015/27

(73) Proprietor: **Easy Automation S.r.l.**
00071 Pomezia (IT)

(72) Inventor: **Vincenzi, Augusto**
00125 Roma (IT)

(74) Representative: **Papa, Elisabetta et al**
Società Italiana Brevetti S.p.A
Piazza di Pietra, 39
00186 Roma (IT)

(56) References cited:
EP-A2- 1 577 046 WO-A1-2004/082934
WO-A1-2007/075242 DE-A1-102009 010 840

EP 2 888 926 B8

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

(19)



(11)

EP 2 888 926 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
28.12.2016 Bulletin 2016/52

(51) Int Cl.:
H05B 3/84 (2006.01) **H05B 3/03** (2006.01)
H05B 3/02 (2006.01) **B23K 3/03** (2006.01)

(21) Application number: **13792440.3**

(86) International application number:
PCT/IB2013/056891

(22) Date of filing: **26.08.2013**

(87) International publication number:
WO 2014/033612 (06.03.2014 Gazette 2014/10)

(54) SYSTEM AND METHOD FOR APPLYING OF A COATING ELEMENT TO A BEARING SURFACE

SYSTEM UND VERFAHREN ZUM AUFBRINGEN EINES BESCHICHTUNGSELEMENTS AUF EINER
TRAGEFLÄCHE

SYSTÈME ET PROCÉDÉ D'APPLICATION D'UN ÉLÉMENT DE REVÊTEMENT SUR UNE SURFACE
D'APPUI

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **27.08.2012 IT RM20120422**
27.08.2012 IT RM20120423

(43) Date of publication of application:
01.07.2015 Bulletin 2015/27

(73) Proprietor: **Easy Automation S.r.l.**
00125 Pomezia (IT)

(72) Inventor: **Vincenzi, Augusto**
00125 Roma (IT)

(74) Representative: **Papa, Elisabetta et al**
Società Italiana Brevetti S.p.A
Piazza di Pietra, 39
00186 Roma (IT)

(56) References cited:
EP-A2- 1 577 046 WO-A1-2004/082934
WO-A1-2007/075242 DE-A1-102009 010 840

EP 2 888 926 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field of the invention

[0001] The present invention relates to a device and a method for applying a coating element to a support surface by means of administration of heat, in particular by means of heat obtained by the so-called Joule effect.

[0002] More particularly, this invention relates to the application of conductive elements, so-called "busbars", onto plastic supports for manufacturing thermal wind-screens and/or for manufacturing photovoltaic panels.

Background of the invention

[0003] In the motor-vehicle sector frequently filaments of metal are applied onto windscreens in order to ensure rapid defrosting in climatic conditions such as rain, snow or ice.

[0004] Generally, during the process for manufacturing windscreens, as in the manufacture of safety glass, it is envisaged bonding together two glass planes by means of a sheet of polyvinyl butyral (PVB).

[0005] In particular, during the manufacture of wind-screens which incorporate conductive filaments, these filaments are applied onto the sheet of polyvinyl butyral before it becomes an integral part of the windscreen itself.

[0006] Usually the metal filaments positioned along straight paths parallel to each other are laterally confined by conductive strips, so-called "busbars", which are configured to distribute electric current in each of the filaments so as to ensure operation thereof.

[0007] In this sector, the operations of applying the busbars, are usually performed manually by an operator, with the metal strip usually being applied by means of a hot iron.

[0008] The manual operation performed by the operator is necessary to ensure the working accuracy and precision required during positioning of the element to be fixed onto the plastic support, in particular when applied along curved paths.

[0009] The main disadvantage of the manual system used in the prior art is that such manual application results in extremely high manufacturing costs both in terms of manufacturing time and in terms of labour.

[0010] A further disadvantage is the lack of reproducibility of the quality of the end product, a characteristic which is mainly dependent on the experience and skill of the operator who performed the application operation.

[0011] In particular, in operations involving the application of conductive elements onto plastic supports, insufficient heating of the joining zone may result in incomplete application of the element onto the support. Similarly, excessive heating may result in local deterioration of the plastic support with a consequent weakly set joint during cooling of the working zone.

[0012] Therefore, inadequate heating of the joining zone between conductive element and support surface

gives rise, during quality control checks, to a large number of rejects.

[0013] Documents EP 1 577 046 A2, DE 10 2009 010840 A1 and WO 2007/075242 A1 disclose systems for applying coatings according to the prior art.

Summary of the invention

[0014] The technical problem posed and solved by the present invention is therefore that of providing a device and method for applying coating elements, able to overcome the drawbacks mentioned above with reference to the prior art.

[0015] This problem is solved by a system according to claim 1 and also, according to the same inventive idea, by a system according to claim 7 and a method according to claim 20.

[0016] Preferred characteristic features of the present invention are defined in the dependent claims thereof.

[0017] According to its more general aspect the invention relates to a system which comprises a heating device, suitable for heating a portion of the coating element in a configuration where there is contact between the heating device and the portion of coating element, and automatic movement means, able to move the device along the path for application of the coating element to the support surface.

[0018] The invention achieves reproducibility of the degree of quality of the end product by means of automation of the displacement of the heating device. Advantageously, the invention reduces the number of production rejects due to the uncertain quality of the manual operations.

[0019] A further advantage of the present invention is that the presence of the automatic movement means reduces considerably the working time, making it possible for example to perform application of the coating at a speed of more than 300 mm/s compared to the maximum speed of 100 mm/s which can be achieved by means of manual operations.

[0020] Preferably, the invention also allows measurement of the quantity of power transferred during application of the coating element.

[0021] In a second preferred version, advantageously the invention allows adjustment and control of the electric power delivered to the heating device so as to ensure a constant administration of the heat.

[0022] In general terms, the invention allows automatic application of said coating elements in a highly controlled and reproducible manner.

[0023] Further advantages, characteristic features and the modes of use of the present invention will become clear from the following detailed description of a number of preferred embodiments thereof, provided by way of a non-limiting example.

Brief description of the drawings

[0024] Reference shall be made to the figures of the accompanying drawings in which:

- Figure 1 shows a perspective view of a first preferred embodiment of the system according to the invention;
- Figure 2 shows a front perspective view of the heating device in a preferred embodiment of the system according to the present invention;
- Figure 3 shows a perspective view, from the rear, of the device according to Figure 2;
- Figure 4 shows a perspective view of a detail of the device according to Figure 2;
- Figure 5 shows a perspective view of a detail of the device according to Figure 2;
- Figure 6 shows a perspective view, from above, of a detail of a second preferred embodiment of the device according to the invention;
- Figure 7 shows a perspective view, from above, of a detail of an alternative embodiment of the device according to Figure 6;
- Figure 8 shows a perspective view, from below, of a further detail of the system according to Figure 1;
- Figure 9 shows a front perspective view of a device for cleaning the heating device according to Figure 2;
- Figure 10 show a schematic cross-sectional view of the cleaning device according to Figure 9 in an operating configuration ;
- Figure 11 shows a perspective view of a further preferred embodiment of the system according to the invention.

Detailed description of preferred examples of embodiment

[0025] As will be illustrated in greater detail further below, reference will be made to different preferred embodiments of the invention. All the embodiments achieve the same advantages mentioned above with reference to the system according to the invention, by means of the same technical solution of automatic application of a coating element to a support surface by means of heating obtained by the Joule effect.

[0026] Reference will be made below to the aforementioned preferred embodiments, using the same reference

number to denote components which are substantially common to the different constructional forms.

[0027] As shown in Figure 2, a first preferred embodiment of the present invention concerns a heating device 1 for applying a coating element 4 to a support surface along an application path, by means of administration of heat obtained by the Joule effect. The heating device 2 according to the first preferred embodiment described here comprises a first electrode 5 and a second electrode 6 which can be connected to an electric power generator and are configured to form a part of an electric circuit in which a portion of the coating element 4 can be arranged between the first electrode 5 and the second electrode 6 so as to close the electric circuit and obtain heating by the Joule effect of the portion of the coating element 4 following a flow of a current in the electric circuit.

[0028] Moreover, the overall configuration of the heating device 1 is such that the first electrode 5 and the second electrode 6 are able to slide with respect to the coating element 4 during application of the coating element 4 to the support surface.

[0029] Advantageously, therefore, a relative movement of the electrodes and the coating element to be applied is envisaged.

[0030] The relative sliding of the first electrode and second electrode with respect to the coating element prevents any localized overheating both on the coating element and of the electrodes themselves. Application of the coating element therefore takes place at a substantially constant temperature.

[0031] In particular, the coating element 4 is made of conductive material.

[0032] Preferably, each electrode comprises an end for connection to the heating device 2 and a free end for contact between the electrode and the coating element 4 in which electric current flows.

[0033] In particular, each electrode has a substantially planar free end configured to interface, for example in an engaging configuration, with the coating element 4.

[0034] Measurement means 8, for example comprising a sensor, designed to measure the flow of current in at least one of the aforementioned electrodes, are positioned in the region of at least one of the aforementioned first electrode 5 and second electrode 6.

[0035] In the preferred embodiments described here, means are also provided for adjusting and controlling the flow of current in at least one of the aforementioned electrodes, said means being designed to allow delivery of a constant amount of power in the portion of the coating element 4.

[0036] In particular, during operation of the system according to the present invention, once contact has been established between the aforementioned first electrode 5 and second electrode 6 and the closing means of the electric circuit, a predetermined amount of power is delivered by the generator and measured on at least one of the two electrodes.

[0037] This amount of electric current flows in the elec-

tric circuit formed following engagement between the aforementioned first electrode 5 and second electrode 6 and the coating element portion 4 in which the aforementioned flow occurs.

[0038] In one embodiment of the device according to the present invention it is envisaged using rotating electrodes which are able to roll over the surface of the coating element 4 during the aforementioned relative sliding step.

[0039] In other words, the dynamic heating obtained by means of the Joule effect, with the electrodes making dynamic contact with the coating material, may be achieved by means of sliding electrodes or by means of rotating electrodes.

[0040] In a further preferred embodiment it is envisaged using a fixed electrode and a rotating electrode, the latter being in particular able to roll over the surface without sliding. This further embodiment, as shown in Figure 11, is particularly advantageous. In particular, during use, in the region where there is contact between the rotating electrode and the coating element 4, the rolling friction present is able to reduce significantly the presence of dust and impurities which could be produced in the case of sliding friction.

[0041] Therefore, for example, the presence of a suction device, as described below, is not required in the region of the rotating electrode. Preferably, the rotating electrode is positioned, in the direction of welding travel, after the sliding electrode. In this way, advantageously, the rotating electrode manages to keep the busbar in position - as will be described more fully below - without having to provide a first statically welded portion.

[0042] Yet another embodiment envisages the presence of a first rotating electrode 5 and a second rotating electrode 6 which have a first and second axis of rotation substantially coaxial with each other, in particular the first and second axis of rotation being respectively substantially perpendicular to the welding path.

[0043] Advantageously, in such a configuration, during use, the current flow will take place in a direction substantially perpendicular to the desired application path. In particular, the current will pass through a section of the coating element where there is no frictional interaction with the electrodes. In this way the operating inefficiency due to the impurities generated by the friction between the electrodes and the coating element is reduced.

[0044] In particular, the electrodes are configured so as to be positioned, during welding of a strip-like coating element 4, respectively along the outer edges of the strip-like element.

[0045] Preferably, in all the embodiments described here, the device according to the present invention also comprises means 20, 21, 22, 23 for supporting and positioning a coating element 4, suitable for supporting and positioning the coating element 4 along the desired application path.

[0046] The aforementioned supporting and positioning means comprise, for example, a plurality of rollers which are rotatably mounted on a respective plurality of spin-

dles attached to the heating device. The aforementioned rollers support the coating element, which has in particular a strip-like form, in the form of reels.

[0047] The coating element 4 may be unwound from a reel 20 for storing the strip-like element, said reel being for example removably attached to the heating device 2.

[0048] Preferably, each pin is able to be moved along its longitudinal axis in such a way as to allow a change in format of the strip-like coating element, in particular change of format of strip-like elements with different widths.

[0049] In particular, as shown in Figures 2 and 3, the movement of the storage reel is produced by a motor, for example a brushless motor.

[0050] In a configuration during use, as shown in Figure 1, a first portion of the coating element 4, partially unwound from the storage reel 20, is positioned on a plurality of drive elements - for example at least a first drive wheel 21 and second drive wheel 22 - which are suitably positioned and adjusted to obtain a desired degree of tensioning of the strip-like coating element 4 in the zone where it is applied onto the support surface.

[0051] In particular, as shown in the figures, the second drive wheel 22 is positioned in an end zone of the heating device 2, for example in a zone of the device 2 designed to make contact with the coating element 4 in an operating condition of the device 1.

[0052] In a configuration during use of a preferred embodiment of the system according to the present invention, the coating element 4 is kept in position by means of a retaining element 80. In particular, this retaining element comprises a suction mouth configured to retain a portion of the coating element 4 by means of application of a vacuum.

[0053] In an alternative embodiment, not shown in the figures, the aforementioned element 80 comprises a plurality of contact needles for retaining the coating element with respect to the support surface.

[0054] In an alternative embodiment it is envisaged using a sucker element 80.

[0055] In particular, the device 1 according to the embodiments described here also comprises an element 81 for cutting the coating element 4.

[0056] For example, the cutting element is formed as a blade 81, preferably connected to the retaining element 80, so as to perform cutting of the coating element 4, in particular during use at the end of a first coating operation.

[0057] In particular, in order to keep the coating element portion tensioned, for example following the aforementioned cutting operation, a locking element positioned in a configuration where it makes support contact against the second drive wheel 22 is provided.

[0058] In the first preferred embodiment described here, the device 1 according to the invention also comprises suction means 15 configured to remove by means of suction any residues present on the coating element 4. In particular, these suction means 15, as shown in

Figure 8, comprise two suction mouths positioned relative to each other so as to remove by means of suction, from different angles, any impurities from the surface of the coating element 4.

[0059] For example, the aforementioned impurities comprise residual material which forms on the surface of the coating element following interaction between the electrodes and the coating element during dynamic contact.

[0060] Preferably, the suction means 15 are attached to the heating device 1 so that they may be moved, together with the device 1, above the coating element 4.

[0061] In particular, the suction device 15 is supported above the coating element 4 by revolving elements, for example wheels, which in particular may be adjusted heightwise with respect to the coating 4 so as to allow positioning of the suction mouths at an optimum suction height.

[0062] In the first embodiment described here, the device 1 according to the invention also comprises positioning means able to move the aforementioned first electrode 5 and second electrode 6 from a lowered operating configuration, in which the first electrode 5 and second electrode 6 are able to interact with the coating element 4, into a raised configuration, in which the first electrode 5 and second electrode 6 are able to interact with a cleaning element 30.

[0063] In particular, the aforementioned movement takes place in a plane substantially perpendicular to the application path of the coating element 4.

[0064] In a raised cleaning position, the electrodes are positioned in a direction substantially perpendicular to the direction of use and in particular any traces of contaminating material are removed from the surfaces of the connecting ends suitable for interacting with the coating element 4.

[0065] These positioning means are also envisaged in the aforementioned further embodiment, in particular for allowing positioning of the sliding electrode in a direction substantially perpendicular to the direction of use as described above. As shown in Figure 10, the cleaning element 30 comprises for example a brush 32 preferably made of brass.

[0066] For example, the zone of interaction between electrodes and brush is enclosed inside a suction chamber from which any residual impurities are removed by means of suction mouths 33 and 34, as shown in Figure 9.

[0067] The cleaning device 30 also comprises an abrasive belt 31.

[0068] The abrasive belt 31, in the same way as the brush 32, interacts with the contact ends of the first electrode 5 and second electrode 6 for removal of impurities, for example produced during use, i.e. during sliding of the first electrode 5 and second electrode 6 with respect to the coating element 4.

[0069] In all the preferred embodiments described here, the system 2 according to the present invention comprises a heating device 1 and automatic movement

means 3 able to move the device 1 along the path where the coating element 4 is applied to the support surface.

[0070] In particular, the aforementioned automatic movement means 3 comprise a robotic arm, for example a robotic arm of a six-axis robot.

[0071] In the first preferred embodiment it is also envisaged applying pressure on the coating element 4. In particular, the pressure on the coating element 4 is exerted by the same first electrode 5 and second electrode 6, for example during the aforementioned heating operation.

[0072] Preferably, the system 2 according to the present invention also comprises a revolving element 18, for example a pressure roller, configured to apply a fixing pressure on a portion of the coating element 4. In particular, the revolving element 18 is positioned so as to act on the coating element 4 after the aforementioned first electrode 5 and second electrode 6.

[0073] The pressure exerted by the revolving element 18 on the coating element 4 may be in addition to or instead of the pressure exerted by the first electrode 5 and second electrode 6.

[0074] In a second preferred embodiment, the heating device 10 according to the present invention comprises a first electrode 50 and second electrode 60 which can be connected to an electric power generator and which are configured to form a part of an electric circuit. The heating device 1 also comprises means 7 for closing the aforementioned electric circuit, which can be arranged between the aforementioned first electrode 50 and second electrode 60 and are made of conductive material so as to obtain heating by means of the Joule effect of an external surface of the closing means following a flow of current in the electric circuit. Advantageously, the closing means 7 are able to slide with respect to the coating element 4 during application of the coating element onto the support surface.

[0075] In particular, the aforementioned closing means comprise a member 7 configured to be arranged between the aforementioned first electrode 50 and second electrode 60 and having a plate-shaped form, for example of small thickness.

[0076] Preferably the member 7 is made of metallic material.

[0077] In particular, the aforementioned conductive member 7 is made of a refractory metallic material, for example molybdenum.

[0078] In the second embodiment described here, the free end of each electrode is suitably shaped so as to ensure contact between each electrode and the conductive member 7.

[0079] A point-like shape of the free end of the electrode allows, for example, a point-like contact. Alternatively, the contact between each electrode and the conductive element 7 is planar or spherical, for example in the case of a form-fit between the free end of the electrode and the conductive member 7.

[0080] In particular, the same conductive member 7

comprises a portion shaped so as to accommodate a form-fit with a free end of the aforementioned first electrode 50 and second electrode 60.

[0081] Preferably, in this configuration each electrode is connected independently to the main body of the heating device 2 by means of a system for adjusting the contact height, for example by means of an elastic member positioned at the connection end of each electrode.

[0082] In particular, an elastic member, for example a spring, suitable for allowing any substantial vertical movements of the electrode, is provided at the point where each electrode is connected to the heating device 2. This elastic member is configured so as to ensure continuous contact of the free end of each electrode with the conductive member 7, in particular during sliding of the conductive member 7 on the coating, thus compensating for any roughness or unevenness of the support surface.

[0083] During use, heating of the conductive member 7 is produced by the flowing of current across the contact zone between the electrodes and the conductive member 7, in particular by the resistance of the contact zone between electrodes and conductive member 7.

[0084] The transfer of heat from the conductive member 7 to the support surface depends on the temperature reached by the member 7 and on the extension of the actual contact zone between the member 7 and the support surface. In particular, in order to obtain substantially constant and uniformly distributed transfer of heat, the two contact surfaces between which heat exchange occurs must be substantially planar.

[0085] Advantageously, as a result of the configuration of the heating device 1 according to the second preferred embodiment of the present invention, the contact of the conductive member 7 may be automatically adapted to the support surface, thereby increasing the efficiency of the heat transfer.

[0086] This adaptive capacity is determined both by the possibility for vertical movement of each electrode and by the substantially point-like contact between the free end of each electrode and the conductive member 7.

[0087] Advantageously, therefore, there exists an ample capacity for adapting the conductive member 7, in particular while heating, during use of the heating device 1.

[0088] As shown in Figure 6, the conductive member 7 has a substantially curved form at a first and second end of a surface of the conductive member 7, designed to face the coating element 4.

[0089] This curved form allows a reduction in the frictional forces during relative sliding of the conductive member 7 and the coating element 4.

[0090] In particular, the conductive member 7 is made of material with an electrical resistance less than the electrical resistance of the coating element 4.

[0091] In this way, during an operating condition, namely during a condition where there is contact between the conductive member 7 and the coating element 4, the electric current flows in the electric circuit formed follow-

ing engagement between the aforementioned first electrode 50 and second electrode 60 and the conductive member 7.

[0092] In particular, in this operating condition, at least 90% of the current delivered passes through the conductive member 7 and only a small percentage, for example, passes through the coating element 4.

[0093] The conductive member 7 has a socket portion, in particular suitable for connection with measurement means 8, for example a temperature sensor, designed to measure the temperature value of the conductive member 7. In the embodiment described here, as shown in Figure 6, a thermocouple 8 is arranged in position, for example above an upper surface between the aforementioned contact zones, in order to measure the temperature value of the conductive member 7.

[0094] In a further embodiment, the conductive member 7 has at least one discontinuous zone on the surface designed to face the coating element 4. In particular, as shown in Figure 7, the aforementioned discontinuous zone comprises at least one undercut portion 72, formed in particular by stock removal.

[0095] This undercut portion 72 allows, in particular during operation of the heating device 1, more rapid cooling of the conductive member 7 due to an increase in the surface area of the member 7 in contact with the air.

[0096] In particular, in a static operating condition where there is contact between the conductive member 7 and the coating element 4, the undercut portion 72 allows the flow of an air current between the contact surfaces and prevents excessive overheating thereof. In the case of static operation of the heating device 1, it is envisaged that there is no sliding of the heating system 1 with respect to the coating element 4, but only contact between the conductive member 7 and the coating element 4, located in a specific zone where the coating element 4 is fixed to the support surface.

[0097] With reference to both the first and the second embodiments described here, the heating device 1 according to the present invention comprises means for controlling and adjusting the voltage applied to the electrodes.

[0098] By means of these control and adjusting means it is possible to administer to the heating device 1 the amount of electric power needed to supply the amount of heat necessary for fixing the coating element 4 to the support surface.

[0099] For example in the first embodiment described here, with said means the power required may be set. The system, based on the resistance encountered in the circuit, is able to adjust the voltage or current values so as to achieve the desired aim.

[0100] In particular, in the second embodiment described, said means may be used to set the temperature of the conductive member 7. The system, depending on the temperature variations detected, for example via the thermocouple 8, is able to adjust the voltage or current values so as to achieve the desired aim.

[0101] Advantageously, the heating device 1 according to the second preferred embodiment of the present invention allows application of a coating element 4 made of non-conductive material. Moreover, extension of the contact surface area between the conductive member 7 and the support surface allows use thereof also for the application of flexible connectors, such as those used in Kapton electronics.

[0102] As regards operation of the heating device 1 according to the present invention, in all the preferred embodiments described here the device may be moved towards the support surface for application of a coating element 4.

[0103] With reference to the aforementioned preferred embodiments the main operating steps of the heating device 1 will be described below.

[0104] During a configuration of use of the heating device 1 according to the first embodiment, the free ends of the first electrode 5 and second electrode 6 are positioned opposite the coating element 4 and heating of the coating element 4 is performed following a flow of current in the coating element itself.

[0105] In particular, in the case where the coating element is made of conductive material and is in contact with the first electrode 5 and second electrode 6, heating of the external surface of the portion situated between the two electrodes occurs as a result of the Joule effect following a flow of current in the portion of the coating element 4.

[0106] During delivery of electric power to at least one of said first electrode 5 and second electrode 6, said delivery is monitored and adjusted so as to administer a constant amount of power to said first electrode 5 or second electrode 6. In particular, the aforementioned monitoring and adjustment step is performed during relative sliding of the aforementioned first electrode 5 and second electrode 6 with respect to the coating element.

[0107] In the heating device 10 according to the second embodiment, each first electrode 50 and second electrode 60 is in contact with the aforementioned closing means, for example a conductive member 7 which is engaged with the coating element.

[0108] Advantageously, the conductive member 7 is heated independently via a contact resistance between the first electrode 5 and second electrode 6 and the conductive member 7.

[0109] In this case, adjustment of the desired heating is performed less effectively than in the aforementioned case; it is therefore preferable to operate in such a way as to keep the temperature of the conductive member 7 constant. In other words, in this case the power output by the conductive member 7 is detected and an amount of current which compensates for the power output is delivered so as to keep the energy balance of the conductive member 7 constant.

[0110] During delivery, monitoring and adjustment of the electric power delivered is also performed so as to administer a constant amount of power to the aforemen-

tioned closing means 7 so as to ensure constant administration of the heat to the coating element.

[0111] In particular, in the second embodiment described here, the closing means 7 are able to slide with respect to the coating element 4 during application of the coating element 4 onto the support surface.

[0112] For example, the monitoring and adjustment step is performed during relative sliding of the aforementioned closing means 7 with respect to the coating element 4.

[0113] An operator will be able to adjust the parameters, such as the sliding speed of the electrodes or the power delivered, depending on the specific characteristics in each case, for example the type of material of the support surface or the type of material of the coating element.

[0114] In some embodiments described here, before moving the heating device 2 along the path for application onto the support surface, an initial step involving fixing of a first portion of the coating element 4 is envisaged. During the initial step it is in fact important to fix a first portion of the coating element by means of the heating device 1 preferably in a static configuration, by performing firstly heating as described above and then cooling thereof in order to ensure that bonding has taken place.

[0115] In the first embodiment heating of the first portion is performed only along the portion situated between the two electrodes; as soon as current delivery to the electrodes is stopped, the cooling step starts, said step being able to be speeded up for example by means of an air jet.

[0116] In the second embodiment described above, cooling of the heated portions is performed less effectively than in the preceding case and therefore forced-air cooling is envisaged.

[0117] In both cases, fixing of this first portion therefore allows the following step of sliding the heating device 2 on the support surface in order to apply the coating element 4.

[0118] In particular, the subsequent restoration of the initial temperature conditions in the zone where the coating element 4 and support surface are joined together results in fixing of the coating element 4 to the support surface.

[0119] Advantageously, in the further embodiment described above, this step of fixing a first portion is not necessary, since the bond between the layers to be welded is ensured by the configuration of the device itself.

[0120] In particular, owing to the presence of the rotating electrode, it is possible to speed up the processing time and move the device along the welding path keeping the busbar in position.

[0121] In fact, the frictional force which occurs between the support surface, for example made of plastic, and the metallic coating element, is greater than the revolving frictional force between the free end of the rotating electrode and the metallic coating element. The greater frictional force generates greater cohesion between the con-

tact surfaces which therefore reduces significantly the possibility of displacement of the busbar from the desired welding path.

[0122] The present invention has been described hitherto with reference to preferred embodiments. It is understood that other embodiments relating to the same inventive idea may exist, as defined by the scope of protection of the claims which are provided hereinbelow.

Claims

1. System (2) for automatically applying a coating element (4) to a support surface, comprising:

- a heating device (1) for applying the coating element (4) along an application path of the support surface, by means of administration of heat obtained by the Joule effect, which heating device (1) comprises a first electrode (5) and second electrode (6) which can be connected to an electric power generator and are configured to form a part of an electric circuit, a portion of the coating element (4) being able to be arranged between said first electrode (5) and said second electrode (6) so as to close said electric circuit so as to obtain heating by means of the Joule effect of the portion of the coating element (4) following a flow of current in the electric circuit, and
- automatic movement means (3),

characterized in that

the overall configuration of said heating device (1) is such that said first electrode (5) and second electrode (6) are to be slid with respect to the coating element (4) during application of the coating element (4) to the support surface, said automatic movement means (3) being configured to slide said first electrode (5) and second electrode (6) along the path for applying the coating element (4) to the support surface during application of the coating element.

2. System (2) according to any one of the preceding claims, wherein said first electrode (5) and/or second electrode (6) have a substantially planar free end able to contact said coating element.
3. System (2) according to any one of the preceding claims, wherein said first electrode (5) is a sliding electrode and said second electrode (6) is a rotating electrode.
4. System (2) according to the preceding claim, wherein said second rotating electrode (6) has an axis of rotation substantially at right angles to said application path, preferably an axis of rotation which is substantially horizontal.

5. System (2) according to claim 1, wherein said first electrode (5) and second electrode (6) are rotating electrodes.

6. System (2) according to the preceding claim, wherein said first rotating electrode (5) and second rotating electrode (6) have respectively a first and second axis of rotation substantially coaxial with each other, said first and second axis of rotation being substantially perpendicular to the welding path.

7. System (20) for automatically applying a coating element (4) to a support surface, comprising:

- a heating device (10) for applying the coating element (4) along an application path of the support surface, by means of administration of heat obtained by the Joule effect, which heating device (10) comprises a first electrode (50) and second electrode (60) which can be connected to an electric power generator and are configured to form a part of an electric circuit, which heating device (10) comprises means (7) for closing said electric circuit, which are arranged between said first electrode (50) and second electrode (60) and are made of conductive material, so as to obtain heating by means of the Joule effect of an external surface of said closing means following a flow of current in the electric circuit, wherein said closing means (7) are able to slide with respect to the coating element (4) during application of the coating element to the support surface; and
- automatic movement means (3),

characterized in that said automatic movement means are configured to slide said first electrode (50) and second electrode (60) along the path for applying the coating element (4) to the support surface during application of the coating element to the support surface.

8. System (20) according to the preceding claim, wherein said closing means (7) are made of refractory metallic material.
9. System (20) according to claim 8 or 9, wherein said closing means comprise a substantially plate-shaped member (7) configured to be arranged between said first electrode (50) and second electrode (60).
10. System (20) according to the preceding claim, wherein each of said first electrode (50) and second electrode (60) have a free end with a substantially point-like form suitable for making contact with the substantially plate-shaped member (7).

11. System (20) according to claim 10 or 11, wherein said substantially plate-shaped member (7) comprises a portion configured to accommodate a form-fit with a free end of said first electrode (50) and said second electrode (60).
12. System (20) according to any one of claims 8 to 12, further comprising an elastic member positioned in the region of said first electrode (50) and second electrode (60) and configured to ensure continuous contact of the free end of said first electrode (5) and second electrode (60) with said closing means (7).
13. System (2; 20) according to any one of the preceding claims, further comprising means (8) for measuring the flow of current in at least one of said first electrode (5; 50) and second electrode (6; 60).
14. System (2; 20) according to any one of the preceding claims, further comprising means for adjusting and controlling the flow of current in at least one of said first electrode (5; 50) and second electrode (6; 60), designed to allow delivery of a constant amount of power in a portion of the coating element (4) which closes the electric circuit.
15. System (2; 20) according to any one of the preceding claims, further comprising means (20, 21, 22) for supporting and positioning a coating element (4), suitable for supporting and positioning the coating element (4) along the application path.
16. System (2; 20) according to any one of the preceding claims, further comprising suction means (15) configured to remove by means of suction any residues on the coating element (4).
17. System (2; 20) according to any one of the preceding claims, further comprising positioning means suitable for moving said first electrode (5; 50) and second electrode (6; 60) from a lowered operating configuration, in which said first electrode (5; 50) and second electrode (6; 60) are able to interact with said coating element (4), to a raised configuration in which said first electrode (5; 50) and second electrode (6; 60) are able to interact with a cleaning device, said movement occurring in a plane substantially perpendicular to said application path.
18. System (2; 20) according to any one of the preceding claims, further comprising an element for cutting said coating element (4), configured to define a cutting surface at the longitudinal ends of the coating element (4).
19. System (2; 20) according to any one of the preceding claims, wherein said automatic movement means (3) comprise a robotic arm.

20. Method for applying a coating element (4) to a support surface by means of administration of heat obtained by the Joule effect, comprising the steps of:

- 5 - providing a system (2; 20) according to any one of the preceding claims, said system comprising a heating device (1; 10);
- 10 - moving said heating device (1; 10) towards the support surface for applying a coating element (4);
- delivering electric power to at least a first electrode (5; 50) or second electrode (6; 60) of the heating device (1; 10);
- 15 - monitoring and adjusting said delivery of electric power so as to administer a constant amount of power to said first electrode (5; 50) or second electrode (6; 60),

characterized in that said first electrode (5; 50) and second electrode (6; 60) being moved to slide with respect to said coating element (4) during application of the coating element (4) to the support surface.

- 25 21. Method according to the preceding claim, wherein said monitoring and adjustment step is performed during a relative movement of said first electrode (5; 50) and second electrode (6; 60) with respect to said coating element (4).
- 30 22. Method according to claim 22, wherein said movement comprises a rotation of at least one of said electrodes (60) with respect to said coating element (4).

35 Patentansprüche

1. System (2) zur automatischen Aufbringung eines Beschichtungselementes (4) auf eine Tragefläche, das umfasst:
 - 40 - eine Heizvorrichtung (1) zur Aufbringung des Beschichtungselementes (4) entlang eines Aufbringungspfad der Tragefläche durch Zuführung von Wärme, die durch den Joule-Effekt erhalten wird,
 - 45 wobei die Heizvorrichtung (1) umfasst: eine erste Elektrode (5) und eine zweite Elektrode (6), die an einen Stromgenerator angeschlossen werden können und geeignet sind, einen Teil einer elektrischen Schaltung zu bilden,
 - 50 wobei ein Teil des Beschichtungselementes (4) zwischen der ersten Elektrode (5) und der zweiten Elektrode (6) angeordnet sein kann, um so die elektrische Schaltung zu schließen, um eine Erwärmung durch den Joule-Effekt des Teils des Beschichtungselementes (4) nach einem Stromfluss in der elektrischen Schaltung zu erhalten, und
 - 55

- automatisches Bewegungsmittel (3),

dadurch gekennzeichnet,

dass die Gesamtkonfiguration der Heizvorrichtung (1) so vorgesehen ist, dass die erste Elektrode (5) und die zweite Elektrode (6) gegenüber dem Beschichtungselement (4), während der Aufbringung des Beschichtungselementes (4) auf die Tragefläche, geschoben werden müssen, wobei das automatische Bewegungsmittel (3) geeignet ist, die erste Elektrode (5) und die zweite Elektrode (6) entlang des Pfades zur Aufbringung des Beschichtungselementes (4) auf die Tragefläche während der Aufbringung des Beschichtungselementes zu schieben.

2. System (2) gemäß einem der vorangehenden Ansprüche, wobei die erste Elektrode (5) und/oder die zweite Elektrode (6) über ein im Wesentlichen planares freies Ende verfügen und in der Lage sind, das Beschichtungselement zu kontaktieren.

3. System (2) gemäß einem der vorangehenden Ansprüche, wobei die erste Elektrode (5) eine Gleitelektrode und die zweite Elektrode (6) eine Drehelektrode ist.

4. System (2) gemäß dem vorangehenden Anspruch, wobei die zweite Drehelektrode (6) über eine Drehachse verfügt, die im Wesentlichen in einem rechten Winkel zu dem Aufbringungspfad angeordnet ist, vorzugsweise eine Drehachse, die im Wesentlichen horizontal ist.

5. System (2) gemäß Anspruch 1, wobei die erste Elektrode (5) und die zweite Elektrode (6) Drehelektroden sind.

6. System (2) gemäß dem vorangehenden Anspruch, wobei die erste Drehelektrode (5) und die zweite Drehelektrode (6) jeweils über eine erste und zweite Drehachse verfügen, die im Wesentlichen koaxial zueinander angeordnet sind, wobei die erste und zweite Drehachse im Wesentlichen senkrecht zu dem Schweißpfad angeordnet sind.

7. System (20) zur automatischen Aufbringung eines Beschichtungselementes (4) auf eine Tragefläche, das umfasst:

- eine Heizvorrichtung (10) zur Aufbringung des Beschichtungselementes (4) entlang eines Aufbringungspfad der Tragefläche durch Zuführung von Wärme, die durch den Joule-Effekt erhalten wird,

wobei die Heizvorrichtung (10) umfasst: eine erste Elektrode (50) und eine zweite Elektrode (60), die an einen Stromgenerator angeschlossen werden können und geeignet sind, einen

Teil einer elektrischen Schaltung zu bilden, wobei die Heizvorrichtung (10) umfasst: Mittel (7) zur Schließung der elektrischen Schaltung, das zwischen der ersten Elektrode (50) und der zweiten Elektrode (60) angeordnet ist und aus leitfähigem Material besteht, um eine Erwärmung durch den Joule-Effekt einer Außenfläche des Schließmittels nach einem Stromfluss in der elektrischen Schaltung zu erhalten, wobei das Schließmittel (7) in der Lage ist, gegenüber dem Beschichtungselement (4) während der Aufbringung des Beschichtungselementes auf die Tragefläche zu gleiten; und

- automatisches Bewegungsmittel (3),

dadurch gekennzeichnet, dass das automatische Bewegungsmittel geeignet ist, die erste Elektrode (50) und die zweite Elektrode (60) entlang des Pfades zur Aufbringung des Beschichtungselementes (4) auf die Tragefläche während der Aufbringung des Beschichtungselementes auf die Tragefläche zu schieben.

8. System (20) gemäß dem vorangehenden Anspruch, wobei das Schließmittel (7) aus einem feuerfesten metallischen Material besteht.

9. System (20) gemäß Anspruch 8 oder 9, wobei das Schließmittel umfasst: ein im Wesentlichen plattenförmiges Teil (7), das geeignet ist, zwischen die erste Elektrode (50) und die zweite Elektrode (60) angeordnet zu werden.

10. System (20) gemäß dem vorangehenden Anspruch, wobei sowohl die erste Elektrode (50) als auch die zweite Elektrode (60) über ein freies Ende mit einer im Wesentlichen punktförmigen Form verfügen, die geeignet ist, mit dem im Wesentlichen plattenförmigen Teil (7) in Kontakt zu treten.

11. System (20) gemäß Anspruch 10 oder 11, wobei das im Wesentlichen plattenförmige Teil (7) umfasst: einen Teil, der geeignet ist, einen Formschluss mit einem freien Ende der ersten Elektrode (50) und der zweiten Elektrode (60) zu beherbergen.

12. System (20) gemäß einem der Ansprüche 8 bis 12, das weiterhin umfasst: ein elastisches Teil, das in dem Bereich der ersten Elektrode (50) und der zweiten Elektrode (60) positioniert ist und geeignet ist, einen kontinuierlichen Kontakt des freien Endes der ersten Elektrode (5) und der zweiten Elektrode (60) mit dem Schließmittel (7) sicherzustellen.

13. System (2; 20) gemäß einem der vorangehenden Ansprüche, das weiterhin umfasst: Mittel (8) zur Messung des Stromflusses in der ersten Elektrode (5; 50) und/oder der zweiten Elektrode (6; 60).

14. System (2; 20) gemäß einem der vorangehenden Ansprüche, das weiterhin umfasst: Mittel zur Justierung und Steuerung des Stromflusses in der ersten Elektrode (5; 50) und/oder der zweiten Elektrode (6; 60), das geeignet ist, die Bereitstellung einer konstanten Menge an Leistung in einem Teil des Beschichtungselementes (4), das die elektrische Schaltung schließt, zu erlauben. 5
15. System (2; 20) gemäß einem der vorangehenden Ansprüche, das weiterhin umfasst: Mittel (20, 21, 22) zur Unterstützung und Positionierung eines Beschichtungselementes (4), das geeignet ist, das Beschichtungselement (4) entlang des Aufbringungspfad zu unterstützen und zu positionieren. 10
16. System (2; 20) gemäß einem der vorangehenden Ansprüche, das weiterhin umfasst: Saugmittel (15), das geeignet ist, jeden beliebigen Rückstand auf dem Beschichtungselement (4) durch Absaugen zu entfernen. 20
17. System (2; 20) gemäß einem der vorangehenden Ansprüche, das weiterhin umfasst: Positioniermittel, das geeignet ist, die erste Elektrode (5; 50) und die zweite Elektrode (6; 60) aus einer abgesenkten Betriebskonfiguration, in der die erste Elektrode (5; 50) und die zweite Elektrode (6; 60) in der Lage sind, mit dem Beschichtungselement (4) zu interagieren, in eine angehobene Konfiguration zu bewegen, in der die erste Elektrode (5; 50) und die zweite Elektrode (6; 60) in der Lage sind, mit einer Reinigungsvorrichtung zu interagieren, wobei die Bewegung in einer Ebene auftritt, die im Wesentlichen senkrecht zu dem Aufbringungspfad angeordnet ist. 25
18. System (2; 20) gemäß einem der vorangehenden Ansprüche, das weiterhin umfasst: ein Element zum Schneiden des Beschichtungselementes (4), das geeignet ist, eine Schnittfläche bei den longitudinalen Enden des Beschichtungselementes (4) zu definieren. 30
19. System (2; 20) gemäß einem der vorangehenden Ansprüche, wobei das automatische Bewegungsmittel (3) einen Roboterarm umfasst. 35
20. Verfahren zur Aufbringung eines Beschichtungselementes (4) auf eine Tragefläche durch Zuführung von Wärme, die durch den Joule-Effekt erhalten wird, das die folgenden Schritte umfasst: 40
- Bereitstellung eines Systems (2; 20) gemäß einem der vorangehenden Ansprüche, wobei das System eine Heizvorrichtung (1; 10) umfasst; 45
 - Bewegung der Heizvorrichtung (1; 10) in Richtung der Tragefläche zur Aufbringung eines Be-

schichtungselementes (4);

- Bereitstellung von elektrischer Energie an eine erste Elektrode (5; 50) und/oder eine zweite Elektrode (6; 60) der Heizvorrichtung (1; 10);
- Überwachung und Justierung der Bereitstellung von elektrischer Leistung, um der ersten Elektrode (5; 50) oder der zweiten Elektrode (6; 60) eine konstante Menge an Leistung zuzuführen,

dadurch gekennzeichnet, dass die erste Elektrode (5; 50) und die zweite Elektrode (6; 60) bewegt werden, um gegenüber dem Beschichtungselement (4) während der Aufbringung des Beschichtungselementes (4) auf die Tragefläche zu gleiten. 15

21. Verfahren gemäß dem vorangehenden Anspruch, wobei der Überwachungs- und Justierungsschritt während einer relativen Bewegung der ersten Elektrode (5; 50) und der zweiten Elektrode (6; 60) gegenüber dem Beschichtungselement (4) durchgeführt wird. 20

22. Verfahren gemäß Anspruch 22, wobei die Bewegung umfasst: eine Drehung mindestens einer der Elektroden (60) gegenüber dem Beschichtungselement (4). 25

Revendications 30

1. Système (2) d'application automatique d'un élément de revêtement (4) sur une surface de support, comprenant : 35

- un dispositif chauffant (1) pour appliquer l'élément de revêtement (4) le long d'un trajet d'application de la surface de support à l'aide de l'administration de chaleur obtenue par l'effet Joule, lequel dispositif chauffant (1) comprend une première électrode (5) et une seconde électrode (6) qui peuvent être reliées à un générateur de courant électrique et sont configurées pour former une partie d'un circuit électrique,
- une partie de l'élément de revêtement (4) pouvant être disposée entre ladite première électrode (5) et ladite seconde électrode (6) pour fermer ledit circuit électrique afin d'obtenir du chauffage au moyen de l'effet Joule de la partie de l'élément de revêtement (4) suivant un flux de courant dans le circuit électrique, et
- des moyens de mouvement automatique (3), 40

caractérisé en ce que 45

la configuration générale dudit dispositif chauffant (1) est telle que ladite première électrode (5) et ladite seconde électrode (6) doivent coulisser par rapport à l'élément de revêtement (4) au cours de l'appa- 50

- tion de l'élément de revêtement (4) sur la surface de support, lesdits moyens de mouvement automatique (3) étant configurés pour faire coulisser ladite première électrode (5) et ladite seconde électrode (6) le long du trajet d'application de l'élément de revêtement (4) sur la surface de support au cours de l'application de l'élément de revêtement.
2. Système (2) selon l'une quelconque des revendications précédentes, dans lequel ladite première électrode (5) et/ou ladite seconde électrode (6) possède(nt) une extrémité libre essentiellement plane pouvant entrer en contact avec ledit élément de revêtement.
3. Système (2) selon l'une quelconque des revendications précédentes, dans lequel ladite première électrode (5) est une électrode coulissante et ladite seconde électrode (6) est une électrode rotative.
4. Système (2) selon la revendication précédente, dans lequel ladite seconde électrode rotative (6) possède un axe de rotation essentiellement à angles droits par rapport audit trajet d'application, de préférence un axe de rotation qui est essentiellement horizontal.
5. Système (2) selon la revendication 1, dans lequel ladite première électrode (5) et ladite seconde électrode (6) sont des électrodes rotatives.
6. Système (2) selon la revendication précédente, dans lequel ladite première électrode rotative (5) et ladite seconde électrode rotative (6) possèdent respectivement un premier et un second axe de rotation essentiellement coaxiaux l'un par rapport à l'autre, ledit premier et ledit second axe de rotation étant essentiellement perpendiculaire au trajet de soudure.
7. Système (20) d'application automatique d'un élément de revêtement (4) sur une surface de support, comprenant :
- un dispositif chauffant (10) pour appliquer l'élément de revêtement (4) le long d'un trajet d'application de la surface de support à l'aide de l'administration de chaleur obtenue par l'effet Joule, lequel dispositif chauffant (10) comprend une première électrode (50) et une seconde électrode (60) qui peuvent être reliées à un générateur de courant électrique et sont configurées pour former une partie d'un circuit électrique, lequel dispositif chauffant (10) comprend des moyens (7) pour fermer ledit circuit électrique qui sont disposés entre ladite première électrode (50) et ladite seconde électrode (60) et sont composés d'un matériau conducteur, afin d'obtenir du chauffage au moyen de l'effet Joule d'une surface externe desdits moyens de
- fermeture suivant un flux de courant dans le circuit électrique, lesdits moyens de fermeture (7) pouvant coulisser par rapport à l'élément de revêtement (4) au cours de l'application de l'élément de revêtement sur la surface de support ; et
- des moyens de mouvement automatique (3),
- caractérisé en ce que** lesdits moyens de mouvement automatique sont configurés pour faire coulisser ladite première électrode (50) et ladite seconde électrode (60) le long du trajet d'application de l'élément de revêtement (4) sur la surface de support au cours de l'application de l'élément de revêtement sur la surface de support.
8. Système (20) selon la revendication précédente, dans lequel lesdits moyens de fermeture (7) sont composés d'un matériau métallique réfractaire.
9. Système (20) selon la revendication 8 ou 9, dans lequel lesdits moyens de fermeture comprennent un membre essentiellement de forme plate (7) configuré pour être disposé entre ladite première électrode (50) et ladite seconde électrode (60).
10. Système (20) selon la revendication précédente, dans lequel chacune desdites première électrode (50) et seconde électrode (60) possède une extrémité libre essentiellement en forme de point, adaptée pour entrer en contact avec le membre essentiellement de forme plate (7).
11. Système (20) selon la revendication 10 ou 11, dans lequel ledit membre essentiellement de forme plate (7) comprend une partie configurée pour adapter un élément ergonomique à une extrémité libre de ladite première électrode (50) et ladite seconde électrode (60).
12. Système (20) selon l'une quelconque des revendications 8 à 12, comprenant en outre un membre élastique positionné dans la zone de ladite première électrode (50) et ladite seconde électrode (60) et configuré pour assurer un contact continu de l'extrémité libre de ladite première électrode (5) et de ladite seconde électrode (60) avec lesdits moyens de fermeture (7).
13. Système (2, 20) selon l'une quelconque des revendications précédentes, comprenant en outre des moyens (8) pour mesurer le flux de courant dans au moins une desdites première électrode (5, 50) et seconde électrode (6, 60).
14. Système (2, 20) selon l'une quelconque des revendications précédentes, comprenant en outre des moyens pour ajuster et contrôler le flux de courant

- dans au moins une desdites première électrode (5, 50) et seconde électrode (6, 60), conçues pour permettre la fourniture d'une alimentation d'intensité constante dans une partie de l'élément de revêtement (4) fermant le circuit électrique. 5
15. Système (2, 20) selon l'une quelconque des revendications précédentes, comprenant en outre des moyens (20, 21, 22) pour supporter et positionner un élément de revêtement (4), adapté pour supporter et positionner l'élément de revêtement (4) le long du trajet d'application. 10
16. Système (2, 20) selon l'une quelconque des revendications précédentes, comprenant en outre des moyens d'aspiration (15) configurés pour retirer par aspiration tous les résidus se trouvant sur l'élément de revêtement (4). 15
17. Système (2, 20) selon l'une quelconque des revendications précédentes, comprenant en outre des moyens de positionnement adaptés pour déplacer ladite première électrode (5, 50) et ladite seconde électrode (6, 60) et les faire passer d'une configuration de fonctionnement abaissée, dans laquelle ladite première électrode (5, 50) et ladite seconde électrode (6, 60) peuvent interagir avec ledit élément de revêtement (4), à une configuration élevée, dans laquelle ladite première électrode (5, 50) et ladite seconde électrode (6, 60) peuvent interagir avec un dispositif de nettoyage, ledit mouvement se produisant sur un plan essentiellement perpendiculaire audit trajet d'application. 20 25 30
18. Système (2, 20) selon l'une quelconque des revendications précédentes, comprenant en outre un élément pour découper ledit élément de revêtement (4), configuré pour définir une surface de découpe au niveau des extrémités longitudinales de l'élément de revêtement (4). 35 40
19. Système (2, 20) selon l'une quelconque des revendications précédentes, dans lequel lesdits moyens de mouvement automatique (3) comprennent un bras robotisé. 45
20. Procédé d'application d'un élément de revêtement (4) sur une surface de support à l'aide de l'administration de chaleur obtenue par l'effet Joule, comprenant les étapes de : 50
- fourniture d'un système (2, 20), selon l'une quelconque des revendications précédentes, ledit système comprenant un dispositif chauffant (1, 10) ; 55
 - déplacement dudit dispositif chauffant (1, 10) vers la surface de support pour appliquer un élément de revêtement (4) ;
- alimentation en courant électrique d'au moins une première électrode (5, 50) ou une seconde électrode (6, 60) du dispositif chauffant (1, 10) ;
 - surveillance et ajustement de ladite alimentation en courant électrique pour administrer une alimentation d'intensité constante sur ladite première électrode (5, 50) ou ladite seconde électrode (6, 60),
- caractérisé en ce que** ladite première électrode (5, 50) et ladite seconde électrode (6, 60) sont déplacées pour coulisser par rapport audit élément de revêtement (4) au cours de l'application de l'élément de revêtement (4) sur la surface de support.
21. Procédé selon la revendication précédente, dans lequel ladite étape de surveillance et d'ajustement est exécutée lors d'un mouvement relatif de ladite première électrode (5, 50) et de ladite seconde électrode (6, 60) par rapport audit élément de revêtement (4).
22. Procédé selon la revendication 22, dans lequel ledit mouvement comprend une rotation d'au moins une desdites électrodes (60) par rapport audit élément de revêtement (4).

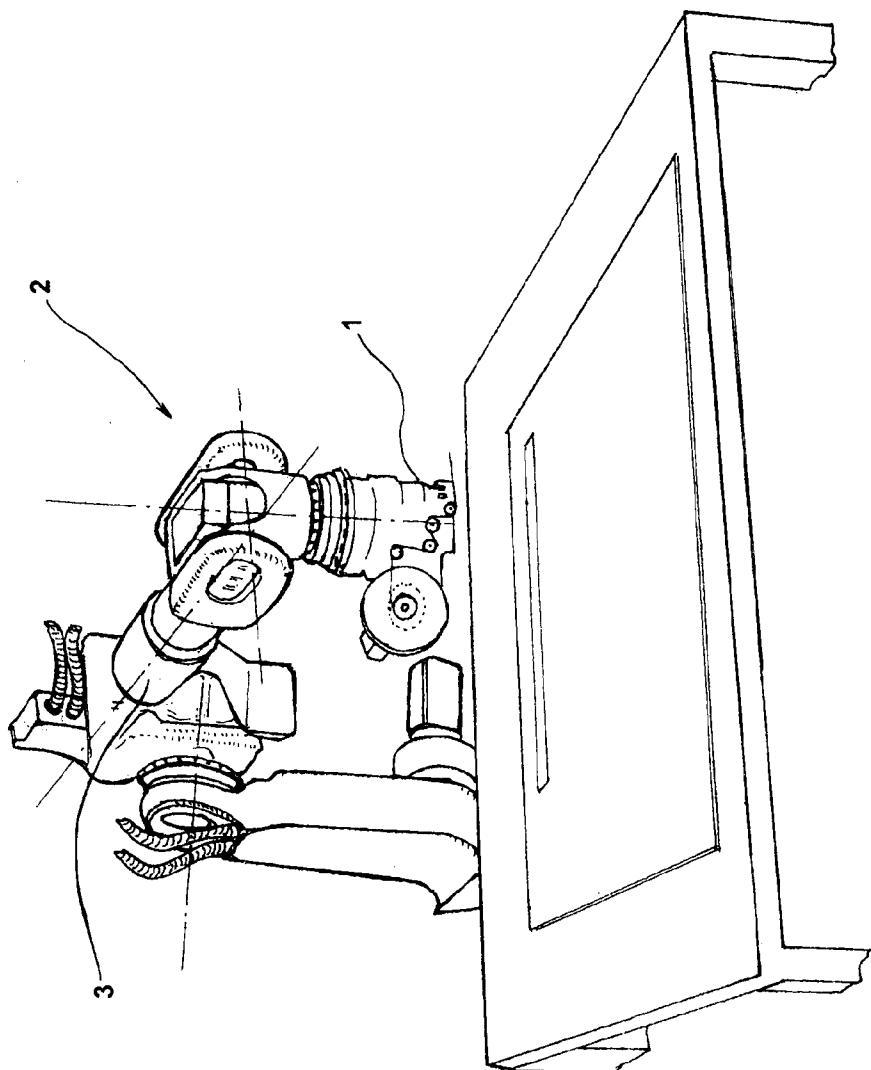
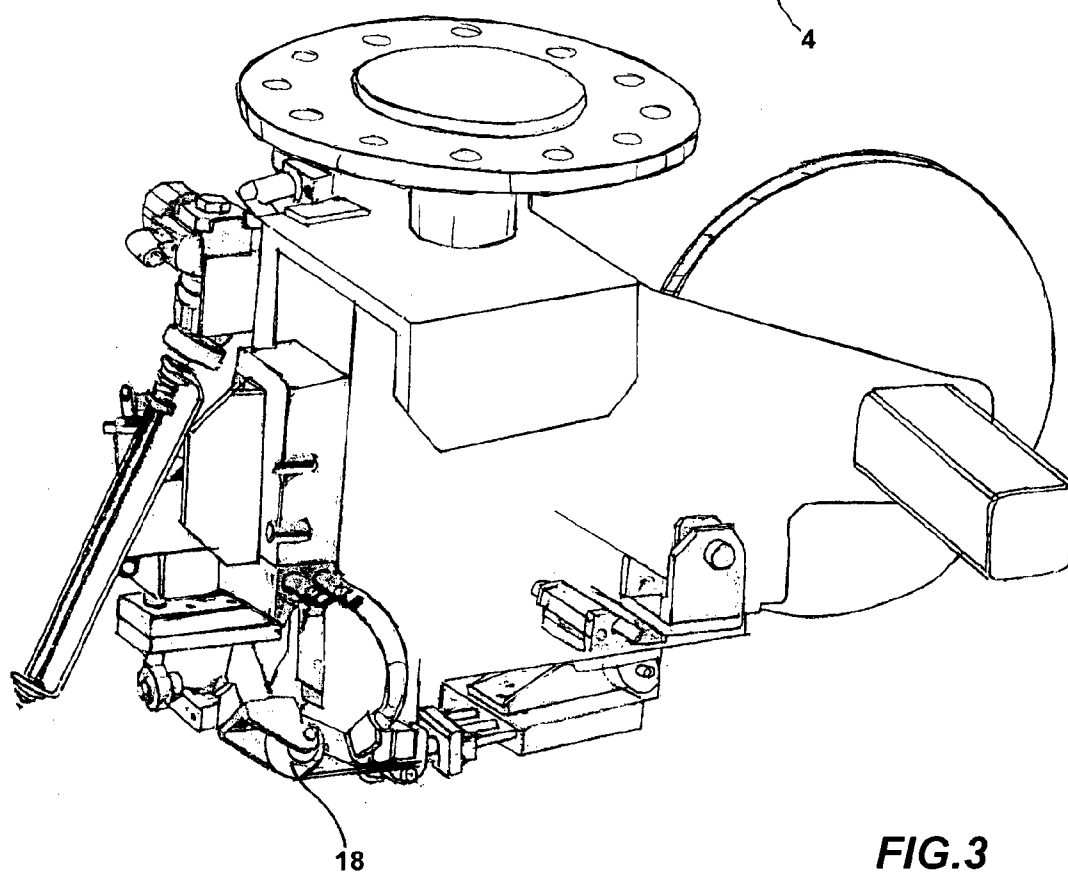
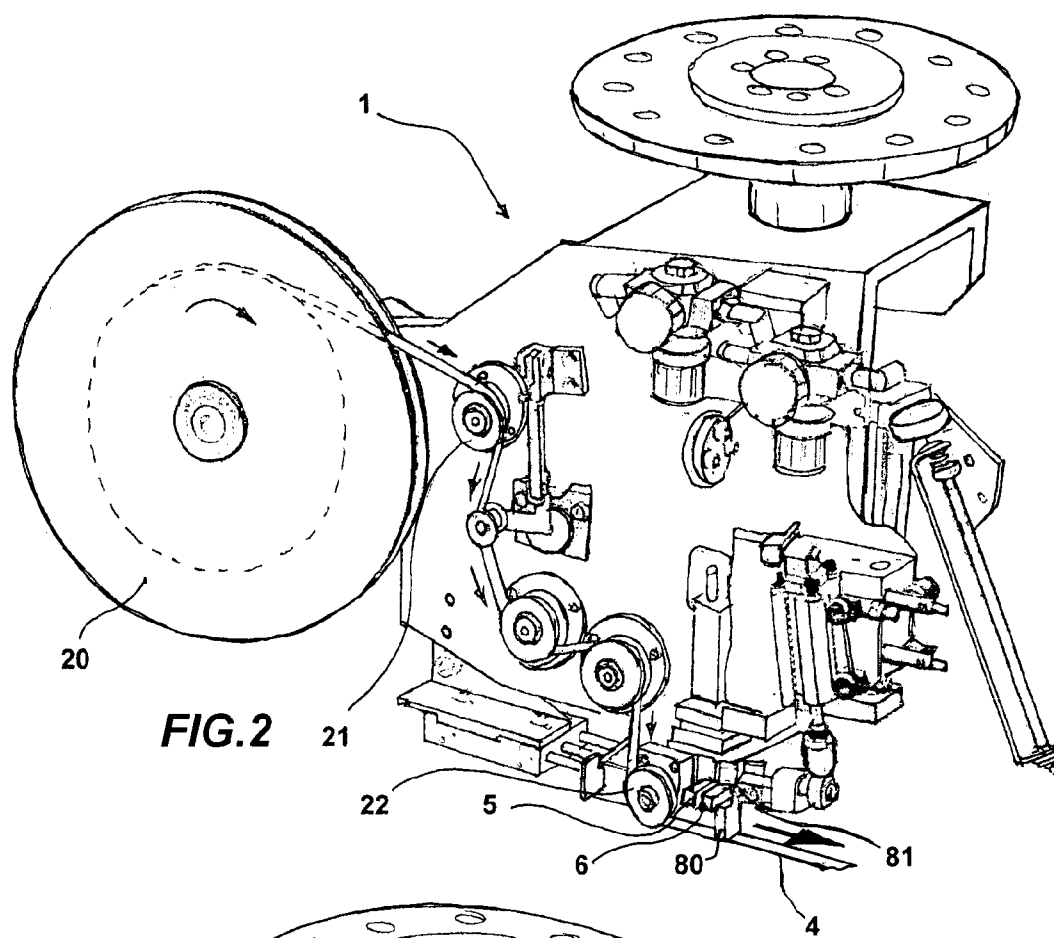


FIG.1



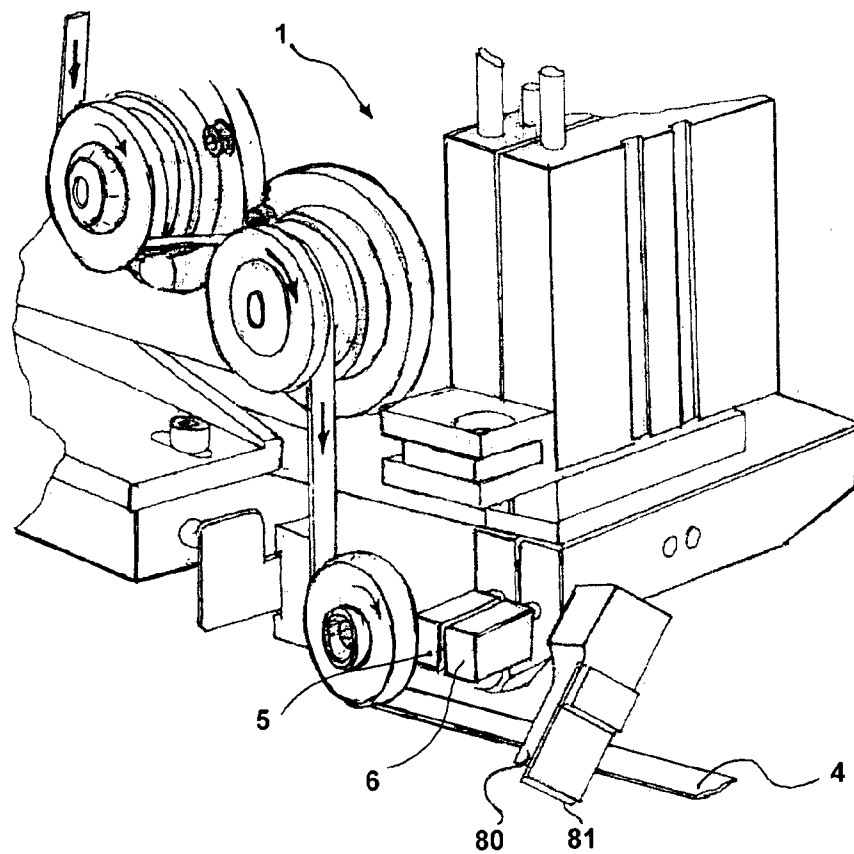


FIG. 4

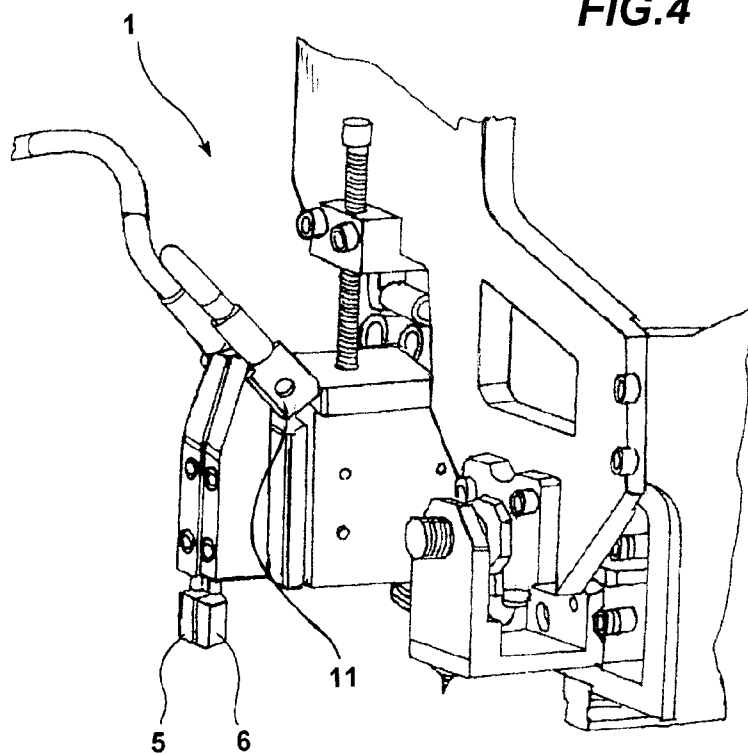
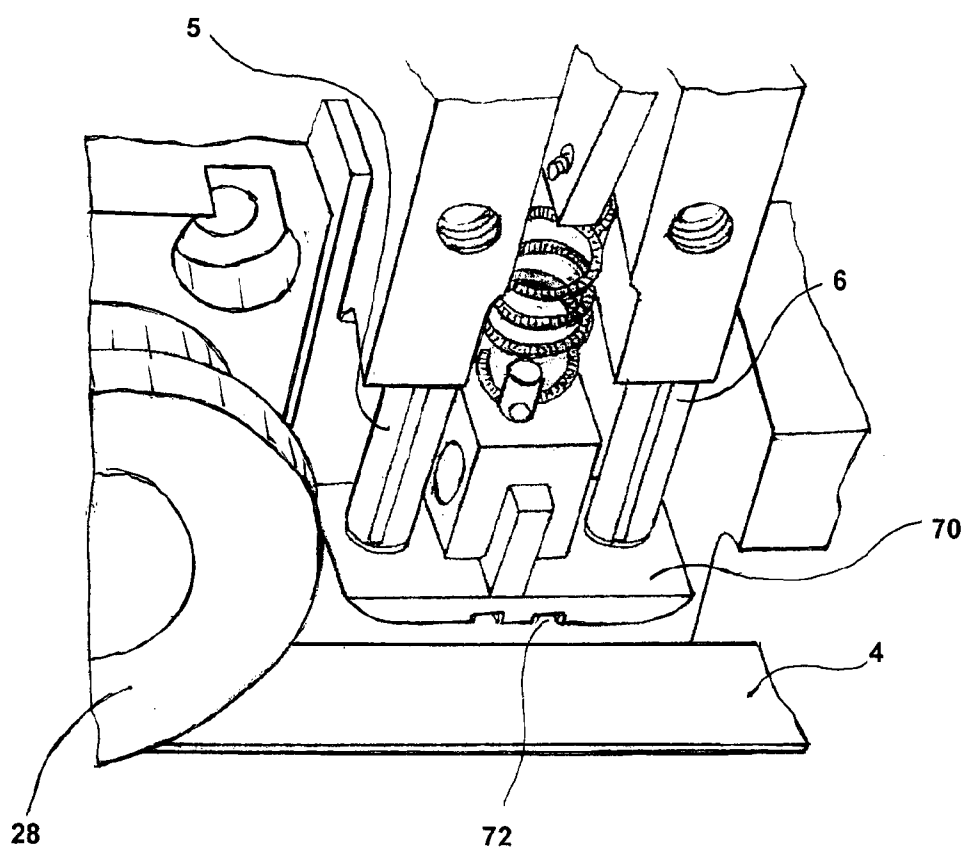
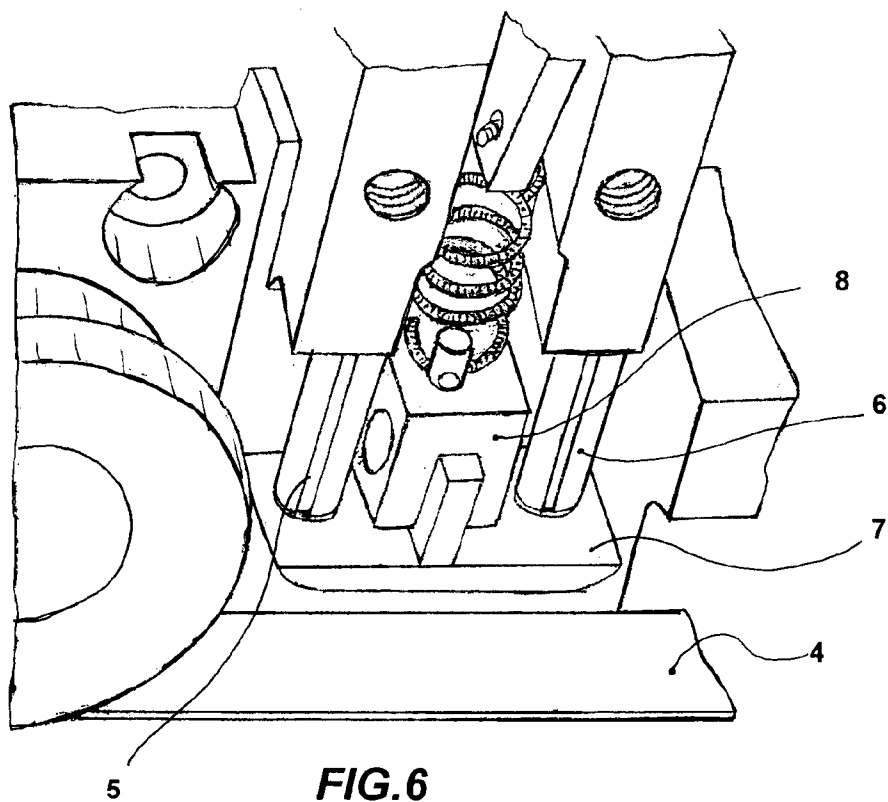


FIG. 5



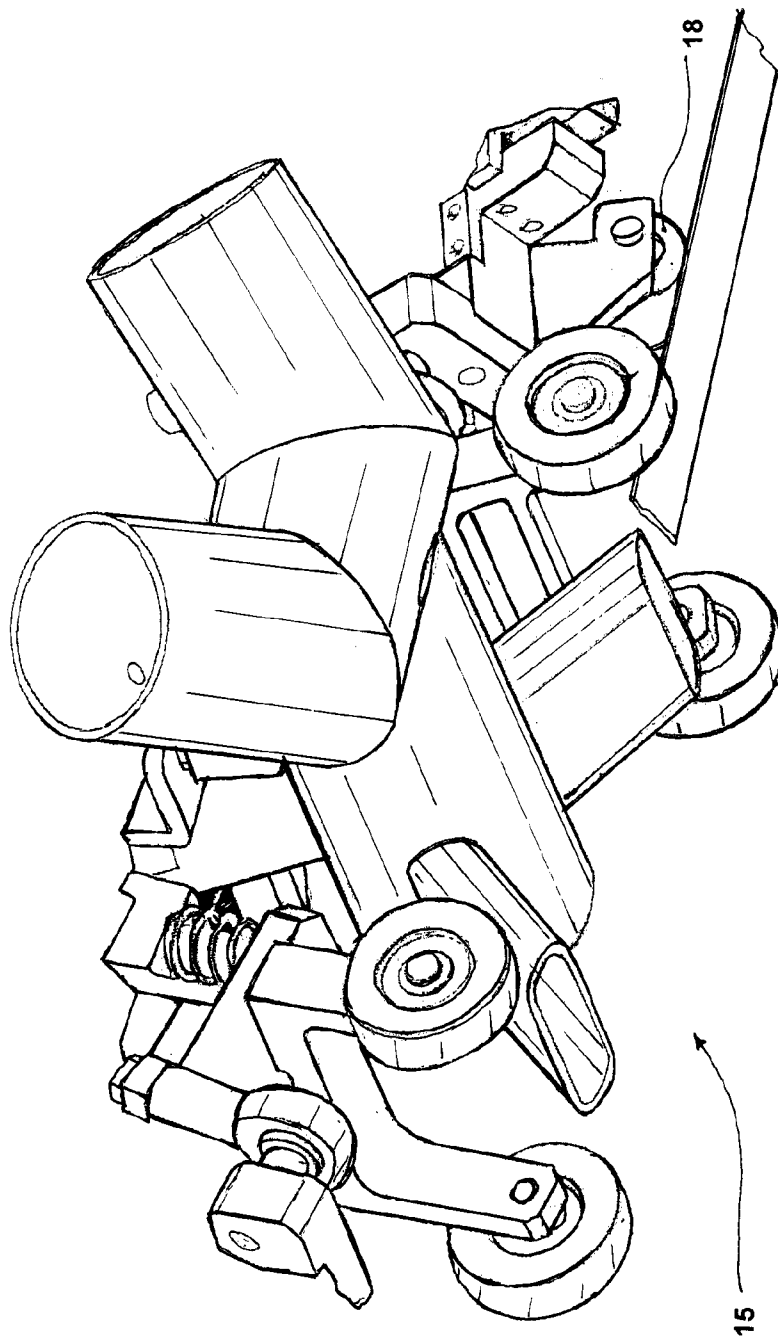


FIG.8

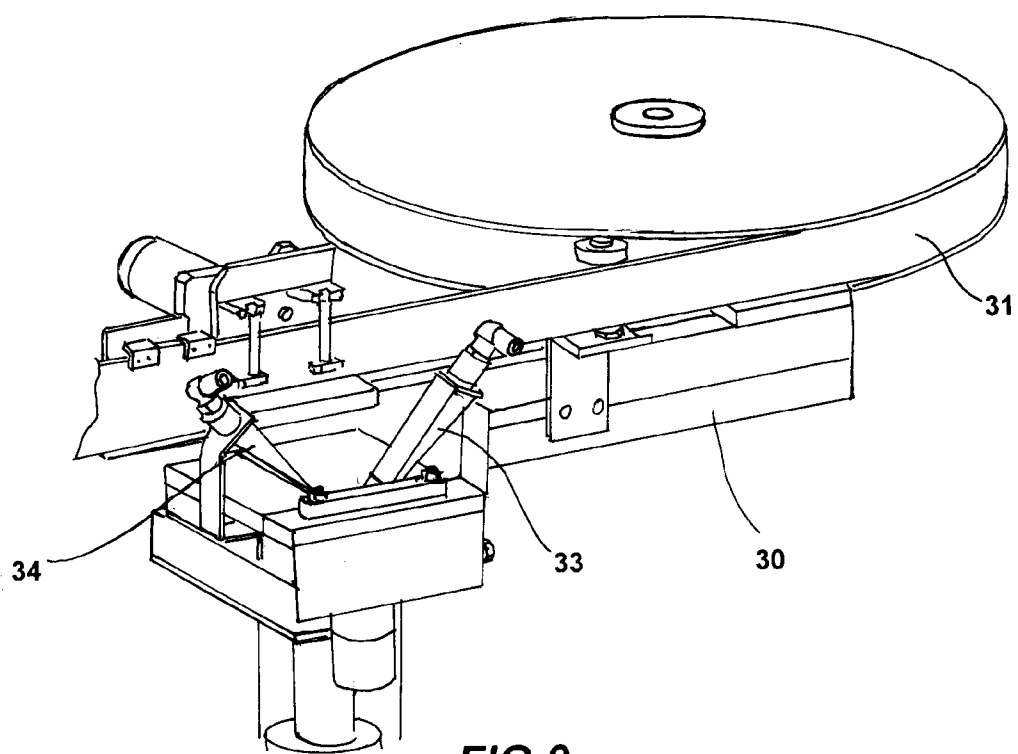


FIG. 9

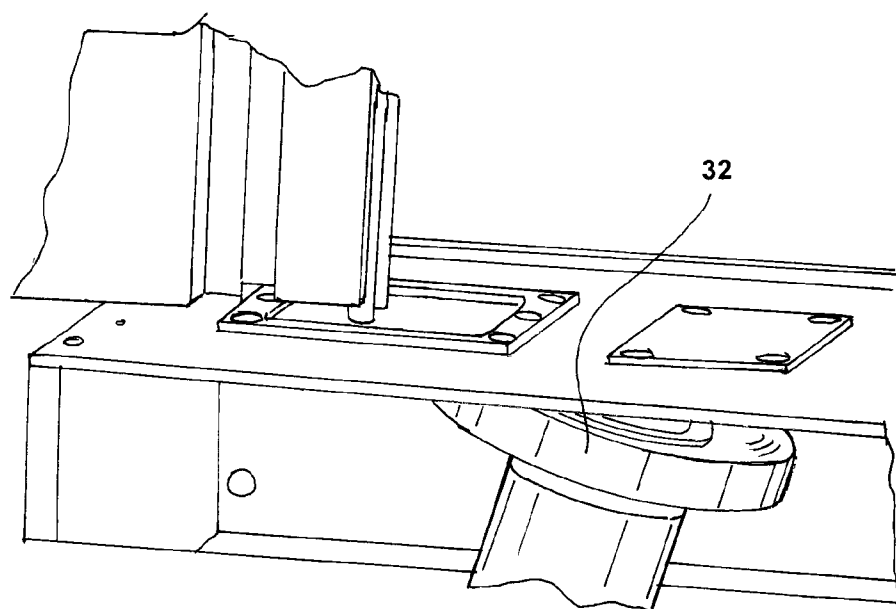


FIG. 10

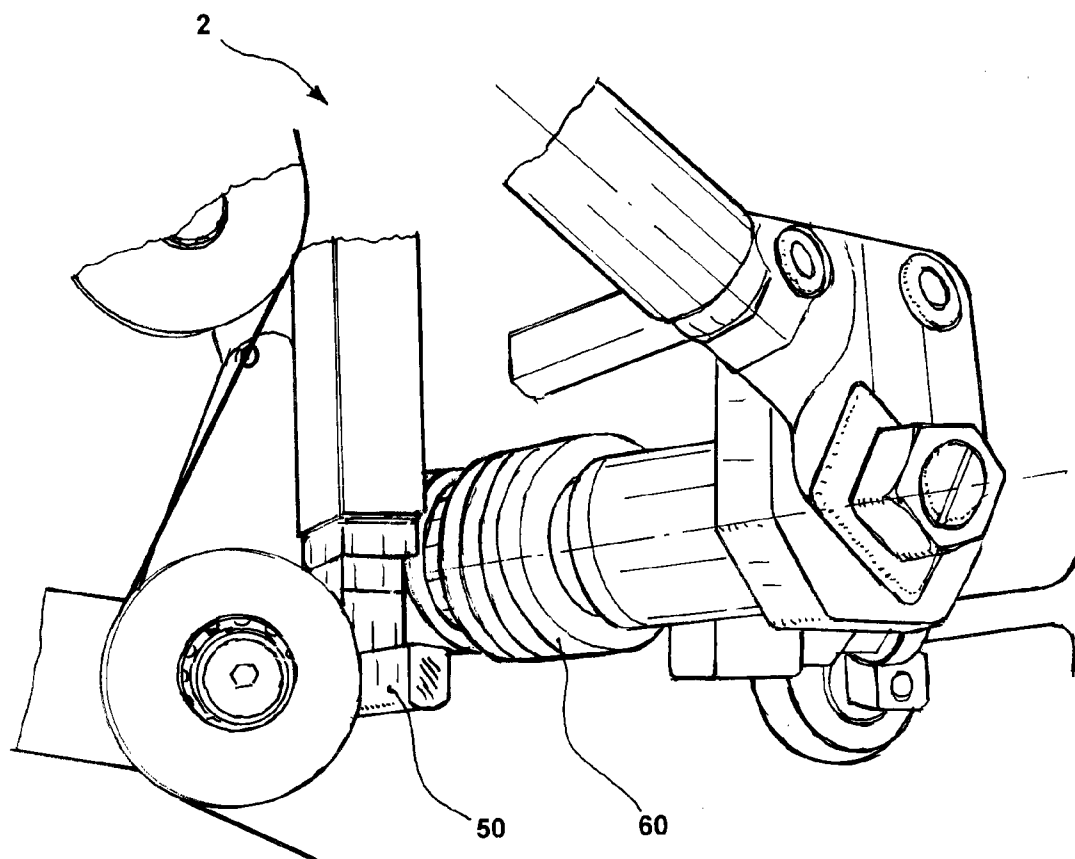


FIG.11

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1577046 A2 [0013]
- DE 102009010840 A1 [0013]
- WO 2007075242 A1 [0013]



ÖSSZEÁLLÍTÁS ÉS ELJÁRÁS BEVONATELEM HORDOZÓFELÜLETRE VALÓ FELHORDÁSÁRA

Szabadalmi igénypontok

- 5 1. Összeállítás (2) bevonatelem (4) hordozófelületre való automatikus felhordására, amely tartalmaz
- hevítőeszközt (1) a bevonatelemnek (4) a hordozófelület felhordási pályája mentén a Joule-effektussal
nyert hő alkalmazása révén történő felhordására,
amely hevítőeszköz (1) villamos tápforrásra kapcsolható és villamos áramkör részét képezőn kialakított
első elektródot (5) és második elektródot (6) tartalmaz,
- 10 a bevonatelem (4) egy része az első elektród (5) és a második elektród (6) között az áramkört zárón
rendezhető el, ami a villamos áramkörben áram folyását követően a bevonatelem (4) tekintett részének a Joule-
effektus révén történő hevítését váltja ki, és
- automata mozgatóeszközt (3),
azzal jellemezve, hogy
- 15 a hevítőeszköz (1) teljes konfigurációjában a bevonatelem (4) hordozófelületre történő felhordása
közben az első elektród (5) és a második elektród (6) a bevonatelemhez (4) képest elcsúsztatható, az automata
mozgatóeszköz (3) az első elektródot (5) és a második elektródot (6) a bevonatelem felhordása közben a
bevonatelem (4) hordozófelületre való felhordási pályája mentén elcsúsztatón van kiképezve.
2. Az előző igénypontok bármelyike szerinti összeállítás (2), ahol az első elektródnak (5) és/vagy a
20 második elektródnak (6) a bevonatelemmel való érintkezésre alkalmas lényegében sík szabad vége van.
3. Az előző igénypontok bármelyike szerinti összeállítás (2), ahol az első elektródot (5) csúszóelektród
és a második elektródot (6) forgó elektród képezi.
4. Az előző igénypont szerinti összeállítás (2), ahol a második forgó elektródnak (6) a felhordási
pályával lényegében derékszöget bezáró forgástengelye, előnyösen lényegében vízszintes forgástengelye van.
- 25 5. Az 1. igénypont szerinti összeállítás (2), ahol az első elektródot (5) és a második elektródot (6) forgó
elektród képezi.
6. Az előző igénypont szerinti összeállítás (2), ahol az első forgó elektródnak (5) és a második forgó
elektródnak (6) rendre egymással lényegében koaxiális első és második forgástengelye van, amely első és
második forgástengely a hegesztési pályára lényegében merőleges.
- 30 7. Összeállítás (20) bevonatelem (4) hordozófelületre való automatikus felhordására, amely tartalmaz
- hevítőeszközt (10) a bevonatelemnek (4) a hordozófelület egy felhordási pályája mentén Joule
hatással nyert hő alkalmazása révén történő felhordására,
amely hevítőeszköz (10) első elektródot (50) és második elektródot (60) tartalmaz, melyek egy
villamos tápforráshoz kapcsolhatók és egy villamos áramkör részét képezőn vannak kiképezve,
- 35 amely hevítőeszköz (10) a villamos áramkört zárására alkalmas eszközt (7) tartalmaz, amely az első
elektród (50) és a második elektród (60) között van elrendezve és vezető anyagból van,
úgy, hogy az áramkörben áram folyását követően a záróeszköz egy külső felületének Joule-effektus
által hevítését váltja ki, ahol a záróeszköz (7) a bevonatelem hordozófelületre történő felhordása közben a
bevonatelemhez (4) képest elcsúsztatható; és
- 40 automata mozgatóeszközt (3)

azzal jellemezve, hogy az automata mozgatóeszköz a bevonatelem felhordása közben az első elektródot (50) és a második elektródot (60) a bevonatelem (4) hordozófelületre való felhordási pályája mentén elcsúsztatón van kiképezve.

8. Az előző igénypont szerinti összeállítás (20), ahol a záróeszköz (7) tűzálló fém anyagból van.

9. A 8. vagy a 9. igénypont szerinti összeállítás (20), ahol a záróeszköz lényegében lemez alakú tagot (7) tartalmaz, amely az első elektród (50) és a második elektród (60) közötti elrendezésre alkalmasan van kiképezve.

10. Az előző igénypont szerinti összeállítás (20), ahol az első elektródnak (50) és a második elektródnak (60) a lényegében lemez alakú taggal (7) való érintkezéshez egyaránt lényegében pontszerű szabad vége van.

11. A 10. vagy a 11. igénypont szerinti összeállítás (20), ahol a lényegében lemez alakú tag (7) az első elektród (50) és a második elektród (60) szabad végével alakzáró kötés kialakítására alkalmasan kiképzett részt tartalmaz.

12. A 8-12. igénypontok bármelyike szerinti összeállítás (2), amely az első elektród (50) és a második elektród (60) tartományában elhelyezett rugalmas tagot tartalmaz, amely az első elektród (5) és a második elektród (60) szabad végének a záróeszközzel (7) való folyamatos érintkezése biztosítására alkalmasan van kiképezve.

13. Az előző igénypontok bármelyike szerinti összeállítás (2; 20), amely egy az első elektród (5; 50) és a második elektród (6; 60) legalább egyikén átfolyó áramerősség mérésére szolgáló eszközt (8) tartalmaz.

14. Az előző igénypontok bármelyike szerinti összeállítás (2; 20), amely egy az első elektródon (5; 50) és a második elektródon (6; 60) átfolyó áramerősség állítására és szabályozására szolgáló eszközt tartalmaz, amely a bevonatelem (4) áramkört záró részében állandó teljesítmény biztosítására alkalmasan van kiképezve.

15. Az előző igénypontok bármelyike szerinti összeállítás (2; 20), amely egy bevonatelemet (4) tartó és pozicionáló eszközt (20, 21, 22) tartalmaz, amely a bevonatelemnek (4) a felhordási pálya mentén történő tartására és pozicionálására alkalmasan van kiképezve.

16. Az előző igénypontok bármelyike szerinti összeállítás (2; 20), amely a bevonatelemen (4) visszamaradó bármely maradvány szívás révén történő eltávolítására alkalmasan kiképzett szívóeszközt (15) tartalmaz.

17. Az előző igénypontok bármelyike szerinti összeállítás (2; 20), amelynek egy az első elektród (5; 50) és a második elektród (6; 60) leeresztett üzemi helyzetből felemelt helyzetbe mozgatására alkalmas pozicionálóeszköze is van, a mozgatás a felhordási pályára lényegében merőleges síkban történik, ahol a leeresztett üzemi helyzetben az első elektród (5; 50) és a második elektród (6; 60) a bevonatelemmel (4) léphet kölcsönhatásba, továbbá a felemelt helyzetben az első elektród (5; 50) és a második elektród (6; 60) tisztítóeszközzel léphet kölcsönhatásba.

18. Az előző igénypontok bármelyike szerinti összeállítás (2; 20), amely a bevonatelem (4) vágására alkalmas elemet tartalmaz, amely a bevonatelem (4) hosszanti végénél vágási felületet határoz meg.

19. Az előző igénypontok bármelyike szerinti összeállítás (2; 20), ahol az automata mozgatóeszköz (3) robotkart tartalmaz.

20. Eljárás bevonatelem (4) hordozófelületre Joule-effektussal nyert hő alkalmazása révén történő felhordására, amely során

- egy az előző igénypontok bármelyike szerinti összeállítást (2; 20) biztosítunk, amely összeállítás hevítőeszközi (1; 10) tartalmaz;

- a bevonatelem (4) felhordásához a hevítőeszközi (1; 10) a hordozófelület felé mozgatjuk;

- a hevítőeszköz (1; 10) első elektródja (5; 50) vagy második elektródja (6; 60) legalább egyikére villamos teljesítményt bocsátunk;

- a villamos teljesítmény rábocsátását az első elektródra (5; 50) vagy a második elektródra (6; 60) állandó teljesítményt juttatva monitorozzuk és állítjuk,

azzal jellemezve, hogy a bevonatelem (4) hordozófelületre történő felhordása közben az első elektródot (5; 50) és a második elektródot (6; 60) a bevonatelemhez (4) képest elcsúsztatva mozgatjuk.

21. Az előző igénypont szerinti eljárás, ahol a monitorozást és állítást az első elektród (5; 50) és a második elektród (6; 60) bevonatelemhez (4) viszonyított elmozdulása közben végezzük.

22. A 22. igénypont szerinti eljárás, ahol a mozgatás során az elektródok (60) legalább egyikét a bevonatelemhez (4) képest forgatjuk.