



US 20140294234A1

(19) **United States**

(12) **Patent Application Publication**
CADUFF

(10) **Pub. No.: US 2014/0294234 A1**

(43) **Pub. Date: Oct. 2, 2014**

(54) **SYSTEM AND METHOD FOR INITIATING ACTIONS AND PROVIDING FEEDBACK BY POINTING AT OBJECT OF INTEREST**

Publication Classification

(71) Applicant: **IPOINTER INC.**, Bakersfield, CA (US)

(72) Inventor: **David CADUFF**, Degen (CH)

(73) Assignee: **IPOINTER INC.**, Bakersfield, CA (US)

(21) Appl. No.: **14/218,245**

(22) Filed: **Mar. 18, 2014**

(51) **Int. Cl.**
G06K 9/00 (2006.01)
H04W 4/02 (2006.01)
G06F 3/0481 (2006.01)

(52) **U.S. Cl.**
 CPC *G06K 9/00208* (2013.01); *G06K 9/00624* (2013.01); *G06F 3/04815* (2013.01); *H04W 4/02* (2013.01)
 USPC **382/103**


Related U.S. Application Data

(63) Continuation of application No. 12/645,231, filed on Dec. 22, 2009, now Pat. No. 8,675,912.

(60) Provisional application No. 61/139,843, filed on Dec. 22, 2008.

(57) **ABSTRACT**

A system and method as described for compiling feedback in command statements that relate to applications or services associated with spatial objects or features, pointing at such spatial object or feature order to identify the object of interest, and executing the command statements on a system server and attaching feedback information to their representation of this object or feature in a database of the system server.

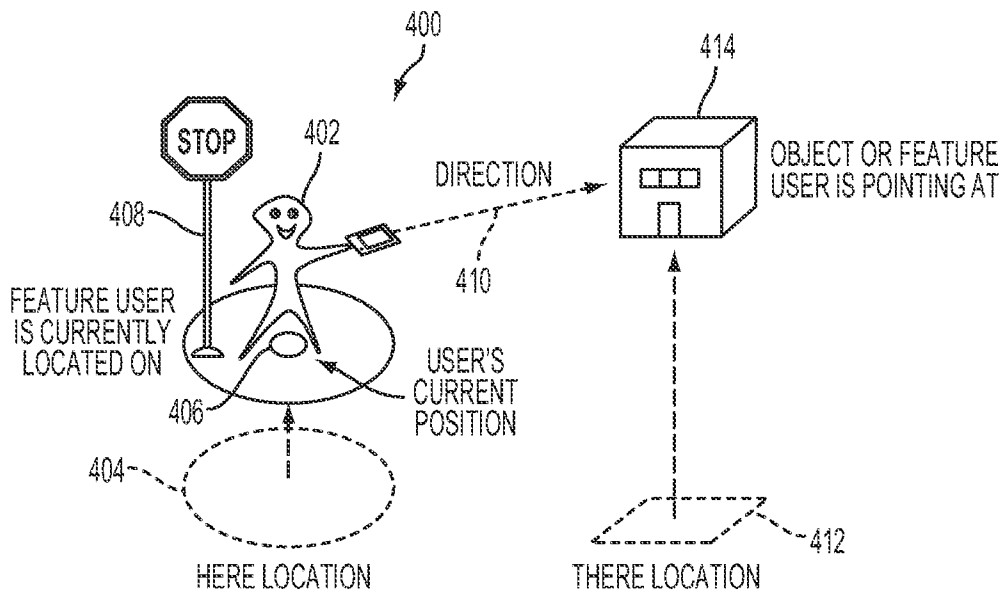

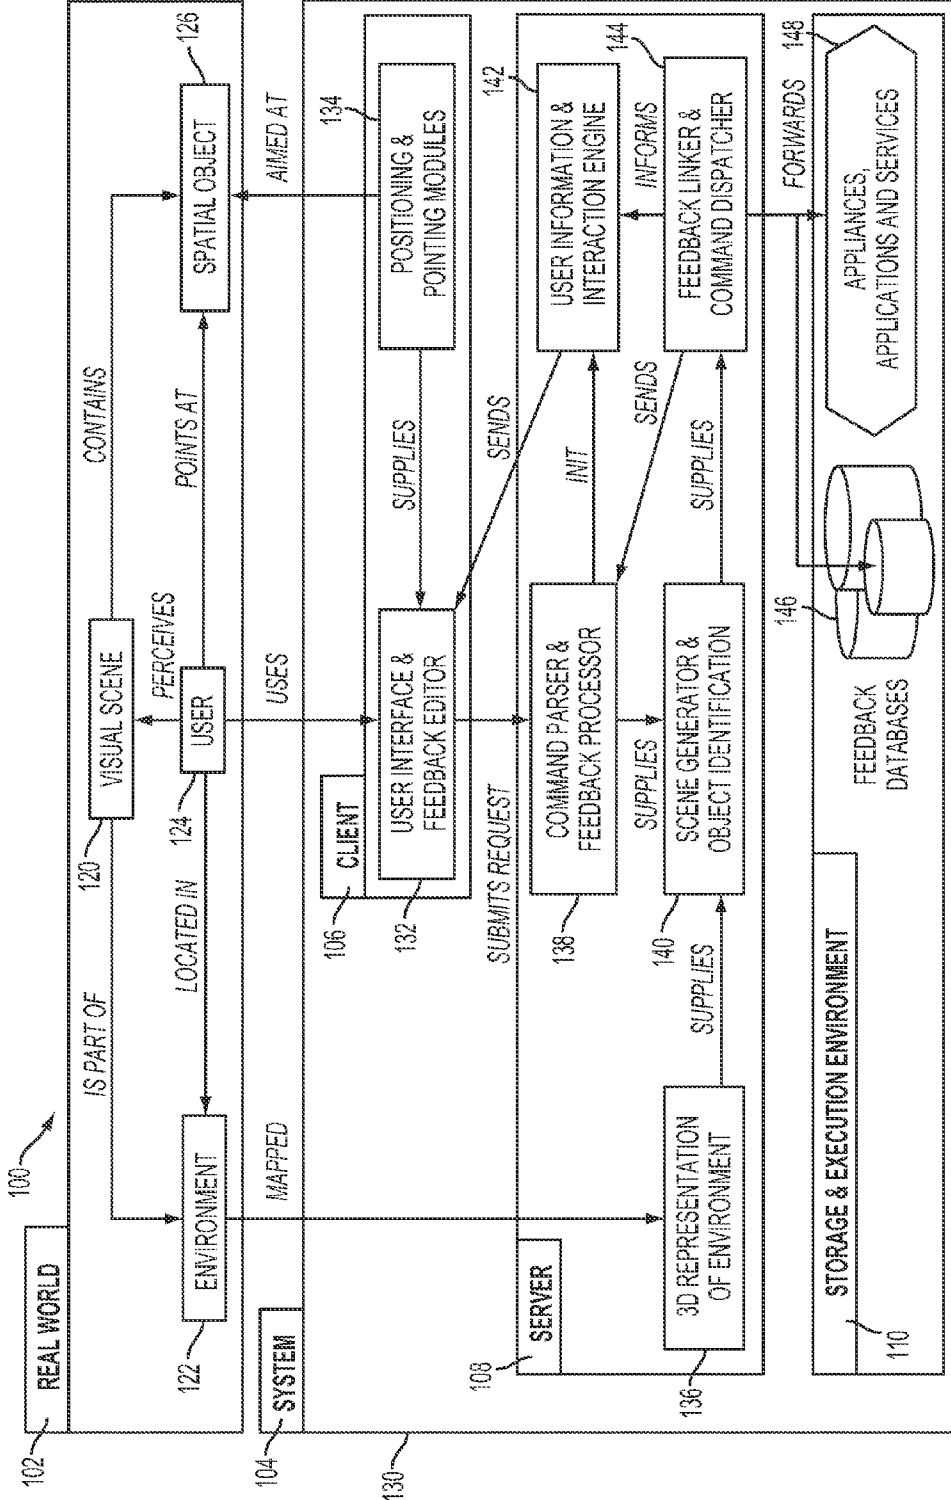


FIG. 1

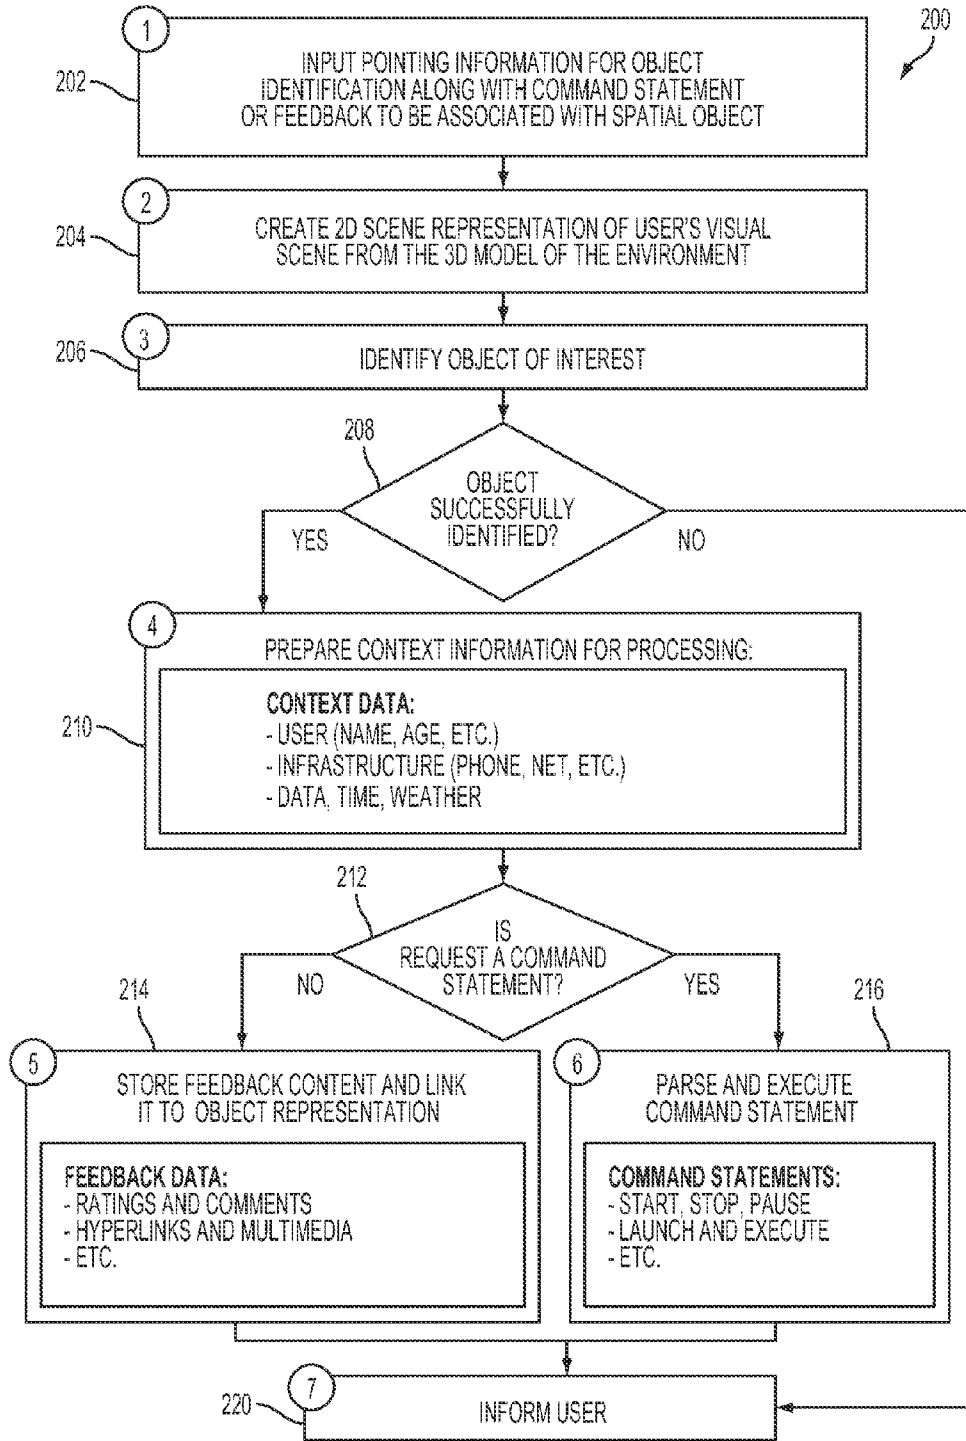


FIG. 2

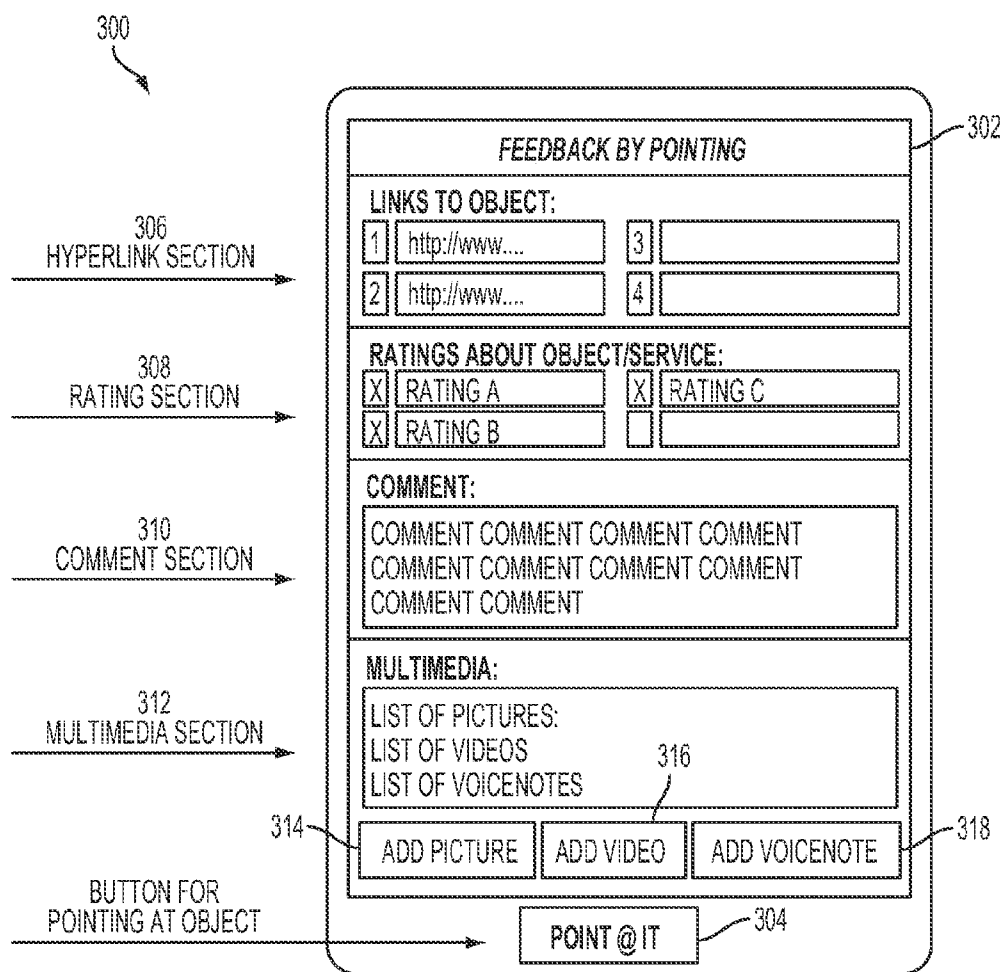


FIG. 3

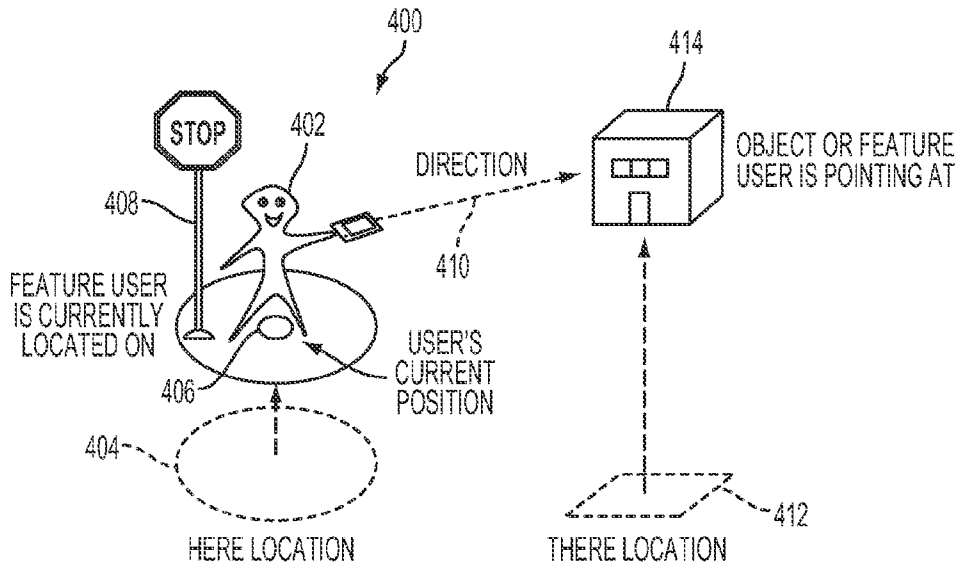


FIG. 4

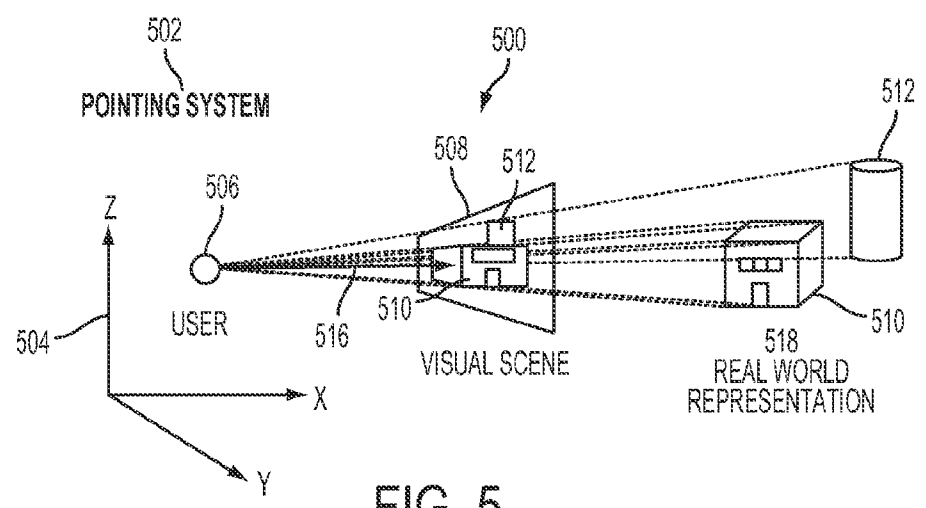


FIG. 5




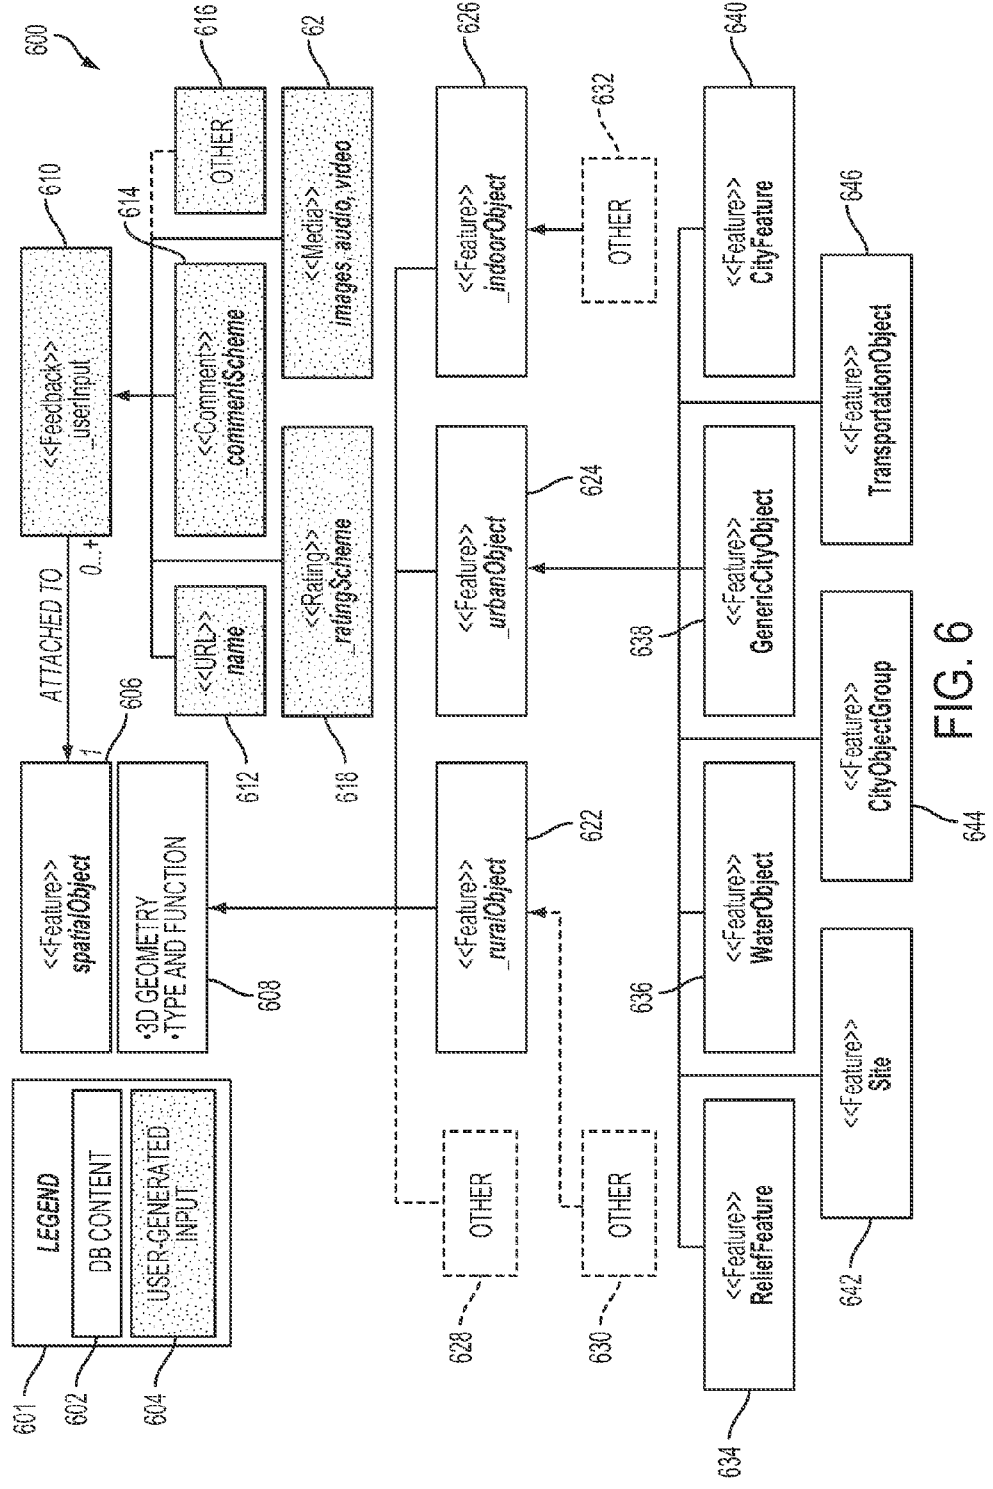


FIG. 6

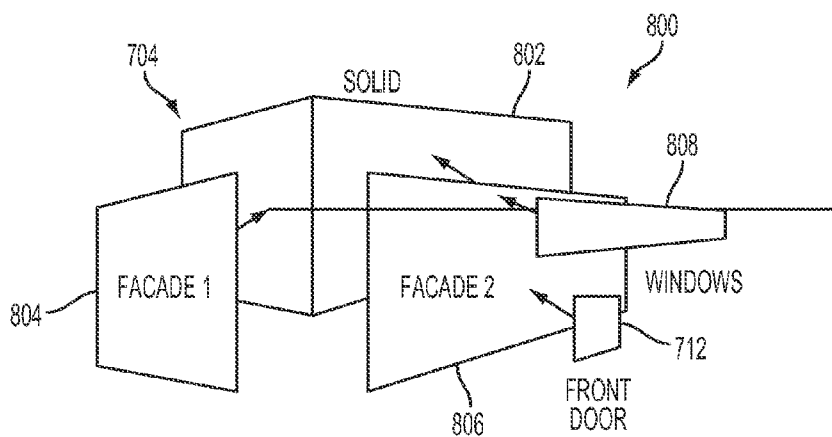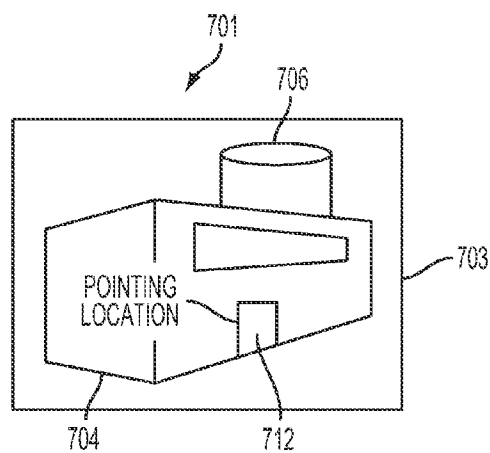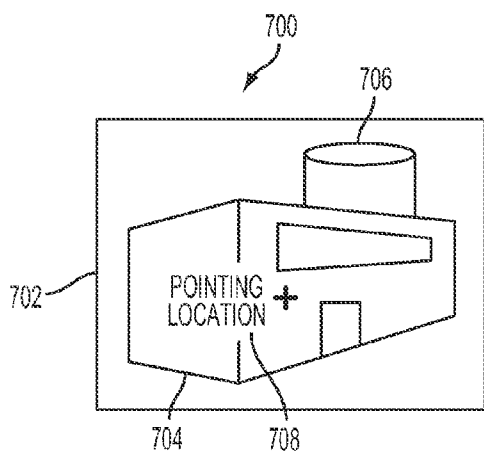

SYSTEM AND METHOD FOR INITIATING ACTIONS AND PROVIDING FEEDBACK BY POINTING AT OBJECT OF INTEREST

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is a continuation of U.S. patent application Ser. No. 12/645,231, entitled “System and Method for Initiating Actions and Providing Feedback by Pointing at Object of Interest”, filed Dec. 22, 2009, which claims the benefit under 35 U.S.C. §119(e) to U.S. Provisional Application No. 61/139,843, filed Dec. 22, 2008 entitled “System and Method for Providing Feedback by Pointing at Object of Interest,” the entire contents of which are incorporated herein by reference.

FIELD OF INVENTION

[0002] The present invention relates generally to systems and methods for providing feedback relating to spatial objects, elements, or functional artifacts related to spatial objects, and controlling actions or services that are performed in a functional dependency of the spatial object. More specifically, the present invention relates to distributed systems and methods that initiate or manipulate activities and services, bookmark, or attach comments, hyperlinks, ratings, or multimedia to representations of the spatial objects in database systems, by pointing at the spatial object or feature of interest in the real-world.

BACKGROUND OF THE INVENTION

[0003] Geotagging and Geoblogging are increasingly popular techniques for attaching location information to various types of media. Geotagging, sometimes also referred to as Geocoding, is the process of adding geographical identification metadata to media such as websites, RSS (“Rich Site Summary”) feeds, or images, typically, in the form of geospatial metadata. However, there are some differences between Geotagging and Geocoding. Generally, Geotagging information associated with a location consists of latitude and longitude coordinates, which also may include altitude, bearing, and place name information. Geocoding, on the other hand, refers to the process of taking non-coordinate based geographical identifiers, such as a postal address, and assigning geographic coordinates to them (or vice versa).

[0004] Geotagging media assists system users to find a wide variety of location-specific information. For example, a system user can find images taken near a given location by entering latitude and longitude coordinates into a Geotagging-enabled image search engine. Geotagging-enabled information services also can potentially be used to find location-based news, websites, or other resources.

[0005] Geoblogging, in contrast to geotagging, attaches specific geographic location information to blog entries. The geographic location information is typically identified by geotags, which usually consist of latitude and longitude information. Searching a list of blogs and pictures tagged using geotag technology allows system users to select areas of specific interest to them on interactive maps.

[0006] Similar to geotagging and geoblogging, the use of “pointing at” technology allows system users to point out spatial objects and features in order to retrieve information related to them stored in a database. This technology is

becoming increasingly popular predominantly in domains, such as location-based services (“LBS”) or gaming.

[0007] The current generation of handheld devices, such as cellular phones and personal digital assistants (“PDAs”), include all of the components and sensors required to derive the system user’s position and direction of pointing, as well as the modules for wireless communication with information storing databases. These components, together with a three-dimensional representation of the environment in a database, enables the identification of spatial objects or features simply by pointing at them.

[0008] Generally, conventional pointing technology methods retrieve information about the object being pointed at; however, there is no two-way communication between the system user and spatial objects. Establishing a bi-directional communication channel between a system user and spatial objects will allow interaction between the system user and the environment, and lead to more efficient and effective use of information and services associated with spatial objects or features in the environment around the system user of a handheld or other device.

SUMMARY OF INVENTION

[0009] The system and method of the present invention is directed to compiling feedback and/or command statements that relate to applications or services associated with spatial objects or features, pointing at spatial objects or features in order to identify the object of interest, and executing a command statement on a system server or attaching the feedback to the representation of the object or feature in a system database on a system server.

[0010] Feedback, according to the present invention, includes all forms of system user input, including, but not limited to, hyperlinks, comments and anecdotes, ratings, tags, keywords, images and sketches, audio or voicenotes, and videos that relate to the spatial object or feature of interest. Command statements, according to the present invention, include all types of actions, as long as such actions relate to appliances, applications, or services on the system server used to relate information to and with the spatial object or feature of interest. Command statements include, but are not limited to, bookmarking objects of interest, launching applications or services related to the object or feature, or configuration statements that relate to the state of any application or appliance associated with the object or feature. Applications as used herein, include but are not limited to, information systems, database management systems, web applications, dedicated and embedded applications, and any other tool that functions and is operated by a computer. Appliances as used herein, include but are not limited to, automated teller machines, meters, automated systems for doors, lights and displays, household devices, and other electrical and mechanical instrument or apparatus designed or used as a means to a specific end. And services as used herein, include but are not limited to, web services, bookmarking and registration services, electronic counter services, automated teller services, vending and ticketing services, and any other software system designed to support interoperable machine-to-machine interaction over a network.

[0011] According to the present invention, an object of interest is identified by a system user by pointing at it. By doing this, the system user’s position and direction of pointing are used to create a ray in three-dimensional space, which is then intersected with a two-dimensional projection of the

system user's current scene. In this scene, the object being pointed at is subsequently identified and used as a dispatcher to associate functional units on the system server. The two-dimensional projection of the current scene is generated from a representation of the environment stored in a database on the system server. This representation of objects or features that define the environment on the system server is linked to information, applications, services, appliances, and other functional units that relate to individual objects or features.

[0012] The system client according to the present invention consists of a user interface that allows the system user to select command statements or compile feedback in any form, such as hyperlinks, ratings or comments, or multimedia. Feedback may be provided for any object, feature, service, or function as long as it is associated with corresponding objects or features existing in geographic space. Examples of feedback include comments about museums, photos of monuments, videos of buildings, bridges, roads, etc., but also audio tags for food or service in a restaurant, notes of problems associated with some traffic element (hidden highway speed sign), or even personal comments about experiences or happenings associated with other spatial objects or features. Feedback also may be tailored to suit specific sites or exhibitions that are displayed only for a short period of time, but wish to collect feedback about performance or preference of displayed items or artists.

[0013] Command statements may be presented for selection to a system user in various forms, such as, for example, buttons on a user interface or menu items. Command statements may be addressed directly to appliances, applications, or services linked with spatial objects or features in the real-world through corresponding associations with the representations of these spatial objects or features on the system server or in the system database. Examples of command statements of this type are (i) switching on and off the light of a building by simply pointing at the building in the real-world, (ii) registering the real-world object with a social bookmarking service by pointing at the object in the real-world, or (iii) starting, stopping, or pausing a virtual service running on a system server, but associated with the representation of the spatial object or feature by pointing at the spatial object or feature in the real-world.

[0014] A system client, typically a mobile device, is adapted for wireless communication with a virtual system or database that contains spatial objects and features representing the system user's environment and links to associated functional units. In order to identify the spatial object or feature of interest on the system server, the system client includes modules for acquiring position information, e.g., GPS for outdoor positioning or WLAN ("wireless local area network") triangulation for indoor positioning, as well as directional information, i.e., electronic compass, pitch, and yaw.

[0015] In operation, the system user points at the spatial object or feature of interest in order to collect current position and direction information. This information is then, together with the command statement or system user-generated feedback and contextual information, sent to the system server. At the system server, it is separated into appropriate segments. These segments are used to (i) identify the spatial object or feature of interest, (ii) identify the type of command or feedback, and (iii) dispatch the command to the associated execu-

tion unit or attach the feedback to the representation of the spatial object or feature of interest stored in the system database.

[0016] The following are representative examples of the present invention:

[0017] As a first example, if Person A is having dinner in Restaurant C and the dinner is delicious, Person A may want to share the experience with others. Currently, Person A's options are limited to (i) informing the restaurant owners about the great dining experience by orally telling them, or sending letter or e-mail, (ii) accessing the Internet at home or somewhere else and posting a comment about the great dining experience at Restaurant C, for example, by looking up the Restaurant C's webpage and posting a comment in the guest-book, or (iii) posting a blog about the experience.

[0018] The present invention enables system users, such as Person A, to stand in front of the restaurant, like Restaurant C, type comments or a note on their handheld device about the great dining experience, and point at Restaurant C in order to submit the comments or note to the system server. At the system server, the message containing the comments or note is separated into pointing information from which the object is identified, and the system user's comments or note are then attached to the spatial object or feature of interest. The information about the spatial object or feature of interest is subsequently available for everybody consulting the web or pointing at this object or feature in the field in order to retrieve information about the object or feature.

[0019] A second example relates to real estate and home shopping. Person K is exploring a neighborhood in search of a new home. While exploring the neighborhood, Person K keeps notes on homes that are for sale. Some of the homes are more interesting than others and in order to keep notes and prepare for meetings with various real estate agents, Person K tediously writes down the corresponding addresses, along with the phone numbers of agents. Using the present invention, Person K would simply point at the building of interest and register it with a bookmarking service, without having to write down anything at all. Back at home, Person K could use the bookmarking service to generate a list of addresses for the bookmarked homes or a list of phone number of agents that are in charge of the bookmarked homes.

[0020] The present invention combines pointing, geotagging, and geoblogging in order to define a novel system and method, which enables system users to add information or media to a spatial object or feature in the database, rather than just attaching geographic location information to media. As such, the present invention differs from geotagging and geoblogging in a number of ways, these include, but are not limited to, not attaching location information to specific media, but attaching the media to the representation of the spatial object or feature in the database simply by pointing at the spatial object or feature in the real-world. Moreover, the present invention extends geotagging and geoblogging by allowing system users to address objects or features within the system user's field of view by pointing at the reference object or feature, and attaching information about this object or feature to its representation stored in a system database.

[0021] The present invention further extends social bookmarking services by a method that allows bookmarking objects or features within the system user's field of view simply by pointing at the object or feature. The present invention extends spatial interaction with real-world objects or

features by a pointing mechanism enabling interaction between system users and representations of real-world objects or features.

[0022] The present invention enables system users to execute commands associated with the representations of spatial objects or features on a system server by pointing at their counterpart in the real-world. The present invention extends remote control of services or appliances by allowing the control and management of appliances, applications, or services by pointing at the object or feature in the real-world.

[0023] The present invention will be described in greater detail in the remainder of the specification referring to the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] FIG. 1 shows a block diagram of a representative system for carrying out the present invention.

[0025] FIG. 2 shows a representative flow diagram for carrying out the method of the present invention.

[0026] FIG. 3 shows a representative user interface for a system client for providing feedback about a specific spatial object or feature of interest.

[0027] FIG. 4 shows a representative diagram relating to HERE and THERE locations.

[0028] FIG. 5 shows a representative example of a visual scene which system users may use to provide feedback by pointing.

[0029] FIG. 6 shows a representative example of levels associated with spatial objects and features to which system user-generated feedback may be attached.

[0030] FIGS. 7A and 7B show representative examples of pointing at different elements of a building for attaching system user-generated feedback information.

[0031] FIG. 8 shows a representative example of elements of a building to which system user-generated feedback may be attached.

DETAILED DESCRIPTION OF THE INVENTION

[0032] The system and method of the present invention are for compiling feedback or command statements that relate to applications or services associated with spatial objects or features, pointing at spatial objects or features in order to identify an object or feature of interest, and executing the command statement on a system server or attaching the feedback to a representation of this object or feature in a system database on a system server.

[0033] FIG. 1, generally at 100, shows a general overview of the system of the present invention. FIG. 1 also shows the general information data flow among the elements of the system of the present invention. Further, FIG. 1 shows the basic workflow according to a method of the present invention, which will be described in greater detail subsequently.

[0034] Referring to FIG. 1, system 100 of the present invention is shown in relation to the real-world 102. The real-world 102 represents a visual scene that would be viewed by the system user. System 104 includes system client 106, system server 108, and storage and execution environment 110. As shown at 102, System User 124 will be located in environment 122 and will see visual scene 120 which is part of environment 122. Visual scene 120 includes one or more spatial objects 126 that may be pointed at by System User 124.

[0035] As stated, system 104 includes system client 106, system server 108, and storage and execution environment 110. System User 124 interacts directly with system client 106 that includes User Interface and Feedback Editor 132, and Positioning and Pointing Modules 134. System User 124 principally interacts with system client 106 at User Interface and Feedback Editor 132. When System User 124 points system client 106 at spatial object 126, Positioning and Pointing Modules 132 can determine the position of the specific spatial object or feature being pointed at and supplies this information to User Interface and Feedback Editor 132 for display to System User 124 that will relate to the identification of the pointed at object or feature.

[0036] System server 108 receives mapped information relating to environment 122 in which System User 124 is located. More specifically, system server 108 at 136 receives three-dimensional (3-D) representation information about environment 122 based on the location and pointing direction of system client 106. The geographic location may be provided to system server 108, by, for example, a GPS sensor associated with system client 106. Other methods of determining environment scene may be used and still be within the scope of the present invention.

[0037] The three-dimensional representation of environment 122 at 136 is provided to Scene Generator and Object Identification 140. User Interface and Feedback Editor 132 sends system user requests for identification of spatial objects or features of interest being pointed at by System User 124 to Command Parser and Feedback Processor 138. Command Parser and Feedback Processor 138 determines if the request is a command statement only or whether there is a feedback statement as part of the request. Command Parser and Feedback Processor 138 transmits command statements to User Information and Interaction Engine 142 and feedback statements to Scene Generator and Object Identification 140.

[0038] Scene Generator and Object Identification 140 provides the identity and likelihood of the accurate identification of objects or features of interest to Feedback Linker and Command Dispatcher 144. The purpose of Feedback Linker and Command Dispatcher 144 is to dispatch system user generated feedback or actions to the executing instance for objects or features of interest in Storage and Execution Environment 110, and/or to generate feedback for the separate system user in case of inaccurate object or feature identification. Feedback Linker and Command Dispatcher 144 sends system user-generated feedback to system database 146 for linking with stored information relating to spatial objects or features, and commands to be executed by appliances, applications, and services at 146. Feedback Linker and Command Dispatcher 144 also sends information to Command Parser and Feedback Processor 138 and informs User Information and Interaction Engine 142 of the performance of the object identification process, and the success, failure, or state of dispatching and linking system user generated feedback and commands to the corresponding instance. User Information and Interaction Engine 142 sends information about the outcome of object or feature identification, and/or dispatch and linking operations to User Interface and Feedback Editor 132. Certain of this information will be displayed on the user interface of User Interface and Feedback Editor 132. For example, User Interface and Feedback Editor 132 may display the success or failure of object or feature identification, state of feedback linking, and/or progress of command execution. Other information may be sent from User Information

and Interaction Engine **142** to User Interface and Feedback Editor **132** for the display and still be within the scope of the present invention.

[0039] As stated, Feedback Linker and Command Dispatcher **144** sends system user-generated commands and, if necessary, the object or feature identity information to appliances, applications, and services **148**. By way of example only, appliances, applications, and services, include, but are not limited to, electronic-mechanical devices controlled within the scope of the object or feature of interest (e.g., automated door opener), software applications associated with the object of interest (e.g., electronic meters), and dedicated or generic bookmarking or registering services. Other appliances, applications, and services may apply and still be within the scope of the present invention.

[0040] It is understood that the elements of system server **108** may be separate modules or integrated into one or more modules and still be within the scope of the present invention. It is also understood that the elements of client serve **106** may be separate modules or integrated into one or more modules and still be within the scope of the present invention. It is further understood that the elements of Storage and Execution Environment **110** may be separate modules or integrated into one or more modules and still be within the scope of the present invention.

[0041] Referring to FIG. 2, shown generally at **200**, the steps of the method of the present invention will be described. In describing the steps of the present invention according to FIG. 2, reference also will be made to FIGS. 1 and 3.

[0042] Generally, Step 1 at **202** is for inputting pointing information for object or feature identification along with command statements or feedback associated with a spatial object or feature of interest. This is performed by the system user selecting a command statement or generating feedback by entering specific information using user interface (“UI”) of system client **106**, such as in User Interface and Feedback Editor **132** (FIG. 1). The UI is adapted such that the system user can insert multiple or just specific types of commands or feedback. Examples of command statements are (i) “start,” “stop,” “pause applications or services,” (ii) “bookmark items,” or (iii) configuration statements. The purpose of command statements with regard to appliances, applications, or services is to control, manipulate, and/or inform these entities. The command statements that are provided are by way of example and not of limitation. It is understood that other command statements may be used and still be within the scope of the present invention. Examples of feedback include, but are not limited to, hyperlinks or URLs, ratings, comments, tags, keywords, or all types of media items, or a combination thereof, depending on the scope and purpose of the situation.

[0043] Preferably, command statements may be selected by the system user from drop down lists or menu items placed on the UI, or typed by the system user on a console interface on system client **106**. Feedback generation, however, is preferably carried out using an application-specific system user interface. An example of an application-specific system user interface for feedback generation is shown in FIG. 3 generally at **300**.

[0044] Referring to FIG. 3, a preferable application-specific system user interface is shown at **300** for providing feedback about specific spatial objects or features. Application-specific system user interface **300** will enable the system user to add different types of feedback. In FIG. 3, the interface titled “Feedback by Pointing” is shown at **302**. This interface

is shown with four sections. The first is hyperlink section **306**; the second is rating section **308**; the third is comment section **310**; and the fourth is multimedia section **312**. It is understood that there may be more or less than four sections associated with the interface and still be within the scope of the present invention.

[0045] At the bottom of the system user interface **300** is button **304** for uploading to system server **108**, system user generated feedback relating to the spatial object or feature being pointed at. The activation of this button will be described in greater detail subsequently.

[0046] Referring to hyperlinked section **306**, the system user can enter hyperlinks with regard to the spatial object or feature being pointed at. For example, if the system user is reading the menu posted outside of a restaurant where the system user has enjoyed a meal, system user could enter the hyperlink of the restaurant on the menu in hyperlinked section **306**. In FIG. 3, there are four spaces provided for entering hyperlinks. It is understood that there may be a more or less and than four spaces provided for entering hyperlinks and still be within the scope of the present invention.

[0047] At rating section **308**, the system user can enter ratings about an object or service based on his/her experience. It is noted that rating section **308** provides spaces for rating an object or service with a “Rating A,” “Rating B,” or “Rating C.” It is understood that more than these three ratings may be used and still be within the scope of the present invention.

[0048] Comment section **310** is used by the system user to input any comments he/she has relating to the spatial object or feature. The comments may be confined to the area provided or unlimited with a scrolling screen to capture the full extent of the system user’s comments.

[0049] Multimedia section **312** is used by the system user to input multimedia associated with the object of interest. This may include lists of pictures, videos, voice notes, or other multimedia sources of information that may be available that relate to the object or feature. In order for the system user to add pictures, he/she will activate button **314** for picture download. Similarly, the system user would activate button **316** for adding videos and button **318** for adding voice notes. If there are other types of multimedia source information to be added via the interface, there would be a button made available on interface for that purpose. Although only three buttons for adding multimedia information are shown for adding multimedia information, namely buttons **314**, **316**, and **318**, it is understood that more or less than three buttons for adding multimedia information may be available on interface and still be within the scope of the present invention.

[0050] After system user has entered the feedback information about the spatial object using interface **300**, and wants to link it to a representation of the spatial object or feature in the system server database, he/she points at the object or feature of interest and activates point@it button **304**. This will upload the feedback information to system server **108**. It is also understood that the system user can point the device having application-specific system user interface **300** at the object of interest before compiling the feedback data and it will still be in the scope of the present invention.

[0051] Referring to FIG. 1, when point@it button **304** is activated, system client **106** connects to Positioning and Pointing Module **134** and extracts system client **106**’s (i) position in latitude, longitude, altitude, or according to x, y, and z positioning in an x, y, and z coordinate system, and (ii) direction in yaw and pitch. These measurements together

with the system user feedback or command statement are then submitted as a “request” to the system server for further processing. The request that includes the system user generated feedback or command statement and is sent from system client 106 to system server 108. Preferably, the request will include at least the following components that are in BNF (“Backus Naur Form”) notation:

```

<Request> ::=
  <Context>
  (<Feedback> | <Command_Statement>)
  (<HERE_Location> | <THERE_Location>)
<Context> ::=
  <Personal>
  <Infrastructure>
  <Environmental>
  <Temporal>
<Personal> ::=
  'User ID, Name, Age, Gender, Interests, etc.'
<Infrastructure> ::=
  'Type of network, bandwidth, etc.'
<Environmental> ::=
  'Weather, Noise, other sensory input'
<Temporal> ::=
  'Date, Time, User's path to this location, etc.'
<Feedback> ::=
  <URI>
  <Comment>
  <Tag>
  <Keyword>
  <Rating>
  <Multimedia>
<URI> ::=
  'any URI'
<Comment> ::=
  'any Comment or application-specific
  scheme-based Comment'
<Rating> ::=
  'any Rating or application-specific
  scheme-based Rating'
<Tag> ::=
  'any Tag that is associated with the object'
<Keyword> ::=
  'any Keyword that is associated with the
  object'
<Multimedia> ::=
  'any list of multimedia items or files'
<Command_Statement> ::=
  <Command>
  [<Option> [<Option>]]
  [<Command> [<Option> [<Option>]]]
  <Target>
<Command> ::=
  'any command associated with object, e.g.,
  start, stop, pause, configure'
<Option> ::=
  'any option associated with command, e.g.,
  time stamp'
<Target> ::=
  'target appliance, application, or service, e.g.,
  bookmarking service'
<HERE_Location> ::=
  'user's current position identifying feature of
  interest'
<THERE_Location> ::=
  'pointing data for identification of object of
  interest'

```

[0052] Referring to the feedback statement shown above, there are three principal components of the statement. These components are the (i) Context, (ii) Feedback or Command Statement, and (iii) HERE or THERE Location.

[0053] The Context component sets forth a set of properties that describe the identity and interests of the system user, as well as the personal, infrastructure, environmental, and temporal characteristics under which the feedback statement was compiled and submitted to system server 108.

[0054] The Feedback component of the feedback statement consists of any URL, comment, rating, document, multimedia, or other piece of information that the system user wants to attach to the object of interest. Preferably, the Command Statement component is a three-valued statement that includes information about what target appliance, application, or service that needs to be manipulated when pointing at an object or feature, and related options. In referring to related options, it is understood to mean optional commands for refining parameters or attributes, such as additional command

attributes (e.g., user name), control parameters (e.g., safe execution only), or time-dependent execution (e.g., now or a specific date/time).

[0055] The HERE or THERE Location component includes information that is required for identifying an object or feature of interest. A HERE Location refers to a spatial object or feature located at the system user’s current location. A THERE Location refers to a spatial object or feature that is located at a distant position. This is shown graphically in FIG. 4.

[0056] Referring to FIG. 4, generally at 400, HERE and THERE Locations will be described in detail. System User 402 is standing at system user position 406. This position would have a latitude, longitude, and altitude. A predetermined distance around a system user’s position defines HERE Location 404. If a spatial object, such as stop sign 408, is located at the HERE Location 404, it could be identified by the system server as an object at the HERE Location. It is understood that the definition of the size of the HERE Location may be larger or smaller and cover a shape that is different from what is shown in FIG. 4 and still be within the scope of the present invention.

[0057] Again referring to FIG. 4, if system user 402 desires to identify a distant object or feature of interest, such as building 414, system user 402 at HERE Location 404 would point system client 106 in direction 410 toward building 414. Distant building 414 would be located at THERE Location 412.

[0058] Again referring to FIG. 2, Step 2 at 204 provides for the generation of a two-dimensional (2-D) representation of the system user’s visual scene from the three-dimensional (3-D) model of the environment surrounding the system user. In contrast to HERE Location 404 in FIG. 4, THERE Location 412 uses a different method for identification. The method by which distant objects of interest are identified is to generate a 2-D digital scene from the representation of the environment stored in the system database 146 of storage and execution environment 110 (FIG. 1). This digital scene will represent the system user’s current field of view. Within the scene, the system and method of the present invention will intersect a ray defined by the system user’s current position and pointing direction with the spatial object or feature within the scene. This will result in the identification of objects or features of interest.

[0059] Referring to FIG. 2, Step 3 at 206 of the present invention will be described. At Step 3, the object or feature of interest is identified. If, for example, there is a single object spatially dispersed from other objects to which system client 106 is being pointed, then the 2-D scene that is generated only shows that object or feature, and it can be correctly identified from information stored in the system database. However, to the extent that the identification of any spatial object or feature of interest cannot be carried out with a sufficient level of accuracy and confidence, the system user is informed by the system of this, and asked to resubmit the request or choose the select object from a list of possible objects. This method identification will be described in more detail referring to FIG. 5.

[0060] Referring to FIG. 5, generally at 500, the description for identifying an object or feature of interest where there may be more than one object in the pointing direction of system client 106 will be provided. Pointing system 502 is based on x, y, z coordinate system 504. Based on coordinate system 504, system user 506 will have a latitude, longitude, and

altitude. By pointing system client 106 in a specific direction, yaw and pitch associated with system user's position will be generated. As shown in FIG. 5, by the system user pointing in direction 516, there is generation of 2-D visual scene 508. In that visual scene, are building 510 and silo 512. As shown in real-world representation 518, building 510 and silo 512 are different objects that are spaced apart but in 2-D visual scene 508 they are overlapping. Without any additional information, it could not be determined with any confidence whether system user 506 is pointing at building 510 or silo 512.

[0061] According to the method of the present invention, object or feature identification is carried out using statistical methods and error propagation principles in order to assess the reliability of pointing. Examples of the statistical methods and error propagation principles are the following t-test for correspondence of pointing direction and likely target objects or features, and—geodetic methods for assessing propagation of GPS and compass errors in a visual scene. There also may be default reliability criteria set for the system which if not met will notify the system user of same and require additional information before identification can be made and confirmed.

[0062] Referring to FIG. 2, at decision point 208, the system and method of the present invention determines whether or not identification of the object of interest has been made with sufficient accuracy according to system settings. If the answer is "No," then the system and method will move to Step 7 at 220 and inform the system user that identification could not be made without additional information. If the answer is "Yes," then the system and method will proceed to Step 4 at 210.

[0063] Referring to Step 4 at 210 in FIG. 2, preparation of context information will be described. As discussed above with respect to feedback data that is provided by the system user using system client 106, there are three main components of the feedback statement submitted to the system server; one of them is Context (contextual) information.

[0064] When contextual information is input by the system user into system client 106, it is processed to be added as part of the command statement or feedback statement submitted to system server 108. The accurate capture of the Context information is important to ensure the quality of the data attached to a spatial object or feature. For example, if system user A and system user B are rating the "fear factor" they both experienced in crossing a park, the context of their crossing will have impact on their rating of the park. If system user A crosses the park during daylight and rates the park as open and friendly, that rating will reflect the time of day of the crossing. However, if system user B across the park at night and rates the park as dark and scary due to many missing lights, this context is very different than the one experienced by system user A. Therefore, if the contextual information of each crossing is attached to the rating, the differences in these ratings could clearly be understood and explained. As such, the contextual information stored with each feedback item provides insights about the circumstances under which the system user feedback was generated.

[0065] Referring again to FIG. 2, Step 4 at 210 provides examples of personal contextual data that may be included. This information may include system user data such as the system user's name, age, gender, or other personal information. Infrastructure contextual data may be the type of system client device being used, such as a phone, PDA, or other device. The environmental contextual data may include

weather conditions or other environmental conditions or factors. Temporal contractual data may include the time of day. The above examples are not meant to be of limitation and it is understood that other information may be provided and still be within the scope of the present invention.

[0066] At decision point 212, the present invention determines whether or not what is submitted to system server 108 is a command statement or a feedback statement. This will be carried out by the system server at Command Parser and Feedback Processor 138. If it is determined at decision point 212 that what is received by system server 108 from system client 106 is a feedback statement, then the present invention will proceed to Step 5 at 214. However, if what is received by system server 108 from system client 106 is a command statement, the present invention will proceed to Step 6 at 216.

[0067] Before discussing Step 5 at 214 in greater detail, generally, Step 5 is directed to linking the individual feedback information generated by the system user to the spatial object or feature of interest identified at Step 3 at 206. These spatial objects or features may be any element that is perceived, visually or otherwise, by the system user and mapped into the system database. These spatial objects or features will also be identified by means of a HERE Location, the system user's current location, or a THERE Location, objects or feature at which the system user is pointing. Spatial objects or features of this type include, but are not limited to, rural objects, urban objects, and even indoor objects. By way of example, urban objects include, but are not limited to, water objects like lakes or ponds; generic city objects like buildings or bridges; city features like crosswalks or traffic lights; or city object groups like districts.

[0068] An ontology of geographic space that may serve as a base for the feedback system is represented in the class diagram shown in FIG. 6, generally at 600. This ontology of geographic information is meant to serve only as an example, and is understood to be an incomplete ontology. It is further understood that information may be added to this ontology to make it complete and it would be within the scope of the present invention.

[0069] Referring to FIG. 6 at 602, the component information associated with any spatial object or feature is shown in what is referred to as "Legend" 601. These components are the contents of the system database at 604 and the system user-generated feedback at 606. These two components will be used to find and define a spatial object or feature. In order to obtain the information set forth in Legend 601, it is necessary to link the information that is accumulated at 606, which is shown as

$$\frac{\langle\langle\text{Feature}\rangle\rangle}{\text{spatialObject}}$$

Class instances include different class levels to which feedback information attaches. For example, one class level would be the feature class, that includes ReliefFeature 634, Site 642, WaterObject 636, CityObjectGroup 644, Generic-CityObject 638, TransportationObject 646, and CityFeature 640. This feature class would inherit all the properties of spatialObject 606. For purpose of example, referring to FIG. 6, an urban object will be described which is intended to be a feature of interest.

[0070] At a first class level, an object may be rural object 622, urban object 624, indoor object 626, or other object 628.

Rural object **622** may be further defined by other subfeatures such as shown in phantom at **630**. Similarly, indoor objects **626** may be further defined by the subfeatures shown in phantom at **632**.

[0071] Urban object **624** is shown with possible subfeatures. At this second or sub-level, the possible defining subfeatures are relief feature **634**, site feature **642**, water object **636**, city object group **644**, generic city object **638**, transportation object **646**, or city feature **640**. Urban object **624** would include at least one of these features. For purpose of example, the feature of interest is a particular art museum, and the feature could be a general city object such as **638**. Information about this museum that is stored in a system database will be transmitted to **608** where information relating to the 3-D geometric features and a type and function of the museum would be provided that relate to this feature.

[0072] Next, user feedback information is generated at **610** based on system user information at **612**, comments provided by system users at **614**, rating information about the museum at **618**, media information, such as images, audio, or video information, at **620**, or other information at **616**. This system user feedback is attached to spatial object at **606**. The combination of this information at **606** and **608** will generate Legend **601** that includes database content **602** and a system user generated input **604**.

[0073] According to the foregoing, the feedback statement generated at **610** by the system user based on system user input is attached to the spatial object information based on the level of granularity of the feature classes. The level granularity of spatial objects or features may be based on system settings or determinations by the system user. As an example, system settings may provide that the finest granularity for spatial objects is the level of building blocks, so that when a system user points at some ornament that is part of the building, it will result in attaching the feedback to the building. On the other hand, if the system settings are such that the ornaments of a building define the highest granularity level, then feedback will be attached to an ornament rather than to the building block itself. Therefore, the defined class level will determine where information will attach. This will be explained in greater detail referring to FIGS. 7 and 8.

[0074] Referring to FIG. 7A, generally at **700**, it shows at first representation **702** of a scene where the pointing location is the building. Referring to FIG. 7B, generally at **701**, it shows a second representation **703** of the same scene where the pointing location is the front door of the building. Referring to FIGS. 7A and 7B, they each show a 2-D representation of the scene that includes building **704** and silo **706**. In FIG. 7A, pointing location **708** is building **704** or the front of the building **704**. In this case, the class level of granularity would be building blocks or the level right below building blocks (the front of building **704**). As such, the feedback statement information would attach to building **704** or the front of building **704**. In FIG. 7B, the pointing location is front door **712**. This will mean that the level of granularity would be ornaments of building **704** or features of the front of building **704**. Therefore, the feedback statement information would attach to front door **712** as a feature of the building or the front of the building.

[0075] Referring to FIG. 8, generally at **800**, features of building **704** to which feedback information may attach are shown. For example, feedback information may attach to (i) Class Level 1: the solid form of the building at **802**, (ii) Class

Level 2: façade **1** at **804** or façade **2** at **806**, or (iii) Class Level 3: window **808** on façade **2** or front door **712** on façade **2**.

[0076] If at decision **212**, it is determined that the context information that is provided from Step **4** at **210** is a command statement without a feedback statement, the present invention will proceed to Step **6** at **216**. The purpose of Step **6** is to parse and execute command statements.

[0077] As set forth above, command statements are processed by system server **104** at **138** and command statement information is transmitted to User Information and Interaction Engine **142** for processing. User Information and Interaction Engine **142** processes the command information and sends instructions to User Interface and Feedback Editor **132** of system client **106** (FIG. 2). The command information that is parsed from the command statements and sent may include, but not be limited to, “start,” “stop,” “pause applications or services,” “bookmark items,” or configuration statements. These statements are launched from User Information and Interaction Engine **142** for execution by Appliances, Applications, and Services **146** associated with the object or feature of interest using Feedback Linker and Command Dispatcher **144** as the intermediary between the system user, object of interest, and executing entity.

[0078] In more detail, according to Step **6**, an incoming command statement is parsed and associated with the spatial object or feature of interest in order to engage an associated appliance, application, or service. This is carried out by a synchronized process involving Command Parser **136**, Scene Generator and Object Identification **140**, User Information and Interaction Engine **142**, and Feedback Linker and Command Dispatcher **144**.

[0079] In parsing the command statement, it is parsed into the core command, the options that accompanying this command, and the target appliance, application, or service at **148** addressed by the command statement. This information is transmitted to User Information and Interaction Engine **142** which forwards the parsed command to Feedback Linker and Command Dispatcher **144**. This information is then forwarded to appliances, applications, and services in Storage and Execution Environment **110** for execution (FIG. 1). The execution engine at **148** will then engage the target application or service associated with the object or feature of interest and this causes these applications or services to behave as requested by the system user. The following is an example of the operation of the system of the present invention with respect to command parsing and execution.

[0080] The following example will be directed to a pointing-based dialing service for real estate agency. Conventionally, when exploring a neighborhood for a new home, a system user would have to find the telephone number of the agent that manages the house of interest and dial the number in order to call the agent. In the case of a pointing-based dialing service, the system user would simply point the system client device, such as a cell phone, at the real estate of interest, and hit the “Dial by pointing” button on the screen. The command statement, for example, would include a core command, e.g., “Start,” the target application, e.g., “Call Agent,” and the referenced object, which provides the execution engine at **148** enough information to automatically launch the call at **142**. Once a call is launched, control is handed back to the system user for further handling using the user interface at **132**.

[0081] According to the method of the present invention, once there is processing according to either Step **5** at **214** or Step **6** at **216**, the method proceeds to Step **7** at **220**. At Step

7, there is generation of system feedback and user information. The system feedback is feedback information that is generated based on a system user's input and intended to inform the system user of the success or failure at Steps 3 at 206, 4 at 210, 5 at 214, and 6 at 216.

[0082] When the object or feature of interest is identified at Step 3 with sufficient reliability, the command is executed according to Step 6 or the feedback is linked to the spatial object or feature according to Step 5, and the system user is notified about the success of the operation at Step 7. In situations when the spatial object of interest cannot be identified with sufficient reliability, system bypasses Steps 4, 5, and 6 and the system user is notified of the identification failure. In situations where there is a failure, the system server is provided with a list of likely spatial objects or features. These objects or features are displayed on a system client 106, which provides the system user with an opportunity to select the correct spatial object or feature and resubmit the request. The present invention also provides an additional option through system client 106. This option is for the system user to point at the object or feature of interest a second time and resubmit the request.

[0083] The feedback system may also be adapted to be used for educational purposes either outdoors or indoors. Typically, educational systems take user input, such as the result of a multiple choice test or other type of results, assess this feedback with respect to the correct answers, and provide appropriate feedback to the system user. The present invention is contemplated to be adapted to incorporate these types of educational systems. More specifically, the present invention may be configured such that applications which require testing system user feedback against predetermined values may be implemented. As an example, a professor may decide to take his/her class on a field trip to a historic site or museum. Instead of going back to the classroom to examine the students, he/she may want to test their knowledge in the field. The feedback system of the present invention can implement this type of educational activity and provides all of the components required to set up the system for this specific purpose.

[0084] It is understood that the elements of the systems of the present invention may be connected electronically by wired or wireless connections and still be within the scope of the present invention.

[0085] The embodiments or portions thereof of the system and method of the present invention may be implemented in computer hardware, firmware, and/or computer programs executing on programmable computers or servers that each includes a processor and a storage medium readable by the processor (including volatile and non-volatile memory and/or storage elements). Any computer program may be implemented in a high-level procedural or object-oriented programming language to communicate within and outside of computer-based systems.

[0086] Any computer program may be stored on an article of manufacture, such as a storage medium (e.g., CD-ROM, hard disk, or magnetic diskette) or device (e.g., computer peripheral), that is readable by a general or special purpose programmable computer for configuring and operating the computer when the storage medium or device is read by the computer to perform the functions of the embodiments. The embodiments or portions thereof, may also be implemented as a machine-readable storage medium, configured with a computer program, where, upon execution, instructions in the

computer program cause a machine to operate to perform the functions of the embodiments described above.

[0087] The embodiments or portions thereof, of the system and method of the present invention described above may be used in a variety of applications. Although the embodiments, or portions thereof, are not limited in this respect, the embodiments, or portions thereof, may be implemented with memory devices in microcontrollers, general purpose microprocessors, digital signal processors (DSPs), reduced instruction-set computing (RISC), and complex instruction-set computing (CISC), among other electronic components. Moreover, the embodiments, or portions thereof, described above may also be implemented using integrated circuit blocks referred to as main memory, cache memory, or other types of memory that store electronic instructions to be executed by a microprocessor or store data that may be used in arithmetic operations.

[0088] The descriptions are applicable in any computing or processing environment. The embodiments, or portions thereof, may be implemented in hardware, software, or a combination of the two. For example, the embodiments, or portions thereof, may be implemented using circuitry, such as one or more of programmable logic (e.g., an ASIC), logic gates, a processor, and a memory.

[0089] Various modifications to the disclosed embodiments will be apparent to those skilled in the art, and the general principals set forth below may be applied to other embodiments and applications. Thus, the present invention is not intended to be limited to the embodiments shown or described herein.

1. A computer-implemented method for identifying an object in a real-world scene by pointing at the object with an electronic pointing device and electronically linking information to the object in a digital representation of the object stored in system storage, comprising the steps of:

- (A) mapping a three-dimensional representation of a real-world scene containing at least one object and transmitting the three-dimensional representation of the scene to a system server;
- (B) generating a two-dimensional representation of the three-dimensional representation with the system server;
- (C) pointing the pointing device at the at least one object and collecting a current geodetic position and pointing direction for the pointing device and creating a ray that intersects with a two-dimensional representation according to the geodetic position and pointing direction of the of the pointing device;
- (D) selecting at the pointing device command statements and compiling feedback associated with the at least one object for identifying the at least one object;
- (E) transmitting from the pointing device to the system server at least three segments of information, with the three segments including (1) the geodetic position and pointing direction of the pointing device, (2) command statements, and (3) compiled feedback;
- (G) the system server separating the segments and (1) using the current position and pointing direction of the pointing device to identify the at least one object, (2) identifying the types of commands and compiled feedback, and (3) dispatching the command statements for execution and attaching the compiled feedback to the at least one object;

- (H) identifying the at least one object of interest at the system server and transmitting the identity of the object of interest to the pointing device, with the command statements being executed respect to the at least one object of interest, and the compiled feedback being attached to the at least one object of interest.
- 2. The method as recited in claim 1, wherein command statements include actions that relates to appliances, applications, or services on the system server relate information to the at least one object.
- 3. The method as recited in claim 2, wherein appliances include at least automated teller machines, meters, automated door systems, lights, displays, devices, or electrical/mechanical instruments.
- 4. The method as recited in claim 2, wherein applications include at least information systems, database management systems, web applications, dedicated and embedded applications, or any tool that functions and is operated by a computer.
- 5. The method as recited in claim 2, wherein services include web services, bookmarking and registration services, electronic counter services, automated teller services, vending and ticketing services, or any software system for supporting interoperable machine-to-machine interaction over a network.
- 6. A computer-implemented method for identifying an object in a real-world scene by pointing at the object with an electronic pointing device and electronically linking information to the object in a digital representation of the object stored in system storage, comprising the steps of:
 - (A) inputting from the pointing device to a system server a geodetic position and pointing direction of the pointing device with command statements generated by the system user on the pointing device and feedback associated with the at least one object of interest;
 - (B) mapping a three-dimensional representation of a real-world scene containing at least the one object and transmitting the three-dimensional representation of the scene to a system server;

- (C) generating a two-dimensional representation of the three-dimensional representation with the system server;
- (D) identifying with the system server the at least one object and transmitting an identity of the at least one object to the pointing device and if a predetermined level of accuracy in identifying the at least one object of interest is not achieved, then step (A), otherwise step (E);
- (E) inputting from the pointing device to the system server contextual information;
- (F) determining if what was input at step (A) was a command statement or feedback and if what was input at step (A) was a command statement then step (G), otherwise step (H);
- (G) the system server parsing and executing the command statement with respect to the at least one object; and
- (H) linking the feedback to the at least one object and storing the feedback in the system database with respect to the at least one object.
- 7. The method as recited in claim 6, wherein command statements include actions that relates to appliances, applications, or services on the system server relate information to the at least one object.
- 8. The method as recited in claim 7, wherein appliances include at least automated teller machines, meters, automated door systems, lights, displays, devices, or electrical/mechanical instruments.
- 9. The method as recited in claim 7, wherein applications include at least information systems, database management systems, web applications, dedicated and embedded applications, or any tool that functions and is operated by a computer.
- 10. The method as recited in claim 7, wherein services include web services, bookmarking and registration services, electronic counter services, automated teller services, vending and ticketing services, or any software system for supporting interoperable machine-to-machine interaction over a network.

* * * * *