

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 July 2003 (17.07.2003)


PCT

(10) International Publication Number
WO 03/057461 A1

- (51) International Patent Classification⁷: **B31F 5/00**, 1/07, B32B 23/00 // B26F 1/24, B26D 7/08
- (74) Agents: **WATSON, Sue, C.** et al.; Kimberly-Clark Worldwide, Inc., 401 N. Lake St., Neenah, WI 54956 (US).
- (21) International Application Number: PCT/US02/37095
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date:
18 November 2002 (18.11.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/035,067 28 December 2001 (28.12.2001) US
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant: **KIMBERLY-CLARK WORLDWIDE, INC.** [US/US]; 401 N. Lake Street, Neenah, WI 54956 (US).
- (72) Inventors: **KING, Timothy, James**; 5 Church Bank Gardens, Burton in Kendal, Carnsforth, Lancashire LS6 1NT (GB). **YORK, Cheryl, Lynn**; 1509 Cambry Cove, Alpharetta, GA 30022 (US).
- Declarations under Rule 4.17:**
— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations*

[Continued on next page]

(54) Title: METHOD FOR SIMULTANEOUSLY IMPRINTING A PATTERN AND BONDING CELLULOSE WEBS USING ULTRASONIC ENERGY

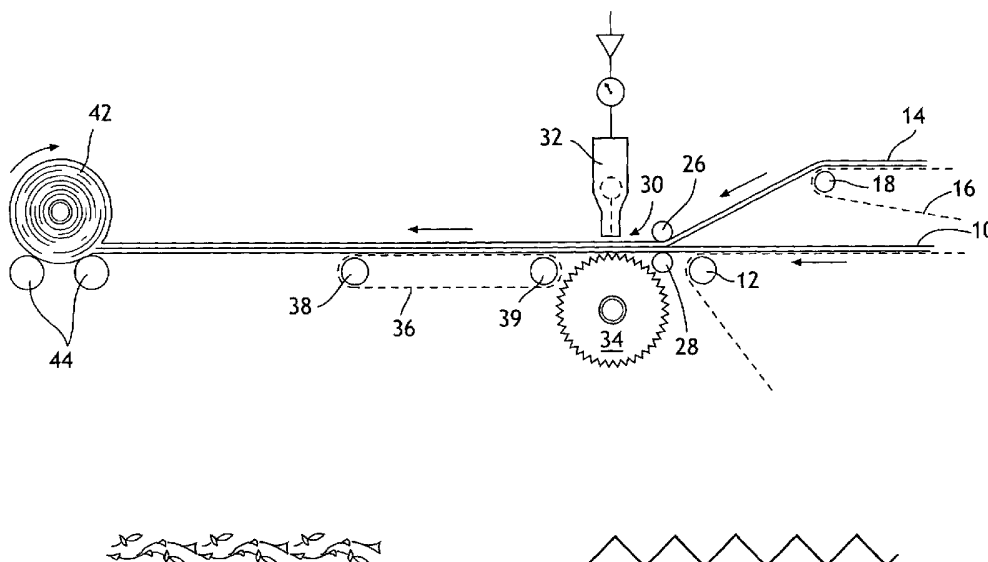

(57) Abstract: A method of simultaneously laminating and imprinting a pattern on a web formed substantially from cellulosic material, using at least two plies or layers (10, 14), and superposing the plies and passing the plies past an ultrasonic bonder (32) and a patterned anvil roll (34) to simultaneously produce either substantially imprinted patterned and bonded areas over the superposed plies or substantially patterned perforations and bonded areas over the superposed plies.

WO 03/057461 A1



— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

METHOD FOR SIMULTANEOUSLY IMPRINTING A PATTERN AND BONDING CELLULOSE WEBS USING ULTRASONIC ENERGY

FIELD OF THE INVENTION

5 This invention generally relates to the field of imprinting and joining fibrous cellulose webs together, and more particularly, to simultaneous ultrasonic imprinting of a pattern and sonic bonding of cellulose webs.

BACKGROUND

10 Cellulose webs often have two or more plies, and the plies are bonded together by various means. In some instances, the plies are bonded together by an apparatus which crimps the plies into a cellulosic laminate. Often, it is desirable to bond the cellulosic plies and to simultaneously provide a pattern upon the cellulosic laminate as well. One such apparatus and process for producing a crimp-bonded and patterned cellulosic laminate is
15 disclosed in U.S. Pat. No. 5,622,734. In this instance, two or more plies are bonded together simultaneously when the web is run through mechanical crimping wheels that apply high pressure to the two or more plies of the web in order to bond the web together, and in some instances, also impart a portion of a pattern such as a linear edge crimp or an overall pattern, at the same time. This technique, however, has disadvantages. At
20 higher converting speeds, the crimping wheels will sometimes skip and miss a portion of the web, resulting in inconsistent and indistinguishable printing/imprinting of the pattern, uneven ply attachment, or the absence of either of the latter, or both, in some areas.

 Cellulose webs have been bonded together in other ways. Ultrasonic energy has been used to "stitch" or bond two or more webs together, but has required the use of a
25 significant amount of adhesive as well, as disclosed in U.S. Pat. No. 3,660,186. Ultrasonic energy is well known for bonding as well as applying patterns to heavier basis weight nonwoven fabrics made from thermoplastic fibers. One such method of bonding such nonwoven webs, which uses a liquid to moisten the material just prior to bonding, is disclosed in U.S. Pat. No. 4,605,454. The addition of adhesives and/or fluids may not be
30 suitable for personal care tissue products because physical properties of the tissue products such as softness, bulk, and absorption may be compromised, and such addition may add further expense to the manufacturing process.

 Previously, when ultrasound energy has been used on webs comprising primarily, or exclusively, cellulosic material, the webs were often burned when attempts were made to

both provide a laminate as well as a pattern simultaneously. While some bonding was possible, bonding while simultaneously providing a significant pattern caused burning and degradation of the web, and making the web unfit for sale or use. Even when ultrasonic energy was successful in providing a degree of bonding, such as the web disclosed in
5 U.S. Pat. No. 3,660,186, a significant degree of adhesive and/or aqueous solution (usually water, or an oil and water mixture) was still required as a bonding medium to assist in the formation of hydrogen bonds to provide the level of lamination required to bond the materials together.

Accordingly, a method and apparatus for producing a fibrous cellulosic web with
10 required levels of ply attachment via ultrasound energy while simultaneously imparting a consistent and distinct pattern to the web without significantly degrading the desired physical attributes would be desirable. Moreover, such methods and apparatus which did not require the use of conventional mechanical crimping wheels, adhesives, or fluids to moisten the web prior to bonding, or equipment to dry the web after application of fluids
15 would likewise be desirable.

DEFINITIONS

As used herein, the term "cellulosic material" refers to material that may be prepared from cellulose fibers from synthetic sources or natural sources, such as woody
20 and non-woody plants. Woody plants include, for example, deciduous and coniferous trees. Non-woody plants include, for example, cotton, flax, esparto grass, milkweed, straw, jute, hemp, and bagasse. The cellulose fibers may be modified by various treatments such as, for example, thermal, chemical, and/or mechanical treatments. It is contemplated that reconstituted and/or synthetic cellulose fibers maybe used and/or
25 blended with other cellulose fibers of the fibrous cellulosic material

As used herein, the term "pulp" refers to cellulosic fibrous material from sources such as woody and non-woody plants. Woody plants include, for example, deciduous and coniferous trees. Non-woody plants include, for example, cotton, flax, esparto grass, milkweed, straw, jute, hemp, and bagasse. Pulp may be modified by various treatments
30 such as, for example, thermal, chemical and/or mechanical treatments.

As used herein, the term "spunbond or "spunbonded fibers" refers to small diameter fibers which are formed by extruding molten thermoplastic material as filaments from a plurality of fine, usually circular capillaries of a spinneret with the diameter of the extruded filaments then being rapidly reduced as by, for example, in U.S. Pat. No. 4,340, 563 to
35 Appel et al., and U.S. Pat. No. 3,692,618 to Dorschner et al., U.S. Pat. No. 3,802,817 to Matsuki et al., and U.S. Pat. No. 5,382, 400 to Pike et al.

As used herein the term "nonwoven fabric" or "non-woven web" means a web having a structure of individual fibers or threads which are interlaid, but not in an identifiable manner as in a knitted fabric. The basis weight of nonwoven fabrics is usually expressed in ounces of material per square yard (osy) or grams per square meter (gsm).

5 As used herein, the term "hydroentangled" with reference to a fibrous web or substrate means the web or substrate has been subjected to a hydraulic entangling or similar procedure whereby streams or jets of a fluid are employed to entangle the fibers in the fibrous web or substrate. Such jets of fluid orient and entangle fibers in the Z direction, i.e., through the thickness of the web or substrate. Where a jet impinges the web or
10 substrate, a distinct hole or depression is formed which represent a locus of fiber entanglement. For convenience, these jet impingement sites, or loci, are referred to collectively hereinafter as "entanglement loci." For example, hydraulic entangling may be accomplished by means of conventional hydraulic entangling equipment, such as that described in U.S. Pat. No. 3,485,706 to Evans, which is incorporated herein by reference.
15 Another hydroentangling process which may be employed is described in U.S. Pat. No. 4,144,370 to Bouolton which also is incorporated herein by reference. See also U.S. Pat. Nos. 4,931,355 and 4,879,170 to Radwanski et al., and U.S. Pat. Nos. 4,808,467 to Suskind et al., 4,612,226 to Kennette et. al., and 5,284,703 to Everhart et al., each of which is incorporated herein by reference.

20 As used herein, the term "basis weight" (hereinafter may be referred to as "BW") is the weight per unit area of a sample and may be reported as grams per meter squared (gsm). The basis weight may be measured using test procedure ASTM D 3776-96 or TAPPI Test Method T-220.

As used herein, the term "Peel Test" refers to testing a laminate for the amount of
25 tensile force which will pull the layers of the laminate apart. The peel test used in the present examples is identical to ASTM Standard Test D 2724.13 and to Method 5951, Federal Test Methods Standard 191 A, except that: (a) the specimen size is 2 in. x 6 in.; (b) the gauge length is 1.0 in.; and (c) the value peak load alone is defined as the bond strength of the specimen. The bond strength of the sample unit is calculated as the
30 average peak load of all the specimens tested. However, in both the Federal and ASTM procedures, the bond strength of each individual specimen is calculated as the average of the five highest and the five lowest peaks recorded for that specimen. Therefore, in the Federal and ASTM methods, the bond strength of the sample unit is the average of the calculated bond strengths of all the specimens tested. The specimen is tested, for
35 example, using an Instron Model TM, available from the Instron Corporation, 2500

Washington St., Canton, MA 02021, or a Thwing-Albert Model INTELLECT II, available from the Thwing-Albert Instrument Co., 10960 Dutton Rd., Philadelphia, PA 19154.

SUMMARY OF THE INVENTION

5 In one aspect of the invention, a method of simultaneously laminating and imprinting a pattern on a web formed substantially from cellulosic material is provided. At least two plies or layers of cellulosic material are provided. The two plies are superposed, and passed between an ultrasonic bonder and a patterned anvil roll to simultaneously produce bonded and patterned areas over the superposed plies without first applying a
10 bonding medium on the plies.

 In another aspect of the invention, a method of simultaneously laminating and imprinting a pattern on a web formed from cellulosic material is provided. At least two plies of substantially dry cellulosic material is provided. The at least two plies are superposed, and the substantially dry combined plies are passed between an ultrasonic
15 bonder and a patterned anvil roll to simultaneously produce bonded and patterned areas over the superposed plies

 In yet another aspect of the invention, a method of simultaneously laminating and providing patterned perforations in a web formed from cellulosic material is provided. At least two plies of substantially dry cellulosic material is provided. The two plies are
20 superposed, and the substantially dry combined plies are passed between an ultrasonic bonder and a patterned anvil roll to simultaneously produce bonded areas and patterned perforations over the superposed plies.

BRIEF DESCRIPTION OF THE DRAWINGS

25 Figure 1 is a schematic illustration of a process for producing a two ply or multi-component layer ultrasonically bonded and pattern imprinted cellulosic web or primarily cellulosic web in accordance with the present invention:

 Figure 2 is a schematic illustration, not necessarily to scale, of a floral vine pattern used in ultrasonic imprinting; and

30 Figure 3 is a scematic illustration, not necessarily to scale, of a zigzag pattern used in ultrasonic imprinting.

DETAILED DESCRIPTION

 While the invention will be described in connection with preferred embodiments, it
35 will be understood that it is not intended to limit the invention to these embodiments. On the contrary, it is intended to cover all alternatives, modifications, and equivalents as may

be included within the spirit and scope of the invention as defined by the appended claims. Furthermore, as used herein, the term "comprises" or "comprising" is inclusive or open-ended and does not exclude additional unrecited elements, compositional components, or method steps. Accordingly, the term "comprising" encompasses the more restrictive terms "consisting essentially of" and "consisting of."

The present invention is useful with cellulosic webs, i.e., webs which are substantially 100% cellulose. Such cellulosic webs are known in the art; for example, but not by way of limitation, methods of making creped cellulosic webs is known in the art, and one method is disclosed, for example, in U.S. Pat. No. U.S. Patent No. 6,027,611 to McFarland et al., which is hereby incorporated by reference herein. Methods of making uncreped throughdried sheet material are disclosed in U.S. Pat. No. 5,591,309 to Rugowski et al., U.S. Pat. No. 5,399,412 to Sudall et al., and U.S. Pat. No. 5,048,589 to Cook et al., all of which are also hereby incorporated by reference herein.

The present invention is also useful in simultaneously bonding and forming a pattern by using ultrasonic equipment on webs which are formed primarily from cellulose, which are, for example, but not by way of limitation, at least about 70% cellulose. In one example, a cellulosic/spunbond hydroentangled web is about 80% cellulose and about 20% spunbonded material. Such a web is disclosed in U.S. Pat. Nos. 5,389,202 and 5,284,703, both to Everhart et al., and both of which are hereby incorporated by reference herein in their entirety.

Previously, to attempt bonding or ply attachment of about 100% cellulosic material, or a cellulosic/synthetic laminate, a liquid, often an aqueous solution, an adhesive/aqueous mixture, an oil and water solution, or a solution of alcohol(s) or mixtures of alcohol(s) and water were required, as disclosed in U.S. Pat. Nos. 4,605,454, and 3,660,186. Additional equipment was required to hold and spray the solution(s) on the web(s) prior to ultrasonic bonding, to prevent burning of the webs. A drier was also required to dry the bonded web after it passed the ultrasonic horn. Damage to the webs by burning, as well as the requirement of additional wetting solutions and equipment, have previously made ultrasonic bonding of cellulosic webs unsuccessful as a commercial product. The present invention requires no wetting of the cellulosic or cellulosic/spunbond web. Bonding mediums have been taught that include an aqueous solution, it may also, or alternatively, include an adhesive mixture, or, in another alternative, it may include an oil and water solution, and, in yet another alternative, it may include a solution of alcohol(s) or mixtures of alcohol(s) and water.

Vibrational ultrasonic bonders are commercially available, for example, from Dukane Corporation, St. Charles, Illinois, and any of a wide variety of specific models may be used

in the process of the invention. The useful range of frequencies is very wide.

Frequencies of up to about 40 kHz and about 20kHz are often used commercially.

Frequencies of, for example, 18 kHz and as low as 10kHz have also been used. The power settings often used commercially are 1000 watts and 700 watts, although other

5 power settings may be utilized. Desirably, the pressure setting for the ultrasonic horn is in the range of about 1 psi to about 100 psi. More desirably, the pressure setting is in the range of about 2 psi to about 70 psi, and in yet more desirably, the range is about 3 psi to about 60 psi.

The particular pattern used for the anvil roll involves largely a matter of choice,
10 depending upon the physical properties desired in the web product. However, the height and spacing of the projections will be selected in accordance with the desired end product. For example, the height will preferably be at least about the thickness of the formed web and the projections will preferably be spaced sufficiently to provide substantial lamination of the two or more plies. The projections, themselves, may be of any desired
15 shape, but will generally occupy about 3 to about 25% of the surface area and, often, about 5 to about 15%, depending on the desired end use.

Various bond patterns have been developed for functional as well as aesthetic reasons. In this regard, the layers are desirably bonded over less than the entire surface area of the fabric using an intermittent or spaced pattern of bond areas. Desirably, the
20 bond area is between about 2% and about 30% of the surface area of the web and still more desirably between about 4% and about 15% of the web. Still further, the bonding pattern desirably employs a pattern comprising a plurality of spaced, repeating bond segments. By way of non-limiting example, various bonding patterns are disclosed in U.S. Patent Nos. 4,374,888; 3,855,046; 5,635,134; D247,370; D247,371; D433,131; D433,132;
25 D437,489; and D450,190, the entire contents of each of the aforesaid references are hereby incorporated herein by reference.

Turning to Figure 1, first ply or layer 10 is directed over feed roll 12 while second ply or layer 14 is directed on support wire 16 over feed roll 18 separated from feed roll 12. The first and second ply 10, 14 are then lightly compacted between rolls 26 and 28 and
30 directed to nip 30 between ultrasonic bonder or horn 32 and patterned anvil bonding roll 34. After bonding, the combined web may be directed over wire 36 supported by one or more rolls 38, 39 to be rolled into parent roll 42 on support rolls 44 or directed to further converting or product manufacturing steps.

While only two layers 10, 14 are illustrated as being bonded and simultaneously
35 ultrasonically imprinted with a pattern, additional plies or layers may be bonded, for

example, in the manner illustrated in Fig. 2 of U.S. Pat. No. 4,605,454, hereby incorporated by reference herein.

In one embodiment, the speed of the web is at least about 40 ft/min (12.2m/min) or more. In an alternative embodiment, the speed of the web is at least about 65 ft/min (19.8 m/min). It is contemplated that greater speeds may be utilized as well.

The process of the present invention is adapted to produce both relatively light basis weight cellulose laminates and relatively heavy basis weight cellulose laminates. The webs (single ply), such as towels produced from about 100% cellulosic material desirably have a dry basis weight in a range of about 3 gsm to about 50 gsm, and, more desirably, in a range of about 5 gsm to about 40 gsm. Even more desirably, the webs produced from about 100% cellulosic material have a dry basis weight of about 20 gsm to about 35 gsm.

Webs (single ply) such as tissues produced from about 100% cellulosic material desirably have a dry basis weight in a range of about 3 gsm to about 35 gsm, and, more desirably, in a range of about 5 gsm to about 20 gsm. Even more desirably, the webs produced from about 100% cellulosic material have a dry basis weight of about 7 gsm to about 19 gsm.

Webs produced from an about 80% cellulosic and about 20% spunbond material (single ply) desirably have a dry basis weight in a range of about 20 gsm to about 300 gsm, and, more desirably, in a range of about 30 gsm to about 200 gsm. Further, the referenced webs even more desirably have a dry basis weight of about 50 gsm to about 180 gsm, and yet still more desirably, a dry basis weight of about 60 gsm to about 110 gsm.

The basis weight of the laminates produced depend upon the particular end use. The number of layers is not critical and will vary depending on the end use and equipment configuration.

When towels were simultaneously ultrasonically imprinted with a pattern and bonded together using ultrasonic energy, the simultaneous bonding/patterned imprinting of the plies was often conducted using, desirably, pressures of about 5 psi to about 26 psi, and more desirably, pressures of about 7 psi to about 25 psi, and even more desirably, pressures of about 10 psi to about 20 psi. The towels were simultaneously bonded and perforated with patterned perforations using pressures, desirably, of about 28 psi to about 60 psi, and more desirably at pressures of about 29 psi to about 50 psi, and even more desirably at pressures of about 30 psi to about 45 psi. Simultaneous bonding/patterned imprinting on towels occurs more readily when a diffuse pattern, such as, for example, but not by way of limitation, a floral vine pattern is utilized at lower pressures. A similar floral

vine pattern is illustrated schematically in Figure 2. Simultaneous bonding and patterned perforations on towels occur more readily when a thicker, more focused, less diffuse pattern, such as a zigzag pattern, was utilized at higher pressures. A similar zigzag pattern is shown schematically in Figure 3.

5 Diffuse patterns, such as the floral vine pattern, are patterns which have may have relatively many thin lines to the pattern, as illustrated in Figure 2. Focused patterns, such as the zigzag pattern, are patterns which may have relatively few lines which are thick lines, as illustrated in Figure 3.

10 As used herein, "perforations" or "slits" refers to a patterned opening formed in at least a two ply web, each ply being substantially bonded at or near the edges of the patterned opening.

15 When tissues were simultaneously imprinted and bonded together using ultrasonic energy, the simultaneous bonding/patterned imprinting of the plies was conducted using a diffuse pattern on the patterned anvil bonding roll, such as, for example, the floral vine pattern, similar to the pattern illustrated in Figure 2, along with pressures desirably of about 10 psi to about 60 psi, and more desirably pressures of about 20 psi to about 55 psi, and even more desirably pressures of about 30psi to about 50 psi. When tissues were simultaneously bonded and perforated with patterned perforations, the simultaneous bonding/patterned perforating of the plies was often conducted using a thicker, more
20 focused, less diffuse pattern, such as, for example, a zigzag pattern, similar to the pattern shown in Figure 3, desirably at pressures of about 10 psi to about 60 psi, and more desirably at pressures of about 20 psi to about 55 psi, and even more desirably at pressures of about 30 psi to about 50 psi.

25 When cellulosic/spunbond rags were simultaneously imprinted and bonded together using ultrasonic energy, the simultaneous bonding/patterned imprinting of the plies was often conducted using pressures desirably of about 1 psi to about 60 psi, and more desirably pressures of about 5 psi to about 50 psi. The rags were simultaneously bonded and perforated with patterned perforations at pressures desirably of about 12 psi to about 60 psi, and more desirably at pressures of about 15 psi to about 50 psi.

30 Simultaneous bonding/patterned imprinting on cellulosic/spunbond rags occurs more readily when a diffuse pattern, such as, for example, but not by way of limitation, a floral vine pattern (Figure 2), is utilized. Simultaneous bonding and patterned perforations on rags occur more readily when a thicker, more focused, less diffuse pattern, such as a zigzag pattern (Figure 3), is used.

When bonding towels, tissues, and rags, the ultrasonic energy frequently applied was 20kHz/1000 Watts. Ultrasonic energy also may also be applied at, for example, 40kHz/700 Watts; other combinations of kHz/Watts may also be used.

5 All plies of all towels, tissues, and rags, desirably have a moisture content of less than about 2 %. Further, all plies of all towels, tissues, and rags, more desirably, have a moisture content of less than about 1 %. Moreover, all plies of all towels, tissues, and rags even more desirably may have a moisture content of less than about 0.5 %.

10 The process produces, under the conditions disclosed in the examples provided below, uniform webs which are physically bonded as well as imprinted with a pattern. The process occurs without use of a bonding medium, and results in no burning of the web, good ply bonding or attachment of the web, and good imprinted patterns to the web. Therefore, a process for laminating cellulosic material while simultaneously imprinting patterns on the material, and substantially reducing or eliminating liquid(s) such as bonding mediums and the additional equipment to provide such liquid(s) and bonding
15 medium, as well as eliminating equipment to dry the web, has been provided.

The process, using a very focused, non-diffuse pattern, such as a zigzag pattern, usually at higher pressure settings, produced well defined slits as well as bonding in the web. The process, under the conditions disclosed in the examples below, may provide bonded webs having patterned perforations, without burning or otherwise impairing the
20 webs, or requiring additional materials or equipment.

The process of the invention will now be further illustrated by specific examples.

EXAMPLE 1

Example 1A

25 A substantially 100% cellulose two ply web was formed using two one-ply webs. Each one ply web had a basis weight of approximately 30 gsm, and each one ply web was tested at least 15 days after manufacture. The webs are towels available from Kimberly-Clark Corporation under the trademark SCOTT®. The webs are uncreped throughdried sheet material and were formed generally in the manner disclosed in U.S.
30 Pat. No. 5,591,309 to Rugowski et al., U.S. Pat. No. 5,399,412 to Sudall et al., and U.S. Pat. No. 5,048,589 to Cook et al., which all have been previously incorporated by reference herein.

The two single ply webs were hand cut and superposed simultaneously and hand-directed to the ultrasonic horn 32 and patterned anvil roll 34. The two plies were lightly
35 compacted and directed to a nip 30 between the ultrasonic horn 32 and a patterned anvil roll 34. Thereafter, the combined plies were removed after passing through the nip 30.

Ultrasonic energy was applied to at 20kHz /1000 Watts with a horn pressure against the patterned anvil roll of 10 psi. The pattern used was a floral vine pattern, which was similar to the pattern illustrated in Figure 2. Individual bond locations on the laminate material may have a surface area ranging from about 0.1 cm² to about 0.3 cm². As disclosed in Table 1, the Peak Load was 7.6 gm; the Average Load was not calculated. Using the floral vine pattern, ply attachment was well achieved.

Example 1B

A substantially 100% cellulose two ply web was formed using two one ply webs. Each web had the same characteristics, was provided under the same conditions, and used exactly the same method as described in Example 1A, except that 20 psi ultrasonic horn pressure was used.

As disclosed in Table 1, the Peak Load was 9.8 gm; the Average Load was not calculated. Using the floral vine pattern, ply attachment was well achieved.

Example 1C

A substantially 100% cellulose two ply web was formed using two one ply webs. Each web had the same characteristics, was provided under the same conditions, and used exactly the same method as described in Example 1A, except that 40 psi ultrasonic horn pressure was used.

As disclosed in Table 1, the Peak Load was 13.5 gm; the Average Load was 4.2 gm. Using the floral vine pattern, the anvil began cutting through the web at 40 psi. Using a zigzag pattern at 40 psi resulted in slitting or perforating the web without damage (burning) to the surrounding web.

TABLE 1

Example:	1A	1B	1C
Description: (one ply)	Towel	Towel	Towel
Material Content:	100% Cellulose	100% Cellulose	100% Cellulose
Pressure Setting (psi):	10	20	40
Basis Weight (per ply) (gsm):	30	30	30
Peel Test: Peak Load (gm)	7.6	9.8	13.5
Average Load (gm)	N/P*	2.2	4.2
*N/P = not performed			

Using the towels and process parameters described in Examples 1A-1C and Table 1, the imprinted patterning was well defined and the bonding of the plies was sufficient at about 10 to 20 psi. At 30 to 40 psi, the anvil created uneven cuts through the plies using the diffuse floral vine pattern. Using a less diffuse pattern, namely, a zigzag pattern, at pressures to 30 to 40 psi resulted in well defined patterned perforations/patterned slits and bonding.

EXAMPLE 2

Example 2A

A 100% cellulose two ply web was formed using one web having two plies, and first separating the web into two one ply webs. The basis weight of each ply was approximately 13 gsm and the basis weight of the combined two ply web was approximately 27 gsm. Each web was tested at least 15 days after manufacture. The webs are commercial facial tissue available from Kimberly-Clark Corporation under the trademark KLEENEX®.

Each of the one ply webs was superposed simultaneously and hand-directed to the ultrasonic horn 32 and patterned anvil roll 34. The two plies were lightly compacted and directed to a nip 30 between the ultrasonic horn 32 and a patterned anvil roll 34. Thereafter, the combined plies were removed after passing through the nip 30.

Ultrasonic energy was applied to at 20kHz /1000 Watts with a horn pressure against the patterned anvil roll of 30 psi. The pattern used was a floral vine pattern, similar to the pattern illustrated in Figure 2. Individual bond locations on the laminate material may have a surface area ranging from about 0.1 cm² to about 0.3 cm². As disclosed in Table 2, the Peak Load was 3.2 gm; the Average Load was 1.0 gm. Using the floral vine pattern, ply attachment was well achieved.

Example 2B

A 100% cellulose two ply web was formed using two one ply webs. Each web had the same characteristics, was provided under the same conditions, and used exactly the same method as described in Example 2A, except that 40 psi ultrasonic horn pressure was used.

As disclosed in Table 2, the Peak Load was 3.2 gm; the Average Load was 1.2 gm. Using the floral vine pattern, ply attachment was well achieved

Example 2C

A 100% cellulose two ply web was formed using two one ply webs. Each web had the same characteristics, was provided under the same conditions, and used exactly the same method as described in Example 2A, except that 50 psi ultrasonic horn pressure was used.

As disclosed in Table 2, the Peak Load was 3.2 gm; the Average Load was not calculated. Using the floral vine pattern, ply attachment was well achieved.

Example 2D

A 100% cellulose two ply web was formed using two one ply webs. Each web had the same characteristics, was provided under the same conditions, and used exactly the same method as described in Example 2A, except that 20 psi ultrasonic horn pressure was used.

As disclosed in Table 2, the Peak Load was 2.1 gm; the Average Load was not calculated. Using the floral vine pattern, ply attachment was only moderately achieved.

Example 2E

A 100% cellulose two ply web was formed using two one ply webs. Each web had the same characteristics, was provided under the same conditions, and used exactly the same method as described in Example 2A, except that 10 psi ultrasonic horn pressure was used.

As disclosed in Table 2, the Peak Load was 2.1 gm; the Average Load was 0.6 gm. Using the floral vine pattern, ply attachment was poorly achieved.

Example 2F

5 A 100% cellulose two ply web was formed using two one ply webs. Each web had the same characteristics, was provided under the same conditions, and used exactly the same method as described in Example 2A, except that 5 psi ultrasonic horn pressure was used.

10 As disclosed in Table 2, the Peak Load was 2.1 gm; the Average Load was 0.6 gm. Using the floral vine pattern, ply attachment was poorly achieved.

Example 2G (Comparison)

15 A 100% cellulose two ply web was formed using two one ply webs, having the same characteristics, and provided under the same conditions, as described in Example 2A, except that the two plies were passed over crimping wheels, in a manner described in, for example, U.S. Pat Nos. 5,698,291, 5,622,734, and 5,543,202, which are all hereby incorporated by reference herein, to provide a control reference of bonding for comparison with Peel Test results.

20 As disclosed in Table 2, the Peak Load was 3.9 gm; the Average Load was 1.1 gm. Ply attachment was well achieved.

TABLE 2

Example:	2A	2B	2C	2D	2E	2F	2G (Comparison)
25 Description:	Tissue	Tissue	Tissue	Tissue	Tissue	Tissue	Tissue
Material	100%	100%	100%	100%	100%	100%	100%
Content:	Cellulose	Cellulose	Cellulose	Cellulose	Cellulose	Cellulose	Cellulose
30 Pressure Setting (psi):	30	40	50	20	10	5	*Wheels
35 Basis Weight (per ply) (gsm):	13	13	13	13	13	13	13
40 Peel Test: Peak Load (gm)	3.2	3.2	3.2	2.1	2.1	2.1	3.9
Average Load (gm)	1.0	1.2	N/P**	N/P**	0.6	0.6	1.1
*Wheels = bonding wheels N/P** = Not Performed							

Using the tissues and process parameters described in Examples 2A-2F and Table 2, the patterning and bonding of the plies was optimal, i.e., the pattern was well defined and the bond was sufficient, at about 30 psi to about 50 psi using the diffuse floral vine pattern, although bonds and patterns were obtained at lower pressures (20psi) as well. At 30 to 50 psi, using a less diffuse and more focused pattern, namely, a zigzag pattern, well defined patterned perforations/patterned slits and bonding were provided in the tissue.

EXAMPLE 3

Example 3A

A 100% cellulose two ply web was formed using two one-ply webs. Each one ply web had a basis weight of about 80 gsm, and each one ply web was tested at least 15 days after manufacture. The webs are hydroentangled pulp and spunbond material (about 80% cellulosic pulp) available from Kimberly-Clark Corporation under the trademark HYDROKNIT® WORKHORSE Rags. Such fabrics and their manufacture are described in U.S. Pat. Nos. 5,284,703, and 5,389,202, both to Everhart et al., which have been previously incorporated herein by reference herein in its entirety.

The two single ply webs were superposed simultaneously and hand-directed to the ultrasonic horn 32 and patterned anvil roll 34. The two plies were lightly compacted and directed to a nip 30 between the ultrasonic horn 32 and a patterned anvil roll 34. Thereafter, the combined plies were removed after passing through the nip 30.

Ultrasonic energy was applied to at 20kHz /1000 Watts with a horn pressure against the patterned anvil roll of 50 psi. The pattern used was a zigzag pattern, similar to the pattern illustrated in Figure 3. Individual bond locations on the laminate material may have a surface area ranging from about 0.1 cm² to about 0.3 cm². As disclosed in Table 3, the Peak Load was 1255.0; the Average Load was not calculated. Using the zigzag pattern, ply attachment was well achieved.

Example 3B

An 80% cellulose 20% spunbond two ply web was formed using two one ply webs. Each web had the same characteristics, was provided under the same conditions, and used exactly the same method as described in Example 3A, except that 5 psi ultrasonic horn pressure was used.

As disclosed in Table 3, the Peak Load was 103.0 gm; the Average Load was not calculated. Using the zigzag pattern, ply attachment was well achieved.

TABLE 3

5	Example:	3A	3B
	Description: (one ply)	Rag	Rag
10	Material Content:	80% Cellulose / 20% Spunbond Fibers	80% Cellulose / 20% Spunbond Fibers
	Pressure Setting (psi):	50	5
15	Basis Weight (per ply) (gsm):	80.0	80.0
20	Peel Test: Peak Load (gm)	1255.0	103.0
	Average Load (gm)	N/P*	N/P*
25	*N/P = not performed		

Using the rags and the process parameters described in Examples 3A and 3B and Table 3, the imprinted patterning and bonding of the plies were obtained at about 5 psi to about 50 psi using the diffuse floral vine pattern. At about 15 to about 50 psi, using a less
 30 diffuse and more focused pattern, namely, a zigzag pattern, well defined and patterned perforations/patterned slits and bonding were provided in the bonded rags.

While the invention has been described in conjunction with specific embodiments thereof, it is evident that many alternatives, modifications, and variations will be apparent to those skilled in the art in light of the foregoing description. Accordingly, it is intended to
 35 embrace all such alternatives, modifications, and variations that fall within the spirit and broad scope of the appended claims.

CLAIMS:

What is claimed is:

1. A method of simultaneously laminating and imprinting a pattern on a web formed from cellulosic material, the method comprising the steps of:

- 5 providing at least two plies of cellulosic material;
 superposing the at least two plies;
 passing the superposed plies between an ultrasonic bonder and a patterned anvil roll to simultaneously produce bonded and patterned areas over the superposed plies without first applying a bonding medium to the plies.

10

2. The method of claim 1, wherein the cellulosic material is at least about 100% cellulose.

3. The method of claim 2, wherein the cellulose is further defined as pulp.

15

4. The method of claim 1, wherein the cellulosic material comprises a basis weight between about 5 gsm and about 40 gsm per ply.

5. The method of claim 4, wherein the cellulosic material comprises a basis
20 weight between about 20 gsm and about 35 gsm per ply.

6. The method of claim 4, wherein the pressure of the ultrasonic bonder against the patterned anvil roll is between about 5 psi to about 26 psi.

25

7. The method of claim 6, wherein the pressure of the ultrasonic bonder against the patterned anvil roll is between about 10 psi to about 20 psi.

8. The method of claim 6, wherein the ultrasonic energy applied to the combined plies is about 20kHz and about 1000 Watts.

30

9. The method of claim 1, wherein the cellulosic material comprises a basis weight of about 5 gsm to about 20 gsm per ply.

10. The method of claim 9, wherein the cellulosic material comprises a basis
35 weight of about 7 gsm to about 19 gsm.

11. The method of claim 9, wherein the pressure of the ultrasonic bonder against the patterned anvil roll is between about 10 psi to about 60 psi.

5 12. The method of claim 11, wherein the pressure of the ultrasonic bonder against the patterned anvil roll is between about 30 psi to about 50 psi.

13. The method of claim 11, wherein the ultrasonic energy applied to the combined plies is about 20kHz and about 1000 Watts.

10

14. The method of claim 1, wherein the cellulosic material includes at least about 80% cellulose.

15

15. The method of claim 14, wherein the basis weight of the material is about 60 gsm to about 110 gsm per ply.

16. The method of claim 15, wherein the pressure of the ultrasonic bonder against the patterned anvil roll is between about 1 psi to about 60 psi.

20

17. The method of claim 16, wherein the pressure of the ultrasonic bonder against the patterned anvil roll is between about 10 psi to about 50 psi.

18. The method of claim 15, wherein the ultrasonic energy applied to the combined plies is about 20kHz and about 1000 Watts.

25

19. The method of claim 1, wherein immediately after the plies pass through a nip formed by the ultrasonic bonder and patterned anvil roll, the plies have less than a 2% moisture content.

30

20. The method of claim 19, wherein immediately after the plies pass through a nip formed by the ultrasonic bonder and patterned anvil roll, the plies have less than a 0.5% moisture content.

35

21. A method of simultaneously laminating and imprinting a pattern on a web formed from cellulosic material, the method comprising the steps of:
providing at least two plies of substantially dry cellulosic material;

superposing the at least two plies together;

passing the substantially dry superposed plies between an ultrasonic bonder and a patterned anvil roll to simultaneously produce substantially patterned and bonded areas over the superposed plies.

5

22. The method of claim 21 wherein each ply has less than 2% moisture content.

23. The method of claim 21, wherein the cellulosic material is about 100% cellulose.

10

24. The method of claim 23, wherein the cellulosic material comprises pulp.

25. The method of claim 21, wherein the cellulosic material comprises a basis weight between about 20 gsm and about 35 gsm per ply.

15

26. The method of claim 25, wherein the pressure of the ultrasonic bonder against the patterned anvil roll is between about 5 psi to about 26 psi and the ultrasonic energy applied to the combined plies is about 20kHz and about 1000 Watts.

20

27. The method of claim 21, wherein the cellulosic material comprises a basis weight of about 7 gsm to about 19 gsm.

28. The method of claim 27, wherein the pressure of the ultrasonic bonder against the patterned anvil roll is between about 10 psi to about 60 psi and the ultrasonic energy applied to the combined plies is about 20kHz and about 1000 Watts.

25

29. The method of claim 21 wherein the cellulosic material includes at least about 80% cellulose and the basis weight of the material is about 60 gsm to about 110 gsm per ply.

30

30. The method of claim 29, wherein the pressure of the ultrasonic bonder against the patterned anvil roll is between about 1 psi to about 60 psi and the ultrasonic energy applied to the combined plies is about 20kHz and about 1000 Watts.

35

31. A method of simultaneously laminating and providing patterned perforations in a web formed from cellulosic material, the method comprising the steps of:

providing at least two plies of substantially dry cellulosic material;
superposing the at least two plies;
passing the substantially dry superposed plies between an ultrasonic bonder and a
patterned anvil roll to simultaneously produce bonded areas and patterned perforations
5 over the superposed plies.

32. The method of claim 31 wherein each ply has less than 2% moisture content.

33. The method of claim 31, wherein the cellulosic material is about 100%
10 cellulose.

34. The method of claim 33, wherein the cellulosic material comprises pulp.

35. The method of claim 31, wherein the cellulosic material comprises a basis
15 weight between about 20 gsm and about 35 gsm per ply.

36. The method of claim 35, wherein the pressure of the ultrasonic bonder against
the patterned anvil roll is between about 28 psi to about 60 psi.

20 37. The method of claim 36, wherein the ultrasonic energy applied to the
combined plies is about 20kHz and about 1000 Watts.

38. The method of claim 31, wherein the cellulosic material comprises a basis
weight of about 7 gsm to about 19 gsm.

25 39. The method of claim 38, wherein the pressure of the ultrasonic bonder against
the patterned anvil roll is between about 10 psi to about 60 psi.

40. The method of claim 39, wherein the ultrasonic energy applied to the
30 combined plies is about 20kHz and about 1000 Watts.

41. The method of claim 31 wherein the cellulosic material includes at least about
80% cellulose and the basis weight of the material is about 60 gsm to about 110 gsm per
ply.

35

42. The method of claim 41, wherein the pressure of the ultrasonic bonder against the patterned anvil roll is between about 12 psi to about 60 psi.

43. The method of claim 42, wherein the ultrasonic energy applied to the
5 combined plies is about 20kHz and about 1000 Watts.

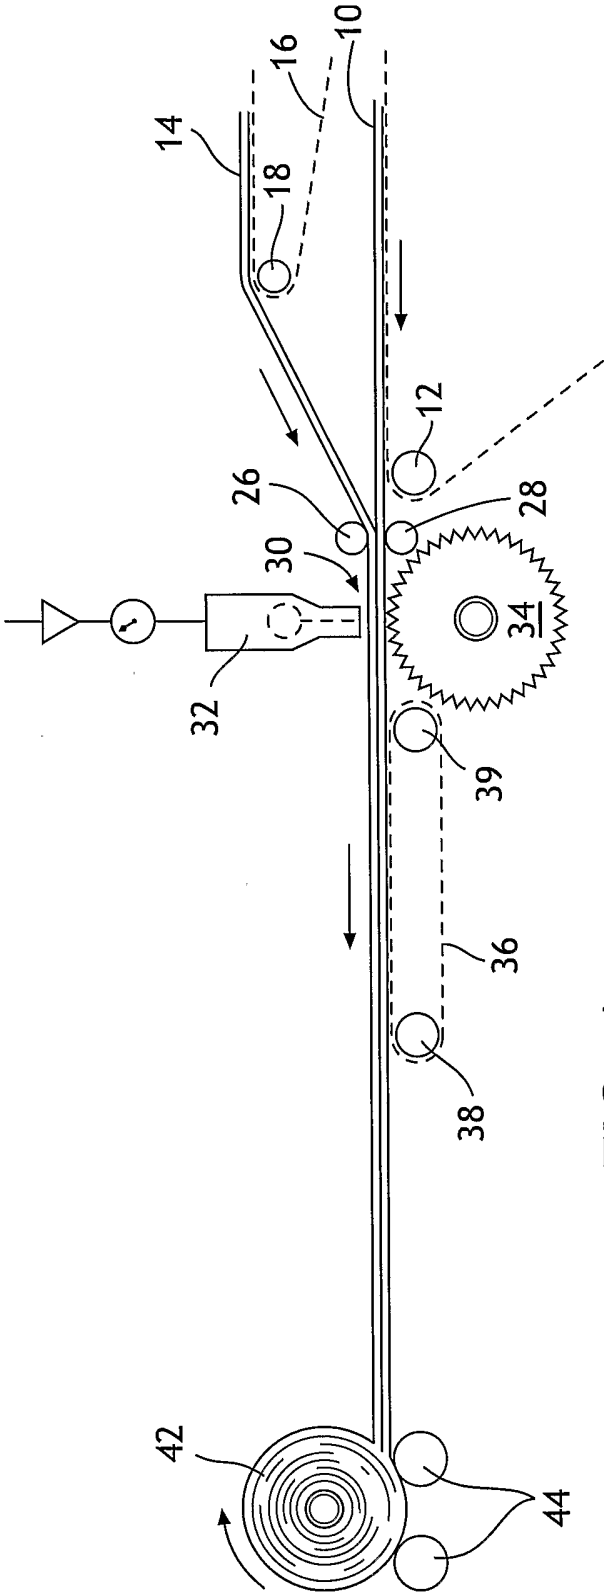


FIG. 1



FIG. 2

FIG. 3



INTERNATIONAL SEARCH REPORT

International application No
PCT/US 02/37095

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B31F5/00 B31F1/07 B32B23/00 //B26F1/24, B26D7/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B31F B32B B29C B23K B26D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 25547 A (MOELNLYCKE HEALTH CARE AB ;ZAWADZKI WALDEMAR (SE); BERDAL OVE (SE)) 27 May 1999 (1999-05-27) page 5, line 12 - line 15 page 7, line 18 - line 20 page 8, paragraphs 2,3 page 9, line 26 - line 29; figures 1,2	1-43
X	US 5 223 329 A (AMANN JOHN A) 29 June 1993 (1993-06-29) column 5, line 43 - line 45 column 6, line 43 - line 47 claims 20,22; figures 3,4 --- -/--	1-43



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

21 March 2003

Date of mailing of the international search report

14/04/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Cordenier, J

INTERNATIONAL SEARCH REPORT

Internatio Application No
PCT/US 02/37095

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 916 476 A (SCHÖBER WERKZEUG & MASCHBAU) 19 May 1999 (1999-05-19) column 2, line 23 column 2, line 26 - line 29 claim 2; figure 2 ---	1-43
X	DE 12 94 175 B (HESSER AG MASCHF) 11 September 1969 (1969-09-11) claims; figures ---	1-43
A	FR 1 382 415 A (OMEGA LAB LTD) 18 December 1964 (1964-12-18) claims 1,5; figures ---	1,21,31
A	EP 0 390 733 A (FERAG AG) 3 October 1990 (1990-10-03) claim 1; figures 2-5 column 6, line 5 - line 26 ---	1,21,31
A	DE 11 56 303 B (LEHFELDT & CO G M B H DR) 24 October 1963 (1963-10-24) claim 1 ---	1,21,31
A	US 3 660 186 A (NELSON HOWARD N ET AL) 2 May 1972 (1972-05-02) cited in the application column 3, line 10 - line 11 abstract; figures ---	1,21,31
A	US 4 605 454 A (SAYOVITZ JOHN J ET AL) 12 August 1986 (1986-08-12) cited in the application the whole document ---	1,21,31
A	US 3 890 892 A (GRACZYK THADEUS S ET AL) 24 June 1975 (1975-06-24) abstract; figure 2 ---	1,21,31
A	EP 1 112 823 A (JOHNSON & JOHNSON CONSUMER) 4 July 2001 (2001-07-04) column 3, line 52 column 2, line 26 figure 1 ---	31
A	PATENT ABSTRACTS OF JAPAN vol. 016, no. 538 (M-1335), 9 November 1992 (1992-11-09) -& JP 04 201546 A (IWATA:KK), 22 July 1992 (1992-07-22) figures -----	

INTERNATIONAL SEARCH REPORT

 Internatio Application No
 PCT/US 02/37095

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9925547	A	27-05-1999	SE 512767 C2 CA 2309040 A1 CN 1278761 T EP 1032494 A1 JP 2001523595 T PL 340495 A1 SE 9704207 A WO 9925547 A1	08-05-2000 27-05-1999 03-01-2001 06-09-2000 27-11-2001 12-02-2001 18-05-1999 27-05-1999
US 5223329	A	29-06-1993	NONE	
EP 0916476	A	19-05-1999	EP 0916476 A1	19-05-1999
DE 1294175	B	11-09-1969	NONE	
FR 1382415	A	18-12-1964	NONE	
EP 0390733	A	03-10-1990	DE 59006734 D1 EP 0390733 A2 JP 2934276 B2 JP 3108590 A US 5350268 A	15-09-1994 03-10-1990 16-08-1999 08-05-1991 27-09-1994
DE 1156303	B	24-10-1963	NONE	
US 3660186	A	02-05-1972	CA 920040 A1	30-01-1973
US 4605454	A	12-08-1986	NONE	
US 3890892	A	24-06-1975	BE 774786 A4 CH 550076 A DE 2154057 A1 DE 2154129 A1 FR 2112368 A6 GB 1328272 A IT 969047 B JP 1000197 C JP 54033852 B JP 54091227 A	14-02-1972 14-06-1974 04-05-1972 06-07-1972 16-06-1972 30-08-1973 30-03-1974 30-05-1980 23-10-1979 19-07-1979
EP 1112823	A	04-07-2001	US 6277224 B1 AU 7251300 A BR 0007359 A CA 2329383 A1 CN 1337299 A EP 1112823 A2 JP 2001246597 A	21-08-2001 28-06-2001 23-04-2002 23-06-2001 27-02-2002 04-07-2001 11-09-2001
JP 04201546	A	22-07-1992	NONE	