



(51) International Patent Classification:

E05B 15/00 (2006.01) E05C 3/00 (2006.01)
E05B 63/00 (2006.01) E05C 7/00 (2006.01)
E05B 65/00 (2006.01) E05C 21/00 (2006.01)

(21) International Application Number:

PCT/US2019/050847

(22) International Filing Date:

12 September 2019 (12.09.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/730,044 12 September 2018 (12.09.2018) US
16/569,184 12 September 2019 (12.09.2019) US

(71) Applicant: **INTERLOCK USA, INC.** [US/US]; 1105 South Rock Blvd, Suites 120-123, Reno, NV 89502 (US).

(72) Inventors: **FULLENWIDER, Marc, Wesley**; 3242 Susileen Drive, Reno, NV 89509 (US). **DURHAM, Stephen, Andrew**; 1105 South Rock Boulevard, Suites 120-123, Reno, NV 89502 (US).

(74) Agent: **DELIO, Anthony, P.** et al.; Delio, Peterson & Curcio, LLC, 700 State Street, Suite 402, New Haven, CT 06511 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: TRUE INDICATING AUTOMATED SASH LOCK

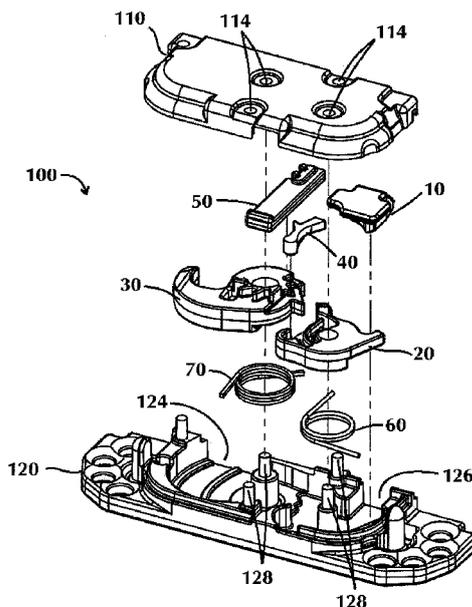


FIG. 3

(57) Abstract: An automated sash lock for locking a window sash comprises a linearly depressible trigger, a cam-style locking element normally biased towards a locked position, a rotatable detent actuated by the trigger, a pivotable transfer element between the detent and the locking element, and an actuator for manually operating the lock mechanism to unlock the lock when the window is in a closed and locked position. The detent is normally biased in the direction of the locking element and a portion of the detent engages a body portion of the locking element to maintain the locking element in a retracted position when the window is open. Upon actuation of the trigger by a closing window, the trigger translates linearly into the lock housing and rotates the detent into the disengaged position, pulling the detent away from the locking element and allowing the locking element to fire out of the lock housing and into an opening in a strike in the adjacent sash to prevent the sashes from relative sliding movement.



Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

TRUE INDICATING AUTOMATED SASH LOCK

Technical Field

The present invention relates to a lock mechanism for a window assembly and, more particularly, to an automated sash lock for a window assembly that prevents window
5 separation around the lock once the sash is in a locked position.

Description of Related Art

A double-hung, single hung, and double slider window assembly typically includes a window frame and a pair of window sashes mounted for vertical reciprocal sliding movement, one relative to the other, in guide rails of the master frame jamb of the
10 window assembly.

A traditional lock mechanism of the prior art for a double hung window assembly usually includes one part of the lock on one sash and another part of the lock on the other sash, wherein joining the two parts of the lock mechanism together results in locking the sashes to one another.

15 One disadvantage of this type of lock mechanism is that it normally requires the sashes be a certain distance away from one another. When the sashes are too close to one another or too far apart the lock mechanism may be ineffective. For example, if the sashes are spaced too far apart, the two parts of the lock mechanism may not be able to be joined together and the window sashes may not be locked. If the
20 sashes are too close to one another, the parts of the lock mechanism may bind or interfere with one another, resulting in the parts not being able to mate together and therefore the window sashes may not be locked. When these problems occur during installation, the installer must adjust the window sashes and lock mechanism, numerous times, before achieving a proper fit between the sashes and lock
25 mechanism. These problems may also occur overtime when windows become old, warped, or damaged through normal wear and tear.

-2-

As a result of the foregoing disadvantage, the lock mechanism and/or window sashes may need to be replaced without any assurance that the problems will not reoccur. In addition, forcibly pushing the sashes together in order to bring them to a proper distance may result in stress upon the frame around the sashes and/or the glass
5 panes. Continuing to use the lock mechanism and window sashes in this fashion can exacerbate the problems.

Therefore, a need exists for an improved window sash lock that is more flexible to use than traditional lock mechanisms.

Disclosure of the Invention

10 Bearing in mind the problems and deficiencies of the prior art, it is therefore an object of the present invention to provide an improved window sash lock that automatically locks the window sashes without user intervention.

It is another object of the present invention to provide an improved window sash lock that provides a true indication of the state of the lock and can accommodate
15 multiple lock states.

A further object of the invention is to provide an improved window sash lock that does not require additional connection methods to prevent window separation around the lock once the window is locked and provides increased resistance to forced entry.

20 It is yet another object of the present invention to provide an improved window sash lock which includes multiple actuation modes.

It is still yet another object of the present invention to provide an improved method of automatically locking a pair of window sashes without user intervention.

25 Still other objects and advantages of the invention will in part be obvious and will in part be apparent from the specification.

The above and other objects, which will be apparent to those skilled in the art, are achieved in the present invention which is directed to an automated sash lock for locking a window sash. The sash lock comprises a lock housing having a front surface and a rear surface defining first and second openings, and a locking element having a body portion and a cam portion extending from the body portion. The locking element is rotatable through the rear surface first opening about a first axis between unlocked and locked positions, and is normally biased toward the locked position. A detent is rotatably secured within the lock housing and rotatable between engaged and disengaged positions about a second axis parallel to the first axis, where the detent is engaged with the locking element body portion when in the engaged position to retain the locking element in the unlocked position, and is normally biased toward the engaged position. The sash lock further includes a depressible trigger being linearly translatable between an extended position and a retracted position within the lock housing to rotate the detent to the disengaged position, where the trigger at least partially extends through the rear surface second opening when in the extended position and is normally biased to the extended position by the detent. The trigger is caused to translate from the extended position to the retracted position as the window sash moves into a window closed position, thereby rotating the detent into the disengaged position and causing the locking element to move to the locked position, whereby the locking element cam portion engages with a strike in an adjacent window sash when in the locked position to prevent the sashes from relative sliding movement. The trigger may be linearly translatable in a direction normal to the first and second axes.

The sash lock may further include a transfer element pivotally secured within the lock housing and pivotable between first and second positions about a first end, where the transfer element includes a fin for engaging the locking element body portion to retain the locking element in an unlocked position when the transfer element is in the first position and the detent is in the disengaged position. The detent may include a recess and a resilient flange adjacent the recess, and the

-4-

transfer element may be at least partially disposed within the detent recess and normally biased toward the first position by the detent resilient flange.

In an embodiment, the locking element body portion may include first and second flanges extending radially therefrom, where the transfer element fin engages the locking element second flange when the transfer element is in the first position and
5 the locking element is in the unlocked position. The detent may also include a catch extending therefrom the detent catch being engaged with the locking element first flange when the detent is in the engaged position.

In at least one embodiment, the lock housing front surface defines an opening and
10 the sash lock further includes an actuator engagable with the locking element body portion and translatable through the front surface opening between first, second, and third positions. The actuator being in the first position when the locking element is in the unlocked position and the detent is in the engaged position and being in the second position when the locking element is in the locked position and the detent is
15 in the disengaged position. The actuator is manually translatable to the third position when the locking element is in the locked position and the detent is in the disengaged position to cause the locking element to rotate to the unlocked position. The locking element body portion may include a plurality of teeth extending radially therefrom and the actuator may be engagable with the locking element plurality of
20 teeth, where the engagement between the actuator and the locking element plurality of teeth causes the locking element to rotate to the unlocked position as the actuator is manually translated to the third position.

The actuator first position may represent a window open and unlocked state, the second position may represent a window closed and locked state, and the third
25 position may represent a window closed and unlocked state. The actuator may comprise a push rack extending through the front surface opening, and at least a portion of the actuator may be visible when the actuator is in the first, second, and third positions to indicate a state of the sash lock.

USPTO 11/001/0000

In an embodiment, the trigger may include a ramped portion for slidingly contacting an edge of the window sash as the window moves into the window closed position, whereby the window sash edge causes a cam action to translate the trigger into the retracted position. The locking element cam portion may comprise a hooked portion
5 extending radially from the body portion for engaging with the strike in the adjacent window sash when in the locked position.

In another aspect, the present invention is directed to a method of operating a sash lock mounted with respect to window sashes capable of relative sliding movement. The method comprises providing a sash lock mounted on a first window sash, where
10 the sash lock includes: a lock housing having a front surface and a rear surface defining first and second openings; a locking element comprising a body portion and a cam portion extending from the body portion, the locking element being rotatable through the rear surface first opening about a first axis between unlocked and locked positions, the locking element being normally biased toward the locked position; a
15 detent rotatably secured within the lock housing and rotatable between engaged and disengaged positions about a second axis parallel to the first axis, the detent engaged with the locking element body portion when in the engaged position to retain the locking element in the unlocked position, the detent being normally biased toward the engaged position; and a depressible trigger being linearly translatable between
20 an extended position and a retracted position within the lock housing to rotate the detent to the disengaged position, the trigger at least partially extending through the rear surface second opening when in the extended position and being normally biased to the extended position by the detent. The method further comprises providing a strike mounted on a second window sash, the strike including an
25 opening for receiving the locking element and preventing the sashes from relative sliding movement; causing the detent to rotate to the engaged position to retain the locking element in the unlocked position; moving the first window sash with respect to the second window sash from an open position towards a closed position wherein the window sashes move relative to each other in generally parallel planes; and

-6-

causing the trigger to translate from the extended position to the retracted position as the window sashes move into the closed position, thereby rotating the detent into the disengaged position and causing the locking element to rotate to the locked position, the locking element cam portion engaging with the strike opening to prevent the sashes from relative sliding movement.

The sash lock may further include a transfer element pivotally secured within the lock housing and pivotable between first and second positions about a first end, the transfer element including a fin for engaging the locking element body portion to retain the locking element in an unlocked position when the transfer element is in the first position and the detent is in the disengaged position, and an actuator engagable with the locking element body portion and translatable through an opening in the lock housing front surface between first, second, and third positions, the actuator being in the first position when the locking element is in the unlocked position and the detent is in the engaged position and being in the second position when the locking element is in the locked position and the detent is in the disengaged position, the actuator being manually translatable to the third position when the locking element is in the locked position and the detent is in the disengaged position, and the method may further comprise translating the actuator to the third position to cause the locking element to rotate to the unlocked position, engagement between the actuator and the locking element body portion causing the locking element to rotate to the unlocked position as the actuator is translated to the third position; and causing the transfer element to pivot from the second position to the first position to retain the locking element in the unlocked position.

At least a portion of the actuator may be visible when the actuator is in the first, second, and third positions to indicate a state of the sash lock, and the method may further comprise viewing a position of the actuator to determine whether the sash lock is in a locked or unlocked condition when the window sashes are in the closed position.

Brief Description of the Drawings

The features of the invention believed to be novel and the elements characteristic of the invention are set forth with particularity in the appended claims. The figures are for illustration purposes only and are not drawn to scale. The invention itself, however, both as to organization and method of operation, may best be understood by reference to the detailed description which follows taken in conjunction with the accompanying drawings in which:

Figs. 1 and 2 are perspective views of one embodiment of the sash lock mechanism of the present invention, in a window closed and locked position. The window sashes are not shown, for clarity.

Fig. 3 is an exploded, perspective view of the embodiment of the present invention shown in Figs. 1-2.

Figs. 4 to 8 are isolated, perspective views of the locking element, rotatable detent, transfer element, actuator, and trigger, respectively, shown in Fig. 3.

Figs. 9 and 10 are top plan views of the embodiment of the sash lock mechanism of the present invention shown in Figs. 1-3, in a window open and unlocked position. The window sashes are not shown, for clarity, and the upper portion of the lock housing has been removed in Fig. 10 to depict the position of the internal sash lock components.

Fig. 11 is an isolated, perspective view of the positions of the trigger, detent, transfer, and locking element, respectively, when the locking mechanism is in the window open and unlocked position, as shown in Fig. 10. The actuator for manually unlocking the sash lock mechanism is not shown, for clarity.

Figs. 12 and 13 are top plan views of the embodiment of the sash lock mechanism of the present invention shown in Figs. 1-3, in a window closed and locked position.

The window sashes are not shown, for clarity, and the upper portion of the lock housing has been removed in Fig. 13 to depict the position of the internal sash lock components.

5 Fig. 14 is an isolated, perspective view of the positions of the trigger, detent, transfer, and locking element, respectively, when the locking mechanism is in the window closed and locked position, as shown in Fig. 13. The actuator for manually unlocking the sash lock mechanism is not shown, for clarity.

10 Figs. 15 and 16 are top plan views of the embodiment of the sash lock mechanism of the present invention shown in Figs. 1-3, in a window closed and unlocked position. The window sashes are not shown, for clarity, and the upper portion of the lock housing has been removed in Fig. 16 to depict the position of the internal sash lock components.

15 Fig. 17 is an isolated, perspective view of the positions of the trigger, detent, transfer, and locking element, respectively, when the locking mechanism is in the window closed and unlocked position, as shown in Fig. 16. The actuator for manually unlocking the sash lock mechanism is not shown, for clarity.

20 Figs. 18 and 19 are side, isolated plan views of the embodiment of the sash lock mechanism of the present invention shown in Figs. 1-3, as the sash lock mechanism transitions from a window open and unlocked position to a window closed and locked position.

Mode(s) for Carrying Out the Invention

In describing the embodiments of the present invention, reference will be made herein to Figs. 1-19 of the drawings in which like numerals refer to like features of the invention.

The present invention is directed to an automated window sash lock comprising a linearly depressible trigger, a cam-style locking element, a rotatable detent actuated by the trigger, and a transfer element between the detent and the locking element. In one or more embodiments, the sash lock further includes an actuator, such as a pull-back pinion or push-in rack, for manually operating the lock mechanism to unlock the window after the window has been closed and locked. Multiple actuation modes permit a pull-back function that allows for traditional auto locking actuation (utilizing the trigger), and a push-in function that allows for button functioning and concealed lock function.

5
10
15
20
25
Certain terminology is used herein for convenience only and is not to be taken as a limitation of the invention. For example, words such as "upper," "lower," "left," "right," "horizontal," "vertical," "upward," "downward," "clockwise," and "counterclockwise" merely describe the configuration shown in the drawings. Indeed, the referenced components may be oriented in any direction and the terminology, therefore, should be understood as encompassing such variations unless specified otherwise. For purposes of clarity, the same reference numbers may be used in the drawings to identify similar elements.

Additionally, in the subject description, the word "exemplary" is used to mean serving as an example, instance or illustration. Any aspect or design described herein as "exemplary" is not necessarily intended to be construed as preferred or advantageous over other aspects or design. Rather, the use of the word "exemplary" is merely intended to present concepts in a concrete fashion.

A window assembly includes a pair of sashes that slide in parallel planes relative to one another, either vertically or horizontally. In the embodiment of the invention described herein, and for exemplary purposes only, a vertically-sliding window sash is described and shown in the Figures; i.e., references to direction of movement up and down are with respect to a vertically-sliding window sash. The sash lock mechanism of the present invention is attached to the adjacent sash portions and

-10-

includes a first lock portion comprising a linearly depressible trigger, a cam-style locking element, a rotatable detent actuated by the trigger for retaining the locking element in a retracted position, and a transfer element between the detent and the locking element for accommodating multiple lock states when the window sash is closed, all mounted on a first sash. The locking element is normally biased, such as by a spring, into the extended position, but is held in a retracted position when the window is open by a catch portion of the rotatable detent which engages with radially-extending flanges on the perimeter of the body portion of the locking element. Depending on the position of the trigger (extended or retracted), the locking element moves in a direction normal to the planes of the sashes, toward and away from the adjacent sash. A second lock portion is mounted on the adjacent sash and includes a strike having an opening for receiving a portion of the locking element when in the extended or locked position to lock the sashes from relative sliding movement.

15 An actuator, such as a pull-back pinion or a push-in rack, can be used to engage the locking element and manually switch between locked and unlocked positions. The actuator can be in one of three positions – 1) fully forward or extended, 2) back or partially retracted, or 3) fully back or retracted – depending on the state of the lock. The fully forward or extended position allows the locking element to engage the opposing strike. The back or partially retracted position retracts the locking element. The fully back or retracted position disengages the activated trigger, while the locking element remains retracted, to allow for manually unlocking and opening the window sash from a closed position.

25 The present invention accommodates three states or phases of the locking mechanism to give a true indication of the state of the lock: 1) window locked and closed; 2) window unlocked and closed; and 3) window unlocked and open. An advantage of the lock mechanism of the present invention is that it allows for the cover to be in a fixed position for each state the lock can be in. As will be described

further below, the mechanical cooperation between the linear trigger and rotatable detent of the present invention provides for automated locking of the window sash when the window is moved to a closed position, while the transfer element permits the locking element to return to and remain in the retracted position when the window is closed to allow for manual unlocking of the locking mechanism. Conversely, the locking element is allowed to extend and fire into an opening in the opposing strike when the trigger is depressed as the window is closed.

Referring now to Figs. 1-8, an embodiment of the automated sash lock 100 of the present invention is shown. Sash lock 100 is mountable on a first window sash (not shown) as part of a window assembly comprising a pair of sashes that slide in parallel planes relative to one another, either vertically or horizontally. In the embodiment of the invention described herein, and for exemplary purposes only, a vertically-sliding window sash is described with reference to the Figures; however, it should be understood by those skilled in the art that the sash lock of the present invention is also applicable to horizontally-oriented sliding window sashes. Sash lock 100 comprises a linearly depressible trigger 10, a cam-style locking element 30, a rotatable detent 20 actuated by the trigger for moving the locking element between unlocked and locked positions, and a transfer element 40 between the detent and the locking element for accommodating the three phases or states of the locking mechanism. An actuator 50, such as a pull-back pinion or a push-in rack, can be used to engage the locking element and manually switch between locked and unlocked positions.

As shown in Figs. 1-3, the internal sash lock components are generally concealed between upper and lower housing portions 110, 120, which are joined together such as by snap fit. Lower housing or base portion 120 includes a plurality of posts 128 which extend through apertures 114 in upper housing or cover portion 110 when the housing portions are joined together. The sash lock housing further includes front and rear surfaces defining a plurality of formed openings 122, 124,

-12-

126 for allowing the interior lock components to extend from and retract into the lock housing during the three phases or states of the locking mechanism. Specifically, push-in rack or actuator 50 is positioned for linear translation within opening 122 in the front surface of the lock housing, and locking element 30 is positioned for rotational extension and retraction within opening 124, and trigger 10 is positioned for linear translation within opening 126, both on the rear surface of the lock housing.

Figs. 1 and 2 show perspective views of the sash lock mechanism 100 when the window sash is in a closed and locked position. The window sashes are not shown, for clarity. As best seen in Fig. 1, when the window is closed and locked, locking element 30 is extended outwardly from the lock mechanism housing 110, 120 through recess 124 and into a mating opening in a strike in the opposing sash (not shown) to prevent the sashes from relative sliding movement. As opposed to a conventional locking bolt of the prior art, the cam-style locking element 30 of the present invention eliminates the need for additional connection methods to prevent window separation around the lock once the window is closed and locked, and provides increased resistance to forced entry.

As can be seen in the exploded view of Fig. 3, the sash lock mechanism includes a linearly depressible trigger 10 (more particularly depicted in Fig. 8) which mechanically cooperates with a rotatable detent 20 to allow for automatic actuation of locking element 30 when detent 20 is disengaged. The sash lock of the present invention automatically locks the window assembly when the pair of sashes are brought together, without user intervention. More particularly, as the window approaches a closed position (i.e., downward for a vertically-oriented sash), the bottom edge of the window contacts a ramped portion 11 of trigger 10 and causes a cam action, resulting in the trigger sliding linearly into the lock housing 110, 120, normal to the vertically-closing window sash, to overcome the force of spring 60 and rotate detent 20. Opposite ramped portion 11 is a substantially planar contacting

surface 13 which is always in contact with a mating portion of detent 20. Trigger 10 further includes an extended lip 12 which extends above and along a top surface 28 of detent 20 (see Figs. 5 and 18). In contrast to triggers of window assemblies of the prior art, the trigger 10 of the present invention is always in contact with a portion of
5 detent 20 and does not rotate about any axis. Instead, the trigger 10 slides linearly within the lock housing along a plane perpendicular to the movement of the closing sash as a result of the cam action caused by actuation by the closing window sash onto the ramped portion 11 of the trigger.

As shown in Fig. 4, locking element 30 includes a body portion 31 with a cam-style
10 hooked portion 38 extending from the body portion, and is normally biased by a spring 70, such as a torsion spring positioned within spring recess 37, into the extended position, but is held in a retracted position (i.e., within the lock housing 110, 120) when the window is open by a catch portion 21 of rotatable detent 20 (Fig. 5) which engages first or second flanges 32, 34 radially extending from the
15 perimeter of the locking element body 31 on a first plane. Locking element 30 further includes a plurality of teeth 36 extending radially from the body portion 31 on a second plane parallel to the first plane and inset from the first and second flanges 32, 34. Depending on the position of the trigger 10 and actuator 50 (one or both extended or retracted), as will be described below, the locking element 30 is
20 caused to rotate about a first axis in a direction normal to the planes of the sashes, toward and away from the adjacent sash. A strike (not shown) is mounted on the adjacent sash and includes an opening for receiving the locking element 30 to lock the sashes from relative sliding movement.

Trigger 10 rotates the detent 20 into the disengaged position when the trigger is
25 actuated by the closing window. When the trigger is deactivated and protruding from the lock housing or cover, as shown in the window open and unlocked state of Figs. 9-11, the detent 20 is in the engaged position with respect to locking element 30 to maintain the locking element in the unlocked or retracted position. In one

embodiment, as described in more detail below, moving an actuator or push rack 50 into the fully back or retracted position *P3* will switch the detent 20 from a disengaged to an engaged position, which deactivates the trigger 10 and causes it to extend outside the lock mechanism housing 110, 120, so long as the window is open. It should be understood by those skilled in the art that an actuator such as a push rack extending from the lock housing is only one means of manually switching the detent from a disengaged to an engaged position, and that other manually actuable switching mechanisms may be employed, such as a pullback pinion.

As shown in Fig. 11, a transfer element 40 having a fin 42 extending from the body of the transfer element is partially disposed within a recessed portion 22 of rotatable detent 20 and is pivotable about a first end 44 as a result of biasing by resilient flange 24 of detent 20. When the detent 20 is in the engaged position, the transfer 40 is in the disengaged position, i.e., not contacting the locking element, as shown in Fig. 11. When the trigger 10 is actuated by a closing window, the trigger translates linearly into the lock housing and rotates the detent 20 into the disengaged position, pulling the detent 20 and transfer 40 away from locking element 30 and allowing hook 30 to fire out of the sash lock mechanism to engage the opposing sash (Figs. 12-14). Conversely, when the detent 20 is disengaged, and actuator or push rack 50 is in the fully back or retracted position *P3*, the transfer fin 42 becomes engaged with the locking element and holds it in the unlocked or retracted position (Fig. 17). When actuator or push rack 50 is in the back or retracted position *P1* (detent 20 still being disengaged), the transfer 40 is positioned to allow for locking element engagement with the adjacent sash to prevent the sashes from relative sliding movement.

Detent 20 is normally biased by a spring 60, such as a torsion spring positioned within spring recess 27, toward the locking element 30, such that a catch 21 of the detent engages with a first flange 32 of the body portion of the locking element, maintaining the locking element in a retracted position, as shown in Fig. 11. Detent

20 rotates about an axis parallel to the axis of rotation of locking element 30, and normally biases trigger 10 into the extended position. As the window is closed, trigger 10 overcomes the force of spring 60 to slide linearly into the lock housing during actuation as a result of the closing window, and the trigger biases the detent
5 20 in a direction opposite its normal operation and causes the detent to counter-rotate (clockwise, as shown in Fig. 14), pulling the catch 21 of the detent away from the first flange 32 of the locking element and allowing the locking hook 38 to fire outwardly into the strike opening in the adjacent sash (not shown), thereby locking the sashes from relative movement.

10 Referring now to Figs. 12-14, the window locked and closed state is shown in more detail. As shown in Fig. 12, when the window is closed and locked, locking element 30 is extended outwardly from the lock mechanism housing 110, 120 and into an opening in a strike in the opposing sash (not shown) to prevent the sashes from relative sliding movement. As opposed to a conventional locking bolt of the prior
15 art, the cam-style locking element of the present invention eliminates the need for additional connection methods to prevent window separation around the lock once the window is closed and locked, and provides increased resistance to forced entry.

As best seen in Fig. 14, detent 20 has been counter-rotated in a clockwise direction by the linear movement of trigger 10 in the direction of arrow 1, pulling the detent
20 and transfer 40 away from the locking element and allowing the locking element 30 to fire outwardly into the extended position in the direction of arrow 2. Catch 21 of the detent is disengaged from first flange 32 of the body portion of the locking element, and detent fin 42 is also disengaged, allowing spring 70 to bias locking element 30 into the extended or locked position. The rotation of locking element 30
25 further causes push-in rack 50 to move to the extended position *P2* (Fig. 13).

Subsequent to the window closing (and the lock mechanism automatically locking the sashes), a user can manually unlock the locking mechanism via actuator or push-in rack 50. Figs. 15-17 depict the locking mechanism of the present invention in a

window closed and unlocked state. As shown in Fig. 16, push-in rack 50 has been manually actuated and is in the transfer or fully-retracted position *P3* within the lock housing 110, 120. As push rack 50 traverses linearly into the lock housing, teeth 52 adjacent the distal end 53 of push-in rack 50 engage the teeth 36 on the body portion 31 of locking element 30, causing the locking element to rotate counterclockwise into the retracted or unlocked position (as shown from the transition between Fig. 14 and Fig. 17). Trigger 10 remains in a depressed or retracted position as a result of the window remaining closed. Because trigger 10 remains depressed, detent 20 remains in the disengaged or retracted position. However, as best seen in Fig. 17, transfer 40 acts as a pawl and fin 42 is now engaged with locking element 30, holding the locking element in the unlocked or retracted position. As locking element 30 rotates in a counterclockwise direction (as shown by arrow 3), resilient member or flange 24 of the detent 20 biases transfer fin 42 towards flange 34 of the locking element 30, retaining the locking element in the retracted position as fin 42 clears the outwardly angled face 35 of flange 34.

Referring again to Figs. 9-11, when the window is next opened, trigger 10 (which is normally biased outwardly by spring 60) translates linearly into the extended position, allowing detent 20 (which is normally biased towards the locking element) to rotate counterclockwise to the engaged position, causing the detent catch 21 to engage with first flange 32 of the body portion of the locking element. Locking element 30 is thus held in the unlocked position by the mechanical communication between detent catch 21 and locking element flange 32, and the transfer member 40 and fin 42 are in the disengaged position. From this open and unlocked state, the locking mechanism is again ready for automated locking once the window sash is moved toward the closed position, causing linear actuation of the trigger 10 and rotation of detent 20 away from the locking element 30.

Figs. 18-19 depict the positions of the interior sash lock components as the lock mechanism transitions from a window open and unlocked position (Fig. 18) to a

window closed and locked position (Fig. 19). As shown by the transition from Fig. 18 to Fig. 19, as trigger 10 translates linearly into the lock housing (not shown) as a result of the closing window sash, detent 20 is caused to rotate in a clockwise direction, pulling detent 20 and transfer 40 away from the locking element 30 and
5 allowing the locking element 30 to fire outwardly, i.e., rotate, into the extended or locked position. The rotation of locking element 30 further causes push-in rack 50 to move to the extended position, as shown in Fig. 19.

Thus the present invention achieves one or more of the following advantages. The present invention provides an improved window sash lock that automatically locks
10 the window sashes without user intervention. The present invention further provides a true indication of the state of the lock and can accommodate multiple lock states, and does not require additional connection methods to prevent window separation around the lock once the window is locked.

While the present invention has been particularly described, in conjunction with
15 specific embodiments, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art in light of the foregoing description. It is therefore contemplated that the appended claims will embrace any such alternatives, modifications and variations as falling within the true scope and spirit of the present invention.

20 Thus, having described the invention, what is claimed is:

Claims

1. An automated sash lock for locking a window sash, comprising:
 - a lock housing having a front surface and a rear surface defining first and second openings;
 - 5 a locking element comprising a body portion and a cam portion extending from the body portion, the locking element being rotatable through the rear surface first opening about a first axis between unlocked and locked positions, the locking element being normally biased toward the locked position;
 - 10 a detent rotatably secured within the lock housing and rotatable between engaged and disengaged positions about a second axis parallel to the first axis, the detent engaged with the locking element body portion when in the engaged position to retain the locking element in the unlocked position, the detent being normally biased toward the engaged position; and
 - 15 a depressible trigger being linearly translatable between an extended position and a retracted position within the lock housing to rotate the detent to the disengaged position, the trigger at least partially extending through the rear surface second opening when in the extended position and being normally biased to the extended position by the detent,
 - 20 wherein the trigger is caused to translate from the extended position to the retracted position as the window sash moves into a window closed position, thereby rotating the detent into the disengaged position and causing the locking element to move to the locked position, the locking element cam portion engaging with a strike in an adjacent window sash when in the locked position to prevent the sashes from relative sliding movement.
 - 25

2. The sash lock of claim 1 further including a transfer element pivotally secured within the lock housing and pivotable between first and second positions about a first end, the transfer element including a fin for engaging the locking element body portion to retain the locking element in an unlocked position when
5 the transfer element is in the first position and the detent is in the disengaged position.
3. The sash lock of claim 2 wherein the detent includes a recess and a resilient flange adjacent the recess, and wherein the transfer element is at least partially
10 disposed within the detent recess, the transfer element being normally biased toward the first position by the detent resilient flange.
4. The sash lock of claim 2 wherein the locking element body portion includes first and second flanges extending radially therefrom, the transfer element fin
15 engaging the locking element second flange when the transfer element is in the first position and the locking element is in the unlocked position.
5. The sash lock of claim 4 wherein the detent has a catch extending therefrom, the detent catch being engaged with the locking element first flange when the
20 detent is in the engaged position.
6. The sash lock of claim 2 wherein the lock housing front surface defines an opening and further including an actuator engagable with the locking element body portion and translatable through the front surface opening between first, second,
25 and third positions, the actuator being in the first position when the locking element is in the unlocked position and the detent is in the engaged position and being in the second position when the locking element is in the locked position and the detent is in the disengaged position, the actuator being manually translatable to the third position when the locking element is in the locked position and the detent is

in the disengaged position to cause the locking element to rotate to the unlocked position.

- 5 7. The sash lock of claim 6 wherein the locking element body portion includes a plurality of teeth extending radially therefrom and the actuator is engagable with the locking element plurality of teeth, the engagement between the actuator and the locking element plurality of teeth causing the locking element to rotate to the unlocked position as the actuator is manually translated to the third position.
- 10 8. The sash lock of claim 6 wherein the actuator first position represents a window open and unlocked state, the second position represents a window closed and locked state, and the third position represents a window closed and unlocked state.
- 15 9. The sash lock of claim 6 wherein the actuator comprises a push rack extending through the front surface opening.
- 20 10. The sash lock of claim 9 wherein at least a portion of the actuator is visible when the actuator is in the first, second, and third positions to indicate a state of the sash lock.
- 25 11. The sash lock of claim 1 wherein the trigger includes a ramped portion for slidingly contacting an edge of the window sash as the window moves into the window closed position, whereby the window sash edge causes a cam action to translate the trigger into the retracted position.
12. The sash lock of claim 1 wherein the locking element cam portion comprises a hooked portion extending radially from the body portion for engaging with the strike in the adjacent window sash when in the locked position.

-21-

13. The sash lock of claim 1 wherein the trigger is linearly translatable in a direction normal to the first and second axes.
- 5 14. An automated sash lock for locking a window sash, comprising:
a lock housing having a front surface and a rear surface defining first and
second openings;
a locking element comprising a body portion and a cam portion extending
from the body portion, the locking element being rotatable through
10 the rear surface first opening about a first axis between unlocked and
locked positions, the locking element being normally biased toward
the locked position;
a detent rotatably secured within the lock housing and rotatable between
engaged and disengaged positions about a second axis parallel to the
15 first axis, the detent engaged with the locking element body portion
when in the engaged position to retain the locking element in the
unlocked position, the detent being normally biased toward the
engaged position;
a transfer element pivotally secured within the lock housing and pivotable
20 between first and second positions about a first end, the transfer
element including a fin for engaging the locking element body
portion to retain the locking element in an unlocked position when
the transfer element is in the first position and the detent is in the
disengaged position; and
25 a depressible trigger being linearly translatable between an extended
position and a retracted position within the lock housing to rotate the
detent to the disengaged position, the trigger at least partially
extending through the rear surface second opening when in the

-22-

extended position and being normally biased to the extended position by the detent,

wherein the trigger is caused to translate from the extended position to the retracted position as the window sash moves into a window closed position, thereby rotating the detent into the disengaged position and causing the locking element to move to the locked position, the locking element cam portion engaging with a strike in an adjacent window sash when in the locked position to prevent the sashes from relative sliding movement.

10

15. The sash lock of claim 14 wherein the detent includes a recess and a resilient flange adjacent the recess, and wherein the transfer element is at least partially disposed within the detent recess, the transfer element being normally biased toward the first position by the detent resilient flange.

15

16. The sash lock of claim 14 wherein the lock housing front surface defines an opening and further including an actuator engagable with the locking element body portion and translatable through the front surface opening between first, second, and third positions, the actuator being in the first position when the locking element is in the unlocked position and the detent is in the engaged position and being in the second position when the locking element is in the locked position and the detent is in the disengaged position, the actuator being manually translatable to the third position when the locking element is in the locked position and the detent is in the disengaged position to cause the locking element to rotate to the unlocked position.

25

-23-

17. A method of operating a sash lock mounted with respect to window sashes capable of relative sliding movement, comprising:
- providing a sash lock mounted on a first window sash, the sash lock including:
- 5 a lock housing having a front surface and a rear surface defining first and second openings;
- a locking element comprising a body portion and a cam portion extending from the body portion, the locking element being rotatable through the rear surface first opening about a first axis between unlocked and
- 10 locked positions, the locking element being normally biased toward the locked position;
- a detent rotatably secured within the lock housing and rotatable between engaged and disengaged positions about a second axis parallel to the first axis, the detent engaged with the locking element body portion
- 15 when in the engaged position to retain the locking element in the unlocked position, the detent being normally biased toward the engaged position; and
- a depressible trigger being linearly translatable between an extended position and a retracted position within the lock housing to rotate the
- 20 detent to the disengaged position, the trigger at least partially extending through the rear surface second opening when in the extended position and being normally biased to the extended position by the detent;
- providing a strike mounted on a second window sash, the strike including an
- 25 opening for receiving the locking element and preventing the sashes from relative sliding movement;
- causing the detent to rotate to the engaged position to retain the locking element in the unlocked position;

-24-

moving the first window sash with respect to the second window sash from an open position towards a closed position wherein the window sashes move relative to each other in generally parallel planes; and causing the trigger to translate from the extended position to the retracted position as the window sashes move into the closed position, thereby rotating the detent into the disengaged position and causing the locking element to rotate to the locked position, the locking element cam portion engaging with the strike opening to prevent the sashes from relative sliding movement.

5

10

18. The method of claim 17 wherein the sash lock further includes:
a transfer element pivotally secured within the lock housing and pivotable between first and second positions about a first end, the transfer element including a fin for engaging the locking element body portion to retain the locking element in an unlocked position when the transfer element is in the first position and the detent is in the disengaged position, and
an actuator engagable with the locking element body portion and translatable through an opening in the lock housing front surface between first, second, and third positions, the actuator being in the first position when the locking element is in the unlocked position and the detent is in the engaged position and being in the second position when the locking element is in the locked position and the detent is in the disengaged position, the actuator being manually translatable to the third position when the locking element is in the locked position and the detent is in the disengaged position,
the method further comprising:
translating the actuator to the third position to cause the locking element to rotate to the unlocked position, engagement between the actuator

15

20

25

and the locking element body portion causing the locking element to rotate to the unlocked position as the actuator is translated to the third position; and

5 causing the transfer element to pivot from the second position to the first position to retain the locking element in the unlocked position.

19. The method of claim 18 wherein at least a portion of the actuator is visible when the actuator is in the first, second, and third positions to indicate a state of the sash lock, the method further comprising:

10 viewing a position of the actuator to determine whether the sash lock is in a locked or unlocked condition when the window sashes are in the closed position.

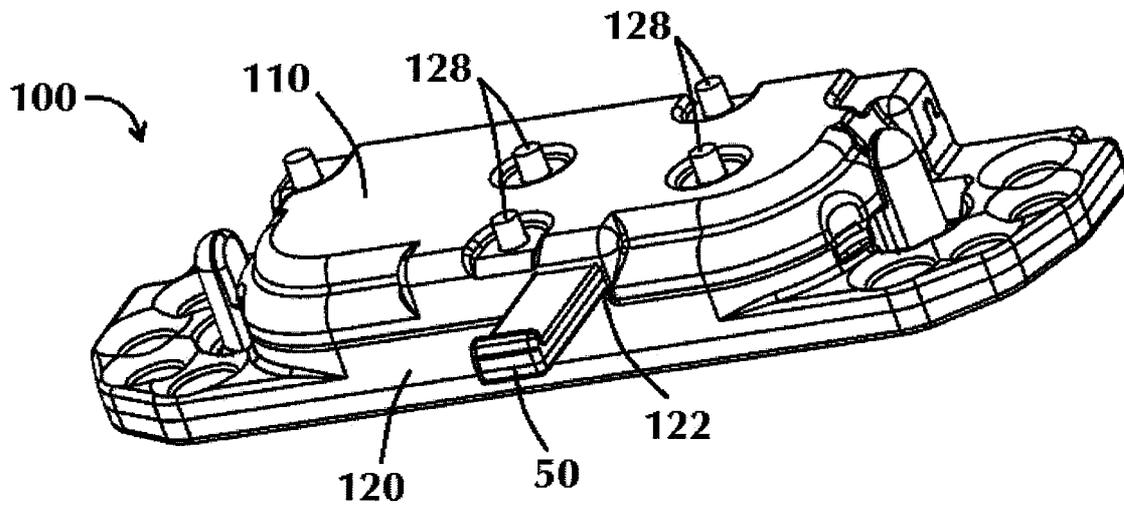
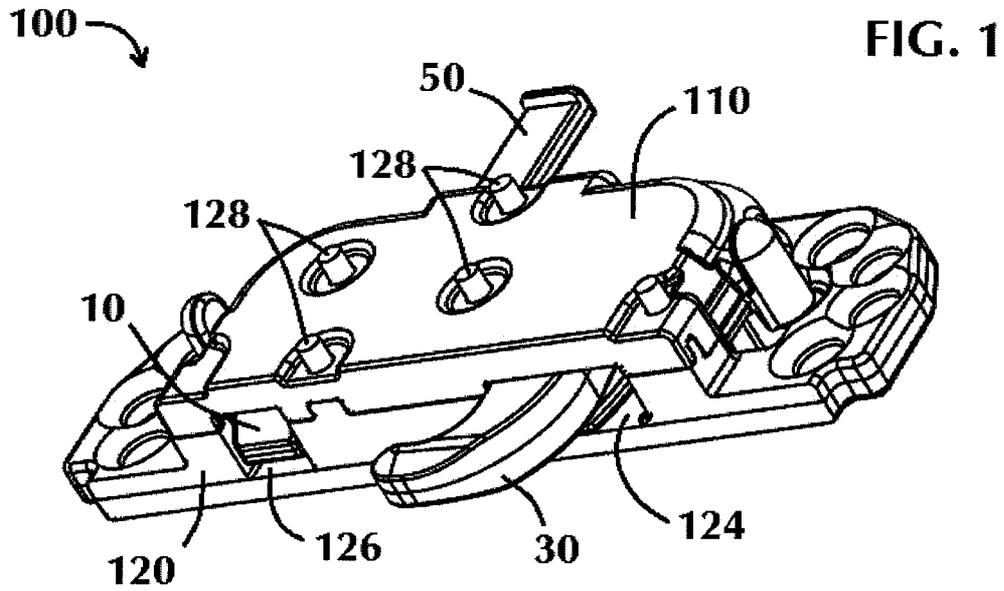


FIG. 2

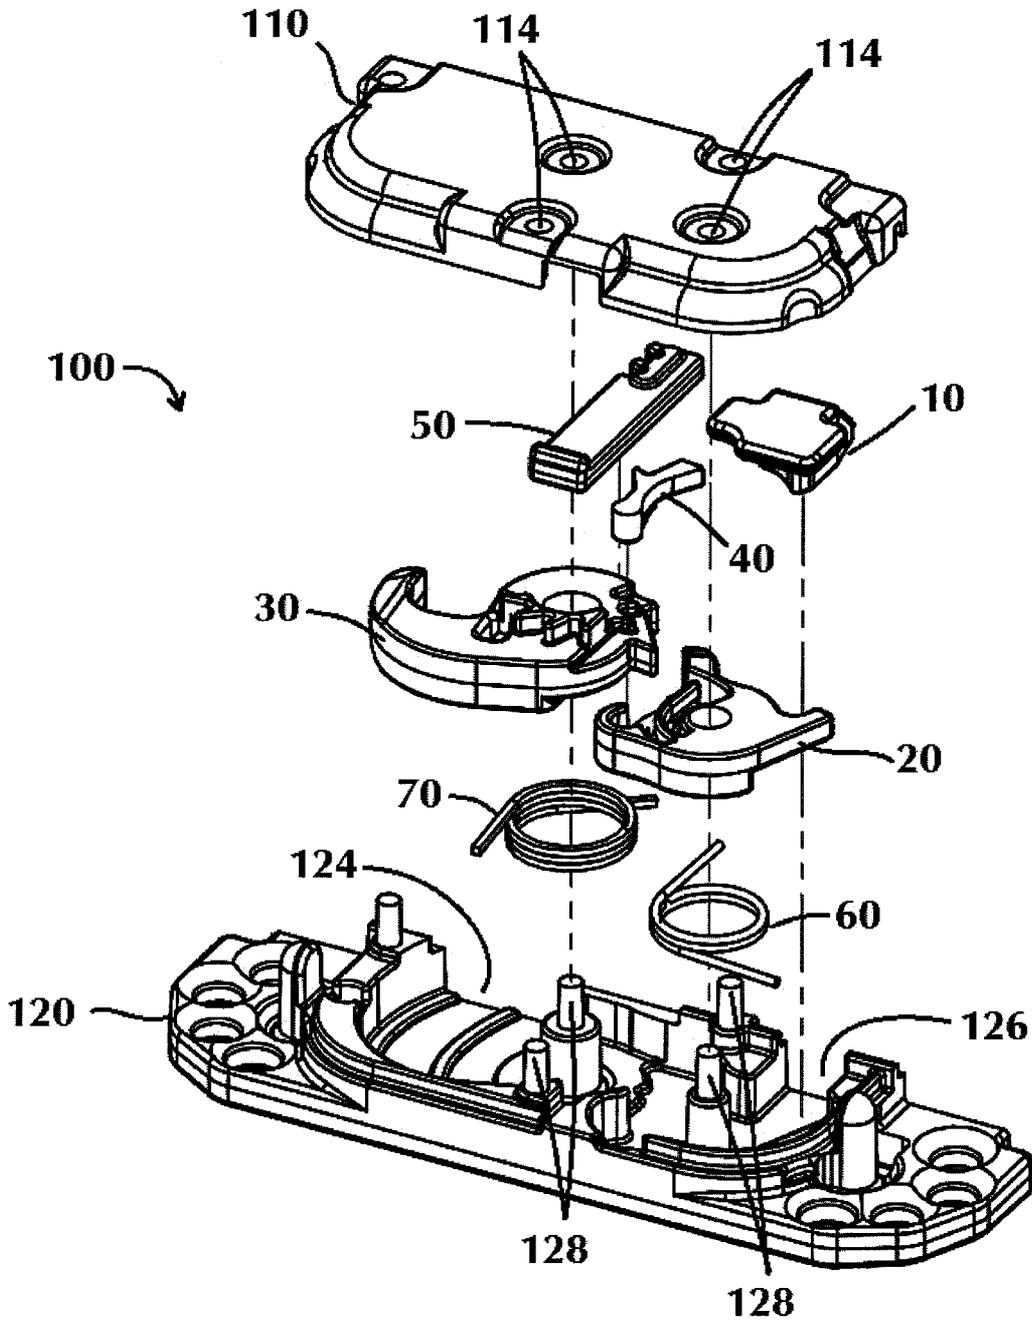
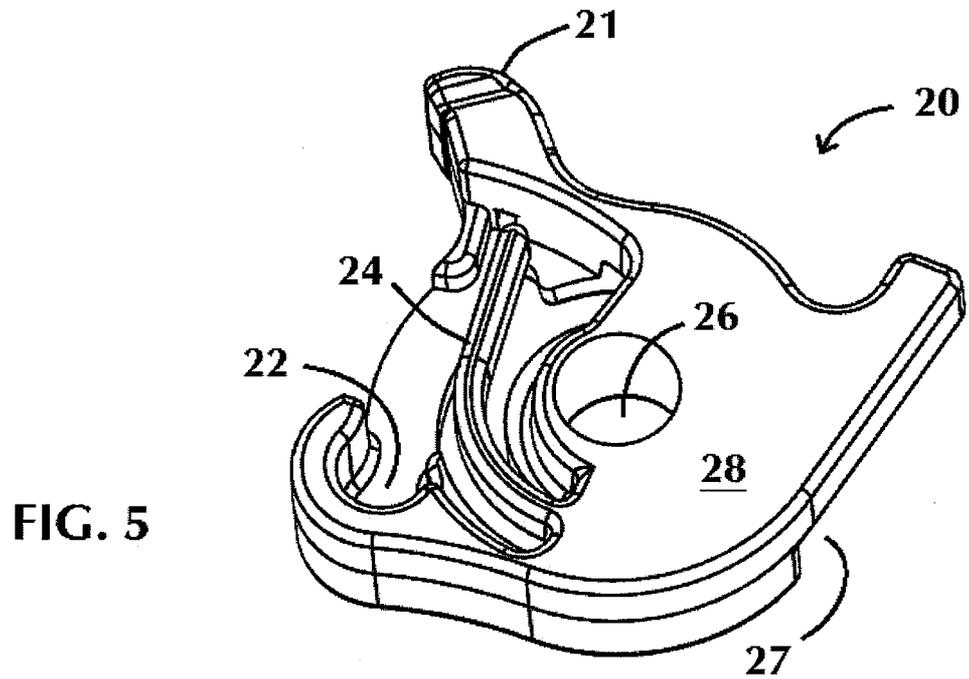
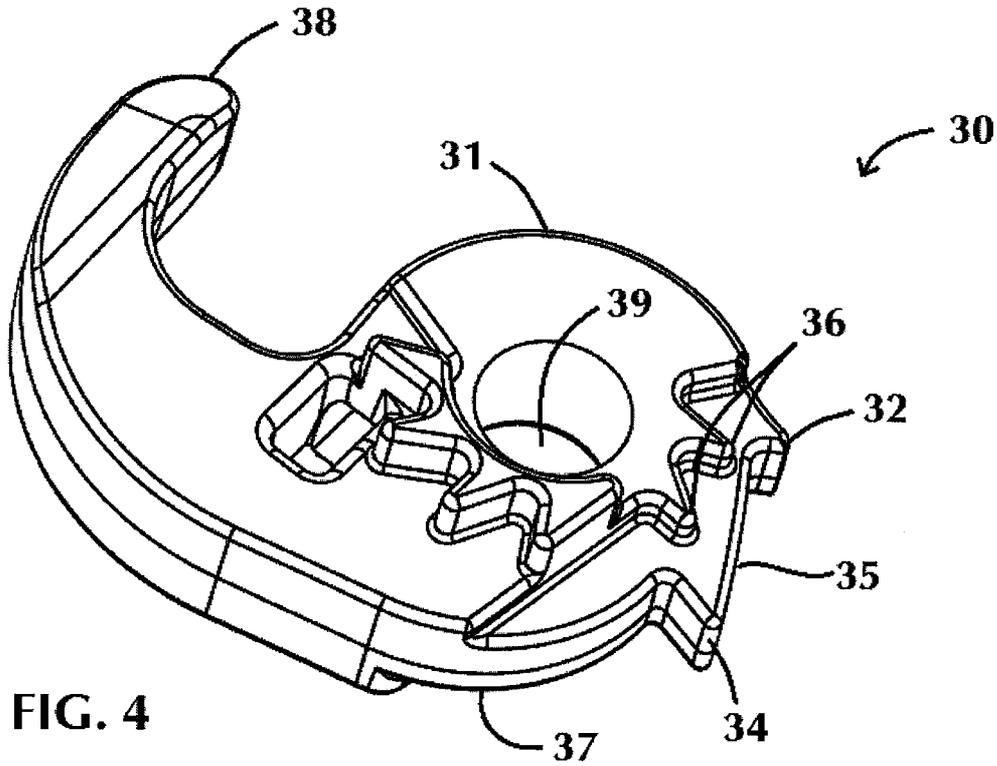


FIG. 3



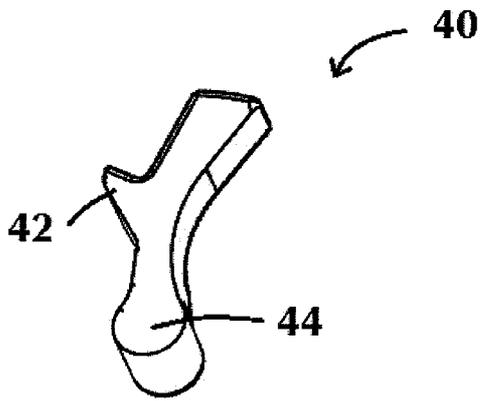


FIG. 6

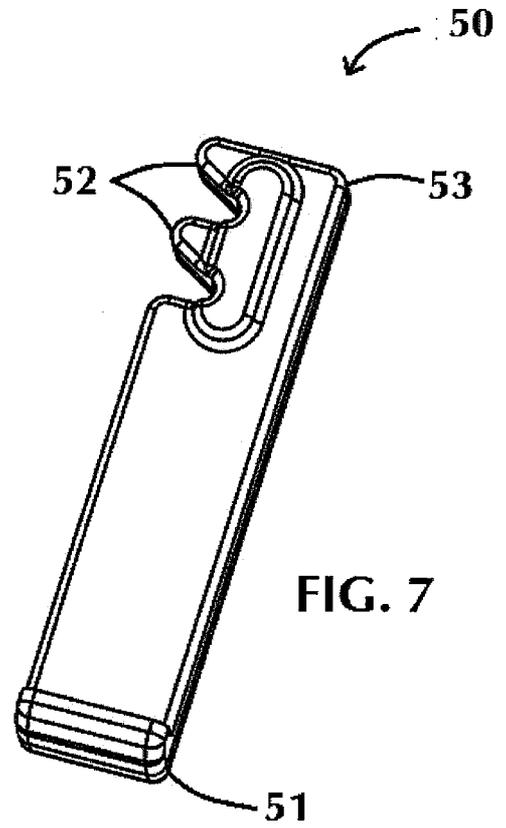


FIG. 7

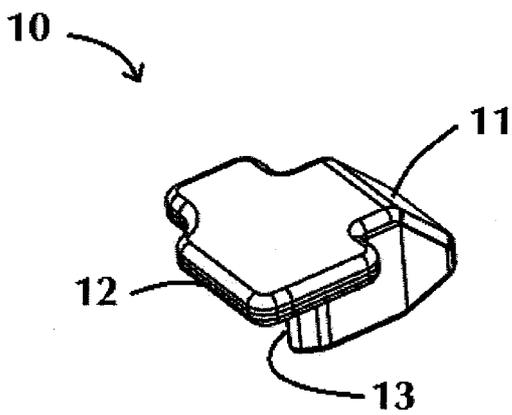


FIG. 8

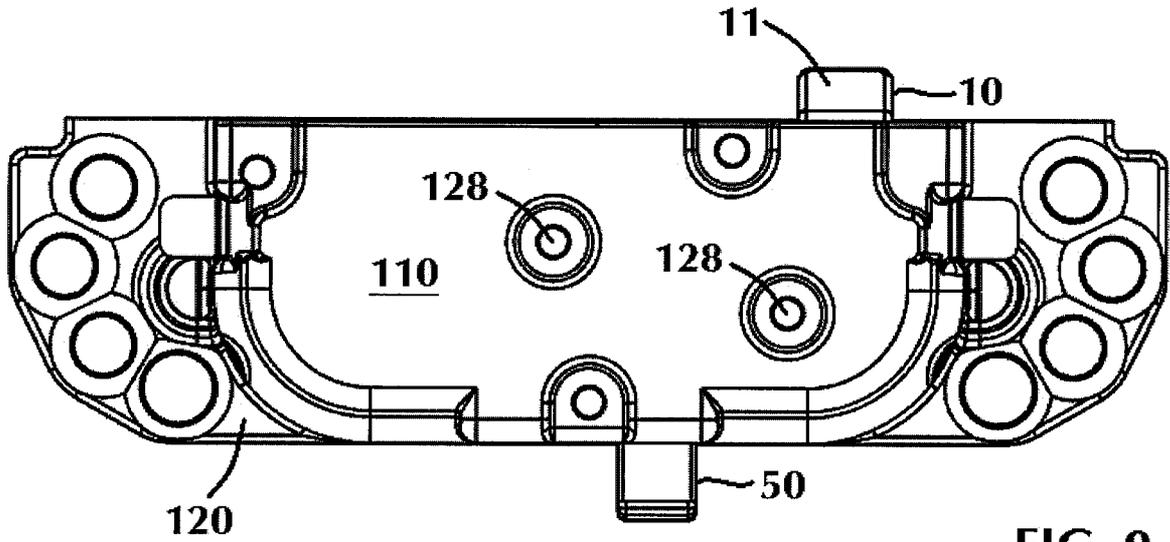


FIG. 9

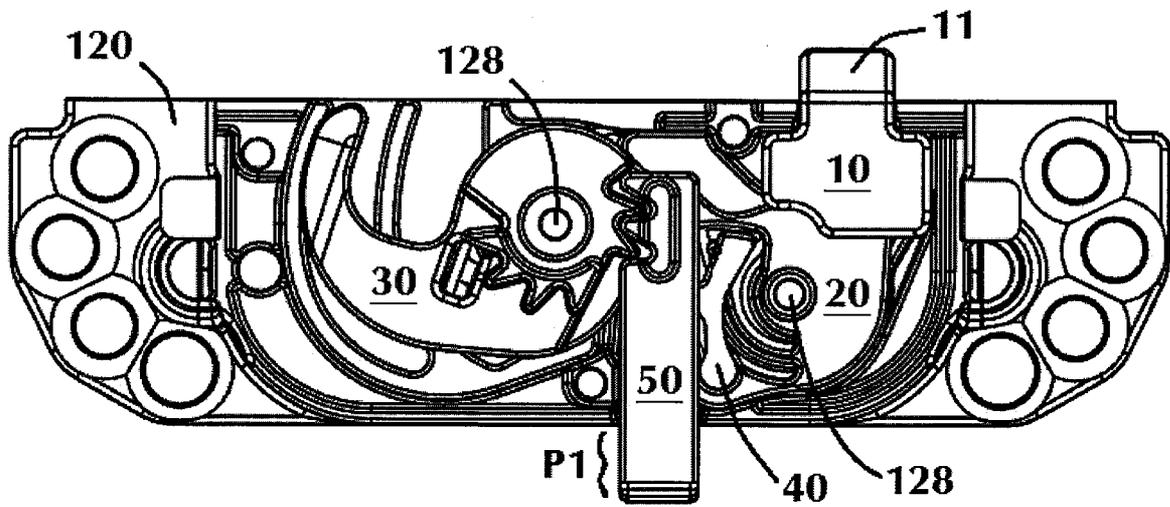


FIG. 10

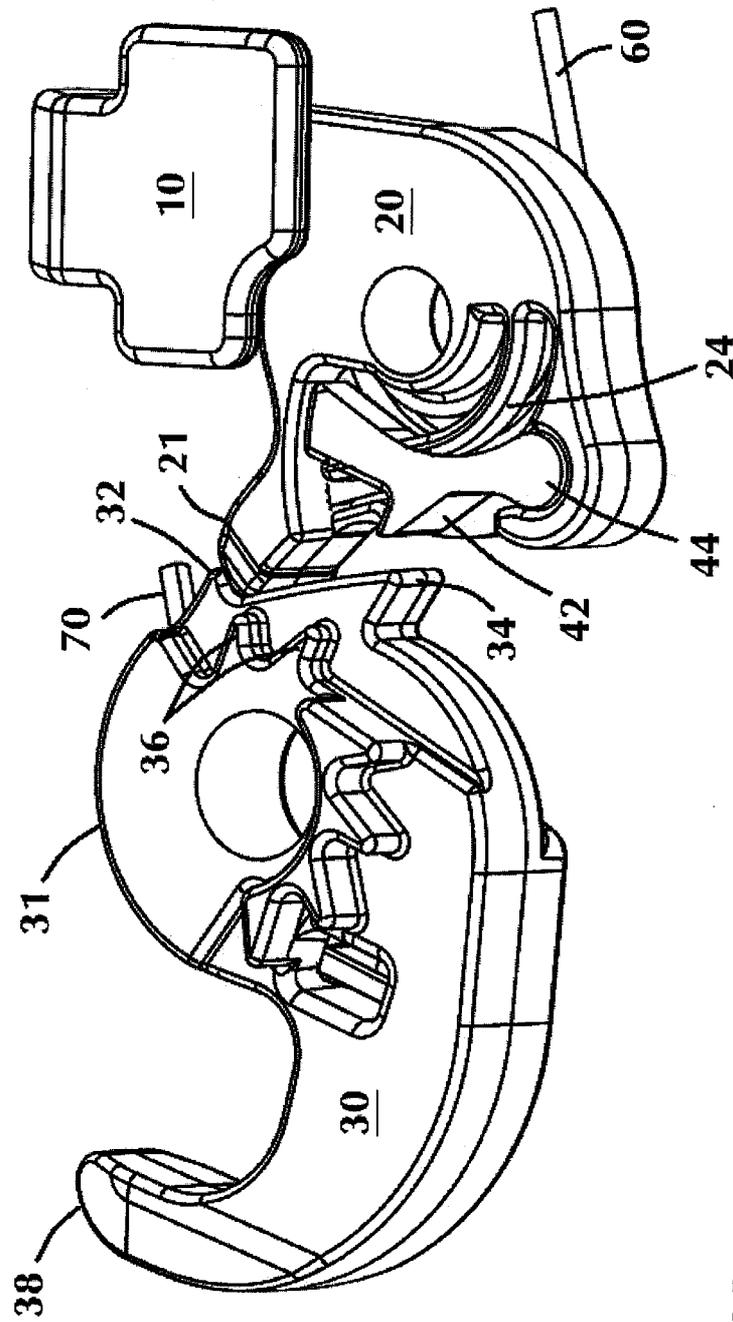


FIG. 11

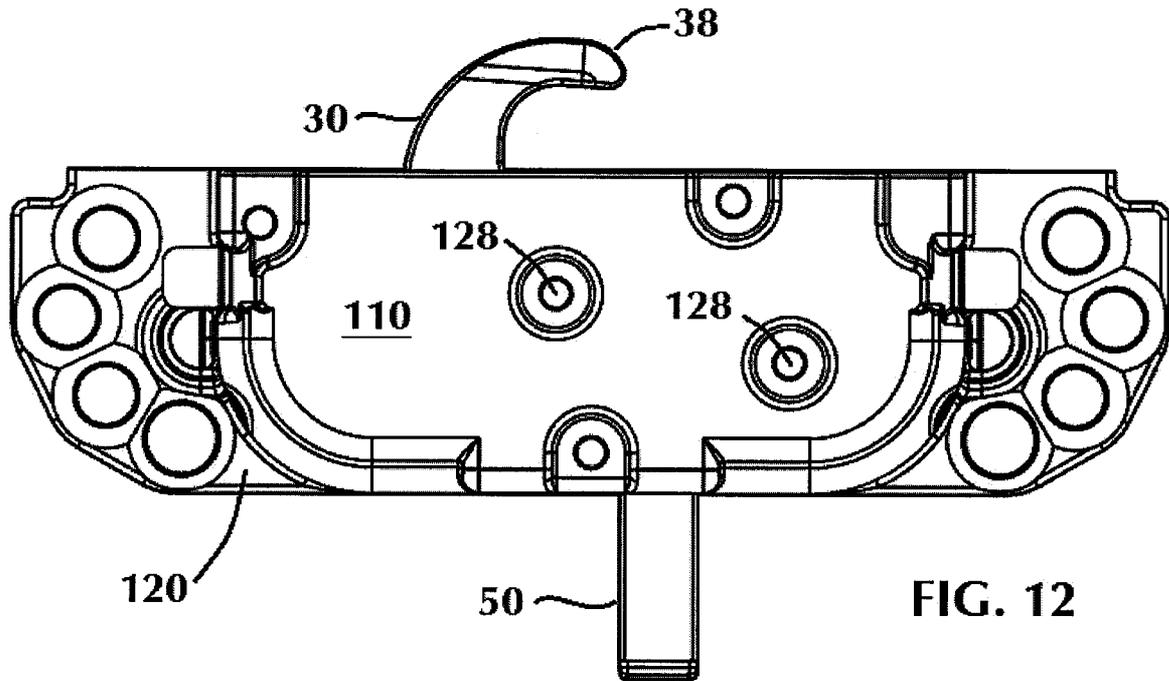


FIG. 12

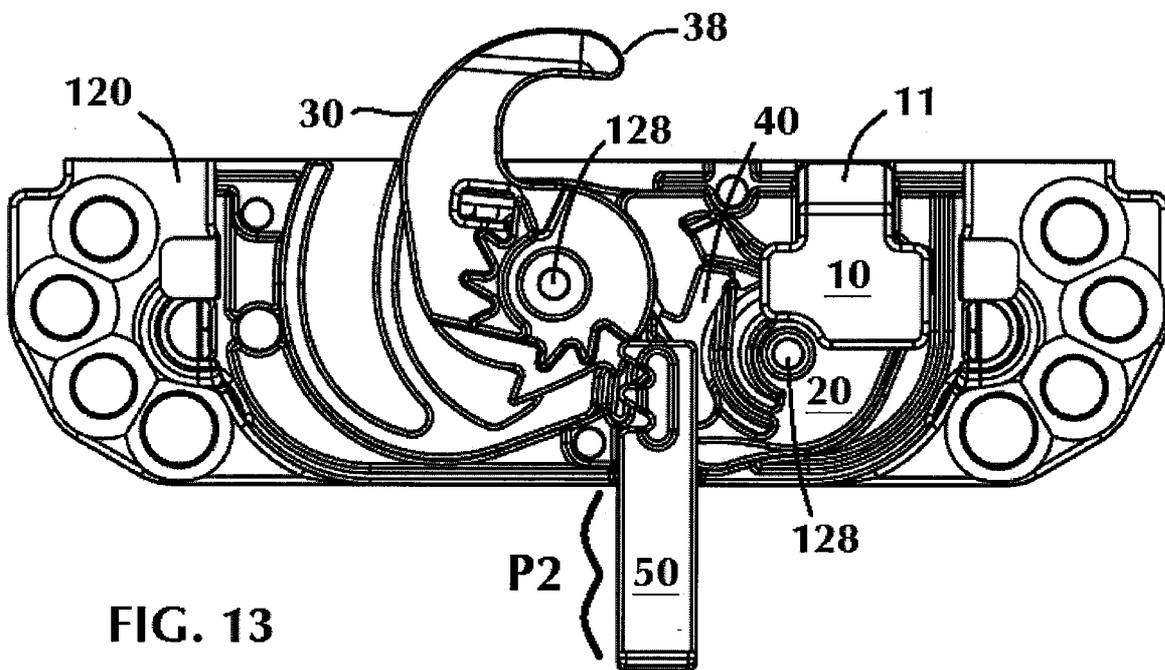


FIG. 13

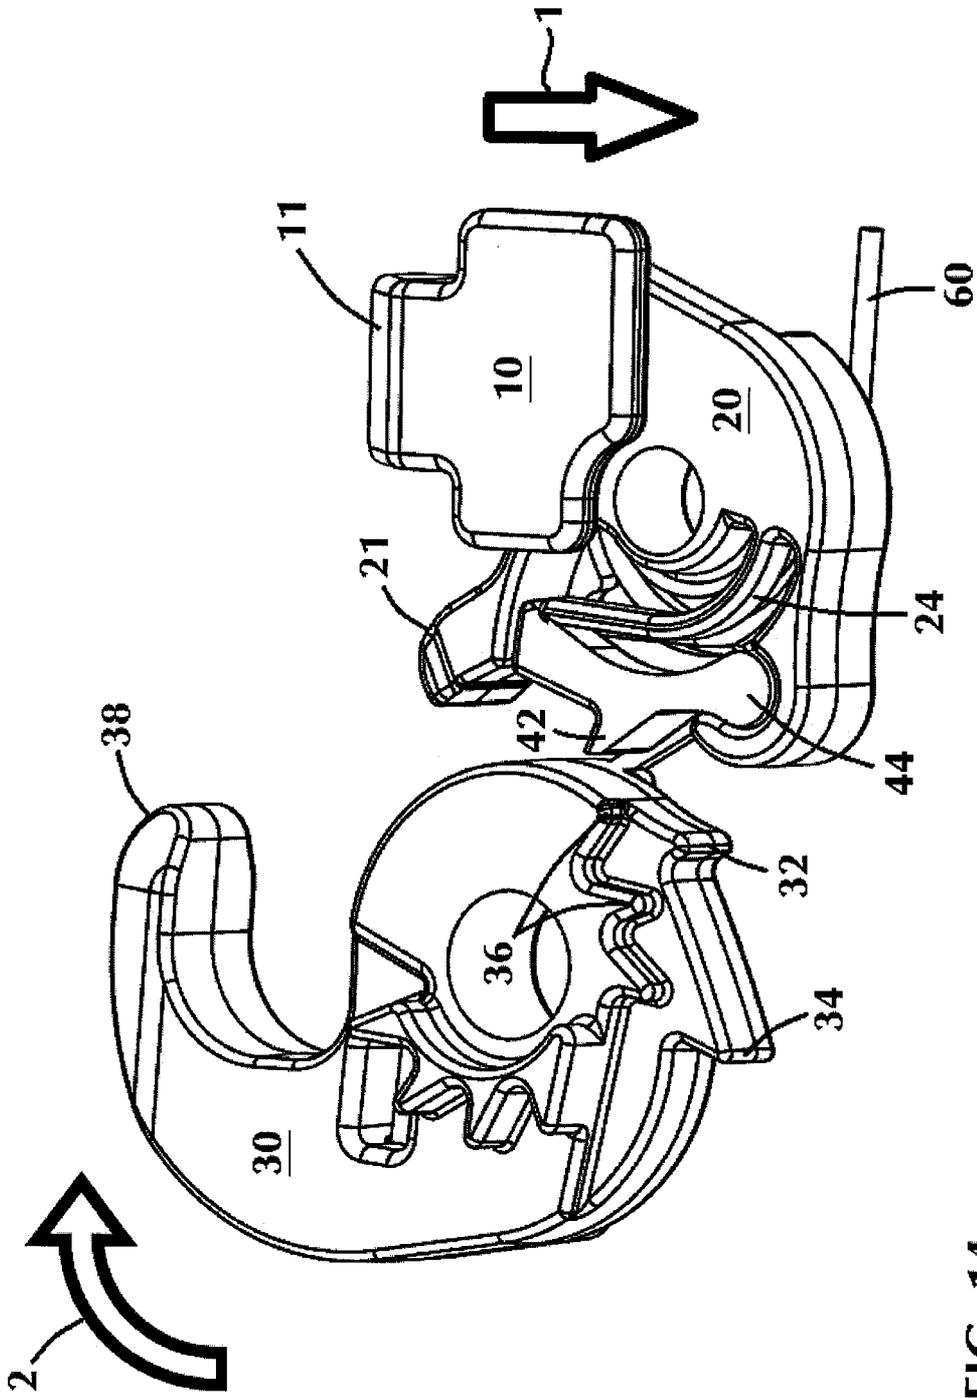


FIG. 14

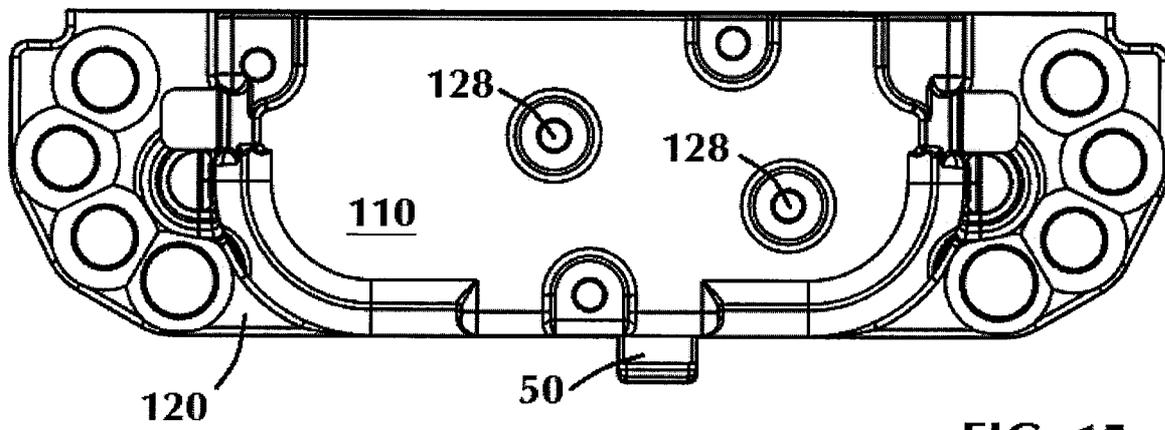


FIG. 15

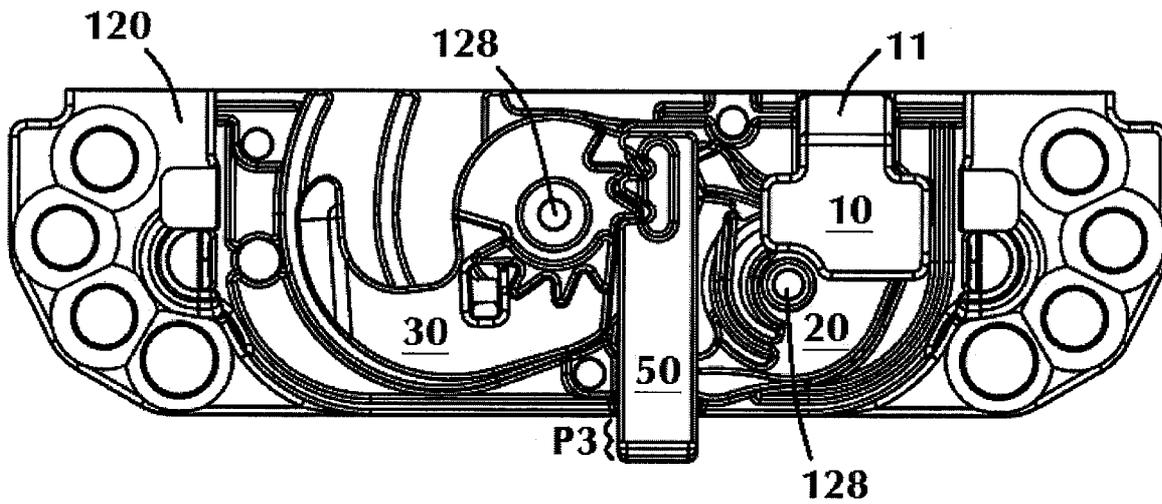


FIG. 16

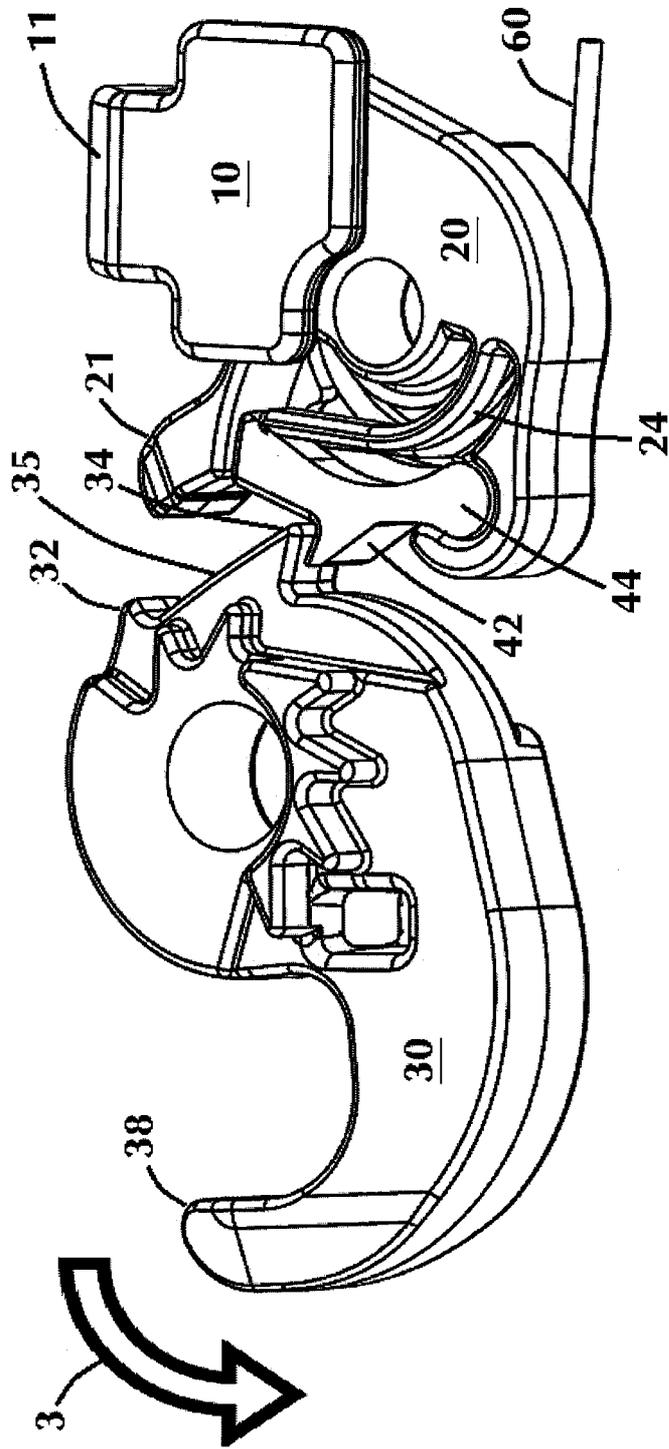


FIG. 17

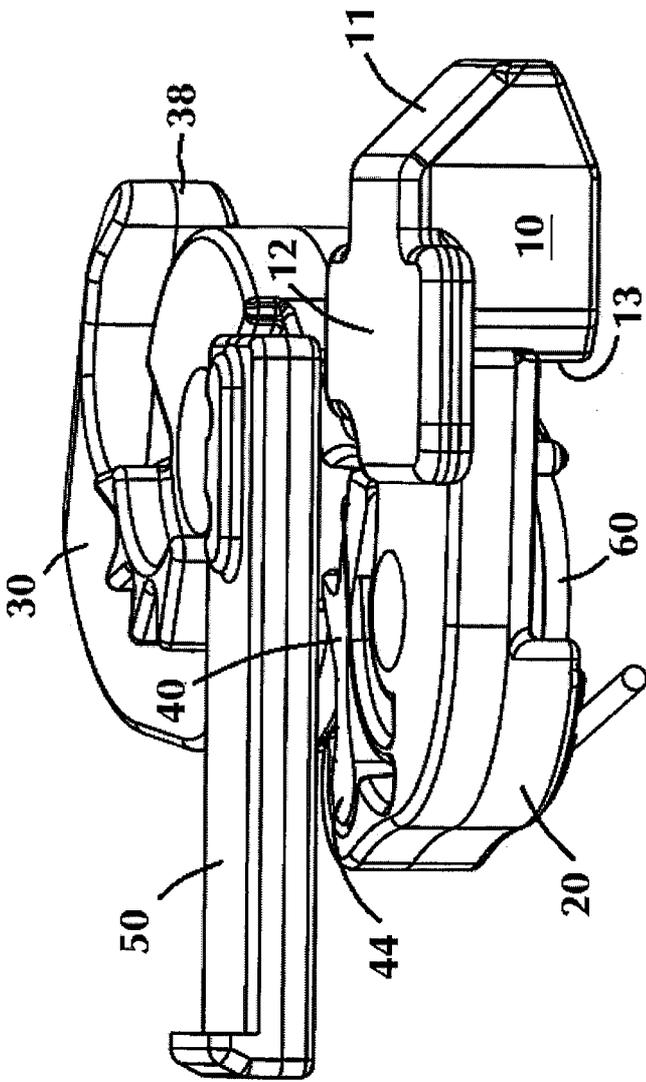


FIG. 18

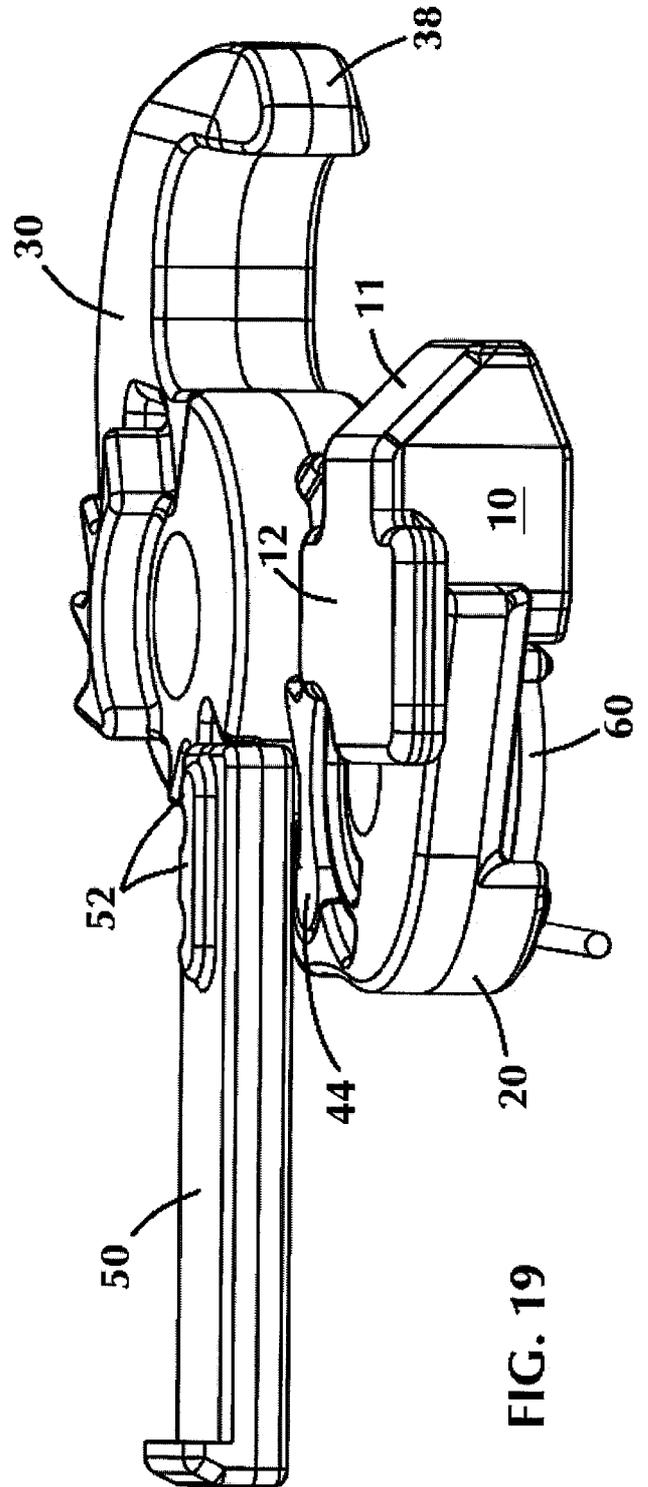


FIG. 19

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US19/50847

A. CLASSIFICATION OF SUBJECT MATTER

IPC - E05B 15/00, 63/00, 65/00; E05C 3/00, 7/00, 21/00 (2019.01)

CPC - E05B 15/00, 63/00, 65/00; E05C 3/00, 7/00, 21/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2324331 B (GORDON, I. A.) 30 June 1999; entire document	1-19
A	US 2007/0209285 A1 (BESTLER, W. et al.) 13 September 2007; entire document	1-19
A	US 2011/0248516 A1 (LIANG, L. et al.) 13 October 2011; entire document	1-19
A	US 2001/0005995 A1 (SUBLISKEY, E. J.) 05 July 2001; entire document	1-19
A	US 9,163,437 B1 (LAWRENCE, B. G.) 20 October 2015; entire document	1-19

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 November 2019 (11.11.2019)

Date of mailing of the international search report

26 NOV 2019

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Shane Thomas

Telephone No. PCT Helpdesk: 571-272-4300