[19] Patents Registry
The Hong Kong Special Administrative Region
香港特別行政區
專利註冊處

[11] 40003473 B
EP 3430844 B1

[12] **STANDARD PATENT (R) SPECIFICATION**
轉錄標準專利說明書

[21] Application no. 申請編號
19126949.7

[22] Date of filing 提交日期
17.07.2019

[51] Int. Cl.
H04W 52/02 (2009.01) H04L 12/911 (2013.01)
H04L 29/08 (2006.01) H04W 28/02 (2009.01)
H04L 12/805 (2013.01)

[54] TELEGRAM SPLITTING FOR SLOTTED ALOHA
針對分隙 ALOHA 的電報劃分

[30] Priority 優先權
15.03.2016 EP 16160485.5

[43] Date of publication of application 申請發表日期
09.04.2020

[45] Date of publication of grant of patent 批予專利的發表日期
22.01.2021

[86] International application no. 國際申請編號
PCT/EP2017/056013

[87] International publication no. and date 國際申請發表編號及日期
WO2017/157949 21.09.2017

EP Application no. & date 歐洲專利申請編號及日期
EP 17709724.3 14.03.2017

EP Publication no. & date 歐洲專利申請發表編號及日期
EP 3430844 23.01.2019

Date of grant in designated patent office 指定專利當局批予專利日期
01.04.2020

[73] Proprietor 專利所有人
Fraunhofer-Gesellschaft zur Förderung der angewandten Forschung e.V.
Hansastraße 27c
80686 München
GERMANY

Friedrich-Alexander-Universität Erlangen-Nürnberg
Schlossplatz 4
91054 Erlangen
GERMANY

[72] Inventor 發明人
HEUBERGER, Albert
BREILING, Marco
ROBERT, Jörg
KNEISSL, Jakob
KILIAN, Gerd
BERNHARD, Josef
WECHSLER, Johannes
ERETH, Stefan

[74] Agent and / or address for service 代理人及/或送達地址
MARKS & CLERK
Level 9, Cyberport 1
100 Cyberport Road, Pok Fu Lam
HONG KONG

(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 3 430 844 B1

(12) EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
01.04.2020 Bulletin 2020/14

(21) Application number: **17709724.3**

(22) Date of filing: **14.03.2017**

(51) Int Cl.:
H04W 52/02 *(2009.01)* ***H04L 12/911*** *(2013.01)*
H04L 29/08 *(2006.01)* ***H04W 28/02*** *(2009.01)*
H04L 12/805 *(2013.01)*

(86) International application number:
PCT/EP2017/056013

(87) International publication number:
WO 2017/157949 (21.09.2017 Gazette 2017/38)

(54) TELEGRAM SPLITTING FOR SLOTTED ALOHA

TELEGRAMMSPALTUNG FÜR SLOTTED ALOHA

DIVISION DE TÉLÉGRAMME POUR ALOHA CRÉNELÉ

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **15.03.2016 EP 16160485**

(43) Date of publication of application:
23.01.2019 Bulletin 2019/04

(73) Proprietors:
- **Fraunhofer-Gesellschaft zur Förderung der angewandten Forschung e.V.**
  80686 München (DE)
- **Friedrich-Alexander-Universität Erlangen-Nürnberg**
  91054 Erlangen (DE)

(72) Inventors:
- **HEUBERGER, Albert**
  91056 Erlangen (DE)
- **BREILING, Marco**
  91052 Erlangen (DE)
- **ROBERT, Jörg**
  91080 Uttenreuth (DE)
- **KNEISSL, Jakob**
  90765 Fürth (DE)
- **KILIAN, Gerd**
  91056 Erlangen (DE)
- **BERNHARD, Josef**
  92507 Nabburg (DE)
- **WECHSLER, Johannes**
  91174 Spalt (DE)
- **ERETH, Stefan**
  90768 Fürth (DE)

(74) Representative: **Schlenker, Julian et al**
Schoppe, Zimmermann, Stöckeler Zinkler, Schenk & Partner mbB
Patentanwälte
Radlkoferstraße 2
81373 München (DE)

(56) References cited:
EP-A1- 2 938 142
DE-A1-102011 082 098
US-A1- 2013 301 420
US-A1- 2014 092 828
US-A1- 2014 321 423
US-A1- 2015 289 292

- **KILIAN, G. ET AL.: "Improved coverage for low-power telemetry systems using telegram splitting", PROCEEDINGS OF 2013 EUROPEAN CONFERENCE ON SMART OBJECTS, SYSTEMS AND TECHNOLOGIES (SMARTSYSTECH, 2013, XP002769837, cited in the application**
- **MASSEY, J.; MATHYS, P.: "The collision channel without feedback Information Theory", IEEE TRANSACTIONS ON, vol. 31, 1985, pages 192-204, XP002769838, cited in the application**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 430 844 B1

Description

[0001] Embodiments relate to a transmitter, and specifically, to a transmitter using telegram splitting for transmitting an additional telegram in a communication system that is configured to operate according to a communication standard, such as 3GPP. Further embodiments relate to a receiver for receiving such an additional telegram.

[0002] The area of machine to machine (M2M) communication leads to new challenges for the 3GPP (3rd Generation Partnership Project, a collaboration between groups of telecommunications associations) standard family. These challenges are currently not solved optimally using the current 3GPP standards, as they are focusing on high data-rates with high amounts of data. In contrast, M2M typically does not require these high data rates, and the amount of data is typically just few bytes per device. On the other hand, the number of devices in case of M2M is expected to be significantly higher compared to today's use of 3GPP networks. As a consequence, the overhead of current 3GPP systems for M2M communication required for the signalling is extremely high, leading to power and spectrally in-efficient systems.

[0003] DE 10 2011 082 098 A1 shows a battery operated stationary sensor arrangement with unidirectional data transmission using telegram splitting.

[0004] US 2015/0289292 A1 discloses a data transmission method. The method includes obtaining configuration information, wherein the configuration information indicates transmission resources of a random access preamble and payload data corresponding to the random access preamble, transmitting the random access preamble and the payload data at the transmission resources, modulating the payload data using a modulation scheme supporting asynchronous transmission, and receiving feedback information, wherein the feedback information comprises an indication which indicates whether the payload data is successfully received.

[0005] Therefore, it is the object of the present invention to provide a concept that improves at least one out of power consumption and spectral efficiency of a communication system that operates according to a mobile communication standard when same is used for transmitting small amounts of data (i.e., just few bytes per device).

[0006] This object is solved by the independent claims.

[0007] Embodiments provide a transmitter, configured to operate in a mobile communication system according to a mobile communication standard (e.g., 3GPP), wherein resources of the communication system are divided into resources elements. The transmitter is configured to transmit an additional telegram by separating the telegram into a plurality of data packets, each of the data packets being shorter than the telegram, and transmitting each of the data packets respectively in one of the resource elements.

[0008] It is the idea of the present invention to use some of the resource elements of the communication system, e.g., resource elements reserved for non-standard compliant communication, for transmitting an additional telegram by separating the telegram into a plurality of data packets (e.g., at least two data packets), wherein each of the plurality of data packets is shorter than the telegram, and to transmit the plurality of data packets in one of the resource elements, respectively.

[0009] Further embodiments provide receiver configured to operate in a mobile communication system according to a mobile communication standard (e.g., 3GPP), wherein resources of the communication system are divided into resources elements. The receiver is configured to receive an additional telegram which is transmitted separated into a plurality of data packets, each of the data packets being shorter than the telegram, by receiving each of the data packets respectively in one of the resource elements reserved for non-standard compliant communication

[0010] Further embodiments provide a method for transmitting in a mobile communication system according to a mobile communication standard, wherein resources of the communication system are divided into resources elements, wherein the method comprises:

- transmitting an additional telegram by separating the telegram into a plurality of data packets, each of the data packets being shorter than the telegram, and by transmitting each of the data packets respectively in one of the resource elements.

[0011] Further embodiments provide a method for receiving in a mobile communication system according to a mobile communication standard, wherein resources of the communication system are divided into resources elements, wherein the method comprises:

- receiving an additional telegram which is transmitted separated into a plurality of data packets, each of the data packets being shorter than the telegram, by receiving each of the data packets respectively in one of the resource elements.

[0012] Advantageous implementations are addressed by the dependent claims.

[0013] In embodiments, the transmitter can be configured to transmit the plurality of data packets of the additional telegram in resource elements reserved for non-standard compliant communication. Some of the resource elements can be reserved or allocated (e.g., by a base station of the mobile communication system) for non-standard compliant communication. Similarly, some of the resource elements can be served of allocated for standard compliant communication. The transmitter can be configured to not transmit the plurality of data packets of the additional telegram in the resource elements reserved for standard compliant communication.

[0014] In embodiments, the transmitter can be config-

ured to perform standard compliant communication using resource elements reserved for standard compliant communication. For example, the transmitter can be configured to transmit standard compliant data packets (i.e., data packets according to the mobile communication standard) in the resource elements that are reserved or allocated (e.g., by a base station of the mobile communication system) for standard compliant communication.

[0015] In some embodiments, some of the resource elements can be allocated for both non-standard compliant communication and standard compliant communication.

[0016] In embodiments, the transmitter can be configured to synchronize itself to a synchronization signal of the mobile communication system or another communication system. For example, a base station of the mobile communication system may transmit such a synchronization signal. The transmitter can be also configured to use payload data, e.g., one or more data packets, transmitted by the base station as synchronization signal to which the transmitters synchronizes itself. Naturally, the transmitter can also use signals transmitted by mobile devices as synchronization signal. In addition, also signals of other communication systems can be used as synchronization signal.

[0017] In embodiments, the resource elements reserved for non-standard compliant communication can be a proper subset of uplink resource elements used for communication from mobile stations to base stations of the mobile communication system. In other words, some of the resource elements of the mobile communication system can be uplink resource elements, i.e. resource elements allocated or reserved for transmitting data from mobile stations to base station or base stations of the mobile communication system, wherein some of the uplink resource elements are allocated or reserved for the non-standard compliant communication. Other resource elements of the mobile communication system can be downlink resource elements, i.e. resource elements allocated or reserved for transmitting data from base station or base stations to mobile stations of the mobile communication system

[0018] In embodiments, the resource elements can be associated with at least one out of specific time slots and specific frequencies. For example, resource elements can be specific frequencies or frequency bands (frequency division multiple access). Resource elements can be specific time slots (time division multiple access). Naturally, resource elements also can be specific codes (code division multiple access).

[0019] In embodiments, the resources elements reserved for non-standard compliant communication can be allocated dynamically by a base station of the mobile communication system in dependence on performance criteria. Performance criteria can be, for example, a number of transmitter (e.g., mobile stations) of the mobile communication system, a number of transmitters communicating in the resource elements reserved for non-standard compliant communication, a number of transmitters communicating in the resource elements reserved for standard compliant communication, a number of mobile stations transmitting in the same resource element, a latency (e.g., overall latency) of the mobile communication system, or a packet loss rate).

[0020] In embodiments, the transmitter can be configured to transmit at least one of the plurality of data packets in a guard resource element, e.g. a guard resource band or frequency, or a guard interval or time slot.

[0021] In embodiments, the transmitter can be configured to channel encode the plurality of data packets such that only a part of the plurality of data packets are required for decoding the additional telegram. For example, some of the data packets may collide with other data packets or data transmitted by an interferer. However, due to channel code applied to the plurality of data packets, the additional telegram still can be decoded using the data packets of the plurality of data packets that were correctly transmitted.

[0022] In embodiments, the transmitter can be configured to not transmit or to transmit later one of the plurality of data packets if a transmission of the data packet will lead to a collision with another data packet transmitted by another transmitter of the mobile communication system. For example, the transmitter may know which of the resource elements are used by other transmitters for transmitting data packets. Or the transmitter may have collision detection capabilities, i.e., the transmitter can be configured to detect a collision by listening the communication channel before transmitting the one data packet, wherein the transmitter is configured to not transmit the one data packet when it detects a transmission of another transmitter or an interfering signal.

[0023] In embodiments, the plurality of data packets can be channel encoded such that only a part of the plurality of data packets are required for decoding the additional telegram. When one of the channel encoded data packets collides with another data packet in one of the resource elements, the receiver can be configured reconstruct an original version of the collided channel encoded data packet based on the decoded additional telegram and to subtract the original version of the collided channel encoded data packet from the data received in the resource element in order to obtain the other data packet.

[0024] Embodiments of the present invention are described herein making reference to the appended drawings.

Fig. 1 shows a schematic block diagram of a transmitter, according to an embodiment of the present invention;

Fig. 2 shows a schematic block diagram of a receiver, according to an embodiment of the present invention;

Fig. 3 shows a schematic block diagram of a communication system, according to an embodiment of the present invention;

Fig. 4 shows a schematic view of a resource grid having a plurality of resource elements of the communication system, according to an embodiment;

Fig. 5 shows a schematic view of a resource grid having a plurality of resource elements, wherein some of the resource elements are reserved for non-standard compliant communication, according to an embodiment of the present invention;

Fig. 6 shows a schematic view of a resource grid having a plurality of resource elements and different user sequences used for transmitting, according to an embodiment;

Fig. 7 shows a flow-chart of a method for transmitting, according to an embodiment of the present invention;

Fig. 8 shows a flow-chart of a method for receiving, according to an embodiment of the present invention.

[0025] Equal or equivalent elements or elements with equal or equivalent functionality are denoted in the following description by equal or equivalent reference numerals.

[0026] In the following description, a plurality of details are set forth to provide a more thorough explanation of embodiments of the present invention. However, it will be apparent to one skilled in the art that embodiments of the present invention may be practiced without these specific details. In other instances, well-known structures and devices are shown in block diagram form rather than in detail in order to avoid obscuring embodiments of the present invention. In addition, features of the different embodiments described hereinafter may be combined with each other, unless specifically noted otherwise.

[0027] Fig. 1 shows a schematic block diagram of a transmitter 100, according to an embodiment of the present invention. The transmitter 100 is configured to operate in a mobile communication system according to a mobile communication standard (e.g., 3GPP). Resource of the mobile communication system can be divided into resource elements (e.g., time slots and/or frequency bands).

[0028] Further, Fig. 1 exemplarily shows a resource grid 102 having a plurality of resource elements 104. The resource grid 102 can comprise different frequency bands and/or different time slots. Thus, each of the resource elements of the plurality of resource elements 104 may have a specific frequency band and/or a specific time slot. In Fig. 1, the ordinate describes the frequency and the abscissa the time.

[0029] The transmitter 100 can be configured to transmit an additional telegram 106 (e.g., additionally to a standard compliant telegram) by separating the additional telegram 106 into a plurality of data packets 108 (e.g., n data packets, wherein n is natural number greater than or equal to two), each of the data packets 108 being shorter than the telegram 106, and transmitting each of the data packets 108 respectively in one of the resource elements 104.

[0030] For example, the transmitter 100 can be configured to transmit a first data packet (of the plurality of data packets) 104 in a first resource element (e.g., a first time slot and/or first frequency band) 104 and to transmit a second data packet (of the plurality of data packets) 108 in a second resource element (e.g., a second time slot following the first time slot, or a second frequency band, different from the first frequency band) 104.

[0031] The transmitter 100, for example, can comprise a data packet generation unit 110 and a transmitting unit 112. The data packet generation unit 110 can be configured to separate the additional telegram 106 into the plurality of data packets 108. The transmitting unit 112 can be configured to transmit the plurality of data packets 108 in different resource elements 104.

[0032] Separating the additional telegram into the plurality of data packets such that each of the plurality of data packets is shorter than the additional telegram is referred herein as to telegram splitting.

[0033] The data packet generation unit 110 and/or the transmitting unit 112 can be implemented in hardware, for example, using a microprocessor, a field programmable gate array or a central processing unit. Furthermore, the data packet generation unit 110 and the transmitting unit 112 can be implemented in the same device.

[0034] The transmitter 100 can be, for example, a mobile device of the mobile communication system. Naturally, the transmitter 100 also can be a base station of the mobile communication system. The transmitter 100 can be a transceiver having both transmitting and receiving capabilities.

[0035] Fig. 2 shows a schematic block diagram of a receiver 120, according to an embodiment of the present invention. The receiver 120 is configured to operate in a mobile communication system according to a mobile communication standard, (e.g., 3GPP). Resource of the mobile communication system can be divided into resource elements (e.g., time slots and/or frequency bands).

[0036] Further, Fig. 2 exemplarily shows a resource grid 102 having a plurality of resource elements 104. The resource grid 102 can comprise different frequency bands and/or different time slots. Thus, each of the resource elements of the plurality of resource elements 104 may have a specific frequency band and/or a specific time slot. In Fig. 1, the ordinate describes the frequency and the abscissa the time.

[0037] The receiver 120 is configured to receive an additional telegram 106 (e.g., additionally to a standard compliant telegram) which is transmitted separated into a plurality of data packets 108 (e.g., n data packets, wherein n is a natural number greater than or equal to two), each of the data packets 108 being shorter than the additional telegram 106, by receiving each of the data packets 108 respectively in one of the resource elements 104.

[0038] For example, the transmitter 120 can be configured to receive a first data packet (of the plurality of data packets) 104 in a first resource element (e.g., a first time slot and/or first frequency band) 104 and to receive a second data packet (of the plurality of data packets) 108 in a second resource element (e.g., a second time slot following the first time slot, or a second frequency band, different from the first frequency band) 104.

[0039] The receiver 120 further can be configured to combine the plurality of data packets 108 in order to obtain the additional telegram.

[0040] The receiver 120, for example, can comprise a receiving unit 122 and (optionally) a data packet combining unit 124. The receiving unit 122 can be configured to receive the plurality of data packets 108 in different resource elements 104. The data packet combining unit 124 can be configured to combine the plurality of data packets 108 in order to obtain the additional telegram 106.

data packet generation unit 110 and a transmitting unit 112. The data packet generation unit 110 can be configured to separate the additional telegram 106 into the plurality of data packets 108. The transmitting unit 112 can be configured to transmit the plurality of data packets 108 in different resource elements 104.

[0041] The receiving unit 122 and/or the data packet combining unit 124 can be implemented in hardware, for example, using a microprocessor, a field programmable gate array or a central processing unit. Furthermore, the receiving unit 122 and/or the data packet combining unit 124 can be implemented in the same device.

[0042] The receiver 120 can be, for example, a base station of the mobile communication system. Naturally, the receiver 120 also can be a mobile device of the mobile communication system. The receiver 120 may be a transceiver having both, receiving and transmitting capabilities.

[0043] As mentioned in the introduction of the present patent application, the area machine to machine (M2M) communication leads to new challenges for the 3GPP (3rd Generation Partnership Project, a collaboration between groups of telecommunications associations) standard family.

[0044] An interesting approach to improve the performance of future M2M communication systems is the telegram splitting [Kilian, G., et al.; Improved coverage for low-power telemetry systems using telegram splitting, Proceedings of 2013 European Conference on Smart Objects, Systems and Technologies (SmartSysTech), 2013] with Slotted ALOHA. The base station of the network assigns specific time and frequency slots to the devices (e.g., mobile devices) that can simply transmit their data within these slots. All slots typically have the same bandwidth and duration, and some kind of synchronization means is required to synchronize the devices with respect to time and frequency so that they are aligned to the slot structure.

[0045] If a device wants to transmit data, it just selects one or multiple slots and starts transmission. A prior listening whether specific slots are free is not required. Thus, collisions on the uplink resources may occur. These collisions can be resolved in most cases by means of signal processing (e.g. successive interference cancellation) and specific user sequences (e.g. as proposed by Massey [Massey, J. & Mathys, P.; The collision channel without feedback Information Theory, IEEE Transactions on, 1985, 31, 192-204]). Furthermore, the devices can be fully synchronized to the network, which allows for additional optimization means.

SYSTEM STRUCTURE

[0046] Fig. 3 shows a schematic block diagram of a mobile communication system 130 comprising three mobile devices 128_1 to 128_3 and a base station 130. Further, in Fig. 3 possible ways of communication are indicated.

[0047] In detail, Fig. 3 shows a principle block diagram of the proposed system. "Mobile station 1" 128_1 and "mobile station 2" 128_2 want to communicate with a base station 130 using the links "BS Link 1" 132_1 and "BS Link 2" 132_2, where the focus here is to transmit uplink data to the base station 130. Furthermore, "mobile station 1" 128_1 and "mobile station 2" 128_2 can also communicate directly using the "D2D Link 1" 134_1 and "D2D Link 2" 134_2 (D2D = Device to Device), without using the base station as relay. (In this case the presence of any base station is not required.) However, also in this case the base station 130 may be interested in receiving the data from the D2D Links. Furthermore, also "mobile station 3" 128_3 may be interested to receive data from the "D2D Link 1" 134_1 by means of "D2D Link 2" 134_2 and "D2D Link 3" 134_3. Examples are e.g. car to car (C2C) communication. In this case the "mobile station 3" 128_3 does not have to be connected to the base station 130. However, "mobile station 3" 128_3 has some synchronization information 136, which may be provided by the base station 130 or any other suitable means (see section synchronization).

[0048] Thus, the system structure applies to current cellular systems (e.g. 3GPP) or also other transmission schemes, e.g. based on IEEE 802.11 (Wifi) or IEEE 802.15.4 (e.g. ZigBee).

SYNCHRONIZATION

[0049] The proposed system uses Slotted ALOHA.

This may require a synchronization of all mobile stations wrt. some kind of framing structure in time and frequency. Fig. 4 shows a possible framing structure 102.

[0050] In detail, Fig. 4 shows a schematic view of a resource grid 102 having a plurality of resource elements 104. The ordinate describes the frequency and the abscissa the time.

[0051] As shown in Fig. 4, the resources for the uplink data can be divided into so-called "resource elements", which may have a specific allocation in time and frequency. Furthermore, the physical resources of each resource element (e.g. bandwidth, duration) can be identical, so that multiple resource elements 104 form a resource grid 102, e.g., in the time and frequency axis. However, such grid 102 could also be extended to other dimensions, e.g., by applying code-division multiple access by using orthogonal or non-orthogonal codes.

[0052] Examples for the grid shown in Fig. 4 are e.g. OFDM (Orthogonal Frequency-Division Multiplexing) symbols, where the frequency axis are the OFDM subcarriers, and the time axis are the different OFDM symbols. Furthermore, the SC-FDMA (Single-Carrier Frequency Division Multiple Access) based uplink scheme used in the 3GPP standard family also may form such an uplink resource grid.

[0053] In other words, Fig. 4 shows a principle of framing structure with resource grid, the sync word and/or the downlink data may also be transmitted on a different frequency, e.g. in case of FDD (Frequency Division Duplexing), the smallest number of resources that can be occupied is a resource element 104.

[0054] It is beneficial when the mobile stations 128 have a precise synchronization to the uplink resource grid 102. E.g. in case of OFDM this would reduce the effects of adjacent channel interference (ACI) and multiple-access interference (MAI). In order to compensate for propagation delays, the mobile stations 128 may also use schemes such as timing advance, i.e. the devices transmit the data earlier than the start time of a resource element 104 in order to compensate for their individual propagation delay. Thus, the uplink data of all devices is perfectly aligned to the uplink resource grid.

[0055] The mobile stations 128 can be configured to synchronize itself to a synchronization signal of the mobile communication system 126 or another communication system.

[0056] The mobile stations 128 can use a specific synchronization signal transmitted by the base station 130 to synchronize themselves on the uplink resource grid. In case of state-of-the-art 3GPP standards (e.g. Release 12) this could be the synchronization signals of the base stations (e.g. primary and secondary synchronization signals, or pilot signals). In addition, the mobile stations 128 may also use payload data transmitted by the base station 130 (also data for other mobile stations) to synchronize themselves onto the base station 130. Examples are e.g. the cyclic prefix of the OFDM symbols in the downlink of state-of-the art 3GPP downlink signals. If a base station 130 is present and TDD (time division duplex) is used for the communication of the mobile stations 128 with the base stations 130, some resources may be used for providing this synchronization signal in addition to downlink data. An example is the TDD (Time Division Duplexing) mode of state-of-the-art 3GPP standards.

[0057] The synchronization of the mobile devices 128 does not require the transmission of any data to the base-station 130. Therefore, the mobile devices 128 may just listen to the signals of base stations 130 to synchronize themselves. Furthermore, the mobile devices 128 can also use signals from other mobile devices to synchronize themselves. Furthermore, the mobile devices 128 can also use any kind of other signals (e.g. navigation systems (GPS, Galileo), digital TV (DVB-T), or digital radio (DAB)) that have not been transmitted for the purpose of synchronization, so-called signals of opportunity, to synchronize themselves on the resource grid. This is especially useful if no base station 130 is present or the base station signal cannot be received.

RESOURCE ALLOCATION FOR SLOTTED ALOHA RESOURCES

Multi system frequency usage

[0058] The transmitters 100 (e.g., mobile devices 128) can be configured to transmit the plurality of data packets 108 of the additional telegram 106 in resource elements 104 reserved for non-standard compliant communication. The resource elements 104 reserved for non-standard compliant communication can be a proper subset of uplink resource elements used for communication from mobile stations 128 to base stations 130 of the mobile communication system 126. The resource elements are associated with at least one out of specific time slots and specific frequencies

[0059] In case of state-of-the-art 3GPP standards the resource grid 102 applies to the uplink resources. Consequently, it is beneficial in this case to transmit all transmit data of the mobile stations 128 in the uplink resources. The uplink resources may be specific frequencies (in case of FDD = frequency division duplex) or specific time periods (in case of TDD = time division duplex). The 3GPP base station 130 may then allocate specific resource elements, e.g. time- and/or frequency resources, within the uplink resources for the slotted ALOHA access. The other resources may be used for classical communication as defined in the current 3GPP specifications.

Pre-allocated resources

[0060] In modern managed communication systems (e.g. 3GPP standard) a user may have to request recourses. Instead of this dynamic allocation for each user some resources of the resource grid may be allocated for slotted ALOHA. In a scenario of M2M communication

a lot of small messages has to be transmitted. Without the resource allocation procedure a lot of traffic and energy in the device is saved. Another advantage is the short delay of these messages. In D2D communication (e.g. Car 2 Car) it is very important to guarantee a short delay of signalling an event to other devices.

Dynamic resource allocation

[0061] The allocation of resources 104 of the resource grid 102 may be either static or variable. A static configuration may be especially beneficial in systems 126 without a managing entity, e.g. if no base station 130 is present. In these systems 126 a certain amount of resources can be allocated for the communication.

[0062] Resource elements 104 reserved for non-standard compliant communication can be allocated by a managing entity (e.g., base station) of the mobile communication system. Further, resources elements 104 reserved for non-standard compliant communication can be allocated dynamically by the managing entity of the mobile communication system in dependence on performance criteria.

[0063] In systems with a managing entity the resources for the slotted ALOHA access may change over time. (A managing entity may be a base station 130 or a mobile station acting as a managing entity.) The number of resources in the resource grid 102 that may be used by a mobile station 128 in the slotted ALOHA may be adjusted to the required resources to achieve a certain performance criteria. Such criteria may be the average number of mobile devices 128 transmitting in a resource element, the overall system latency, the packet loss rate, or any other suitable metric. This ensures an optimal usage of resources in the given scenario.

[0064] Depending on the resources required to fulfil specific performance criteria the base station 130 may vary the resources assigned to slotted ALOHA over time. The position of the available resource elements 104 may be signaled to the mobile stations 128 using some kind of signaling signals transmitted by the base station 130 (typically in the downlink resources) or the managing entity mobile station.

Resource positions for Slotted ALOHA change over time

[0065] Fig. 5 shows a schematic view of a resource grid 102 having a plurality of resource elements 104, wherein some of the resource elements 104' are reserved for non-standard compliant communication. The ordinate describes the frequency and the abscissa the time.

[0066] The resource elements 104' allocated for slotted ALOHA may be fixed on specific frequencies (resources allocated at bottom of Fig. 5) or their position may change over time (resources allocated at top of Fig. 5). Changing positions are especially beneficial in case of fading channels, as varying frequencies lead to improved diversity. Furthermore, it is also possible to allocate resources only during specific times. If OFDM is used, not all OFDM symbols would carry resource elements for slotted ALOHA. The pattern of available time slots, e.g. OFDM symbols, may change over time. The same also applies for SC-FDMA as used in the uplink of 3GPP. Similar schemes can also be applied in case of other schemes providing resource elements, e.g. in case of code-division multiple access using, e.g. orthogonal codes.

[0067] As shown in Fig. 5, resource elements 104' allocated for slotted ALOHA access may change over time, and only a subset of the resources may be allocated for this communication type.

Double usage of resources

[0068] Some of the resource elements 104 can be allocated for both non-standard compliant communication and standard compliant communication.

[0069] In systems such as 3GPP resource elements 104 may be allocated for slotted ALOHA, even if they are also used for classical communication. In this case there is a certain probability of collision between slotted ALOHA data and normal data, which may be acceptable in certain applications. An example is when very low slotted ALOHA traffic is expected. Assigning specific resource elements purely for slotted ALOHA would mean a too high overhead in such cases, while the number of collisions between slotted ALOHA and normal data may be on an acceptable level.

Using "white spaces" to transmit fragments

[0070] The transmitters 100 (e.g., mobile stations 128) can be configured to transmit at least one of the plurality of data packets in a guard resource element, e.g. a guard resource band or frequency, or a guard interval or time slot.

[0071] In the resource grid 102 of state-of-the-art 3GPP standards (e.g. LTE (Long Term Evolution)), there are typically some unused spaces, or spaces with a minor performance degradation if an interfere is on this resource slot (e.g. guard bands or guard intervals). This resources could be used to transmit slotted ALOHA messages. This technique would increase the data rate of the two combined systems.

RESOURCE UTILISATION FOR SLOTTED ALOHA PACKETS

Slotted ALOHA and telegram splitting

[0072] In a typical configuration, the available physical resources in each resource element are not sufficient to carry a complete data packet. The motivation for such a configuration could be to realize telegram splitting as described in [2]. Thus, in a typical configuration each data

packet will be divided into multiple fragments. Each fragment is then transmitted in one resource element assigned for Slotted ALOHA access. A possible realization of this concept is similar to the Telegram Splitting as presented in [Kilian, G., et al.; Improved coverage for low-power telemetry systems using telegram splitting, Proceedings of 2013 European Conference on Smart Objects, Systems and Technologies (SmartSysTech), 2013], except that slotted ALOHA is used instead of pure ALOHA.

Overlap recovery due to FEC

[0073] The transmitters 100 (e.g., mobile stations 128) can be configured to channel encode the plurality of data packets 108 such that only a part of the plurality of data packets 108 are required for decoding the additional telegram 106.

[0074] In a typical configuration, the data packets 108 will be protected using forward error correction (FEC). This improves the performance in case of noise. Furthermore, if one or more fragments of multiple fragments are lost due to collisions (e.g. with other mobile stations using slotted ALOHA, or any other interferer) there is a high probability that the interfered fragments can be recovered in the receiver by means of the FEC and possibly successive interference cancellation. Such collisions occur e.g. if the base station 130 or mobile station 3 128_3 (see Fig. 3) want to receive data from mobile station 1 128_1 and/or mobile station 2 128_2. A receiver in this sense may be the base station or any mobile station.

User sequences to minimize collisions

[0075] The transmitter 100 (e.g., mobile station 128) can be configured to transmit the plurality of data packets 108 in selected resource elements selected out of the resource elements based on user sequences in order to reduce collisions.

[0076] In a simple configuration the fragments are transmitted on the next available resource elements, e.g., on the same frequency slot, assigned for slotted ALOHA. This means that slotted ALOHA resources are occupied over a complete time interval. In an advanced configuration the resulting fragments are transmitted on the slotted ALOHA resource elements using specific user sequences. Examples for these user sequences have e.g. been proposed by Massey in [Massey, J. & Mathys, P.; The collision channel without feedback Information Theory, IEEE Transactions on, 1985, 31, 192-204]. In this case, the transmitting mobile station can leave out some Slotted ALOHA resources. This concept increases the probability that the fragments of multiple mobile stations do not fully overlap. The interfered fragments can then be recovered by the FEC. This concept is especially interesting for the cases where the receiver of the slotted ALOHA fragments is able to detect collisions, i.e. two or more mobile stations transmit data in the same resource element. This then corresponds to erasure decoding, which delivers optimum performance.

Different start times in BS - Frame

[0077] Typically, the data flow is organized in frames. If there are multiple resource blocks available in one frame, it is possible to start the slotted ALOHA user sequence on different time slots. Therefore, the probability of interfering another message is reduced and the quality of service is increased.

[0078] Fig. 5 shows a schematic view of a resource grid 102 having a plurality of resource elements and different user sequences used for transmitting.

SUCCESSIVE INTERFERENCE CANCELATION AND MIMO PROCESSING

[0079] As already mentioned, the plurality of data packets 108 can be channel encoded such that only a part of the plurality of data packets are required for decoding the additional telegram. The receiver 120 (e.g., base station 130) can be configured reconstruct an original version of the collided channel encoded data packet based on the decoded additional telegram and to subtract the original version of the collided channel encoded data packet from the data received in the resource element in order to obtain the other data packet, when one of the channel encoded data packets collides with another data packet in one of the resource elements.

[0080] In other words, above an example of time and non-time critical data packets were described. Due to the used access scheme only 50% of the fragments of the time critical stream are interfered. However, it should be possible to recover the data using the FEC, and thus, the data in the interfered resource elements is known. Consequently, this re-encoded data can be subtracted from the interfered resource elements. And then, the non-time critical service can be decoded. This principle is called successive interference cancelation (SIC).

SIC with optimized user sequences and transmit power

[0081] The SIC principle can work even better using further optimized user sequences. It is also possible to adapt additional parameters, e.g. the transmit power of the mobile station, to further improve the performance of SIC.

[0082] The use of SIC can be further extended with multi-user (MU) single-in-multiple-out (SIMO) (or multiple-in-multiple-out - MIMO) processing. Using MU-SIMO/MIMO, the receiver can use techniques such as receiver-side beam-forming to separate the interfering signals of multiple transmitting mobile stations.

SIC and MIMO (Beamforming)

[0083] Generally, the use of SIC and MU-SIMO/MIMO

is especially useful when using maximum likelihood (ML) decoding or other schemes close to the theoretical performance. Furthermore, there may exist special wave-forms that are more suitable for SIC and MU-SIMO/MIMO. Examples are wave-forms that can be generated with high linearity in the transmitter power amplifier, i.e. that cause only little non-linear distortions. This is due to the reason that the receiver has to subtract the wave-form in case of SIC. If the wave-form is not generated with high linearity, this causes noise like components that cannot be estimated by the receiver. Thus, the receiver is not able to fully subtract the signal of the corresponding mobile stations. The remaining noise level then reduces the performance in the following decoding stages.

[0084] Furthermore, the use of MU-SIMO/MIMO and SIC is not limited to two signals colliding in a resource element. Depending on the received signal quality and the thermal noise level, an arbitrary number of signals may be decoding using MU-SIMO/MIMO and SIC.

FURTHER EMBODIMENTS

[0085] Fig. 7 shows a flow-chart of a method 200 for transmitting in a mobile communication system according to a mobile communication standard. Resources of the communication system are divided into resources elements. The method comprises transmitting 202 an additional telegram by separating the telegram into a plurality of data packets, each of the data packets being shorter than the telegram, and by transmitting each of the data packets respectively in one of the resource elements.

[0086] Fig. 8 shows a flow chart of a method 210 for receiving in a mobile communication system according to a mobile communication standard. Resources of the communication system are divided into resources elements. The method comprises receiving 212 an additional telegram which is transmitted separated into a plurality of data packets, each of the data packets being shorter than the telegram, by receiving each of the data packets respectively in one of the resource elements.

[0087] In embodiments, the plurality of data packets of the additional telegram can be transmitted (e.g., over a communication channel) with a temporal distance between the data packets.

[0088] Embodiments provide a new approach to improve the performance of future M2M communication systems using telegram splitting with slotted ALOHA. The base station of the network assigns specific time and frequency slots to the devices than can simply transmit their data within these slots. If a device wants to transmit data, it just selects one or multiple slots and starts transmission. A prior listening whether specific slots are free is not required. Thus, collisions on the uplink resources occur. These collisions can be resolved in most cases by means of signal processing (e.g., successive interference cancellation) and specific telegram splitting access patterns.

[0089] Embodiments are not limited to any kind of cellular standards. It could also be used in any kind of transmission standard.

[0090] Although some aspects have been described in the context of an apparatus, it is clear that these aspects also represent a description of the corresponding method, where a block or device corresponds to a method step or a feature of a method step. Analogously, aspects described in the context of a method step also represent a description of a corresponding block or item or feature of a corresponding apparatus. Some or all of the method steps may be executed by (or using) a hardware apparatus, like for example, a microprocessor, a programmable computer or an electronic circuit. In some embodiments, one or more of the most important method steps may be executed by such an apparatus.

[0091] Depending on certain implementation requirements, embodiments of the invention can be implemented in hardware or in software. The implementation can be performed using a digital storage medium, for example a floppy disk, a DVD, a Blu-Ray, a CD, a ROM, a PROM, an EPROM, an EEPROM or a FLASH memory, having electronically readable control signals stored thereon, which cooperate (or are capable of cooperating) with a programmable computer system such that the respective method is performed. Therefore, the digital storage medium may be computer readable.

[0092] Some embodiments according to the invention comprise a data carrier having electronically readable control signals, which are capable of cooperating with a programmable computer system, such that one of the methods described herein is performed.

[0093] Generally, embodiments of the present invention can be implemented as a computer program product with a program code, the program code being operative for performing one of the methods when the computer program product runs on a computer. The program code may for example be stored on a machine readable carrier.

[0094] Other embodiments comprise the computer program for performing one of the methods described herein, stored on a machine readable carrier.

[0095] In other words, an embodiment of the inventive method is, therefore, a computer program having a program code for performing one of the methods described herein, when the computer program runs on a computer.

[0096] A further embodiment of the inventive methods is, therefore, a data carrier (or a digital storage medium, or a computer-readable medium) comprising, recorded thereon, the computer program for performing one of the methods described herein. The data carrier, the digital storage medium or the recorded medium are typically tangible and/or non-transitionary.

[0097] A further embodiment of the inventive method is, therefore, a data stream or a sequence of signals representing the computer program for performing one of the methods described herein. The data stream or the sequence of signals may for example be configured to be transferred via a data communication connection, for

example via the Internet.

[0098] A further embodiment comprises a processing means, for example a computer, or a programmable logic device, configured to or adapted to perform one of the methods described herein.

[0099] A further embodiment comprises a computer having installed thereon the computer program for performing one of the methods described herein.

[0100] A further embodiment according to the invention comprises an apparatus or a system configured to transfer (for example, electronically or optically) a computer program for performing one of the methods described herein to a receiver. The receiver may, for example, be a computer, a mobile device, a memory device or the like. The apparatus or system may, for example, comprise a file server for transferring the computer program to the receiver.

[0101] In some embodiments, a programmable logic device (for example a field programmable gate array) may be used to perform some or all of the functionalities of the methods described herein. In some embodiments, a field programmable gate array may cooperate with a microprocessor in order to perform one of the methods described herein. Generally, the methods are preferably performed by any hardware apparatus.

[0102] The apparatus described herein may be implemented using a hardware apparatus, or using a computer, or using a combination of a hardware apparatus and a computer.

[0103] The apparatus described herein, or any components of the apparatus described herein, may be implemented at least partially in hardware and/or in software.

[0104] The methods described herein may be performed using a hardware apparatus, or using a computer, or using a combination of a hardware apparatus and a computer.

[0105] The methods described herein, or any components of the apparatus described herein, may be performed at least partially by hardware and/or by software.

[0106] The above described embodiments are merely illustrative for the principles of the present invention. It is understood that modifications and variations of the arrangements and the details described herein will be apparent to others skilled in the art. It is the intent, therefore, to be limited only by the scope of the impending patent claims and not by the specific details presented by way of description and explanation of the embodiments herein.

Claims

1. Transmitter (100), configured to operate in a mobile communication system (126) according to a mobile communication standard, wherein resources of the communication system (126) are divided into resources elements (104);
   wherein the transmitter (100) is configured to transmit an additional telegram (106) additional to a standard compliant telegram by separating the telegram (106) into a plurality of data packets (108), each of the data packets (108) being shorter than the telegram (106), and transmitting each of the data packets (108) respectively in one of the resource elements (104);
   wherein the transmitter (100) is configured to transmit the plurality of data packets (108) of the additional telegram in resource elements (104') reserved for non-standard compliant communication;
   characterised in that the transmitter is configured to select the resource elements (104) for transmitting the data packets (108) out of the resource elements (104') reserved for non-standard compliant communication, and to start transmission of the data packets (108) in the selected resource elements (104) without prior listening whether these resource elements (104) are free.

2. Transmitter (100) according to claim 1, wherein the transmitter (100) is configured to perform standard compliant communication using resource elements reserved for standard compliant communication.

3. Transmitter (100) according to one of the claims 1 to 2, wherein the transmitter (100) is configured to synchronize itself to a synchronization signal of the mobile communication system (126) or another communication system.

4. Transmitter (100) according to one of the claims 1 to 3, wherein the resource elements (104') reserved for non-standard compliant communication are a proper subset of uplink resource elements used for communication from mobile stations (128) to base stations (130) of the mobile communication system (126).

5. Transmitter (100) according to one of the claims 1 to 4, wherein the resource elements (104) are associated with at least one out of specific time slots and specific frequencies.

6. Transmitter (100) according to one of the claims 1 to 5, wherein the resources elements (104') reserved for non-standard compliant communication are allocated by a managing entity (130) of the mobile communication system (126).

7. Transmitter (100) according to one of the claims 1 to 6, wherein the resources elements (104') reserved for non-standard compliant communication are allocated dynamically by the managing entity (130) of the mobile communication system in dependence on performance criteria.

8. Transmitter (100) according to one of the claims 1 and 2 to 7, wherein some of the resource elements (104) are allocated for both non-standard compliant communication and standard compliant communication.

9. Transmitter (100) according to one of the claims 1 to 8, wherein the transmitter (100) is configured to transmit at least one of the plurality of data packets (108) in a guard resource element.

10. Transmitter (100) according to one of the claims 1 to 9, wherein the transmitter (100) is configured to channel encode the plurality of data packets (108) such that only a part of the plurality of data packets (108) are required for decoding the additional telegram (106).

11. Transmitter (100) according to claim 10, wherein the transmitter (100) is configured to not transmit or to transmit later one of the plurality of data packets (108) if a transmission of the data packet (108) will lead to a collision with another data packet transmitted by another transmitter of the mobile communication system (126).

12. Transmitter (100) according to one of the claims 10 and 11, wherein the transmitter (100) is configured to transmit the plurality of data packets (108) in selected resource elements (104') selected out of the resource elements (104) based on user sequences in order to reduce collisions.

13. Receiver (120), configured to operate in a mobile communication system (126) according to a mobile communication standard, wherein resources of the communication system (126) are divided into resources elements (104);
wherein the receiver (120) is configured to receive an additional telegram (106) additional to a standard compliant telegram which is transmitted separated into a plurality of data packets (108), each of the data packets (108) being shorter than the telegram (106), by receiving each of the data packets (108) respectively in one of the resource elements;
wherein the receiver (120) is configured to receive the data packets (108) of the additional telegram in resource elements (104') reserved for non-standard compliant communication;
characterised in that the receiver (120) is configured to receive the data packets (108) in resource elements selected by a transmitter out of the resource elements (104') reserved for non-standard compliant communication.

14. Receiver (120) according to claim 13, wherein the plurality of data packets (108) are channel encoded such that only a part of the plurality of data packets (108) are required for decoding the additional telegram (106);
wherein, when one of the channel encoded data packets collides with another data packet in one of the resource elements (104), the receiver (120) is configured reconstruct an original version of the collided channel encoded data packet based on the decoded additional telegram (106) and to subtract the original version of the collided channel encoded data packet from the data received in the resource element in order to obtain the other data packet.

15. System (126), comprising:

a transmitter (100) according to one of the claims 1 to 12; and
a receiver (120) according to one of the claims 13 to 14.

16. Method (200) for transmitting in a mobile communication system according to a mobile communication standard, wherein resources of the communication system are divided into resources elements, wherein the method comprises:

transmitting (202) an additional telegram additional to a standard compliant telegram by separating the additional telegram into a plurality of data packets, each of the data packets being shorter than the telegram, and by transmitting each of the data packets respectively in one of the resource elements;
wherein transmitting (202) comprises transmitting the plurality of data packets (108) of the additional telegram in resource elements (104') reserved for non-standard compliant communication;
wherein transmitting (202) comprises selecting the resource elements (104) for transmitting the data packets (108) out of the resource elements (104') reserved for non-standard compliant communication; and
characterised in that the transmitting (202) comprises starting transmission of the data packets (108) in the selected resource elements (104) without prior listening whether these resource elements (104) are free.

17. Method (210) for receiving in a mobile communication system according to a mobile communication standard, wherein resources of the communication system are divided into resources elements, wherein the method comprises:

receiving (212) an additional telegram additional to a standard compliant telegram, wherein the additional telegram is transmitted separated into a plurality of data packets, each of the data pack-

ets being shorter than the telegram, by receiving each of the data packets respectively in one of the resource elements;
wherein receiving (212) comprises receiving the data packets of the additional telegram in resource elements reserved for non-standard compliant communication;
characterised in that the receiving (212) comprises receiving the data packets in resource elements selected by a transmitter out of the resource elements reserved for non-standard compliant communication.

18. Computer program for performing, when running on a computer or microprocessor, a method according to claim 16.

19. Computer program for performing, when running on a computer or microprocessor, a method according to claim 17.

Patentansprüche

1. Sender (100), der dazu ausgebildet ist, gemäß einem Mobilkommunikationsstandard in einem Mobilkommunikationssystem (126) zu arbeiten, wobei Ressourcen des Kommunikationssystems (126) in Ressourcenelemente (104) geteilt sind;
wobei der Sender (100) dazu ausgebildet ist, zusätzlich zu einem standardgemäßen Telegramm ein zusätzliches Telegramm (106) zu senden, durch Trennen des Telegramms (106) in eine Mehrzahl von Datenpaketen (108), wobei jedes der Datenpakete (108) kürzer ist als das Telegramm (106), und durch Senden jedes der Datenpakete (108) jeweils in einem der Ressourcenelemente (104);
wobei der Sender (100) dazu ausgebildet ist, die Mehrzahl von Datenpaketen (108) des zusätzlichen Telegramms in Ressourcenelementen (104') zu senden, die einer nicht standardgemäßen Kommunikation vorbehalten sind;
dadurch gekennzeichnet, dass
der Sender dazu ausgebildet ist, die Ressourcenelemente (104) zum Senden der Datenpakete (108) aus den Ressourcenelementen (104'), die einer nicht standardgemäßen Kommunikation vorbehalten sind, auszuwählen und eine Übertragung der Datenpakete (108) in den ausgewählten Ressourcenelementen (104) zu beginnen, ohne zuvor zu hören, ob diese Ressourcenelemente (104) frei sind.

2. Sender (100) gemäß Anspruch 1, wobei der Sender (100) dazu ausgebildet ist, eine standardgemäße Kommunikation unter Verwendung von Ressourcenelementen, die einer standardgemäßen Kommunikation vorbehalten sind, durchzuführen.

3. Sender (100) gemäß einem der Ansprüche 1 bis 2, wobei der Sender (100) dazu ausgebildet ist, sich selbst auf ein Synchronisationssignal des Mobilkommunikationssystems (126) oder eines anderen Kommunikationssystems zu synchronisieren.

4. Sender (100) gemäß einem der Ansprüche 1 bis 3, wobei die Ressourcenelemente (104'), die einer nicht standardgemäßen Kommunikation vorbehalten sind, eine echte Teilmenge von Aufwärtsverbindungsressourcenelementen sind, die für eine Kommunikation von Mobilstationen (128) zu Basisstationen (130) des Mobilkommunikationssystems (126) verwendet werden.

5. Sender (100) gemäß einem der Ansprüche 1 bis 4, wobei die Ressourcenelemente (104) zumindest einem von spezifischen Zeitschlitzen und spezifischen Frequenzen zugeordnet sind.

6. Sender (100) gemäß einem der Ansprüche 1 bis 5, wobei die Ressourcenelemente (104'), die einer nicht standardgemäßen Kommunikation vorbehalten sind, von einer Verwaltungseinheit (130) des Mobilkommunikationssystems (126) zugewiesen werden.

7. Sender (100) gemäß einem der Ansprüche 1 bis 6, wobei die Ressourcenelemente (104'), die einer nicht standardgemäßen Kommunikation vorbehalten sind, von der Verwaltungseinheit (130) des Mobilkommunikationssystems in Abhängigkeit von Leistungskriterien dynamisch zugewiesen werden.

8. Sender (100) gemäß einem der Ansprüche 1 und 2 bis 7, wobei einige der Ressourcenelemente (104) sowohl für eine nicht standardgemäße Kommunikation als auch eine standardgemäße Kommunikation zugewiesen sind.

9. Sender (100) gemäß einem der Ansprüche 1 bis 8, wobei der Sender (100) dazu ausgebildet ist, zumindest eines der Mehrzahl von Datenpaketen (108) in einem Schutzressourcenelement zu senden.

10. Sender (100) gemäß einem der Ansprüche 1 bis 9, wobei der Sender (100) dazu ausgebildet ist, die Mehrzahl von Datenpaketen (108) derart kanalzucodieren, dass nur ein Teil der Mehrzahl von Datenpaketen (108) zum Decodieren des zusätzlichen Telegramms (106) erforderlich ist.

11. Sender (100) gemäß Anspruch 10, wobei der Sender (100) dazu ausgebildet ist, später eines der Mehrzahl von Datenpaketen (108) nicht zu senden oder zu senden, falls eine Übertragung des Datenpakets (108) zu einer Kollision mit einem anderen Datenpaket führt, das von einem anderen Sender des Mo-

bilkommunikationssystems (126) gesendet wird.

12. Sender (100) gemäß einem der Ansprüche 10 und 11, wobei der Sender (100) dazu ausgebildet ist, die Mehrzahl von Datenpaketen (108) in ausgewählten Ressourcenelementen (104') zu senden, die auf der Basis von Benutzersequenzen aus den Ressourcenelementen (104) ausgewählt werden, um Kollisionen zu reduzieren.

13. Empfänger (120), der dazu ausgebildet ist, gemäß einem Mobilkommunikationsstandard in einem Mobilkommunikationssystem (126) zu arbeiten, wobei Ressourcen des Kommunikationssystems (126) in Ressourcenelemente (104) geteilt sind;
wobei der Empfänger (120) dazu ausgebildet ist, zusätzlich zu einem standardgemäßen Telegramm ein zusätzliches Telegramm (106) zu empfangen, das in eine Mehrzahl von Datenpaketen (108) getrennt gesendet wird, wobei jedes der Datenpakete (108) kürzer ist als das Telegramm (106), durch Empfangen jedes der Datenpakete (108) jeweils in einem der Ressourcenelemente;
wobei der Empfänger (120) dazu ausgebildet ist, die Datenpakete (108) des zusätzlichen Telegramms in Ressourcenelementen (104') zu empfangen, die einer nicht standardgemäßen Kommunikation vorbehalten sind;
dadurch gekennzeichnet, dass
der Empfänger (120) dazu ausgebildet ist, die Datenpakete (108) in Ressourcenelementen zu empfangen, die von einem Sender aus den Ressourcenelementen (104') ausgewählt werden, die einer nicht standardgemäßen Kommunikation vorbehalten sind.

14. Empfänger (120) gemäß Anspruch 13, wobei die Mehrzahl von Datenpaketen (108) derart kanalcodiert ist, dass nur ein Teil der Mehrzahl von Datenpaketen (108) zum Decodieren des zusätzlichen Telegramms (106) erforderlich ist;
wobei der Empfänger (120) dann, wenn eines der kanalcodierten Datenpakete mit einem anderen Datenpaket in einem der Ressourcenelemente (104) kollidiert, dazu ausgebildet ist, eine ursprüngliche Version des kollidierten kanalcodierten Datenpakets auf der Basis des decodierten zusätzlichen Telegramms (106) wiederherzustellen und die ursprüngliche Version des kollidierten kanalcodierten Datenpakets von den in dem Ressourcenelement empfangenen Daten zu subtrahieren, um das andere Datenpaket zu erhalten.

15. System (126), das folgende Merkmale aufweist:

einen Sender (100) gemäß einem der Ansprüche 1 bis 12; und
einen Empfänger (120) gemäß einem der Ansprüche 13 bis 14.

16. Verfahren (200) zum Senden in einem Mobilkommunikationssystem gemäß einem Mobilkommunikationsstandard, wobei Ressourcen des Kommunikationssystems in Ressourcenelemente geteilt sind, wobei das Verfahren folgenden Schritt aufweist:

Senden (202) eines zusätzlichen Telegramms zusätzlich zu einem standardgemäßen Telegramm durch Teilen des zusätzlichen Telegramms in eine Mehrzahl von Datenpaketen, wobei jedes der Datenpakete kürzer ist als das Telegramm, und durch entsprechendes Senden jedes der Datenpakete in einem der Ressourcenelemente;
wobei das Senden (202) ein Senden der Mehrzahl von Datenpaketen (108) des zusätzlichen Telegramms in Ressourcenelementen (104') aufweist, die einer nicht standardgemäßen Kommunikation vorbehalten sind;
wobei das Senden (202) ein Auswählen der Ressourcenelemente (104) zum Senden der Datenpakete (108) aus den Ressourcenelementen (104') aufweist, die einer nicht standardgemäßen Kommunikation vorbehalten sind; und
dadurch gekennzeichnet, dass
das Senden (202) ein Starten einer Übertragung der Datenpakete (108) in den ausgewählten Ressourcenelementen (104) aufweist, ohne zuvor zu hören, ob diese Ressourcenelemente (104) frei sind.

17. Verfahren (210) zum Empfangen in einem Mobilkommunikationssystem gemäß einem Mobilkommunikationsstandard, wobei Ressourcen des Kommunikationssystems in Ressourcenelemente geteilt sind, wobei das Verfahren folgenden Schritt aufweist:

Empfangen (212) eines zusätzlichen Telegramms zusätzlich zu einem standardgemäßen Telegramm, wobei das zusätzliche Telegramm in eine Mehrzahl von Datenpakete getrennt gesendet wird, wobei jedes der Datenpakete kürzer ist als das Telegramm, durch Empfangen jedes der Datenpakete jeweils in einem der Ressourcenelemente;
wobei das Empfangen (212) ein Empfangen der Datenpakete des zusätzlichen Telegramms in Ressourcenelementen aufweist, die einer nicht standardgemäßen Kommunikation vorbehalten sind;
dadurch gekennzeichnet, dass
das Empfangen (212) ein Empfangen der Datenpakete in Ressourcenelementen aufweist, die von einem Sender aus den Ressourcenele-

menten ausgewählt werden, die einer nicht standardgemäßen Kommunikation vorbehalten sind.

18. Computerprogramm zum Ausführen, wenn dasselbe auf einem Computer oder Mikroprozessor abläuft, eines Verfahrens gemäß Anspruch 16.

19. Computerprogramm zum Ausführen, wenn dasselbe auf einem Computer oder Mikroprozessor abläuft, eines Verfahrens gemäß Anspruch 17,

Revendications

1. Emetteur (100) configuré pour fonctionner dans un système de communication mobile (126) selon une norme de communication mobile, dans lequel les ressources du système de communication (126) sont divisées en éléments de ressource (104);
dans lequel l'émetteur (100) est configuré pour transmettre un télégramme additionnel (106) en plus d'un télégramme conforme à la norme en séparant le télégramme (106) en une pluralité de paquets de données (108), chacun des paquets de données (108) étant plus court que le télégramme (106), et en transmettant chacun des paquets de données (108) respectivement dans l'un des éléments de ressource (104);
dans lequel l'émetteur (100) est configuré pour transmettre la pluralité de paquets de données (108) du télégramme additionnel dans les éléments de ressource (104') réservés pour une communication non conforme à la norme;
caractérisé par le fait que
l'émetteur est configuré pour sélectionner les éléments de ressource (104) pour transmettre les paquets de données (108) parmi les éléments de ressource (104') réservés pour une communication non conforme à la norme, et pour commencer la transmission des paquets de données (108) dans les éléments de ressource sélectionnés (104) sans écouter au préalable si ces éléments de ressource (104) sont libres.

2. Emetteur (100) selon la revendication 1, dans lequel l'émetteur (100) est configuré pour effectuer une communication conforme à la norme à l'aide des éléments de ressource réservés pour une communication conforme à la norme.

3. Emetteur (100) selon l'une des revendications 1 à 2, dans lequel l'émetteur (100) est configuré pour se synchroniser sur un signal de synchronisation du système de communication mobile (126) ou d'un autre système de communication.

4. Emetteur (100) selon l'une des revendications 1 à 3, dans lequel les éléments de ressource (104') réservés à une communication non conforme à la norme sont un sous-ensemble approprié d'éléments de ressource de liaison ascendante utilisés pour la communication de stations mobiles (128) à des stations de base (130) du système de communication mobile (126).

5. Emetteur (100) selon l'une des revendications 1 à 4, dans lequel les éléments de ressource (104) sont associés à au moins l'un parmi des intervalles de temps spécifiques et des fréquences spécifiques.

6. Emetteur (100) selon l'une des revendications 1 à 5, dans lequel les éléments de ressource (104') réservés à une communication non conforme à la norme sont attribués par une entité de gestion (130) du système de communication mobile (126).

7. Emetteur (100) selon l'une des revendications 1 à 6, dans lequel les éléments de ressource (104') réservés pour une communication non conforme à la norme sont attribués dynamiquement par l'entité de gestion (130) du système de communication mobile en fonction de critères de performance.

8. Emetteur (100) selon l'une des revendications 1 et 2 à 7, dans lequel certains des éléments de ressource (104) sont attribués tant pour une communication non conforme à la norme que pour une communication conforme à la norme.

9. Emetteur (100) selon l'une des revendications 1 à 8, dans lequel l'émetteur (100) est configuré pour transmettre au moins l'un de la pluralité de paquets de données (108) dans un élément de ressource de garde.

10. Emetteur (100) selon l'une des revendications 1 à 9, dans lequel l'émetteur (100) est configuré pour coder par canal la pluralité de paquets de données (108) de sorte que seule une partie de la pluralité de paquets de données (108) soit requise pour décoder le télégramme additionnel (106).

11. Emetteur (100) selon la revendication 10, dans lequel l'émetteur (100) est configuré pour ne pas transmettre ou pour transmettre ultérieurement l'un de la pluralité de paquets de données (108) si une transmission du paquet de données (108) conduit à un collision avec un autre paquet de données transmis par un autre émetteur du système de communication mobile (126).

12. Emetteur (100) selon l'une des revendications 10 et 11, dans lequel l'émetteur (100) est configuré pour transmettre la pluralité de paquets de données (108) dans des éléments de ressource (104') sélectionnés

parmi les éléments de ressource (104) sur base de séquences d'utilisateurs pour réduire les collisions.

13. Récepteur (120) configuré pour fonctionner dans un système de communication mobile (126) selon une norme de communication mobile, dans lequel les ressources du système de communication (126) sont divisées en éléments de ressource (104);
dans lequel le récepteur (120) est configuré pour recevoir un télégramme additionnel (106) en plus d'un télégramme conforme à la norme qui est transmis séparé en une pluralité de paquets de données (108), chacun des paquets de données (108) étant plus court que le télégramme (106), en recevant chacun des paquets de données (108) respectivement dans l'un des éléments de ressource;
dans lequel le récepteur (120) est configuré pour recevoir les paquets de données (108) du télégramme additionnel dans des éléments de ressource (104') réservés pour une communication non conforme à la norme;
caractérisé par le fait que
le récepteur (120) est configuré pour recevoir les paquets de données (108) dans des éléments de ressource sélectionnés par un émetteur parmi les éléments de ressource (104') réservés pour une communication non conforme à la norme.

14. Récepteur (120) selon la revendication 13, dans lequel la pluralité de paquets de données (108) est codée par canal de sorte que seule une partie de la pluralité de paquets de données (108) soit requise pour décoder le télégramme additionnel (106);
dans lequel, lorsque l'un des paquets de données codés par canal entre en collision avec un autre paquet de données dans l'un des éléments de ressource (104), le récepteur (120) est configuré pour reconstruire une version originale du paquet de données codé par canal entré en collision sur base du télégramme additionnel décodé (106) et pour soustraire la version originale du paquet de données codé par canal entré en collision des données reçues dans l'élément de ressource pour obtenir l'autre paquet de données.

15. Système (126), comprenant:

un émetteur (100) selon l'une des revendications 1 à 12; et
un récepteur (120) selon l'une des revendications 13 à 14.

16. Procédé (200) de transmission dans un système de communication mobile selon une norme de communication mobile, dans lequel les ressources du système de communication sont divisées en éléments de ressource, dans lequel le procédé comprend le fait de:

transmettre (202) un télégramme additionnel en plus d'un télégramme conforme à la norme en séparant le télégramme additionnel en une pluralité de paquets de données, chacun des paquets de données étant plus court que le télégramme, et en transmettant chacun des paquets de données respectivement dans l'un des éléments de ressource;
dans lequel la transmission (202) comprend le fait de transmettre la pluralité de paquets de données (108) du télégramme additionnel dans des éléments de ressource (104') réservés pour une communication non conforme à la norme;
dans lequel la transmission (202) comprend le fait de sélectionner les éléments de ressource (104) pour transmettre les paquets de données (108) parmi les éléments de ressource (104') réservés pour une communication non conforme à la norme; et
caractérisé par le fait que
la transmission (202) comprend le fait de commencer la transmission des paquets de données (108) dans les éléments de ressource sélectionnés (104) sans écouter au préalable si ces éléments de ressource (104) sont libres.

17. Procédé (210) de réception dans un système de communication mobile selon une norme de communication mobile, dans lequel les ressources du système de communication sont divisées en éléments de ressource, dans lequel le procédé comprend le fait de:

recevoir (212) un télégramme additionnel en plus d'un télégramme conforme à la norme, dans lequel le télégramme additionnel est transmis séparé en une pluralité de paquets de données, chacun des paquets de données étant plus court que le télégramme, en recevant chacun des paquets de données respectivement dans l'un des éléments de ressource;
dans lequel la réception (212) comprend le fait de recevoir les paquets de données du télégramme additionnel dans des éléments de ressource réservés pour une communication non conforme à la norme;
caractérisé par le fait que
la réception (212) comprend le fait de recevoir les paquets de données dans des éléments de ressource sélectionnés par un émetteur parmi les éléments de ressource réservés pour une communication non conforme à la norme.

18. Programme d'ordinateur pour réaliser, lorsqu'il est exécuté sur un ordinateur ou un microprocesseur, un procédé selon la revendication 16.

19. Programme d'ordinateur pour réaliser, lorsqu'il est

exécuté sur un ordinateur ou un microprocesseur,
un procédé selon la revendication 17.

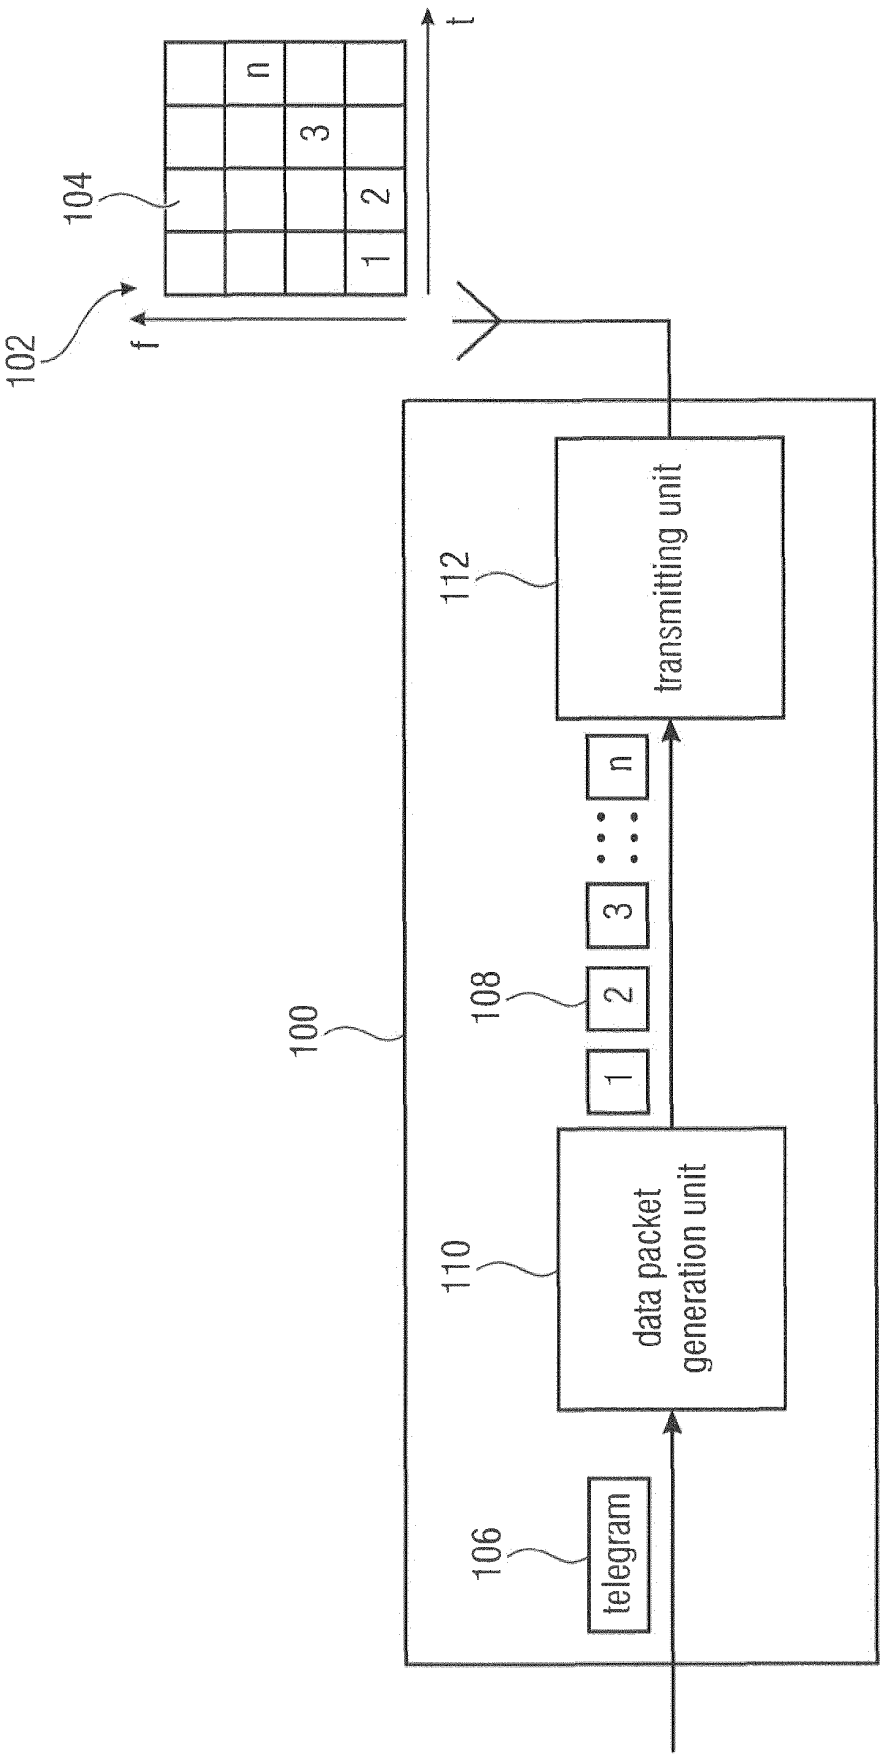

102
104
f
t
1
2
3
n
100
106
telegram
110
data packet generation unit
108
1
2
3
n
112
transmitting unit

Fig. 1

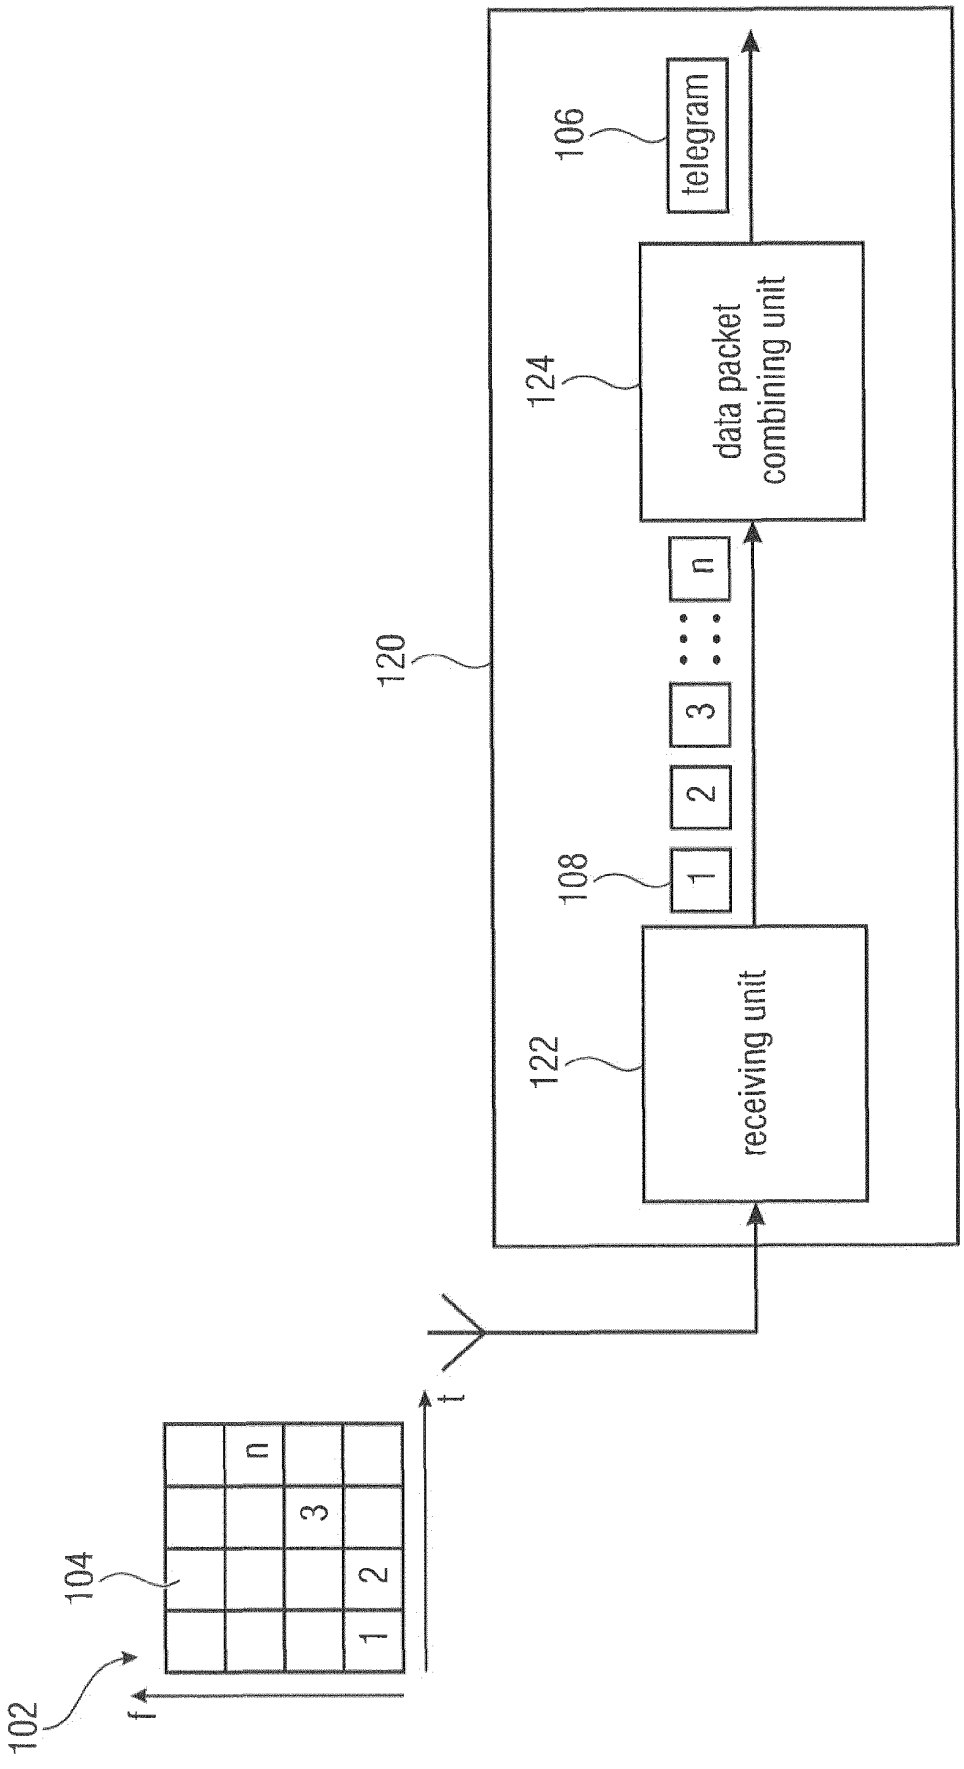

102
f
104
1
2
3
n
t
120
122
receiving unit
108
1
2
3
n
124
data packet combining unit
106
telegram

Fig. 2

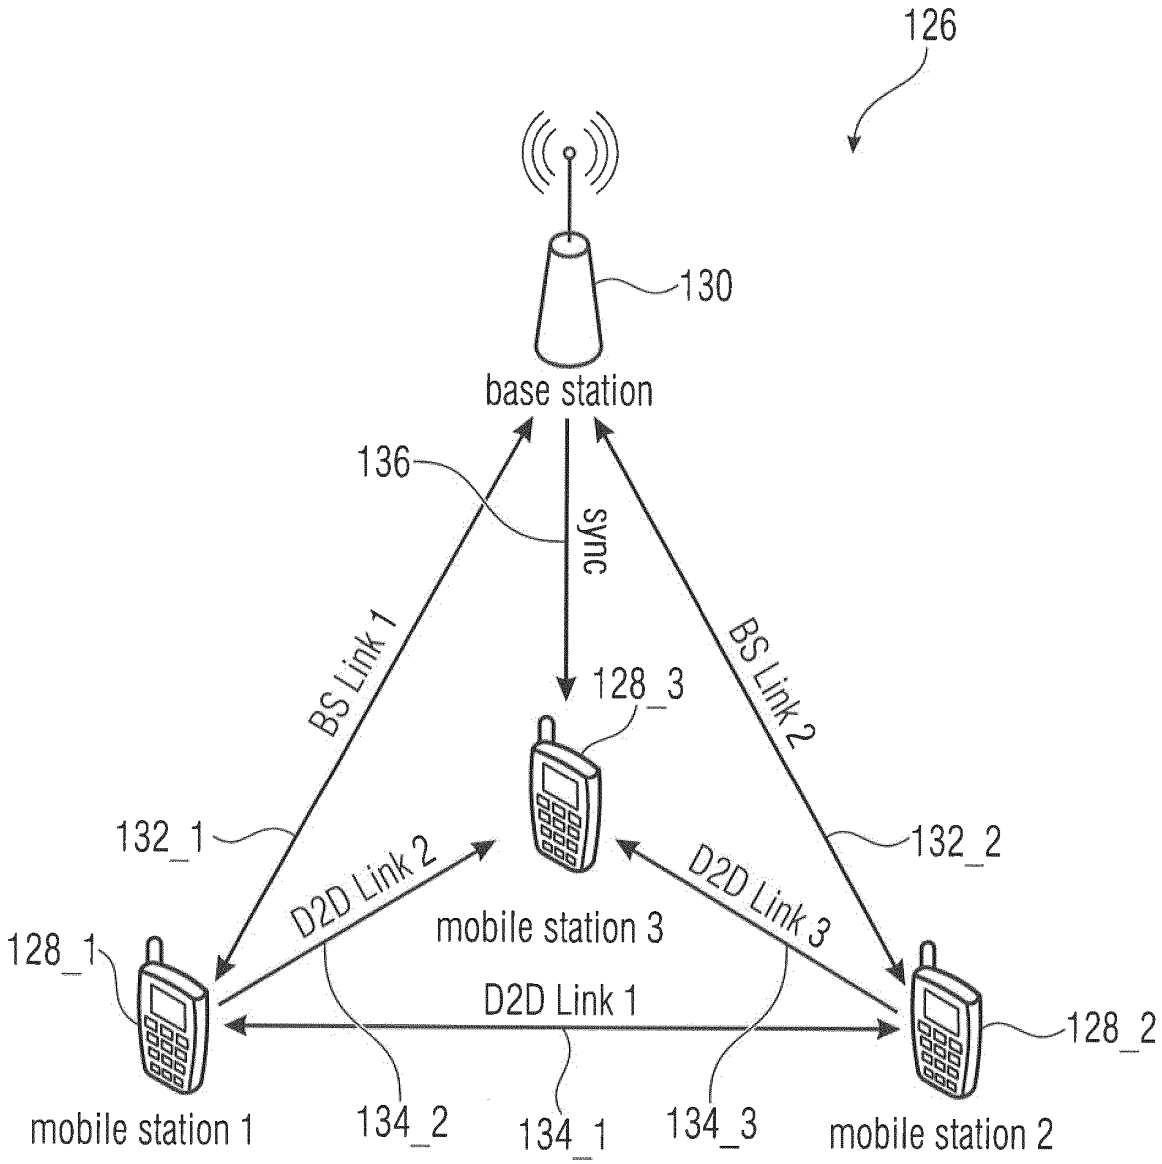

126
130
base station
136
sync
BS Link 1
BS Link 2
128_3
132_1
132_2
D2D Link 2
D2D Link 3
mobile station 3
128_1
D2D Link 1
128_2
mobile station 1
134_2
134_1
134_3
mobile station 2

Fig. 3

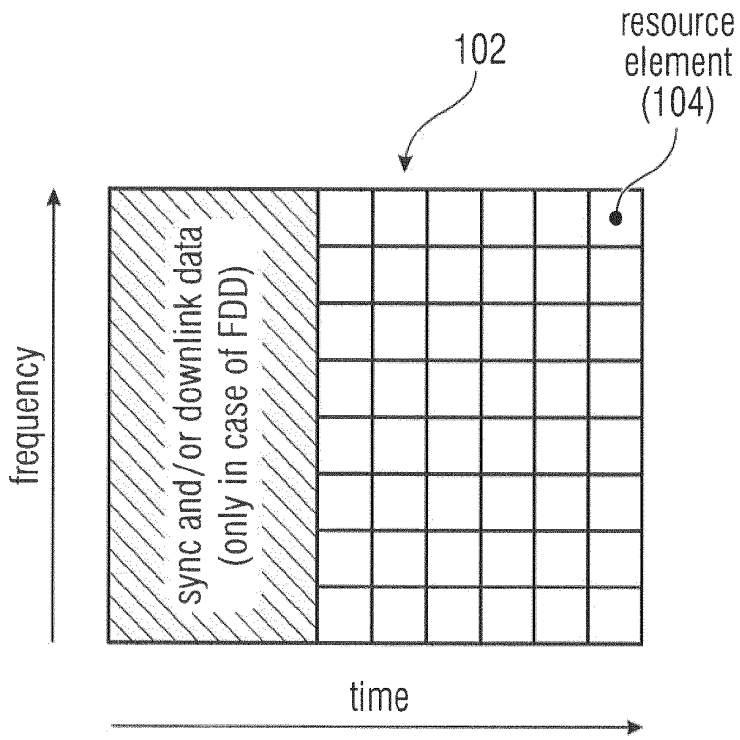

102
resource element (104)
frequency
sync and/or downlink data (only in case of FDD)
time

Fig. 4

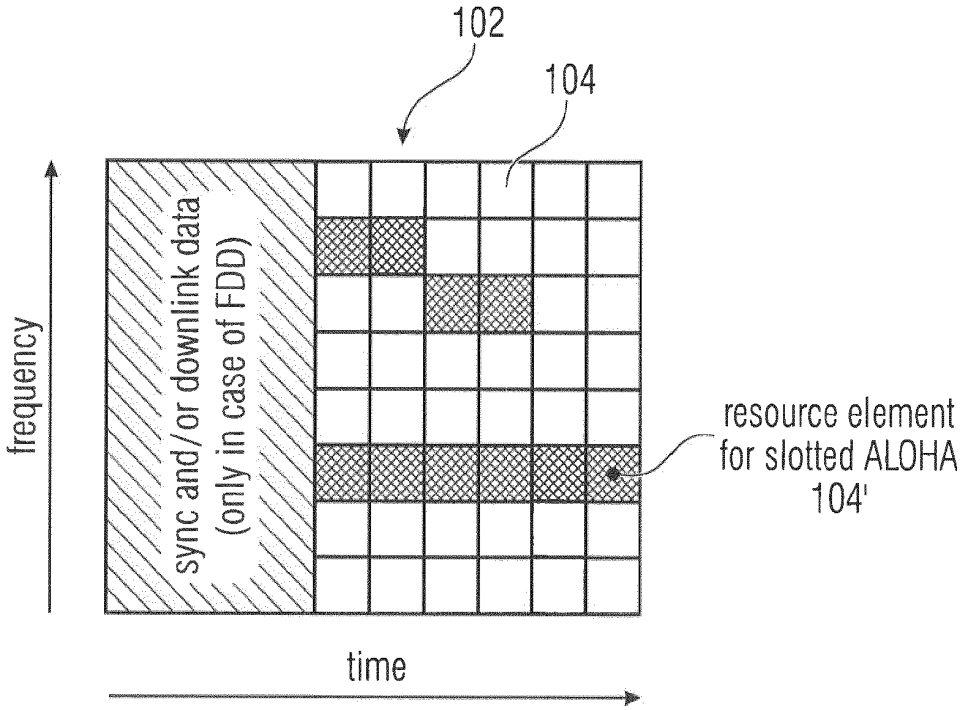

102
104
frequency
sync and/or downlink data (only in case of FDD)
resource element for slotted ALOHA 104'
time

Fig. 5

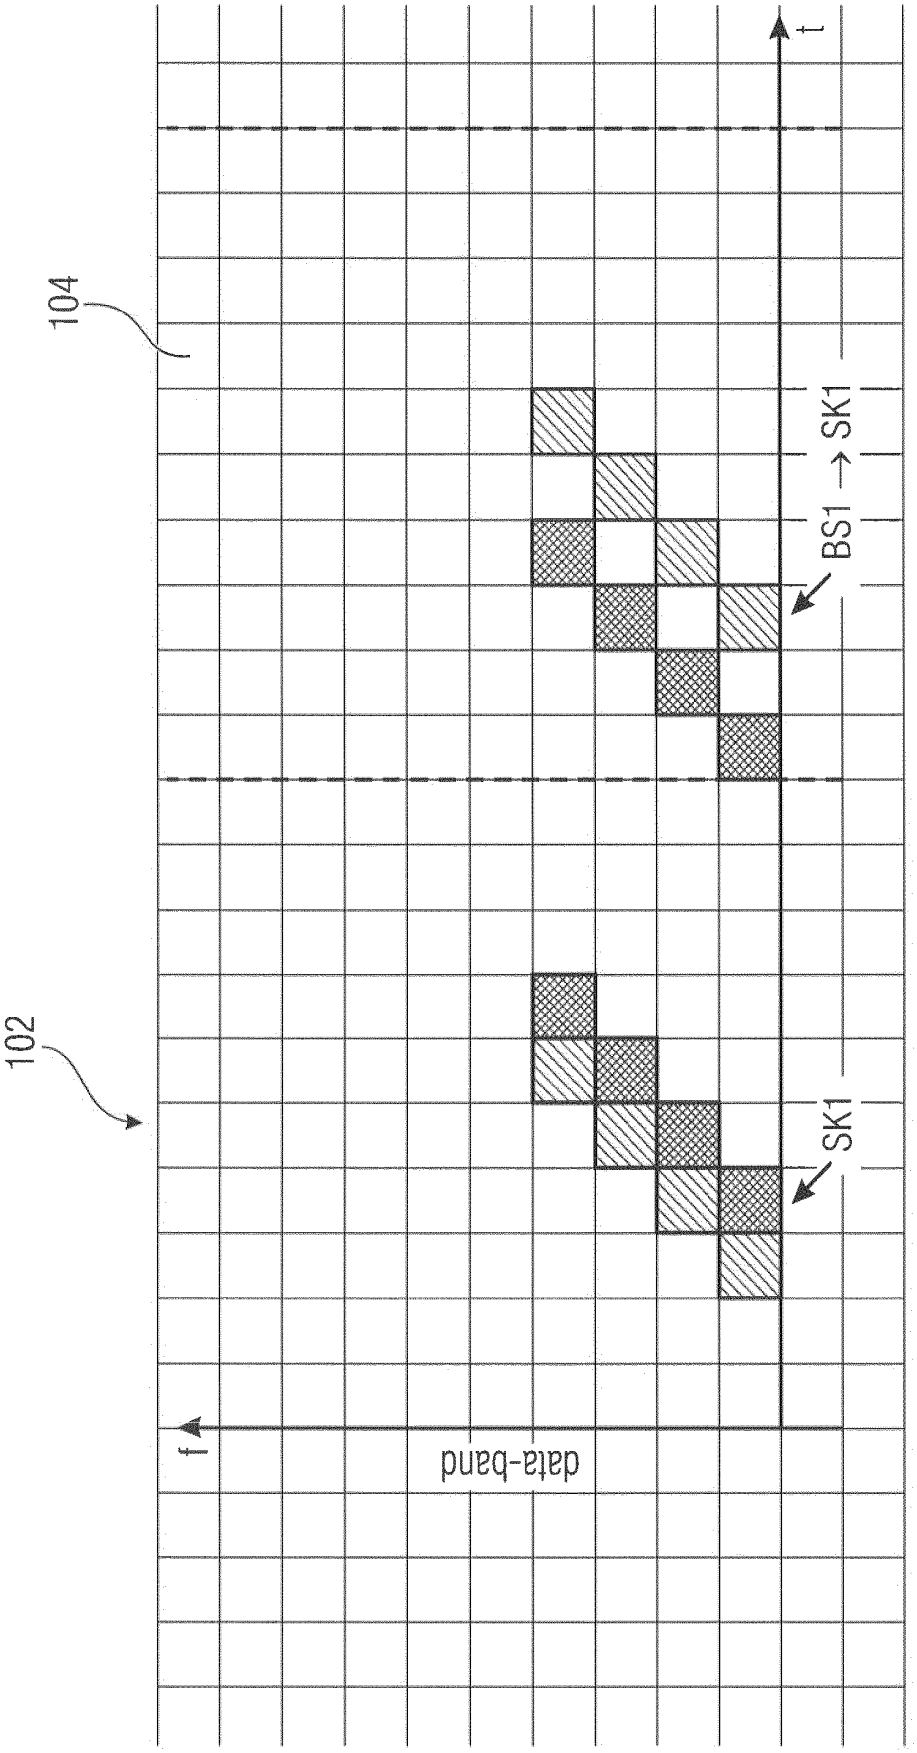


Fig. 6

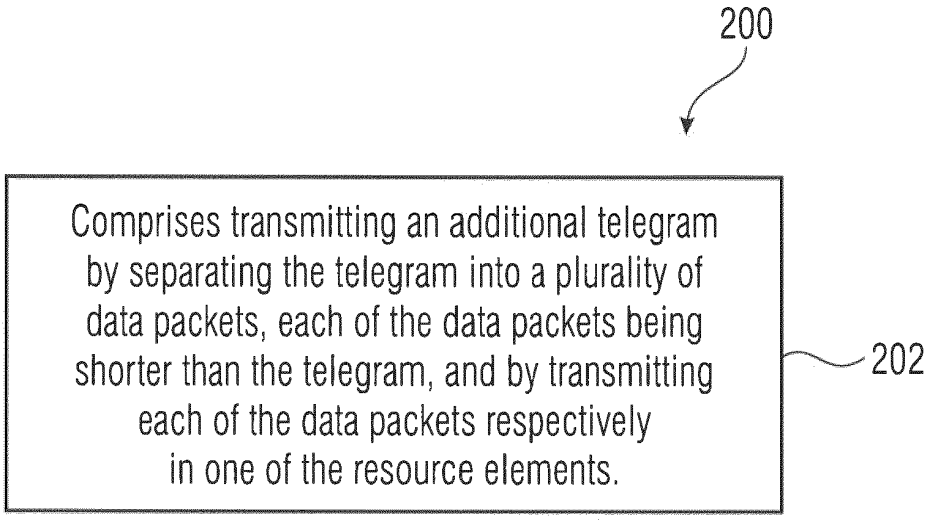

200
Comprises transmitting an additional telegram by separating the telegram into a plurality of data packets, each of the data packets being shorter than the telegram, and by transmitting each of the data packets respectively in one of the resource elements.
202

Fig. 7

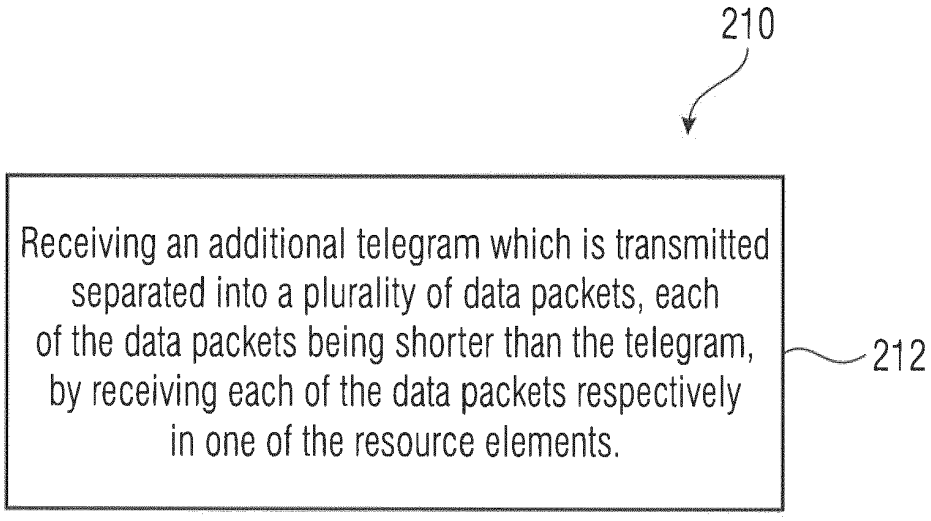

210
Receiving an additional telegram which is transmitted separated into a plurality of data packets, each of the data packets being shorter than the telegram, by receiving each of the data packets respectively in one of the resource elements.
212

Fig. 8

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 102011082098 A1 **[0003]**
- US 20150289292 A1 **[0004]**

Non-patent literature cited in the description

- **KILIAN, G. et al.** Improved coverage for low-power telemetry systems using telegram splitting. *Proceedings of 2013 European Conference on Smart Objects, Systems and Technologies (SmartSysTech),* 2013 **[0044] [0072]**
- **MASSEY, J. ; MATHYS, P.** The collision channel without feedback Information Theory. *IEEE Transactions on,* 1985, vol. 31, 192-204 **[0045] [0076]**