


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : A62C 5/00, C06D 3/00		A1	(11) International Publication Number: WO 94/19060
			(43) International Publication Date: 1 September 1994 (01.09.94)
(21) International Application Number: PCT/US94/00993		(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 27 January 1994 (27.01.94)			
(30) Priority Data:			
104758	16 February 1993 (16.02.93)	IL	
106382	18 July 1993 (18.07.93)	IL	
08/120,497	14 September 1993 (14.09.93)	US	
(71) Applicants: SPECTRONIX LTD. [IL/IL]; P.O. Box 29, New Industry Zone, Sderot (IL). SPECTREX INC. [US/US]; Beckman Industrial Park, 220 Little Falls Road, Cedar Grove, NJ 07009 (US).		Published <i>With international search report.</i>	
(72) Inventors: SPECTOR, Yechiel; 5 Avner, Tel Aviv (IL). JACOBSON, Ester; 16 Shmariau Levin, Tel Aviv (IL). NAISHTUT, Vida; 7/17 Iftah Hagiladi, Kiriat Gat (IL). VITTENBERG, Michael; 10 Yochanan H'Aroni, Beer Sheva (IL). BEINERT, Zohar; 6/31 Rahavat Hashila, Beer Sheva (IL).			
(74) Agent: FRIEDMAN, Mark, M.; c/o Sheinbein, Robert, 2940 Birchtree Lane, Silver Spring, MD 20906 (US).			

(54) Title: FIRE EXTINGUISHING METHODS AND SYSTEMS

(57) Abstract

A method of extinguishing a fire includes pre-positioning a fire extinguishing device (12) which includes at least two reactants, and activating them to react together to create solid particulate products, each having a diameter of about one micron or less, to chemically inhibit the chain reactions of the fire flame and to extinguish the fire when the products come into contact therewith. The first reactant is potassium chlorate, potassium perchlorate, potassium dichromate, cesium nitrate, or potassium nitrate. The second reactant serves as a reduction agent. In one embodiment, a modified device (40) is submerged in a liquid coolant and includes structure (90) for preventing entry of coolant into the device (40) while allowing the escape of the products into the coolant when activated. Alternatively, another modified device (400) using the reactants generates a non-toxic smoke created from the solid particulate products.

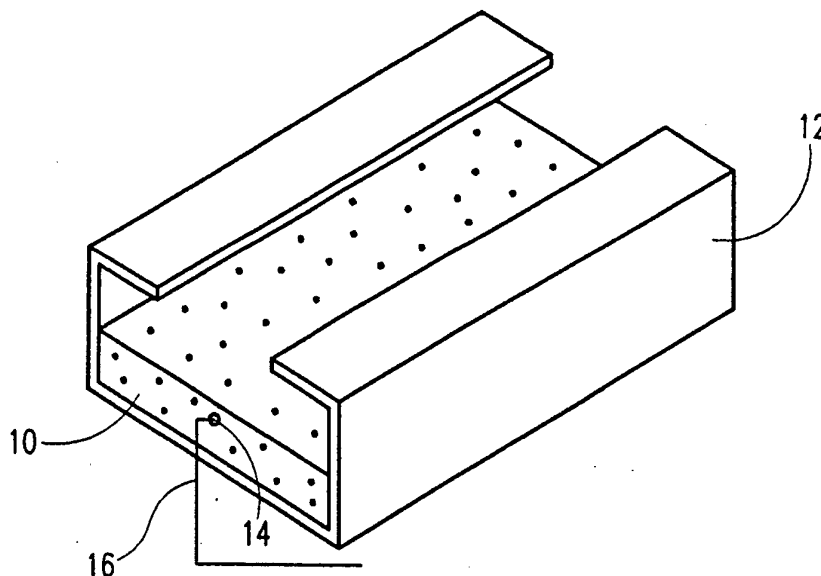

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

FIRE EXTINGUISHING METHODS AND SYSTEMS

FIELD AND BACKGROUND OF THE INVENTION

The present invention relates to fire extinguishing and smoke producing methods and associated systems and, more particularly, to
5 methods and related systems which do not involve halocarbons and which are highly effective in extinguishing fires and/or in setting up smoke screens, even when relatively small quantities of chemicals are used yet are non-toxic.

The present invention relates, in particular, to methods and systems
10 for volume fire extinguishing, some of which methods can also be used to create an effective and non-toxic smoke screen. Throughout most of the subsequent discussion, reference will be made largely to fire extinguishing applications of methods and systems according to the present invention, with only brief mention of use of such methods and systems in the creation
15 of smoke. It is intended that both applications, as well as others, fall within the scope of the present invention.

Volume fire extinguishing involves the temporary creation of an atmosphere which is incapable of sustaining combustion within the volume to be protected, typically a relatively confined volume, or by applying a
20 stream of extinguishing agent to the base of the flame which is known as local application and is commonly practiced using portable fire extinguishers.

One of the volume fire extinguishing methods in most widespread use at present includes the introduction of volatile halocarbons, such as
25 Halon 1301, for example, into the volume to be protected. One of the extinguishing agents which are presently commonly used for location applications is Halon 1211. Halocarbons have excellent fire extinguishing capacity which is attributable to their being inhibitors of combustion. Halocarbons actively interfere with the chemical reactions taking place in
30 the flame and effectively inhibit them.

Furthermore, halocarbons have a number of desirable properties such as low toxicity. In addition, halocarbons gases can be rather easily liquefied under pressure, making them easily storable in the liquefied state. Halocarbons do not adversely affect equipment and other materials with
5 which they come in contact.

Nevertheless, halocarbons suffer from a fundamental disadvantage, namely, they are known to interact with ozone, which leads to the destruction of the earth's ozone layer. According to the 1987 Montreal Protocol, which prescribed a number of international measures for the
10 protection of the earth's ozone layer, the use of halocarbons is to be completely banned by the year 2000.

Another commonly used total flooding and local application extinguishing agent is CO₂. Because of its high weight to extinguishing power ratio and other health considerations, the use of carbon dioxide has
15 been drastically reduced as halons gained wider acceptance

It is thus quite urgent to find alternative volume fire extinguishing means which could successfully act as a replacement for halocarbons or to enhance the performance of other commonly used extinguishing agents, such as CO₂, and the like. A successful replacement for halocarbons would
20 possess a volume and local fire extinguishing effectiveness at least equal to that of halocarbons, yet would be ecologically safe and not-toxic.

Two basic types of such ecologically benign fire extinguishing materials are presently known. The first includes inert gaseous diluents, such as carbon dioxide, nitrogen water vapor, and the like. The second
25 type includes fire extinguishing powders based on mineral salts, such as carbonates, bicarbonates, alkali metal chlorides, ammonium phosphates, and the like.

As presently implemented, both types of materials suffer from serious disadvantages. Inert gaseous diluents are largely ineffective in
30 disrupting the reactions taking place in the flame. Rather, inert diluents act

by diluting the air in the volume being protected, thereby lowering the oxygen concentration below that required to sustain the combustion. An example of the use of inert diluents is disclosed in U.S. Pat. No. 4,601,344 to Reed which relates to a gas generating composition containing glycidyl
5 azide polymer and a high nitrogen content additive generates large quantities of nitrogen gas upon burning and can be used to extinguish fires.

For relatively airtight volumes, the amount of diluent required roughly equals the amount of air already in the volume prior to combustion. If the volume to be protected is not airtight, the required
10 volume of the inert diluent must be several times that of the protected volume.

Fire extinguishing methods based on inert dilution require relatively large amounts of diluent and are appreciably less effective and reliable than extinguishing with halocarbons.

15 Volume fire extinguishing with the help of powders is carried out by dispensing a powder aerosol in the volume to be protected. The aerosol envelops the flame thereby suppressing it. It is believed that powders chemically interrupt combustion by forcing the recombination and deactivation of chain propagators responsible for sustaining the combustion
20 process in the focus of fire.

Such recombination is believed to occur both at the surface of the solid particles of the aerosol and, to some extent, also in reactions of the chain propagators with gaseous products of the evaporation and decomposition of powders in the flame. Chain propagators are gaseous
25 atomic particles or radicals having a free valence, which serve to initiate and sustain the branched chain reactions characteristic of combustion processes in combustible substances containing carbon.

However, the efficiency of presently implemented volume fire extinguishing with the help of powders is also of limited efficacy because
30 of the comparatively low dispersity of the fire-extinguishing powders. The

particle size of presently used powders ranges from about 20 to about 60 microns. Such large particles have a relatively low surface to volume ratio. Since the desired reactions take place largely on the surface of the particles, a given amount of such powders has a limited capacity for
5 interrupting the chain reactions and putting out the fire.

Further, it is difficult to prepare an aerosol of such powders which will distribute uniformly throughout the volume to be protected. It is, in addition, difficult to ensure that the powder particles, once formed, will stay in their original suspended state while stored for a sufficiently long
10 period prior to use so as to maintain the viability of the product as a fire extinguishing composition. Finely-dispersed powders have a strong tendency to agglomerate, or cake, during storage. Such agglomeration greatly hinders the dispensing of the material from its storage container during use. Furthermore, whatever particles are able to leave the storage
15 container and come in contact with the fire, are relatively coarse-grained powder particles, having a relatively low surface area to volume ratio and thus possessing reduced fire extinguishing capacity per unit weight.

Attempts have been made to solve the problems associated with the long-term storage of finely divided powders. Exemplary of such attempts
20 is U.S. Pat. No. 4,234,432 to Tarpley, which discloses a powder dissemination composition in which the powder is contained in a thixotropic gel which prevents the agglomeration, sintering and packing of the powder material. The finely divided powder has at least a bimodal particle distribution size distribution encapsulated in a gelled liquid. The
25 method appears to be complex, requiring the fabrication of a powder of well-defined particle size distribution.

In at least one case, attempts have been made to get around the storage problems by creating storing reaction precursors rather than the actual powders. U.S. Statutory Invention No. H349 to Krevitz et al.
30 discloses reagent compositions which are chemically inert when solid and

are chemically active when molten. The reagent compositions may comprise a first substance such as a high molecular weight wax or polymer and a second substance which is dissolved, dispersed, or encapsulated in a solid matrix of the first substance. The second substance is a highly
5 chemically reactive compound such as a strong base or a strong acid. As solids, the reagent compositions are inert. When molten, the second substance is exposed and the resultant liquid solutions are highly reactive.

There is thus a widely recognized need for fire extinguishing methods and systems which are at least as effective as those involving the
10 use of halocarbons but which are ecologically safe.

Specifically, there is a clear need for, and it would be highly advantageous and desirable to have, fire extinguishing methods and systems which use chemicals which do not adversely affect the earth's ozone layer and which are capable of putting out fires quickly and efficiently.

15 In addition, there is a widely recognized need for smoke creating methods and systems which are highly effective yet are not toxic.

SUMMARY OF THE INVENTION

According to the present invention there is provided a method of generating non-toxic smoke, comprising: pre-positioning a smoke creating
20 device, the device including a composition which includes: (1) a first reactant selected from the group consisting of potassium chlorate, potassium perchlorate, potassium dichromate, cesium nitrate and potassium nitrate; and (2) a second reactant serving as a reduction agent; wherein the medium is activated so as to cause the first reactant and the second reactant
25 to react with each other to create products such that the products create the smoke.

Also according to the present invention there is provided a system for generating non-toxic smoke, comprising: a smoke creating device, the device including a composition which includes: (1) a first reactant selected

from the group consisting of potassium chlorate, potassium perchlorate, potassium dichromate, cesium nitrate and potassium nitrate; and (2) a second reactant serving as a reduction agent; wherein the medium is activated so as to cause the first reactant and the second reactant to react with each other to create products such that the products create the smoke.

Also according to the present invention there is provided a system for extinguishing a fire or generating non-toxic smoke, comprising: a device including a composition which includes: (1) a first reactant selected from the group consisting of potassium chlorate, potassium perchlorate, potassium dichromate, cesium nitrate and potassium nitrate; and (2) a second reactant serving as a reduction agent; wherein the medium is activated so as to cause the first reactant and the second reactant to react with each other to create products effective in extinguishing fire or generating smoke and wherein the system is designed to be placed at a remote location following activation.

Further according to the present invention there is provided a system for extinguishing a fire, comprising: (a) a conventional fire extinguishing cylinder for releasing a pressurized fire extinguishing gas; and (b) a device including a composition which includes: (1) a first reactant selected from the group consisting of potassium chlorate, potassium perchlorate, potassium dichromate, cesium nitrate and potassium nitrate; and (2) a second reactant serving as a reduction agent; wherein the medium is activated so as to cause the first reactant and the second reactant to react with each other to create products effective in extinguishing fire, the device being located so that the fire extinguishing gas and the products intermix.

Yet further according to the present invention there is provided a fire extinguishing apparatus, comprising: (a) an inert gas fire extinguishing apparatus for releasing a pressurized fire extinguishing gas, the apparatus including a discharge nozzle; and (b) a device including a composition which includes: (1) a first reactant selected from the group consisting of

potassium chlorate, potassium perchlorate, potassium dichromate, cesium nitrate and potassium nitrate; and (2) a second reactant serving as a reduction agent; wherein the medium is activated so as to cause the first reactant and the second reactant to react with each other to create products effective in extinguishing fire, the device being located so that the fire extinguishing gas and the products intermix, the device being located in or around the discharge nozzle, the inert gas fire extinguishing apparatus and the device being activated so as to allow the inert gas and the products to intermix.

10 According to further embodiments of systems according to the present invention the system is in the form of a hand grenade or a launchable grenade.

The present invention successfully addresses the shortcomings of the presently known configurations by providing ecologically benign methods and associated systems for putting out fires which is highly effective and which requires relatively small amounts of chemicals per unit volume protected.

The methods according to the present invention are advantageous in that they facilitate the rapid and reliable liquidation of the focus of fire anywhere in the protected volume. The methods can easily be automated, so as to be activated automatically upon the sensing, for example, of a certain preset elevated temperature in the volume, or other parameters which may indicate the presence of a fire, such as radiation, gaseous products, change in pressure, and the like. In addition, systems according to the present invention, for use in either fire extinguishing and smoke creating applications, may feature the ability of being projected onto a fire from a distance, as by throwing a device which resembles hand grenade or by shooting a device using a suitable launcher.

The compositions involved in methods according to the present invention act to extinguish the target in at least two basic ways. One way,

which is common to presently known powder fire extinguishes, involves the absorption of heat by, and consequent heating of, the solid particles, amplified by the evaporation of various chemical species. A second, and much more significant way of extinguishing the fire, is through the
5 chemical interaction of various species present during the activation of species present during the activation of a composition according to the present invention with the flame chain reactions, effecting the interruption of these chain reactions.

The present invention is suitable in the fire protection of various
10 volumes, including, but not limited to, various compartments, machine rooms, cable tunnels, cellars, chemical shops, painting chambers, reservoirs, storage vessels for oil products and liquefied gases, pump rooms handling combustible substances, and the like, as well as diverse means of transportation, such as motor vehicles, aircraft, ships, locomotives, armored
15 vehicles, naval vessels, and the like. The present invention is further useful in creating an effective yet non-toxic smoke screen.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is herein described, by way of example only, with reference to the accompanying drawings, wherein:

20 FIG. 1 is a configuration according to the present invention showing solid fuel composition ("SFC") material in solid or powder form placed in a profile;

FIG. 2 is another configuration according to the present invention showing SFC material in solid or powder form placed in a perforated tube;

25 FIG. 3 is a configuration as in Figure 1 but with a layer of cooling material placed over the SFC;

FIG. 4 is a configuration as in Figure 2 but with a layer of cooling material placed around the SFC;

FIG. 5 is another configuration according to the present invention showing an arrangement of SFC sandwiched between layers of hydrophilic material;

FIG. 6 is another configuration according to the present invention
5 showing a cooling system involving passage of the aerosol through a pipe surrounded by cooling liquid;

FIG. 7 is another configuration according to the present invention showing a cooling system involving the injection of coolant into the aerosol;

10 FIG. 8 is an exploded view of another configuration according to the present invention showing a compact unit including SFC and coolant injection;

FIG. 9 is an assembled view of the configuration of Figure 8;

FIG. 10 is a schematic depiction of a fire extinguishing system
15 featuring SFC material and a distribution manifold for conducting the aerosol to various location following injection of coolant;

FIG. 11 is another configuration according to the present invention featuring SFC material, cooling material and flame arresters;

FIG. 12 is another configuration according to the present invention
20 designed for use immersed in a liquid;

FIG. 13 shows the configuration of Figure 12 as it would appear when deployed in a liquid tank;

FIG. 14 is yet another configuration according to the present invention designed for use immersed in a liquid;

25 FIG. 15 shows the configuration of Figure 14 as it would appear when deployed in a liquid tank;

FIG. 16 is yet another configuration according to the present invention, related to that of Figure 3, designed for use immersed in a liquid;

FIG. 17 shows the configuration of Figure 16 as it would appear when deployed in a liquid tank;

FIG. 18 depicts a system wherein a fan is used to carry and to cool the SFC aerosol;

5 FIG. 19 depicts an embodiment as in Figure 18 further including a handle and trigger and wherein the device is in the form of a hand gun;

FIG. 20 shows a system as in Figures 18 and 19 featuring interchangeable SFC magazines;

FIG. 21 illustrates an embodiment featuring a conventional fire
10 extinguishing cylinder in combination with an SFC device;

FIG. 22 shows a fire extinguishing or smoke generating device in the form of a hand-grenade;

FIG. 23 shows a fire extinguishing or smoke generating device in the form of a mechanically launchable grenade;

15 FIG. 24 shows a fire extinguishing or smoke generating device in the form of a fire extinguishing pot or a smoke pot;

FIG. 25 shows another fire extinguishing or smoke generating device in the form of a hand-grenade;

FIG. 26 shows yet another fire extinguishing or smoke generating
20 device in the form of a hand-grenade;

FIG. 27 shows still another fire extinguishing or smoke generating device in the form of a hand-grenade;

FIG. 28 shows yet a further fire extinguishing or smoke generating device in the form of a hand-grenade.

25 DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is of methods and associated systems which can be used to effectively extinguish fires or create smoke screens and which are not harmful to the ozone layer.

Specifically, the present invention relates to various means of storing two or more reactants which can be activated, directly or indirectly, and made to react upon the incidence of fire, forming products which, with or without the benefit of pre-cooling, tend to interfere with the propagation of the fire thus serving to put out the fire or to create dense smoke which has a variety of civilian and military applications.

Novel configurations for effecting methods for volume fire extinguishing and smoke creating are disclosed herein. A key feature of each of configurations according to the present invention is the in-situ formation of a very finely dispersed aerosol. The aerosol is not prepared ahead of time and stored, as in presently known systems. Rather, the aerosol is created or produced in situ when needed, as, in the case of fire extinguishing, during the fire accident, by combusting a solid-fuel composition or medium (hereinafter referred to as "SFC"), which includes at least two reactants capable of reacting with one another.

Preferably, one of the reactants is an oxidant while the other is a reducing agent. More preferably, the SFC further includes a filler, such as potassium chloride or ammonium phosphate. Upon reaction, the SFC forms gaseous products and solid aerosol particles in the combustion products. The gaseous products, and especially the solid aerosol particles, exert a strong inhibiting effect on the flame of the fire which is to be extinguished by promoting the recombination of combustion propagation centers, thereby inhibiting the continuation of the fire and extinguishing it.

In contrast with currently known powder volume fire extinguishing technologies, the systems according to the present invention obviate the need for storing an aerosol, usually stored as a powder and a separate pressurized propellant, such as air. As was described above, such storage leads to the gradual agglomeration of the particles, leading to dispensing difficulties and to reduced effectiveness brought about by the reduction of the particle surface areas.

The fire extinguishing capacity of an aerosol created in systems according to the present invention is greatly increased in comparison with known technologies since an aerosol according to the present invention is made up of particles of a much smaller size, typically on the order of one 5 micron, and hence much larger surface to volume ratio, than has been heretofore known. The smaller particle size makes for a more highly dispersed and more highly effective aerosol.

As the particle size decreases, the extinguishing surface of the aerosol, on which heterogeneous recombination of the chain propagators 10 takes place, increases. All other things being equal, the number of the aerosol particles per unit volume increases in inverse proportion to the cube of the diameter of the particles, whereas the surface area of the particles is directly proportional to the square of the diameter. Consequently, the total surface of the particles increases in inverse proportion to the diameter of 15 the particles or in direct proportion to the dispersity of the aerosol.

Moreover, as the size of the particles diminishes, the rate of sublimation increases, and the extinguishing effect is augmented by homogeneous gas phase inhibition of the fire flame through the agency of gaseous products forming from the condensed part of the aerosol.

20 The ability of the aerosol to effect the recombination of the chain propagators depends to some extent on the chemical composition of the solid particles. It has been determined that the best fire propagation inhibiting properties are displayed by carbonates, bicarbonates, chlorides, sulfates, and oxides of metals such as, but not limited to, those belonging 25 to Group IA of the Periodic Table, with the exception of Li and Fr. This is discussed, for example, in A. N. Baratov and L. P. Vogman, "Fire Extinguishing Powder Compositions", Moscow, Strojizdat Publishers, 1962, which article is incorporated herein in its entirety by reference as if fully set forth herein.

It has been further determined that the strongest inhibitors are strontium sulfates and cesium sulfates, with potassium chlorides and sodium chlorides being not quite as effective, and with potassium bicarbonates and sodium bicarbonates being somewhat less effective.

- 5 Taking into account the availability and cost, as well as the performance characteristics of these various inhibitors, it would appear that alkali metal chlorides may be commercially most suitable for use in fire extinguishing powders and aerosols.

According to the present invention these powders are created in situ
10 in a finely dispersed form through the reactions of the SFC and are applied to the fire, or used to create a smoke screen immediately following their creation. The SFC is combusted to produce the desired aerosol containing the compounds described above. Prior to combustion, the SFC includes at least two reactants which are capable of reacting with each other to form
15 desired products.

Preferably, the SFC includes one reactant which is preferably an oxidant, such as potassium perchlorate, potassium dichromate, potassium nitrate, potassium chlorate, cesium nitrate or the like. The SFC further includes a second reactant preferably capable of acting as a reducing agent
20 which may be one or more of various organic materials, such as rubber, polymeric materials, epoxy resin, phenol formaldehyde resin, and the like, or which may be phosphorus, sulfur, and the like. The SFC may also include a filler such as, but not limited to, potassium chloride. The filler serves the function of regulating the temperature of the aerosol by
25 absorbing some of the heat of the oxidation-reduction reactions. Simultaneously, the filler serves as a source of potassium compounds which are used in extinguishing the fire.

It should be borne in mind that for extinguishing smoldering materials (fire accidents of Class A), it is necessary not only to liquidate
30 flame burning in the gaseous phase but also to isolate the surface of

burning material from air. This can be accomplished, for example, with the further inclusion in the SFC of ammonium phosphates, which are known fire extinguishing compounds.

The precise composition and concentration of the SFC used in systems according to the present invention is selected with an eye toward the type of fire likely to be encountered and the cost, availability and ease of use of the various suitable components. The possible combinations of components making up the SFC and their precise concentrations are virtually limitless. What is critical to methods and systems according to the present invention is not the precise composition but the in situ reaction, preferably an oxidation-reduction reaction, of two or more components of the SFC to form an aerosol having very fine solid particles.

As illustrations of typical SFC compositions, and without in any way limiting the scope of the present invention, twelve possible compositions are described below.

Composition 1:

	Potassium perchlorate	40-50 wt%
	Epoxy resin 7D-20 (with hardener)	9-12 wt%
	Potassium chloride	40-44 wt%
20	Magnesium powder	0-4 wt%

Composition 2:

	Potassium dichromate	20 wt%
	Gunpowder grade "H"	80 wt%

Composition 3:

25	Mg	25 wt%
	CsN03	75 wt%

Composition 4:

	Mg	25 wt%
	KN03	75 wt%

Composition 5:

30	Iditol (phenol-formaldehyde resin)	30 wt%
	KN03	70 wt%

	<u>Composition 6:</u>	
	Potassium chlorate	65-70 wt%
	Potassium chloride	16-20 wt%
	Epoxy resin	12-18 wt%
5	<u>Composition 7:</u>	
	Potassium chlorate	37-45 wt%
	Potassium nitrate	37-45 wt%
	Epoxy resin	16-19 wt%
	Mg (or Al)	1- 3 wt%
10	<u>Composition 8:</u>	
	Potassium perchlorate	37-45 wt%
	Potassium nitrate	37-45 wt%
	Epoxy resin	16-19 wt%
	Mg (or Al)	1- 3 wt%
15	<u>Composition 9:</u>	
	Potassium nitrate	70-80 wt%
	Epoxy resin	19-23 wt%
	Mg (or Al)	2- 4 wt%
20	<u>Composition 10:</u>	
	Cesium nitrate	80-90 wt%
	Epoxy resin	10-20 wt%
25	<u>Composition 11:</u>	
	KNO ₃	70-80 wt%
	Epoxy	20-25%
	Mg	0-2 wt%
30	<u>Composition 12:</u>	
	KNO ₃	40-45 wt%
	KClO ₄	20-25 wt%
	Epoxy	30-33 wt%
	Hardener	2-5 wt%

Composition 12 is particularly suited for extinguishing A-type fires of solids. Its products of incomplete combustion in combination with the by-products of the target fire interrupt the burning chain reaction and

effectively stop fires of solids. The composition can be used in combination with other compositions to also put out fires of other types.

When selecting solid-fuel composition components, one should also ensure that both the initial composition of the SFC and its combustion products are non-toxic and stable. The stable compositions listed above were tested and were found to be characterized in that their combustion, while rapid, is incapable of becoming so rapid as to become explosive. For illustrative purposes, it is believed that use of a combination of potassium perchlorate as the oxidant, epoxy EPON 828 as a reducing agent, magnesium for enhancing the temperature and the rate of burning, and potassium chloride as filler provides an SFC which, upon combustion, produces an aerosol having a high inhibiting effectiveness, is harmless, and is stable.

Without in any way limiting the scope of the present invention, it may be instructive to briefly discuss the mechanisms believed to be responsible for the efficacy of methods and systems according to the present invention. For illustrative purposes discussion is limited to a system including potassium chlorate, an epoxy resin and potassium chloride.

Upon combustion of an SFC made up of potassium chlorate (68 wt%), epoxy resin (16 wt%), and potassium chloride (16 wt%), without using magnesium, the following gaseous products, in the indicated mass fractions, were obtained:

	K	0.026
25	H ₂	0.017
	H ₂ O	0.100
	HCl	0.002
	N ₂	0.160
	CO	0.430

CO₂ 0.183

KCl 0.082

The condensed phase is made up of solid particles of K₂CO₃. The weight ratio of the gaseous phase to the condensed phase is 0.6 to 0.4.

5 During the cooling process of the aerosol in open air, KCl, KOH, KHCO₃, K₂CO₃ and perhaps oxides of potassium, such as KO and K₂O, pass from the gaseous phase to the condensed phase. The solid particles thus formed have a diameter on the order of approximately one micron.

When the aerosol interacts with the combustion zone of the fire
10 which is to be extinguished, such as a hydrocarbon fire, both homogenous and heterogeneous reactions take place. The heterogeneous inhibition processes, usually between solid and gaseous phases, take place at temperatures of up to about 1000°K. Above this temperature the predominant inhibition processes are homogeneous, typically between
15 gaseous reactants.



The heterogenous processes may be described with the aid of the following reactions:



20 where A· is a radical active species from the fire to be extinguished, S is the surface of a solid aerosol particle and A₂ is a molecular species.

From the above reactions it can be seen that the newly created AS can react with another active species to generate a stable molecular species while at the same time regenerating free aerosol particle surface which is
25 available for further interaction with active species.

The homogenous inhibition processes taking place in the gaseous phase may be described by the following reactions:



where $\cdot\text{H}$ and $\cdot\text{OH}$ are radical active species and M represents an energy input.

An SFC according to the present invention may be prepared in any convenient fashion. Three such methods will be described for illustrative purposes only without in any way limiting the scope of the present invention.

In one process, the various components are dry mixed together. The mixture is then mechanically pressed to form pellets or tablets of desirable size and shape.

10 In a second process, the various components are mixed together to form a paste. The paste is poured into an appropriately sized and shaped form or mold and is dried, for example by heating, to remove any solvent and harden the SFC.

15 In a third process the components are mixed together to form a paste. The paste is simultaneously dried and shaken on a screen to form a dry powder. The powder is placed into tubes or shells suitably shaped and sized to facilitate the functioning of the SFC.

Various improvements of the methods and systems according to the present invention are possible. Two such improvements involve the 20 confining of the flames of the SFC when undergoing combustion and the cooling of the combustion products prior to their release to the fire to be extinguished.

When the SFC is ignited an open flame of the burning charge is created. Also, the aerosol formed on combustion of the SFC is at elevated 25 temperatures. The presence of an open flame, may, in specific situations, have detrimental effects. This is the case, for instance, when the fire to be extinguished involves a hydrocarbon reservoir, or where individuals are found in the vicinity and may be forced inhale flames into their lungs. Similarly, the high temperature of the aerosol militates against its uniform 30 distribution in the volume being protected. The latter difficulty arises since

a hot aerosol tends to first rise by natural convection toward the ceiling of the premises, reaching the focus of the fire to be extinguished only after the aerosol has cooled down sufficiently to descend onto the fire. Such circuitous movement of the aerosol may further lead to the escape of a
5 portio of the aerosol from the space where it is intended to stay, with the attendant reduction in fire extinguishing efficiency and with possible adverse environmental effects on the surroundings, including personnel.

It is thus generally desirable to confine the flame produced in the combustion of the SFC while at the same time cooling the hot aerosol
10 formed during the combustion of the SFC.

The confinement and cooling may be effected by any number of suitable methods. The approaches can be broken into physical cooling and cooling involving chemical reactions. Examples of various such techniques are described below.

15 One such method is to allow the SFC to combust intensely with the subsequent combination, as by ejection, of the hot aerosol with a coolant. Another method involves the dispersal of the SFC through the intensive intermixing of the air medium with the aerosol formed in simultaneous combustion of the entire rated quantity of compounded mixture, the mass
20 of which is distributed in the volume being protected.

In the first method of cooling, it is possible to use as a coolant air, nitrogen, carbon dioxide, water, aqueous solutions of sodium salts and potassium salts, and the like. Experiments have demonstrated that the application of water or aqueous solutions of salts is preferable, since these
25 coolants have high heat capacities and heats of vaporization.

Two basic methods of carrying out the intermixing of gases and liquids are offered, by way of illustration. The first involves the displacement of the liquid into a mixing chamber with the gas flux. A second involves the ejection of the liquid by the gas flux into a mixing
30 chamber where the pressures and temperatures of the two fluxes become

uniform. The latter method offers a number of advantages over the first. Primarily, the method does not require a reservoir operating under pressure, and is of simpler design.

Procedures for designing gas-liquid ejectors are set forth in the 5 monograph of E. Ya. Sokolov and N. M. Zinger "Fluidic Apparatus", Moscow, Gosenergoizdat Publishers, 1984 (in Russian), which is incorporated in its entirety by reference as if fully set forth herein. The gas-liquid ejector designs disclosed in the above-referenced monograph are largely inapplicable to the cooling of an SFC aerosol. This is because the 10 flame or high-temperature aerosol is likely to break through into the mixing chamber and even into the volume being protected immediately after the ignition of the SFC cartridge due to a delay in the supply of the coolant flux.

The underlying principles of systems according to the present 15 invention were disclosed and illustrated in Israeli patent applications Nos. 101298 and 101802, which are incorporated by reference as if fully set forth herein.

The present invention is of a series of novel and unique configurations which can be used to practically implement the underlying 20 principles. Specifically, the configurations disclosed and claimed herein are intended to implement fire extinguishing or smoke creating techniques which overcome the difficulties which are encountered when a basic SFC-based system is implemented. In particular, some of the embodiments which are described below incorporate various means of cooling the 25 aerosol so as to reduce its temperature and increase its density in order to decrease or eliminate adverse effects to surrounding personnel and property and in order to direct the aerosol to the base of the fire without waste of material or delay. The configurations further deal with ways of increasing the rate of aerosol formation so that the aerosol is made available to 30 extinguish the fire earlier than would otherwise be possible.

The principles and operations of the various configurations according to the present invention can best be understood with reference to the drawings and accompanying discussion.

Referring now to the drawings, Figure 1 illustrates a basic
5 embodiment of a fire extinguishing or smoke creating system according to the present invention. Here the solid, granulated, powdered or gelled SFC 10 is packed or molded into a profile 12 of suitable size and shape and of any desired length, typically made of metal. An igniter 14 is used to activate the SFC and may be connected via an igniter cable 16 to a flame
10 or heat detector, a suitable manual or automatic activating mechanism, and the like. Upon activation, the SFC reacts to form a wall of aerosol which is uniformly discharged through the slotted opening of profile 12. Two or more units such as those shown in Figure 1 can be connected end-to-end to form a unit of any suitable length and can be installed in corridors or
15 along the walls of a room or other enclosure.

To control the rate of aerosol formation, it is desirable to control the size of the SFC particles. It has been found that over a certain size range as the SFC particles are made smaller and their surface to volume ratio increases the rate of aerosol formation increases as does its fire
20 extinguishing effectiveness. It was further found that when the SFC particles are made too small, the aerosol formation rate is too large, resulting in a lowered fire extinguishing effectiveness and possible explosions in closed spaces. In many fire extinguishing applications it is desirable to have all the aerosol formed within 10 or 20 seconds from the
25 onset of aerosol formation. It has been found that suitable SFC reaction rates are those which result in the penetration of the reaction front into the SFC cartridge at the rate of from about 0.65 to about 1.35 mm/sec, with an optimum being approximately 1.1 mm/sec.

It is further important to design the SFC tablet, cartridge, and the
30 like so that it has the proper geometry for optimal fire extinguishing or

smoke creating effectiveness. Specifically, it should be noted that while the volume of SFC used controls the total amount of aerosol which is, in theory, available for extinguishing the fire, the exposed surface area of the tabled, cartridge, and the like, plays a leading role, along with particle size, in determining the rate of aerosol formation. Thus, the larger the gross surface are of the tablet, cartridge, and the like, the higher the rate of aerosol formation. For example, very high rates can be achieved where the SFC is "painted" in a thin layer onto a large surface, such as a wall, as is described below.

10 Another configuration is shown in Figure 2. Here SFC, preferably cylindrical in shape, is located inside a perforated tube 20. Upon activation, the SFC reacts to form an aerosol which escapes through the perforations 22 into the space to be protected or to be filled with smoke.


Variations of the two embodiments of Figures 1 and 2 are shown in 15 Figures 3 and 4, respectively. Here a suitable cooling material 30 is placed over the SFC (Figure 3) or around the SFC (Figure 4). In these embodiments the aerosol which is formed upon activation of the SFC is forced to pass through cooling material 30 which results in the cooling of the aerosol prior to its release into the space to be protected.

20 Various means of cooling the aerosol are possible. One way is to effect heat exchange between the aerosol and a suitable heat absorbing medium, such as water, solutions of water and ethylene glycol or water and acetone, solid granulated dry ice (CO_2), and the like.

Another means of cooling the aerosol is by allowing the aerosol to 25 chemically react with a suitable material in an endothermic, or heat-absorbing, reaction or by bringing about the creation of water molecules which have a large heat capacity and which are capable of absorbing significant amounts of heat.

Examples of a suitable chemical coolants is boric acid (H_3BO_3) and 30 similar acids which react with the basic intermediate potassium hydroxide

(KOH), created during the ignition of the SFC, to form water. The reaction is believed to be:



Additional materials which may be suitable in this context include, but are not limited to, NaHCO_3 , KHCO_3 , H_2CO_3 , and the like.

Depicted in Figure 5 is an illustrative embodiment of a honeycomb configuration wherein each of the voids of the honeycomb includes a layer of SFC 10 which is covered, preferably both at the top and at the bottom, with a layer of material 30 which will bring about the cooling of the aerosol, by physical and/or by chemical means. Any of the materials described above may be used for material 30. In addition, it may be useful to use as material 30 a granulated bed of perlite, vermiculite, or similar hydrophilic minerals which are capable of absorbing and keeping moisture for long periods of time. When the aerosol is discharged through the granulated bed the aerosol interacts with the moisture over the considerable surface area of the granulated particles and is cooled in the process.

Another configuration according to the present invention is shown in Figure 6 wherein the SFC is reacted in a burning chamber 40 from which the aerosol passes to a displacement chamber 42 where it contacts a suitable cooling liquid 44. Aerosol leaves the system through a tuyere 46 which runs through cooling liquid 44, thereby serving to further cool the aerosol prior to its exit from the system and its entry into the space to be protected.

A related configuration is shown in Figure 7 where aerosol formed upon the activation of SFC 10 enters a stopper 50, which serves to immobilize the SFC cartridge and prevent the blocking off of the opening, prior to its passage through an exhaust pipe 52 and its exit from the system. During its passage through exhaust pipe 52 the aerosol is cooled by the addition of a suitable coolant from a reservoir 54 which enters exhaust pipe 52 through a pipe 56.

A similar configuration is shown in exploded and assembled views in Figures 8 and 9, respectively. The compact SFC generator shown in Figures 8 and 9 features a combustion chamber 60 which houses SFC 10. A coolant pump 62 injects coolant through a tube 64 into the aerosol.

5 The various configurations discussed can be modified so as to channel the formed aerosol, after cooling if desired, through a manifold to various locations. Such a system is depicted schematically in Figure 10. Here, combustion chamber 60 includes SFC 10. Exhaust pipe 70 leads the hot aerosol away from combustion chamber 60. Coolant pipe 72, which
10 is preferably equipped with an appropriate nozzle 74, is used to introduce coolant into exhaust pipe 70. A valve 76 may be used to control the flow of coolant. The cooled aerosol then enters a distributor 78 from where it is distributed to two or more locations. Such an arrangement may be useful where adjoining but separate chambers are endangered by a fire in
15 one of the chambers such that a fire in one chamber preferably triggers fire extinguishing means in several chambers. An example of such a situation are the storage compartments of a commercial aircraft.

Yet another configuration according to the present invention is presented in Figure 11 which, in contrast with the previously discussed
20 embodiments, features flame arresters 80, between which is preferably located suitable cooling material 30. Flame arresters 80 serve to break up the flame, preventing the flame from reaching the outside of the unit where they could trigger undesirable combustion of the surroundings, and further serve to enhance the contact between the aerosol and cooling material 30.

25 Systems according to the present invention may also be used immersed in a liquid, such as oil, which serves as the cooling medium upon activation of the SFC. Two such configurations are shown in Figures 12-15.

The device depicted in Figure 12 includes a combustion chamber 40
30 which houses SFC 10. Combustion chamber 40 is completely closed

except for one or more exhaust pipes or tuyeres **80** which are so angled as to prevent the ingress of water into combustion chamber **40** when the device is submerged in an oil tank **82** (Figure 13). When the SFC **10** is activated, the aerosol produced has sufficient pressure to exit the device
5 through exhaust pipes **80** and to enter the oil reservoir where the aerosol is cooled as it rises through the oil to the vapor space at the top of oil tank **82**, where the fire to be extinguished is typically located.

A similar device, but one configured slightly differently, is shown in Figures 14 and 15. Here, the exhaust pipes **90** of Figures 12 and 13 are
10 replaced by a cover **100** which preferably features an outwardly extending rim **102**. When SFC **10** is activated, the aerosol formed leaves combustion chamber **40** through the space between combustion chamber **40** and cover **100** and is dispersed radially outwardly into the oil to a degree determined largely by the geometry of rim **102**.

15 Yet another similar device is shown in Figures 16 and 17. Here use is made of a device similar to that of Figure 3 but further including a special cover **200**, which unlike the cover of the embodiment shown in Figures 14 and 15, extends for relatively large distances, perhaps several meters. Cover **200** is shaped such that when SFC **10** is activated, the
20 aerosol formed leaves as shown in Figure 17 throughout the length of cover **200** to form a screen, or curtain, of aerosol. It has been found that suitable SFC reaction rates are those which result in the spread of the reaction front along SFC face at the rate of about 12 cm/sec.

Another configuration effective in the extinguishing of fires in a
25 specified space involves "painting" the interior walls, or some other surface, of the space to be protected with SFC in the form of a paint-like paste or quick-drying liquid. Such a configuration may preferably incorporate the benefits of cooling the aerosol by "painting" over the SFC a layer of suitable coolant material **30**.

Various additional ways of delivering aerosols formed by devices according to the present invention may be envisioned. Shown in Figure 18 is an embodiment which carries out the cooling of the aerosol by a fan 300 which moves air and which serves to simultaneously carry the aerosol 5 created by the SFC 302 from the device and cool the aerosol.

Another version of the embodiment of Figure 18 is shown in Figure 19. Here a handgun device is used to produce the aerosol and deliver it to the desired location. The device includes a housing 310 which houses the SFC 302 and a fan 300. Housing 310 is connected to, or is integrally 10 formed with, a handle 312 which features a trigger 314 or similar activator. Preferably, handle 312 also includes a power supply 316, such as a battery, which is used to start the reaction of SFC 302 using an initiator 318.


In another embodiment according to the present invention shown in Figure 20, a device such as those shown in Figures 18 or 19 is modified 15 through the inclusion of interchangeable SFC magazines 330. The use of magazines 330 makes it possible to use the same 'gun' in repeated operations by simply replacing a spent magazine with a fresh one.

Devices according to the present invention can also be used in conjunction with more conventional fire extinguishers, such as those based 20 on the release of pressurized CO₂ or N₂. Conventional fire extinguishers containing CO₂ or N₂ and various mixtures of inert gases are limited in their ability to effectively deliver their content in open spaces. To overcome this difficulty, it is possible to modify such a conventional fire extinguisher by adding to it SFC capabilities, thereby increasing the fire 25 extinguishing effectiveness of the device and reducing the concentration of conventional fire extinguishing agents required for effective fire fighting.

Nitrogen-based conventional fire extinguishers are typically based on inertization, i.e., the extinguisher operates by lowering the oxygen concentration in the vicinity of the fire, thereby denying the open flames 30 an oxygen supply. One of the difficulties with such systems is the

formation of small amounts of toxic gases such as CN_2 and NO_2 . To avoid the formation of such toxic gases it is preferable to use a completely inert gas such as argon which forms no toxic chemicals, but which is considerably more expensive than nitrogen.

5 Carbon dioxide-based fire extinguishers are in widespread use, primarily because of their relatively low cost and non-toxicity, combined with its effectiveness as a fire extinguisher and its electrical insulation properties. The big advantage of carbon dioxide over nitrogen is that the former is easier to liquefy, carbon dioxide having a vapor pressure of 850
10 psi at 70°F. With the aid of refrigeration, it is possible to keep carbon dioxide at 0°F at a pressure of 300 psi. The fire extinguishing effectiveness of carbon dioxide results from a combination of two phenomena -- (1) the reduction of oxygen concentration in the area of the fire by blanketing the area, and (2) the reduction of the effective oxygen
15 concentration to below about 12% and the cooling of the fire by absorbing heat, primarily by endothermic chemical reactions. These reactions include:



20 which, in sum, yield:



Thus, the overall reaction between the burning carbon and the carbon dioxide produces carbon monoxide via an endothermic reaction. Such reactions have been determined to take place during the extinguishing
25 of a fire with carbon dioxide. Prior to the introduction of carbon dioxide, the flames are yellow, owing to the presence of the carbon and release thick black smoke because of the incomplete combustion of the carbon. When the carbon dioxide is introduced, two effects are observed in the burning zone. The color of the flame changes gradually from yellow to
30 blue, with yellow layers. At the same time, the concentration of smoke

decreases and the smoke disappears completely prior to the final extinguishment of the fire.

Carbon dioxide has been used for years as a total flooding/inerting/extinguishing agent in both portable and non-portable fire extinguishers. However, the relative inefficiency of carbon dioxide owing, in part, to its light weight and high dispersivity, requires that a large amount of gas be used to put out a given fire. By contrast, SFC according to the present invention has a significantly higher fire extinguishing efficiency, so that a smaller amount of SFC has the same fire extinguishing capability of a much larger amount of carbon dioxide. Two inherent shortcomings of SFC in large volume application were discussed above. One of these is the exothermic nature of the SFC reactions, while another is the small particle size of the aerosol particles. The heat generated, in conjunction with the heat of the fire, tends to lighten, or reduce the density of, the aerosol, thereby allowing the aerosol to rise away from the fire base rather than zeroing in on the source of the fire, thus reducing the fire extinguishing effectiveness of the aerosol. As discussed above, to overcome these difficulties, it is often desired to cool the SFC aerosol so as to facilitate its more accurate delivery to the site of the fire.

In the absence of cooling of the SFC aerosol, the aerosol may be suspended and would tend to float and rise upwards and away from the sources of the fire. The effect is magnified when the heat of the fire causes air above the fire to rise turbulently upwards, which tends to further scatter and disperse the SFC aerosol, preventing it from reaching the base of the fire and reducing its effectiveness.

In certain embodiments according to the present invention, the cooling and driving power of a conventional carbon dioxide fire extinguisher is used to cool and drive an SFC aerosol, thereby enhancing the fire extinguishing capabilities of both the carbon dioxide and of the SFC.

An example of one such hybrid system is shown in Figure 21. Here an otherwise conventional fire extinguishing cylinder 340 has been modified by the addition of SFC 302 located in the discharge diffuser 342 which also includes a reflector 344 which serves to deflect the stream of
5 carbon dioxide so as to prevent it from directly impacting the SFC and possibly causing the termination of the reaction of the SFC components. In addition, reflector 344 serves as a convenient surface on which condensation of liquid carbon dioxide can occur. A suitable igniter 346 is used to activate SFC 302. The front face of diffuser 342 is preferably
10 covered with a mesh screen or similar device serving as a flame arrestor 348.

In operation, the jet of gas, such as CO₂, released during discharge of cylinder 340 would cool the aerosol, which is designed to be released over approximately the same time interval, and facilitate its delivery to the
15 desired location. The addition of the aerosol to the conventional fire extinguishing gases would, at the same time, significantly enhance the fire extinguishing capabilities of the conventional fire extinguisher. Preferably, the time during which the cylinder is emptied of its contents corresponds to the time required for the SFC to be exhausted. Any suitable SFC
20 composition and any suitable ignition system may be used. Preferably, the SFC includes 40-45% KClO₄, 40-45% KNO₃ and 10-20% epoxy resin. In addition, the mixture may further contain up to about 2% Mg.

As a result of combining conventional fire extinguishing media with SFC aerosol, a novel extinguishing medium is produced which is a mixture
25 of, for example, carbon dioxide and SFC aerosol in a pre-determined concentration, which mixture includes both the carbon dioxide and micron-sized dry chemical particles.

The precise amounts of inert gas, such as carbon dioxide, and SFC material used could be readily calculated to suit the expected conditions.
30 For example, if one assumes that the carbon dioxide is heated from about -

79°C to about 100°C, a total of nearly 180°, then, since the heat capacity of carbon dioxide over this temperature range is, on average, 0.284 cal/gm°K, the amount of heat absorbed by each gram of the carbon dioxide is:

5 $Q = m \times c \times \Delta T = 1 \times 0.284 \times 180 = 51 \text{ cal}$

A gram of SFC produces approximately 700 cal/gm. Hence, the ratio of carbon dioxide to SFC should be on the order of 15:1. For example, an extinguisher containing 1.5 kg carbon dioxide, which can be released in approximately 30 seconds, will also includes approximately 100
10 gm of SFC.

Further embodiments of systems according to the present invention are depicted in Figures 22 to 24. These embodiments, like many of those described above, have applications both as fire extinguishing agents and as smoke screen creating agents. In both applications, it is at time desired or
15 required to deliver the smoke or fire extinguishing material to a location which is somewhat remote from the location of the operator. For example, there is often a need to place a fire extinguishing device in a burning building to which access has been cut off or is otherwise difficult. Similarly, a smoke bomb may need to be placed near a crowd to be
20 dispersed which may be several hundred meters away.

Shown in Figure 2 is a grenade-like device which can be used either as a fire extinguisher or as a smoke screen generator. The device includes a housing 400 which contains SFC 302 of suitable size and shape and made by any suitable technique. The device features a handle 402 which
25 is immobilized by a safety pin 404. When safety pin 404 is removed, handle 402 can be pivoted so as to press down on an initiator 406 which serves to start the reaction of SFC 302. The aerosol formed during the reaction of SFC 302 can escape housing 400 through suitable holes 408 which, prior to use, are covered by a suitable covering, such as adhesive

tape, to prevent the contamination of the device but which are automatically removed when SFC **302** starts to produce aerosol.

A device such as that shown in Figure 22 can be thrown by hand to the desired location. Alternatively, such a device can be launched to the
5 desired location using a mechanical launcher, such as is shown in Figure 23. Here, the activation of initiator **406** is effected at the instant of launching through an arrangement such as that shown at the anterior end of the launcher (not shown).

Yet another embodiment of a fire extinguishing or smoke screen
10 generating device according to the present invention is shown in Figure 24 which depicts a fire-extinguishing pot or smoke-pot. The device depicted in Figure 24 is similar to that of Figure 22 but is typically larger and designed to be activated in place rather than being thrown or launched for a certain distance.

15 Three more configurations for delivering fire extinguishing or smoke producing materials, especially in the form of a hand-grenade, are depicted in Figures 25, 26, 27 and 28.

In the configuration of Figure 25, SFC charge **2510** located within housing **2520** is ignited by igniter **2530**, which may be a chemical primer
20 or an electrical igniter. The resulting aerosol is then made to travel through a space at the bottom of the device and through paths **2540**, which include a number of contractions and expansions in series and which serves as a flame arrestor, before leaving the device and entering the atmosphere, as shown by the arrows.

25 A similar device is shown in Figure 26. SFC charge **2610** is located within housing **2620**, typically a cylindrical tube, and is activated by igniter **2630**. As in the configuration of Figure 25, the aerosol is made to flow over a path which includes flame arresters, this time in the form of metal protrusions **2640** which cause the aerosol to follow a convoluted path.
30 Surrounding the aerosol path on the outside is a secondary hosing **2650**

which includes a suitable heat-absorbing medium, such as MAP-ABC 70 powder, carbonates, water, ethylene glycol, and the like. The heat-absorbing medium serves to absorb heat from the aerosol, thereby cooling it. Overlying the top portion of the grenade is another housing **2660** which
5 includes a powdered heat extinguishing medium **2670**, preferably a suitable extinguishing powder, which further cools the aerosol and which is able to mix with the aerosol. The resulting product leaving the device is an aerosol mixed with dry powder.

A similar device is shown in Figure 27. Here SFC charge **2710** is
10 activated by igniters **2720**. Baffles **2730** force the produced aerosol to take a long path before it is able to exit. Portions of the path are bordered by a suitable heat-absorbing material **2740** to help cool the aerosol prior to its exit to the atmosphere.

Shown in Figure 27 is another configuration which combines a
15 tortuous path with cooling of the aerosol. SFC charge **2810** is activated by igniter **2820**. The internal divider of the device resemble the configuration of a distillation column commonly used in chemical processing to separate light and heavy components. As the aerosol rises, it is diverted in a series of stages and made to pass over heat-absorbing material **2830** where it is
20 cooled. Any suitable number of stages may be used, depending on the systems geometry, the aerosol formed and heat-absorbing material used and the desired degree of cooling of aerosol prior to its release to the atmosphere.

An advantage of smoke generating devices according to the present
25 invention is that the SFC products include fine particles which contribute to the formation of highly effective smoke, yet the products are completely non-toxic and environmentally friendly. Smoke generating devices according to the present invention may be used to screen visible, infrared or microwave radiation. The activation of the devices may be electrical,
30 mechanical or chemical. Various SFC compositions may be used. For

example, the SFC can contain alkali oxidizers such as KClO_4 , KClO_3 , KNO_3 , NaNO_3 and K_2CO_3 . The SFC can further contain organic reducers based on epoxy resins, and fillers of alkali salts such as KCl , NaCl . In addition, various additives may be included, such as Mg , Al , and the like, 5 for controlling the combustion.

The best results for producing smoke which effectively obscures the visible spectrum were obtained using the following SFC composition:

	KClO_4	41%
	KNO_3	41%
10	Epoxy	16%
	Mg	2%

The selected mixture can, in addition, further include various additives to make the smoke effective in obscuring infrared and microwave radiation. When used for the obscuration of infrared radiation, metal 15 flakes, such as Mg or Al , could be added to increase the smoke temperature and enhance the infrared obscuration. To enhance the obscuration of microwave radiation it may be desirable to add metal fibers, such as Fe , Cu , and the like.

WHAT IS CLAIMED IS:

1. A method of extinguishing a fire in a volume, comprising:
pre-positioning a fire extinguishing device in communication with
the volume, said device including a composition which includes:

- (1) a first reactant; and
- (2) a second reactant;

wherein said medium is activated so as to cause said first reactant
and said second reactant to react with each other to create solid
particulate products having a diameter of about one micron or less
such that, when said products come in contact with the fire, said
products chemically inhibit the chain reactions of the fire flame and
bring about the extinguishing of the fire, wherein said device is
submerged in a liquid coolant and wherein said device includes
means for preventing entry of coolant into said device but
accommodates the escape of said products into said coolant.

2. A method as in claim 1 wherein said means for preventing
entry of coolant includes at least one downwardly directed tuyere
hydraulically connected at or near the top of said device.

3. A method as in claim 1 wherein said means for preventing
entry of coolant includes a downwardly directed covering hydraulically
connected at or near the top of said device.

4. A method as in claim 1 wherein said pre-positioning includes
coating said composition on a surface located in or around the volume.

5. A system for extinguishing a fire in a volume, comprising:
a fire extinguishing device pre-positioned in communication with the
volume, where said device includes a composition which includes:

- (1) a first reactant; and
- (2) a second reactant;

where said medium is activated so as to cause said first reactant and said second reactant to react with each other to create solid particulate products having a diameter of about one micron or less such that, when said products come in contact with the fire, said products chemically inhibit the chain reactions of the fire and bring about the extinguishing of the fire, wherein said device is submerged in a liquid coolant and wherein said device includes means for preventing entry of coolant into said device but accommodates the escape of said products into said coolant.

6. A system as in claim 5 wherein said means for preventing entry of coolant includes at least one downwardly directed tuyere hydraulically connected at or near the top of said device.

7. A system as in claim 5 wherein said means for preventing entry of coolant includes a downwardly directed covering hydraulically connected at or near the top of said device.

8. A system as in claim 5 wherein said pre-positioning includes coating said composition on a surface located in or around the volume.

9. A method of generating non-toxic smoke, comprising:
pre-positioning a smoke creating device, said device including a composition which includes:

- (1) a first reactant selected from the group consisting of potassium chlorate, potassium perchlorate, potassium dichromate, cesium nitrate and potassium nitrate; and
- (2) a second reactant serving as a reduction agent;

wherein said medium is activated so as to cause said first reactant and said second reactant to react with each other to create solid particulate products having a diameter of about one micron or less such that said products create the smoke.

10. A method as in claim 9 wherein said device includes a slitted profile in which said composition is located.

11. A method as in claim 10 wherein said device further includes a coolant material.

12. A method as in claim 9 wherein said device includes a perforated tube in which said composition is located.

13. A method as in claim 12 wherein said device further includes a coolant material.

14. A method as in claim 9 wherein said device includes a granulated hydrophilic material.

15. A method as in claim 9 wherein said device causes said products to exchange heat with a coolant.

16. A method as in claim 15 wherein said device further includes means for bringing a coolant in contact with said products.

17. A method as in claim 9 wherein said device further includes means for distributing said products to different locations.

18. A method as in claim 9 wherein said device further includes at least one flame arrestor.

19. A method as in claim 9 wherein said device is submerged in a liquid coolant and wherein said device includes means for preventing entry of coolant into said device but accommodates the escape of said products into said coolant.

20. A method as in claim 19 wherein said means for preventing entry of coolant includes at least one downwardly directed tuyere hydraulically connected at or near the top of said device.

21. A method as in claim 19 wherein said means for preventing entry of coolant includes a downwardly directed covering hydraulically connected at or near the top of said device.

22. A method as in claim 9 wherein said pre-positioning includes coating said composition on a surface located in or around the volume.

23. A system for generating non-toxic smoke, comprising:
a smoke creating device, said device including a composition which includes:

(1) a first reactant selected from the group consisting of potassium chlorate, potassium perchlorate, potassium dichromate, cesium nitrate and potassium nitrate; and

(2) a second reactant serving as a reduction agent;

wherein said medium is activated so as to cause said first reactant and said second reactant to react with each other to create solid particulate products having a diameter of about one micron or less such that said products create the smoke.

24. A system for extinguishing a fire or generating non-toxic smoke, comprising:

a device including a composition which includes:

- (1) a first reactant selected from the group consisting of potassium chlorate, potassium perchlorate, potassium dichromate, cesium nitrate and potassium nitrate; and
- (2) a second reactant serving as a reduction agent;

wherein said medium is activated so as to cause said first reactant and said second reactant to react with each other to create solid particulate products having a diameter of about one micron or less effective in extinguishing fire or generating smoke and wherein said system is designed to be placed at a remote location following activation.

25. A system as in claim 24 wherein said system is in the form of a hand grenade.

26. A system as in claim 24 wherein said system is in form of a launchable grenade.

27. A system for extinguishing a fire, comprising:

- (a) a conventional fire extinguishing cylinder for releasing a pressurized fire extinguishing gas; and
- (b) a device including a composition which includes:
 - (1) a first reactant selected from the group consisting of potassium chlorate, potassium perchlorate, potassium dichromate, cesium nitrate and potassium nitrate; and
 - (2) a second reactant serving as a reduction agent;

wherein said medium is activated so as to cause said first reactant and said second reactant to react with each other to create solid

particulate products having a diameter of about one micron or less effective in extinguishing fire, said device being located so that said fire extinguishing gas and said products intermix.

28. A system as in claim 27, wherein said fire extinguishing gas includes carbon dioxide.




29. A system as in claim 27, wherein said fire extinguishing gas includes nitrogen.

30. A system as in claim 27 wherein said products include solid particles of under 5 microns in effective diameter.

31. A fire extinguishing apparatus, comprising:

- (a) an inert gas fire extinguishing apparatus for releasing a pressurized fire extinguishing gas, said apparatus including a discharge nozzle; and
- (b) a device including a composition which includes:
 - (1) a first reactant selected from the group consisting of potassium chlorate, potassium perchlorate, potassium dichromate, cesium nitrate and potassium nitrate; and
 - (2) a second reactant serving as a reduction agent;

wherein said medium is activated so as to cause said first reactant and said second reactant to react with each other to create solid particulate products having a diameter of about one micron or less effective in extinguishing fire, said device being located so that said fire extinguishing gas and said products intermix, said device being located in or around said discharge nozzle, said inert gas fire extinguishing apparatus and said device being activated so as to allow said inert gas and said products to intermix.

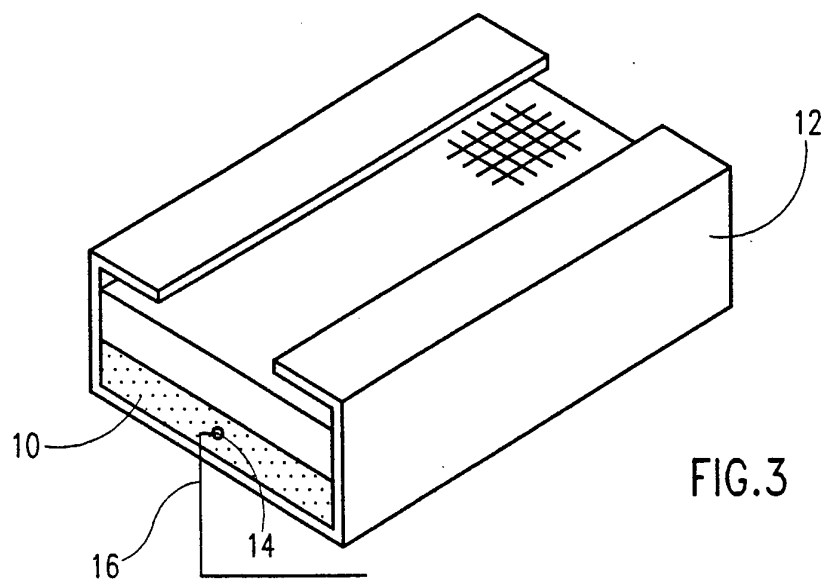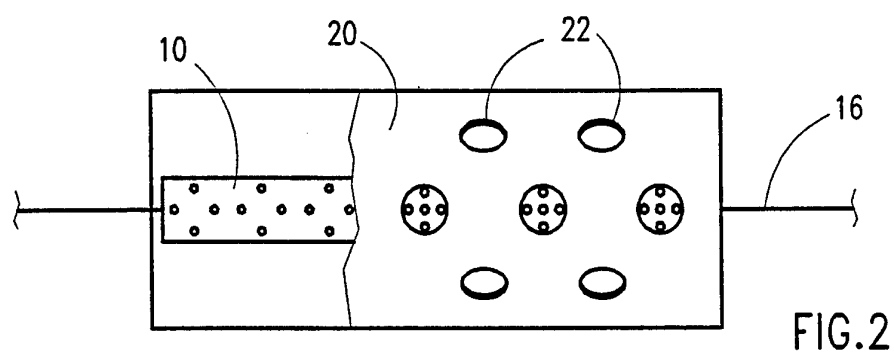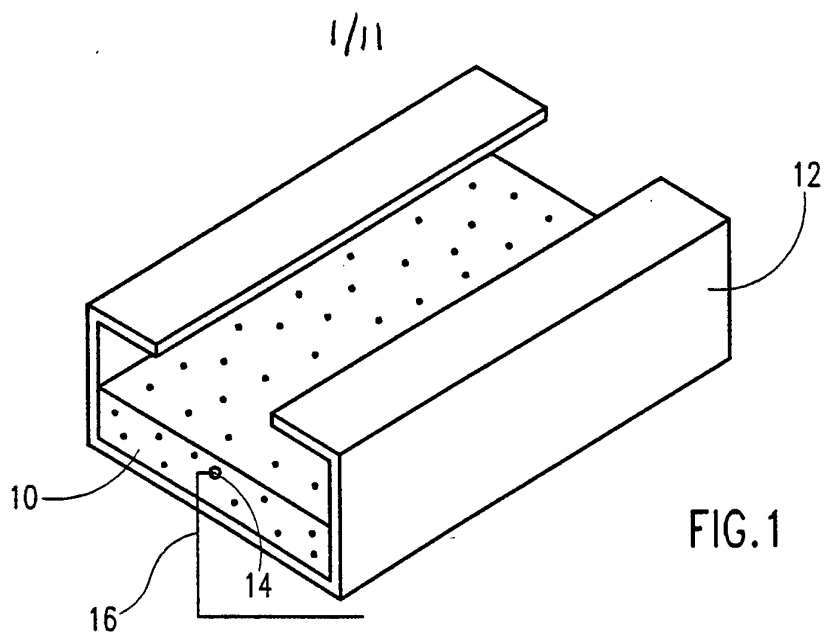

2/11

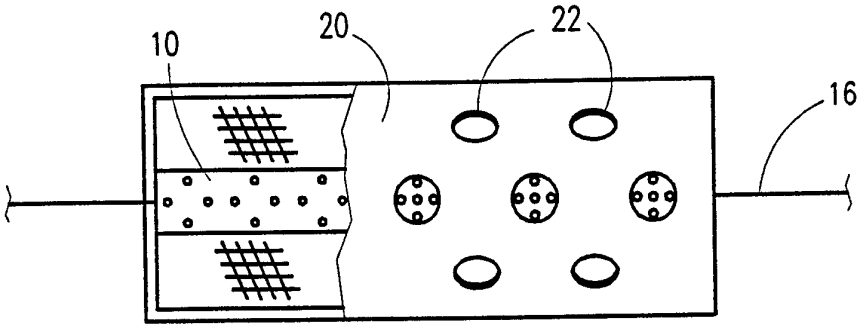


FIG. 4

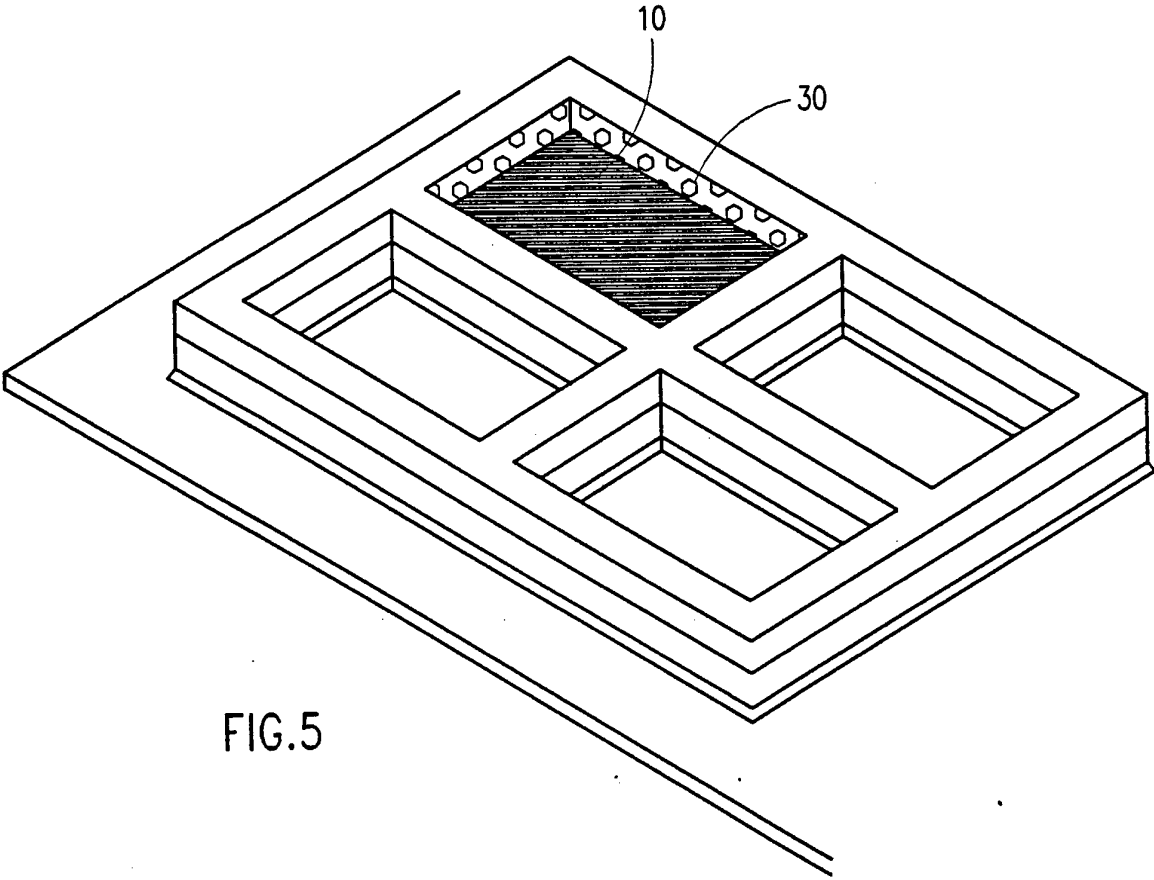


FIG. 5

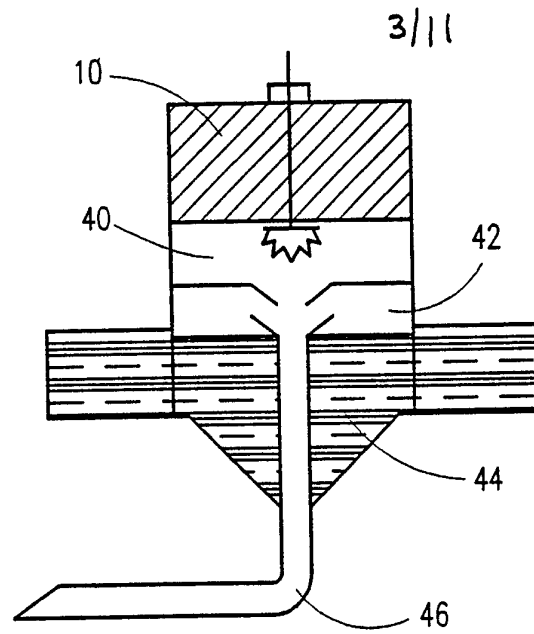


FIG. 6

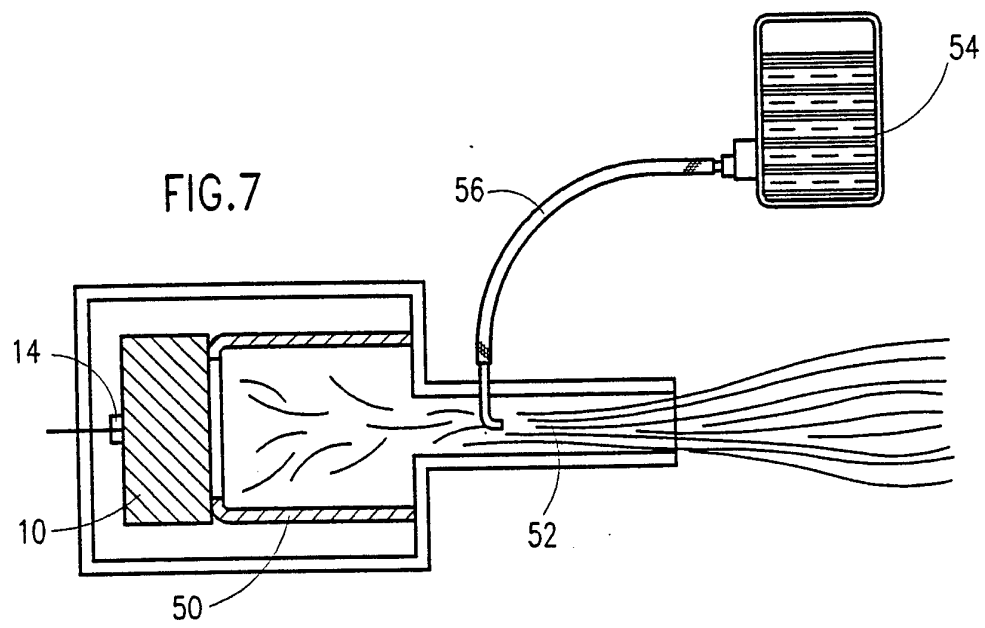


FIG. 7

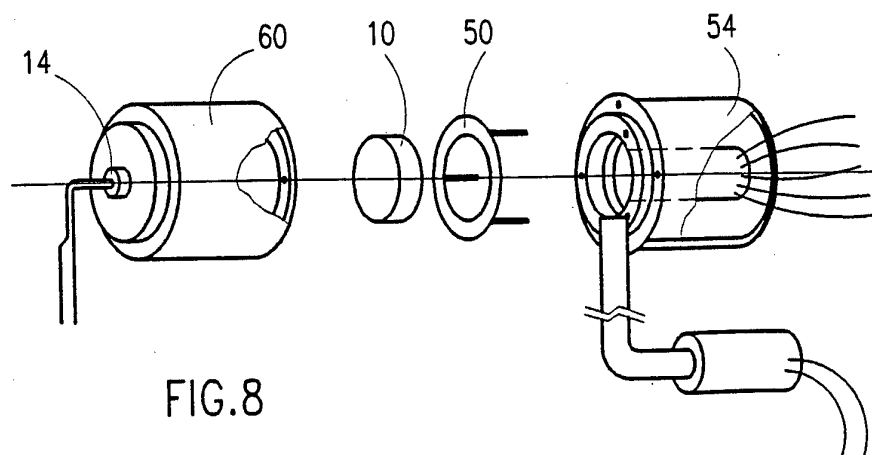


FIG. 8

4/11

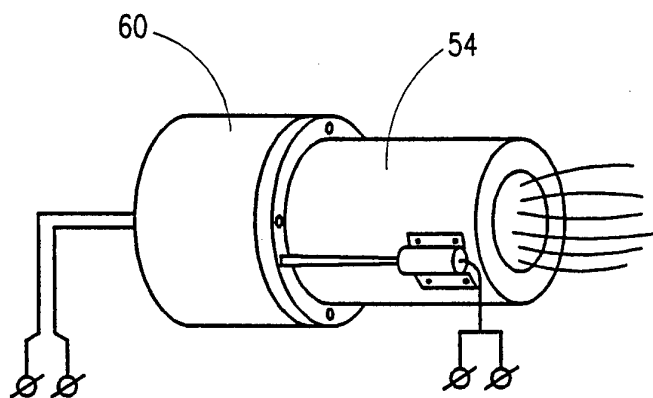


FIG. 9

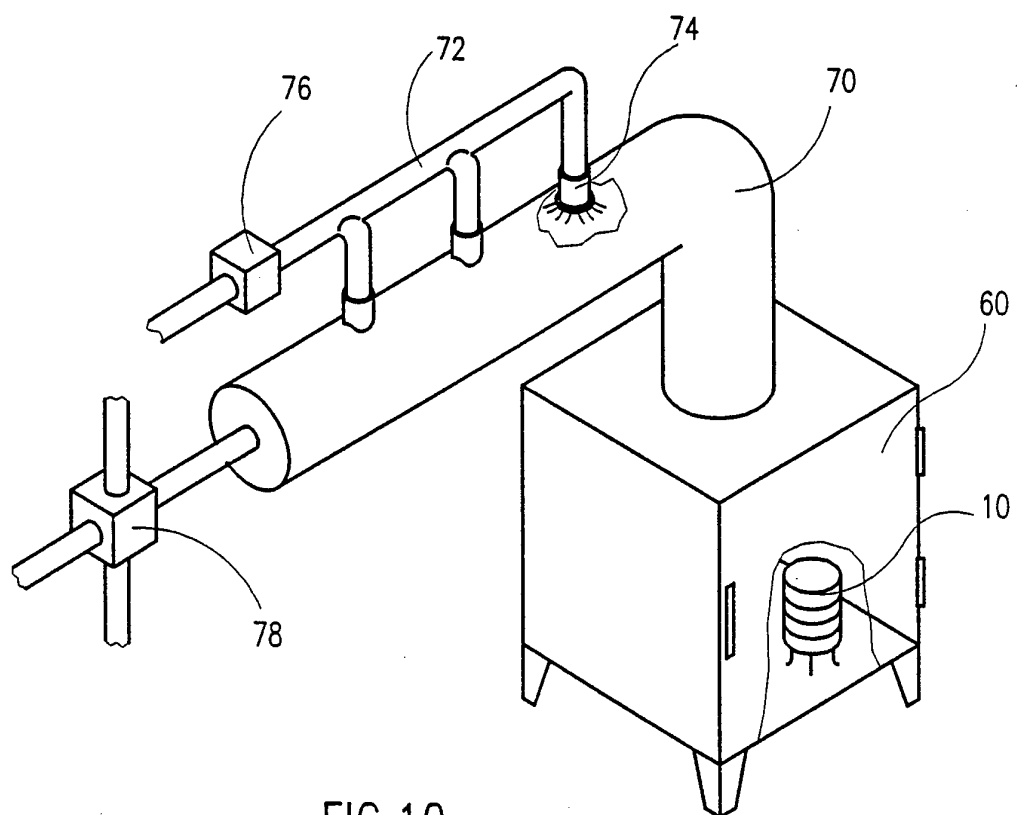
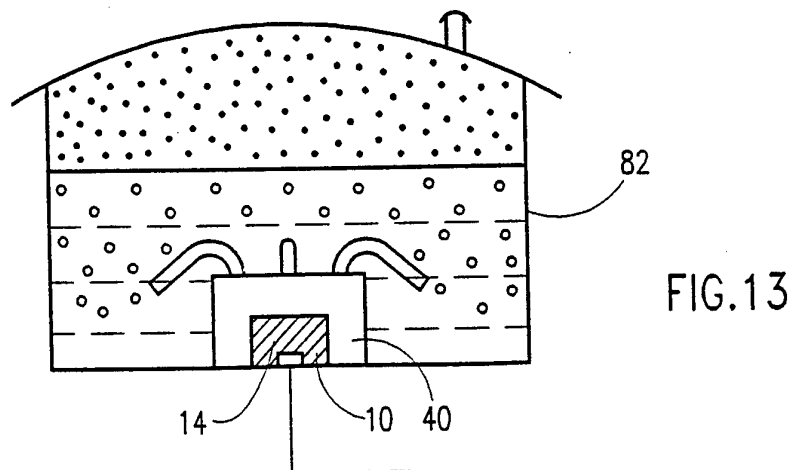
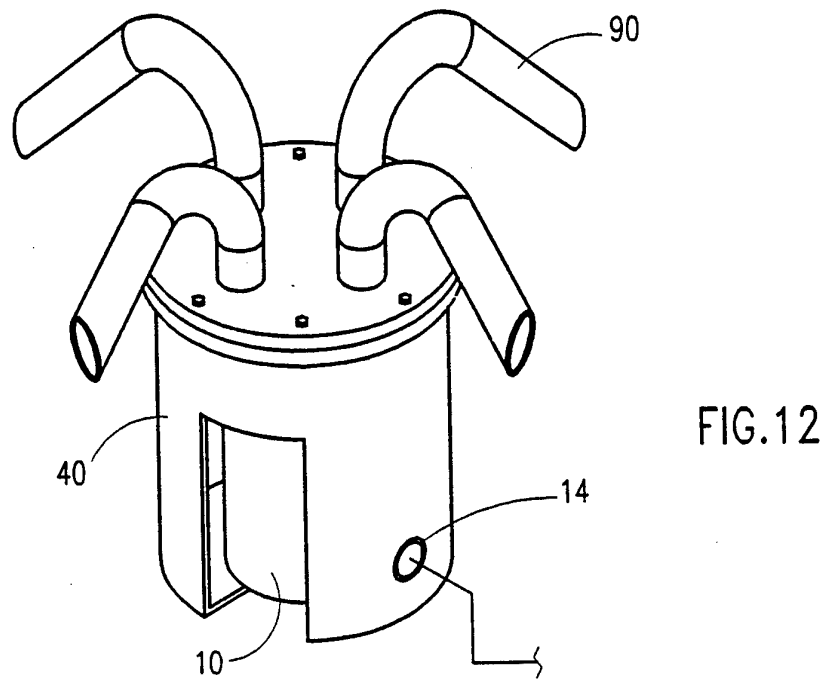
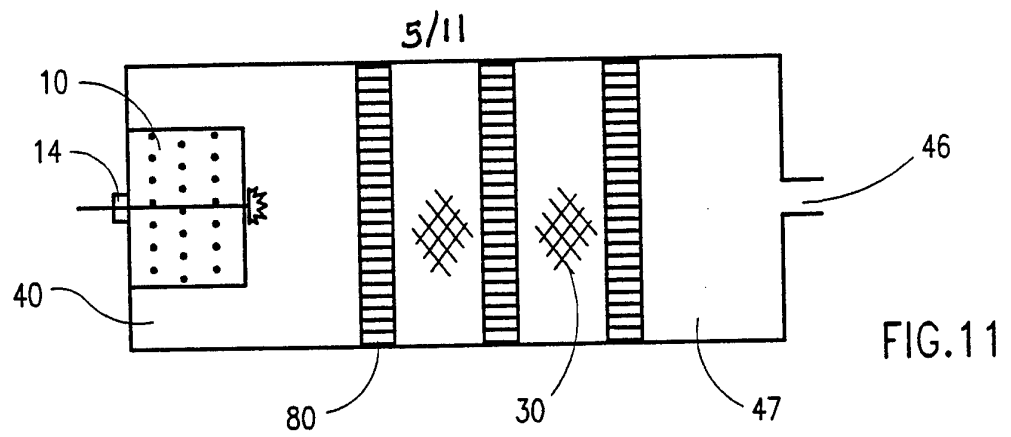
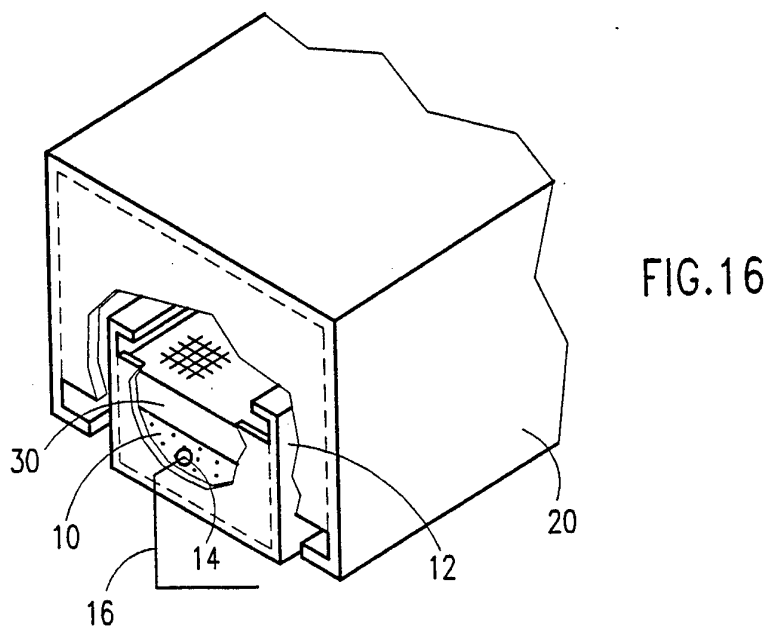
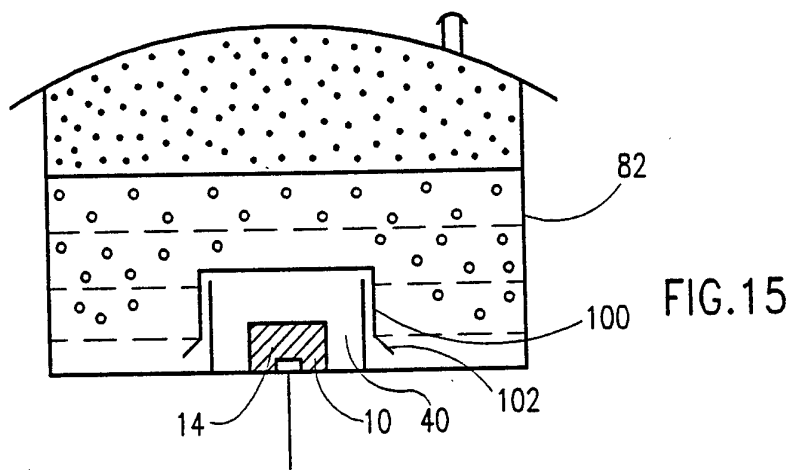
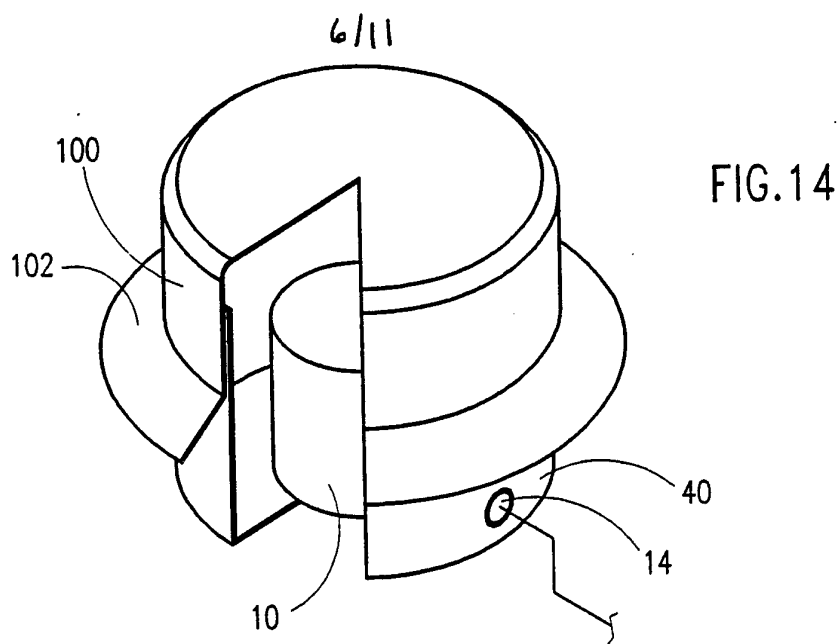


FIG. 10





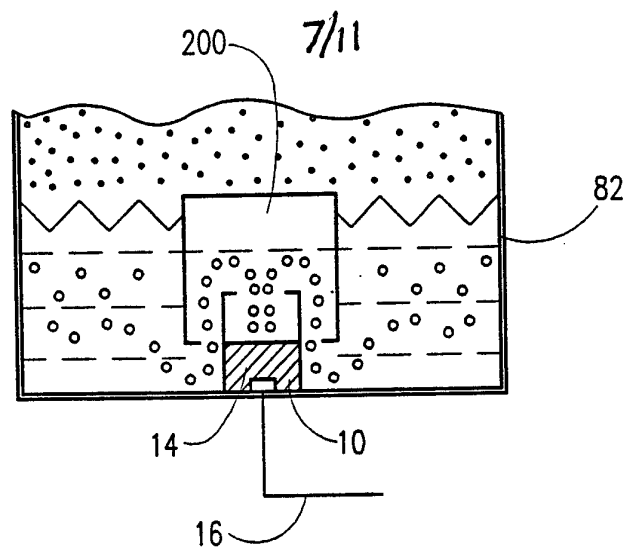


FIG. 17

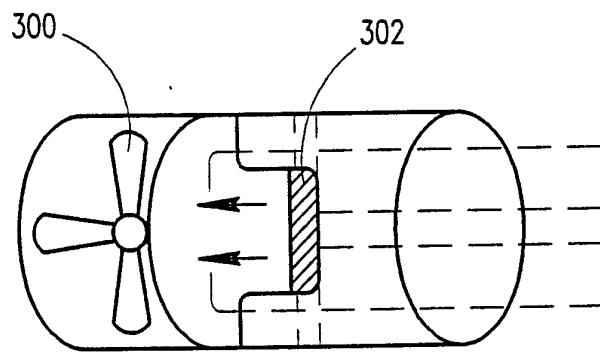


FIG. 18

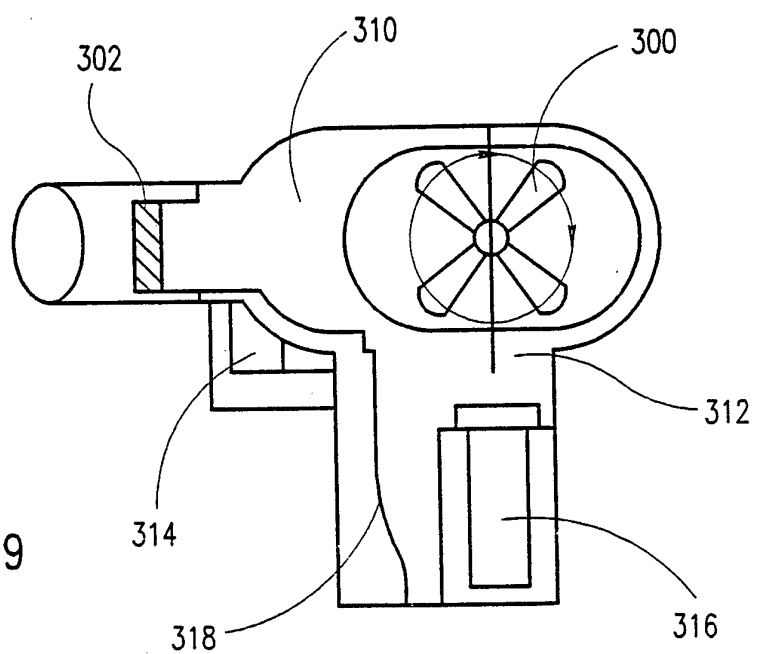
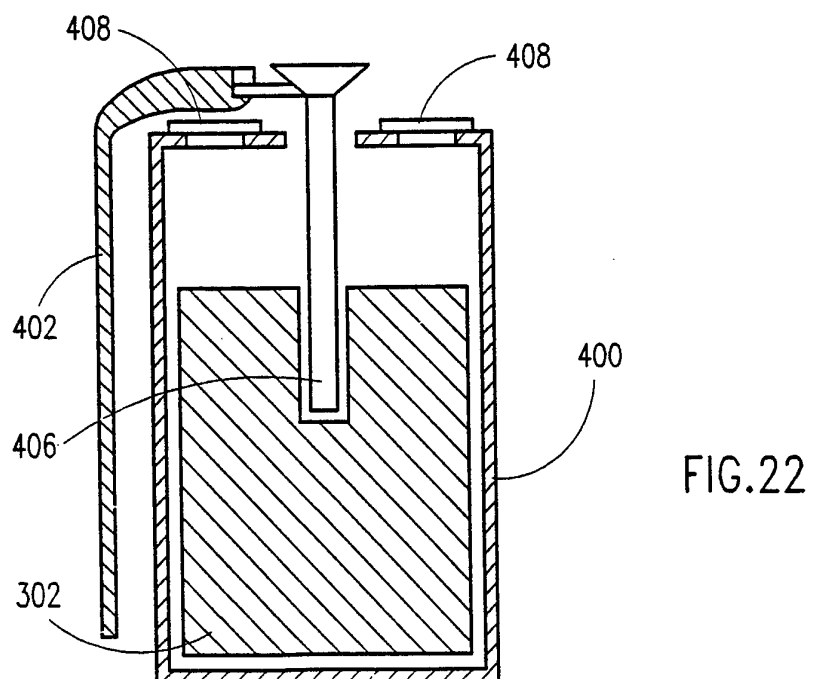
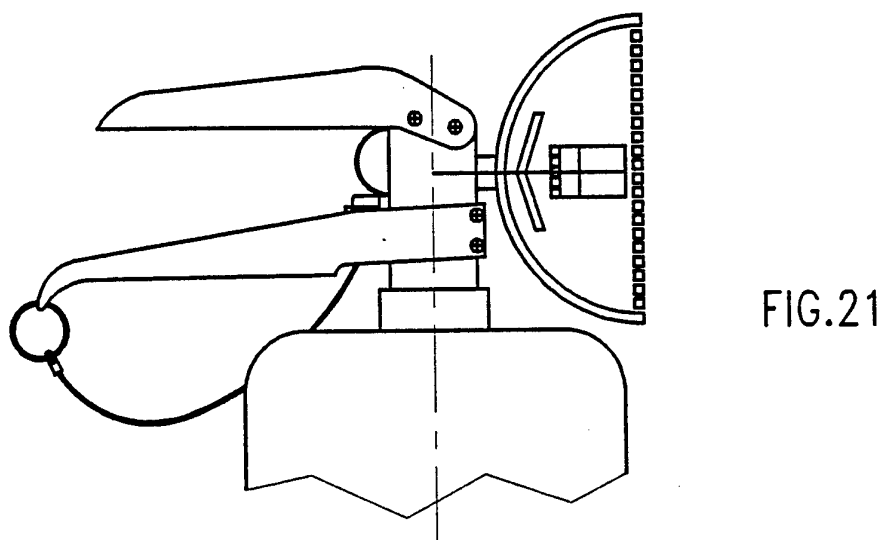
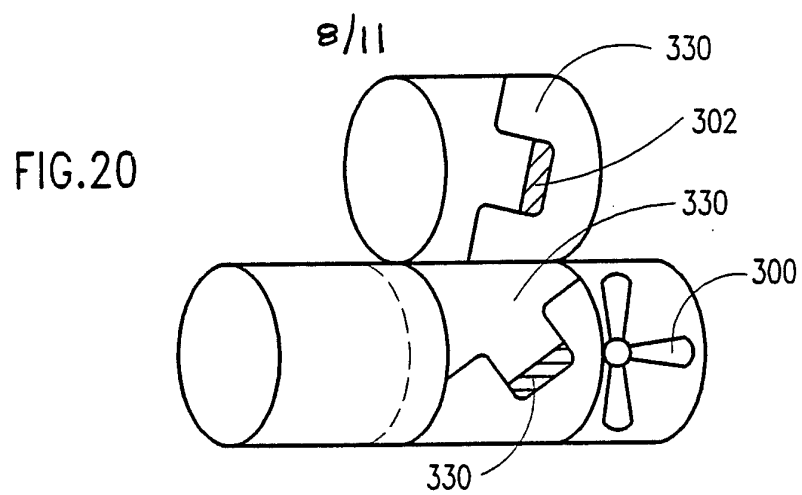


FIG. 19



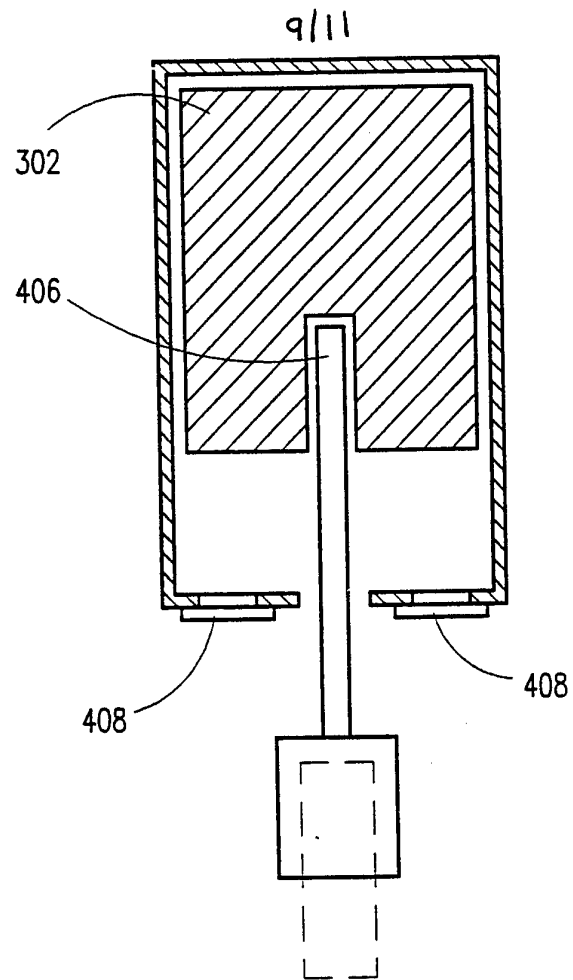


FIG. 23

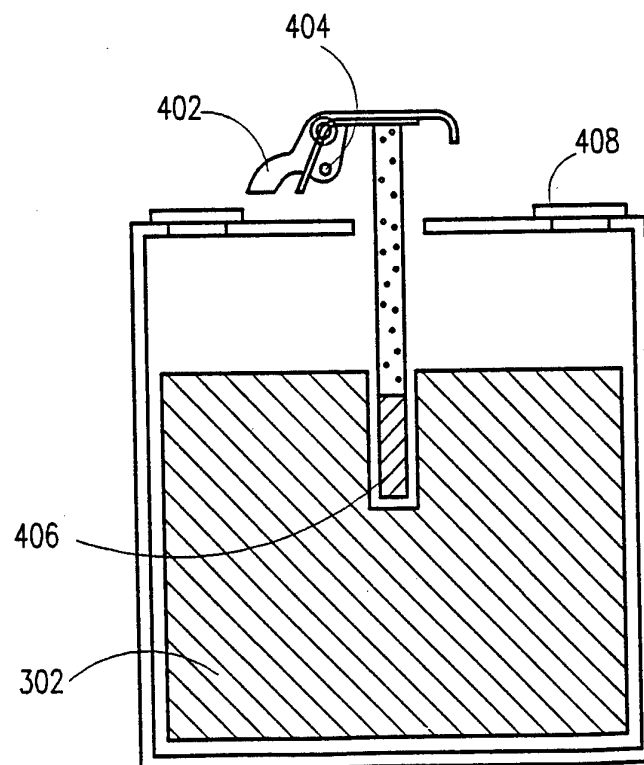
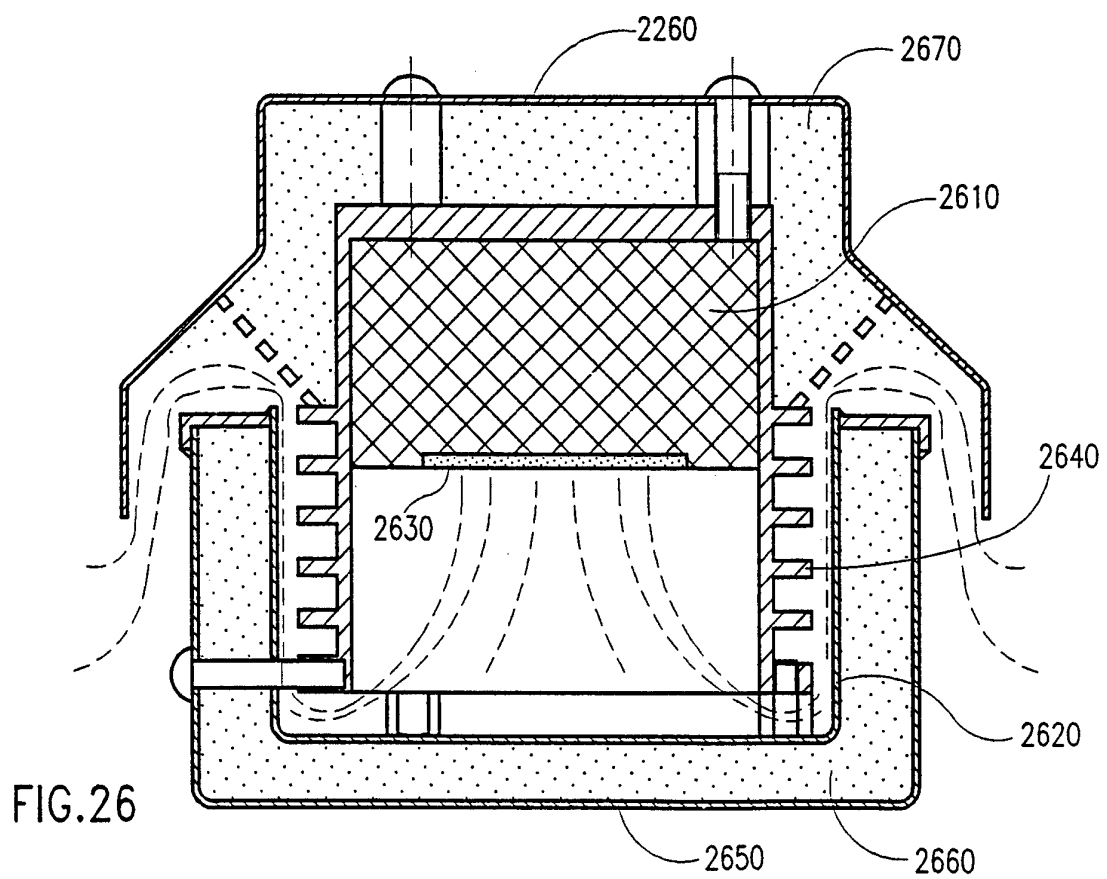
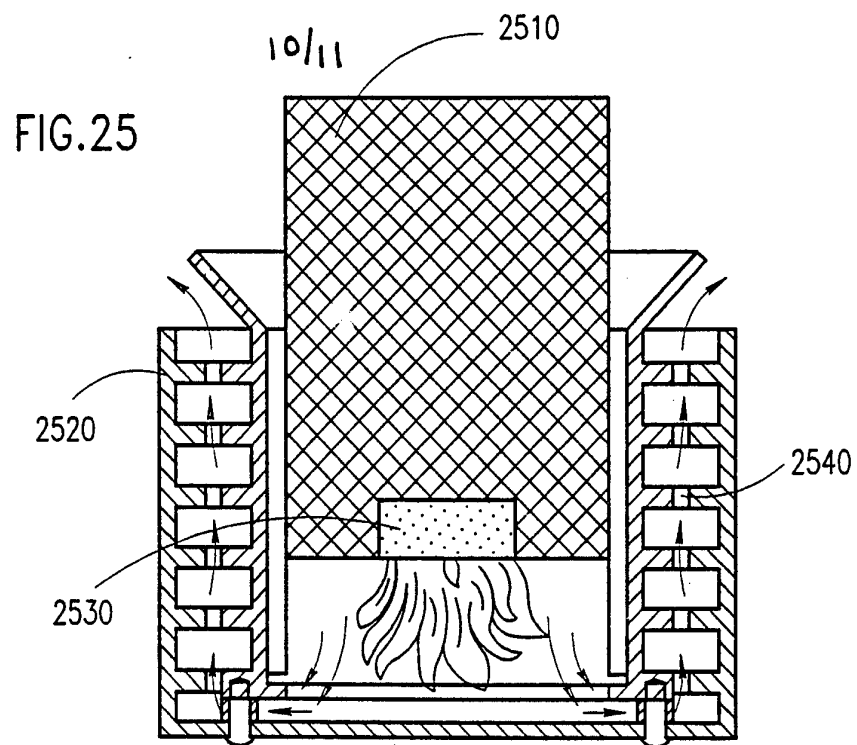


FIG. 24




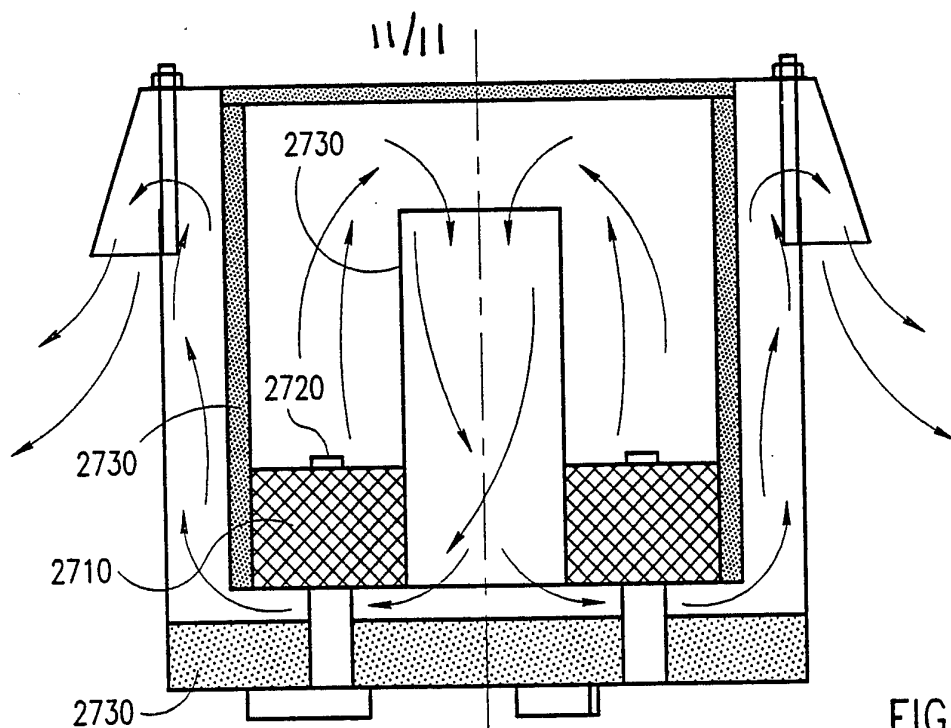


FIG. 27

FIG. 28

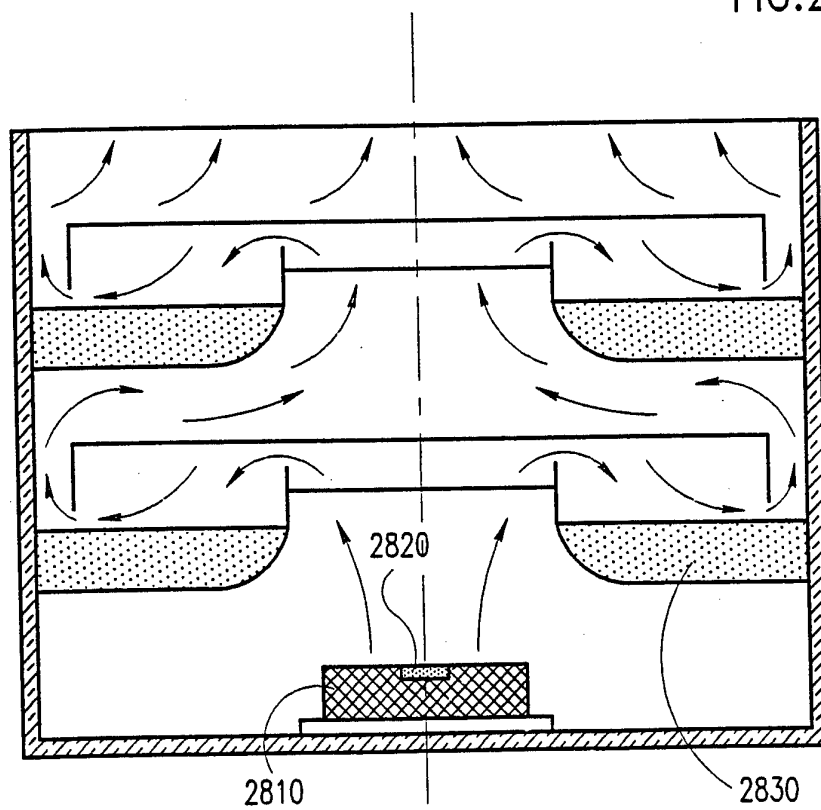

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/00993

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) :A62C 5/00; C06D 3/00

US CL :169/44, 26, 27, 30, 36, 66, 68, 71; 102/334; 149/19.6, 117; 252/4

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : Please See Extra Sheet.

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 3,972,820 (FILTER ET AL.) 03 AUGUST 1976 See entire document.	1, 5, 24-26
X	US, A, 4,968,365 (KRONE) 06 NOVEMBER 1990 See entire document.	9, 23-26
A	US, A, 2,718,927 (DILL ET AL.) 27 SEPTEMBER 1955 See entire document.	1-31
A	US, A, 3,369,609 (FOGELGREN) 20 FEBRUARY 1968 See entire document.	1-31
A	US, A, 3,654,996 (NAGLOWSKY) 11 APRIL 1972 See entire document.	1-31

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be part of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

01 APRIL 1994

Date of mailing of the international search report

APR 13 1994

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

ANDREW C. PIKE

Telephone No. (703) 308-3423

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/00993

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 3,773,111 (DUNN) 20 NOVEMBER 1973 See entire document.	1-31
A	US, A, 3,980,139 (KIRK) 14 SEPTEMBER 1976 See entire document.	1-31
A	US, A, 4,697,521 (ESPAGNACQ ET AL.) 06 OCTOBER 1987 See entire document.	1-31

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/00993

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:
Telephone Practice
Please See Extra Sheet.

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/00993

B. FIELDS SEARCHED

Minimum documentation searched

Classification System: U.S.

169/43, 44, 46, 26, 27, 28, 30, 35, 36, 66, 68, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 91; 102/334, 367; 149/19.6, 117; 252/2, 4, 5

BOX II. OBSERVATIONS WHERE UNITY OF INVENTION WAS LACKING

This ISA found multiple inventions as follows:

Group I, claims 1-8, drawn to a method and a device for extinguishing a fire with the device being submerged in a liquid coolant, classified in U.S. class 169, subclass 68;

Group II, claims 9-23, drawn to a method and a device for generating nontoxic smoke with the device being pre-positioned and having a composition which includes a second reactant serving as a reduction agent, classified in U.S. class 102, subclass 334;

Group III, claims 24-26, drawn to a fire-extinguishing system which is designed to be placed at a remote location following activation, classified in U.S. class 169, subclass 36; and

Group IV, claims 27-31, drawn to a system for extinguishing a fire including mixing of a fire-extinguishing gas and products of two reactants, classified in U.S. class 169, subclass 71.

Groups I-IV each have separate special technical features, and thus lack Unity of Invention, as follows:

Group I: a device submerged in a liquid coolant;

Group II: a device pre-positioned and having a composition which includes a second reactant serving as a reduction agent;

Group III: a system designed to be placed at a remote location following activation; and

Group IV: mixing of a fire-extinguishing gas and products of two reactants.