



(11) **EP 1 139 502 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
14.02.2007 Bulletin 2007/07

(51) Int Cl.:
H01R 13/516^(2006.01) H01R 13/658^(2006.01)
H01R 43/20^(2006.01)

(21) Application number: **00302288.6**

(22) Date of filing: **21.03.2000**

(54) **Electrical connector and method for mounting the same on an electrical cable**

Elektrischer Verbinder und Verfahren zum Anbringen des Verbinders an ein elektrisches Kabel

Connecteur électrique et procédé pour la connexion d'un câble électrique à celui-ci

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

(43) Date of publication of application:
04.10.2001 Bulletin 2001/40

(73) Proprietor: **Huang, George Ying-Liang**
Nei-Hu Dist.,
Taipei City (TW)

(72) Inventor: **Huang, George Ying-Liang**
Nei-Hu Dist.,
Taipei City (TW)

(74) Representative: **Abbie, Andrew Kenneth**
R.G.C. Jenkins & Co.
26 Caxton Street
London SW1H 0RJ (GB)

(56) References cited:
GB-A- 2 121 618 **US-A- 4 786 260**
US-A- 5 092 794 **US-A- 5 197 900**

EP 1 139 502 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to an electrical connector, which is connected electrically to an electrical cable that transmits electrical signals between electrical equipment, more particularly to an electrical connector and a method for mounting the same on an electrical cable. A connector according to the preamble of claim 1 is disclosed in US-A-4 786 260.

[0002] Referring to Figs. 1 and 2, a conventional electrical connector is shown to include an insulator body 11, a front metal housing 12, and a rear metal housing 13. The insulator body 11 has a plurality of parallel terminal pins 111 that extend therethrough, and a shoulder 112. The front metal housing 12 defines a terminal opening 121 therein, and has a rear end that is formed with an outwardly extending flange 122. The rear metal housing 13 has a front end that is formed with an outwardly extending flange 131, and a rear end that is formed with an inwardly extending flange 132. The flanges 122 and 131 abut against each other, and are formed with holes 14 for interconnecting the flanges 122 and 131 by rivets (not shown). In this way, the insulator body 11 is clamped between the front and rear metal housings 12 and 13. The insulator body 11 has a rear end, which abuts against the inwardly extending flange 132 of the rear metal housing 13. The terminal pins 111 have front ends, which are exposed within the terminal opening 121 in the front metal housing 12. The rear metal housing 13 is disposed normally within a metal shield. For example, referring to Figs. 3 and 4, in a first conventional electrical connector, the rear metal housing 13 is fixed within a front opening 151 in a unitary metal protective shield 15 by pressing a front end of the shield 15 to form an inwardly extending annular projection 155 after the rear metal housing 13 has been inserted into the shield 15. The shield 15 has a rear end opening 153, through which an electrical cable (not shown) passes for electrical connection with the terminal pins 111. When the front end of the shield 15 is pressed to form the projection 155, the shield 15 easily deforms, thereby resulting in the formation of voids between the rear metal housing 13 and the shield 15. As a result, the rear metal housing 13 cannot be connected firmly to the shield 15. Furthermore, electromagnetic interference in the first conventional electrical connector is increased.

[0003] Referring to Figs. 5 and 6, in a second conventional electrical connector, the rear metal housing 13 is fixed between an upper metal housing 16 and a lower metal housing 17, which are interconnected by virtue of engagement between inwardly pressed portions 161 of the upper metal housing 16 and rectangular grooves 171 in the lower metal housing 17. An annular welding joint (not shown) is formed between the rear metal housing 13 and the upper metal housing 16 and between the rear metal housing 13 and the lower metal housing 17 for reducing electromagnetic interference in the second conventional electrical connector, thereby resulting in waste of time when the second conventional electrical connec-

tor is mounted on an electrical cable (not shown). Furthermore, the insulator body in the rear metal housing 13 melts partially due to high temperatures resulting from the formation of the annular welding joint.

[0004] Referring to Fig. 7, in a third conventional electrical connector, the rear metal housing 13 is fixed between an upper metal housing 21 and a lower metal housing 23. Each of the upper and lower metal housings 21, 23 is formed with a hook edge 25, which is inserted into a respective one of two mounting slots 133 in the rear metal housing 13. As such, it is time-consuming to mount the third conventional electrical connector on an electrical cable (not shown). Because voids are created unavoidably among the housings 13, 21, 23, electromagnetic interference in the third conventional electrical connector is also increased.

[0005] Referring to Fig. 8, in a fourth conventional electrical connector, the rear metal housing (not shown) is fixed between an upper metal housing 22 and a lower metal housing 24, each of which is formed with a holding edge 26 at a front end thereof for holding the front metal housing 12 thereon. The fourth conventional electrical connector suffers from the same drawbacks as the third conventional electrical connector.

[0006] It is desirable to provide an electrical connector, which reduces electromagnetic interference.

[0007] It is further desirable to provide an electrical connector, which has a relatively high mechanical structural strength without pouring insulating plastic material in a metal protective shield.

[0008] According to an example of an electrical connector, the electrical connector includes an insulator body with a terminal pin unit, a metal housing, and a metal protective shield. The electrical connector is mounted on an electrical cable that transmits signals between electrical equipment by a process, which includes the steps of:

- (1) passing the cable through the shield to connect electrically with the terminal pin unit on the insulator body;
- (2) placing the insulator body into the shield in such a manner that the terminal pin unit is exposed partially to exterior of the shield;
- (3) fastening the housing onto the shield so as to clamp the insulator body between the housing and the shield; and
- (4) pressing inwardly and sleeving tightly a portion of the shield on the cable.

[0009] Because the insulator body is clamped directly between the housing and the shield, and because the electrical connector is composed of a relatively small number of parts, electromagnetic interference in the electrical connector is reduced.

[0010] The shield can have a thickness large enough to increase the mechanical structural strength thereof, without the need for pouring insulating plastic material

therein.

[0011] Furthermore, because the number of the parts of the electrical connector is reduced, the electrical connector can be mounted easily on the electrical cable.

[0012] The invention will become apparent in the following detailed description of the preferred embodiments, with reference to the accompanying drawings, in which:

Figs. 1 and 2 illustrate how an insulator body is disposed between front and rear metal housings in a conventional electrical connector;

Fig. 3 is an exploded perspective view of a first conventional electrical connector;

Fig. 4 is an assembled perspective view of the first conventional electrical connector;

Fig. 5 is an exploded perspective view of a second conventional electrical connector;

Fig. 6 is an assembled perspective view of the second conventional electrical connector;

Fig. 7 is an exploded perspective view of a third conventional electrical connector;

Fig. 8 is an assembled perspective view of a fourth conventional electrical connector;

Fig. 9 is an exploded perspective view of a first example of an electrical connector;

Fig. 10 is an assembled perspective view of the first example;

Fig. 11 is an exploded perspective view of a second example of an electrical connector;

Fig. 12 is an assembled perspective view of the second example;

Figs. 12A and 12B are schematic sectional views illustrating how two flanges of the second example are interconnected;

Fig. 12C is a rear view of the flanges of the second example;

Fig. 13 is an exploded perspective view of a preferred embodiment of an electrical connector according to this invention;

Fig. 14 is an assembled perspective view of the preferred embodiment;

Fig. 15 is a block diagram of a method for mounting an electrical connector on an electrical cable ; and

Fig. 16 is a schematic top view illustrating how an insulating housing is injection molded on an electrical connector.

[0013] Before the preferred embodiments are described in detail, it is noted that like numerals designate similar elements or structures throughout the whole description of the preferred embodiments.

[0014] Referring to Figs. 9 and 10, a first example of an electrical connector is shown to include an insulator body 3, an annular metal housing 5, and a tubular unitary metal protective shield 7.

[0015] The electrical connector is adapted to be connected to an electrical cable 8 that is disposed behind

the electrical connector and that has a plurality of signal lines 81.

[0016] The insulator body 3 has a front face 31, a rear face 33 that is opposite to the front face 31, a shoulder 34, and a terminal pin unit 35, which includes a plurality of parallel pins 350 that extend through the insulator body 3. Each of the pins 35 has a front end 351 that extends from the front face 31, and a rear end 353 that extends from the rear face 33.

[0017] The housing 5 has a rear end formed with an outwardly extending flange 51, and defines a terminal opening 55 in the housing 5. Six inwardly extending reinforcing projections 551 are formed on the housing 5 for pressing against another electrical connector (not shown), which is inserted into the terminal opening 55. Two holes 57 are formed through the flange 51 on two sides of the terminal opening 55.

[0018] The shield 7 has open front and rear ends, which are adapted for passage of the cable 8 through the shield 7 to connect with the rear ends of the pins 350 electrically. The shield 7 defines a hole 73 therein, which has an enlarged front end portion 75 that is defined in front of a shoulder 77 so as to receive the insulator body 3 fittingly therein, and a rear end 76, into which the cable 8 is inserted. The front end of the shield 7 is formed with an outwardly extending flange 71, which abuts against the flange 51 of the housing 5 and which is connected fixedly to the flange 51 of the housing 5. Each of the flanges 51, 71 of the housing 5 and the shield 7 has two holes 57, 711 that are formed therethrough on two sides of the terminal opening 55. The electrical connector further includes two rivet elements 58, each of which extends through a respective one of the holes 57 in the housing 5 and a respective one of the holes 711 in the shield 7 for interconnecting the flanges 51, 71 of the housing 5 and shield 7. In use, the rivet elements 58 are attached to, e.g. a computer housing (not shown). The shield 7 has a generally rectangular containing body 731 and a cylindrical rear end portion 733. Because voids occur only between the flanges 51, 71 of the housing 5 and the shield 7, electromagnetic interference in the electrical connector is reduced significantly.

[0019] The shield 7 is manufactured by a press casting process, and has a thickness, which ranges between 0.6mm and 1.0mm. Accordingly, the electrical connector has a relatively high mechanical structural strength.

[0020] The interconnection between the flanges 51, 71 can be changed. For example, as shown in Figs. 11 and 12, the flange 71 of the shield 7 is generally rectangular, and has four notches 713 in four corners thereof. The flange 51 of the housing 5 is generally rectangular, and is formed with four integral tongues 513 at four corners thereof, which engage respectively the notches 713 in the flange 71 of the shield 7 and which are bent to clamp the flange 71 of the shield 7 between the flange 51 of the housing 5 and the tongues 513 for fixing the housing 5 relative to the shield 7. It is noted that the tongues 513 are shaped as rectangular plates prior to mounting of the

electrical connector on the cable 8, as shown in Fig. 11. The flanges 51, 71 are interconnected by the steps of:

- abutting the flange 51 against the flange 71;
- bending the tongues 513 by 90 degrees to a position, as shown in Fig. 12A, to engage the notches 713 in the flange 71 of the shield 7; and
- bending the tongues 513 once again by 90 degrees to a position, as shown in Figs. 12, 12B, 12C, to clamp the flange 71 of the shield 7 between the tongues 513 and the remaining portion of the flange 51 of the housing 5.

[0021] According to a preferred embodiment the flanges 51, 71 are interconnected in a manner illustrated in Figs. 13 and 14. As illustrated, the flange 71 of the shield 7 has an outer periphery, which is formed integrally with an endless annular frame 718 that extends axially and outwardly therefrom and that confines the flange 51 of the housing 5 therein, thereby reducing electromagnetic interference in the electrical connector. The flange 71 is formed with four integral projecting posts 712 that engage respectively four holes 512 in the flange 51. The posts 712 have front ends, each of which is hammered to form an enlarged end for preventing separation of the flanges 51, 71. In this embodiment, the rivet elements 58 are secured to a computer housing (not shown). It is noted that the frame 718 may be formed on the flange 51, instead of the flange 71. Further, the positions of the posts 712 and the holes 512 can be interchanged.

[0022] Referring to Figs. 9 and 15, an electrical connector is mounted on the cable 8 by the steps:

- (1) passing the cable 8 through the shield 7 to connect electrically with the terminal pin unit 35 of the insulator body 3;
- (2) placing the insulator body 3 onto the shield 7 in such a manner that the terminal pin unit 35 is exposed partially to exterior of the shield 7;
- (3) fastening the housing 5 into the shield 7 so as to clamp the insulator body 3 between the housing 5 and the shield 7; and
- (4) pressing inwardly and fitting tightly the rear end portion 733 of the shield 7 on the cable 8.

[0023] Before the housing 5 is fastened to the shield 7, an outer surface of the shield 7 can be plated and/or painted.

[0024] Because the number of the parts of the electrical connector of this invention is relatively small, the electrical connector can be mounted easily on the cable 8.

[0025] Preferably, after the rear end portion 733 of the shield 7 is press fitted on the cable 8, as shown in Fig. 16, an insulating housing 9 is injection molded on the shield 7. The insulating housing 9 has two holes 91 that are formed therethrough and that are aligned with the holes 711 (see Fig. 9) in the shield 7.

Claims

1. An electrical connector adapted to be connected with an electrical cable (8) that is disposed behind the electrical connector, the electrical connector including an insulator body (3), which has a front face (31), a rear face (33) that is opposite to the front face (31), and a terminal pin unit (35), the terminal pin unit (35) including a plurality of parallel pins (350) that extend through the insulator body (3), each of the pins (350) having a front end (351) that extends from the front face (31) of the insulator body (3) and a rear end (353) that extends from the rear face (33) of the insulator body (3), wherein the electrical connector further includes:

an annular metal housing (5) for defining a terminal opening (55) therein, the housing (5) having a rear end, which is formed with an outwardly extending flange (51); and

a unitary metal protective shield (7) having open front and rear ends, which are adapted for passage of the cable (8) through the shield (7) to connect with the rear ends of the pins (350) electrically, the shield (7) defining a hole (73) therein, which has an enlarged front end portion (75) for receiving the insulator body (3) fittingly therein, the front end of the shield (7) being formed with an outwardly extending flange (71), which abuts against the flange (51) of the housing (5) and which is connected fixedly to the flange (51) of the housing (5), **characterised in that:**

one of the flanges (51, 71) of the housing (5) and the shield (7) has an outer periphery, which is formed integrally with an endless annular frame (718) that extends axially and outwardly therefrom and that confines the other one of the flanges (51, 71) of the housing (5) and the shield (7) therein, thereby reducing electromagnetic interference in the electrical connector.

2. The electrical connector as claimed in Claim 1, wherein each of the flanges (51, 71) of the housing (5) and the shield (7) has two holes that are formed therethrough on two sides of the terminal opening (55), the electrical connector further including two rivet elements (58), each of which extends through a respective one of the holes (57) in the housing (5) and a respective one of the holes in the shield (7) for interconnecting the flanges (51, 71) of the housing (5) and shield (7).
3. The electrical connector as claimed in Claim 1 or Claim 2, further comprising an insulating housing (9), which is injection molded on the shield (7).

4. The electrical connector as claimed in any preceding claim, wherein the shield (7) is tubular.

Patentansprüche

1. Elektrische Steckvorrichtung, die ausgebildet ist, um mit einem elektrischen Kabel (8) verbunden zu werden, das sich hinter der elektrischen Steckvorrichtung befindet, wobei die elektrische Steckvorrichtung einen Isolierkörper (3) umfasst, der eine Vorderseite (31), eine Rückseite (33) gegenüber von der Vorderseite (31), und eine Anschluss-Stifteinheit (35) umfasst, wobei die Anschluss-Stifteinheit (35) mehrere parallele Stifte (350) umfasst, die sich durch den Isolierkörper (3) hindurcherstrecken, jeder der Stifte (350) ein vorderes Ende (351) hat, das aus der Vorderseite (31) des Isolierkörpers (3) herausragt, und ein hinteres Ende (353), das aus der Rückseite (33) des Isolierkörpers (3) herausragt, wobei die elektrische Steckvorrichtung außerdem umfasst:

ein ringförmiges Metallgehäuse (5) zum Bilden einer Anschlussöffnung (55) darin, wobei das Gehäuse (5) ein hinteres Ende hat, das einen nach außen ausgeweiteten Flansch (51) umfasst; und

eine einheitliche Schutzabdeckung (7) aus Metall, die offene Vorder- und Hinterenden hat, die zum Durchführen des Kabels (8) durch die Abdeckung (7) ausgebildet sind, zur elektrischen Verbindung mit den hinteren Enden der Stifte (350), wobei die Abdeckung (7) ein Loch (73) darin definiert, das über einen vergrößerten Vorderendabschnitt (75) verfügt, zur passenden Aufnahme der Isolierkörper (3), wobei das vordere Ende der Abdeckung (7) einen nach außen ausgeweiteten Flansch (71) umfasst, der an dem Flansch (51) des Gehäuses (5) anliegt, und der starr mit dem Flansch (51) des Gehäuses (5) verbunden ist, **dadurch gekennzeichnet, dass:**

einer der Flansche (51,71) des Gehäuses (5) und der Abdeckung (7) einen äußeren Rand hat, der integral mit einem durchgehenden, ringförmigen Rahmen (718) verbunden ist, der sich davon axial und nach außen erstreckt und den anderen Flansch (51, 71) des Gehäuses (5) und der Abdeckung (7) darin eingrenzt, infolgedessen die elektromagnetische Störung in der elektrischen Steckvorrichtung verringert ist.

2. Elektrische Steckvorrichtung nach Anspruch 1, wobei jeder der Flansche (51, 71) des Gehäuses (5) und der Abdeckung (7) zwei Löcher hat, die sich auf beiden Seiten der Anschlussöffnung (55) befinden,

wobei die elektrische Steckvorrichtung außerdem zwei Nietelemente (58) enthält, die jeweils durch eines der Löcher (57) des Gehäuses (5) und der Abdeckung (7) herausragen, um die Flansche (51, 71) des Gehäuses (5) und der Abdeckung (7) miteinander zu verbinden.

3. Elektronische Steckvorrichtung nach Anspruch 1 oder 2 weiterhin umfassend ein isolierendes Gehäuse (5), das durch Spritzguss auf der Abdeckung (7) angebracht ist.

4. Elektrische Steckvorrichtung nach den vorhergehenden Ansprüchen, wobei die Abdeckung (7) rohrförmig ist.

Revendications

1. Connecteur électrique adapté pour être connecté à un câble électrique (8) qui est disposé derrière le connecteur électrique, le connecteur électrique comportant un corps isolant (3), lequel présente une face avant (31), une face arrière (33) qui est opposée à la face avant (31), et une unité de broches de connexion (35), l'unité de broches de connexion (35) comportant une pluralité de broches parallèles (350) qui s'étendent à travers le corps isolant (3), chacune des broches (350) ayant une extrémité avant (351) qui s'étend à partir de la face avant (31) du corps isolant (3) et une extrémité arrière (353) qui s'étend à partir de la face arrière (33) du corps isolant (3), dans lequel le connecteur électrique comporte, de plus :

un logement métallique annulaire (5) pour y définir une ouverture de connexion (55), le logement (5) ayant une extrémité arrière qui est formée avec une bride s'étendant vers l'extérieur (51) ; et

un écran de protection métallique unitaire (7) possédant des extrémités ouvertes, avant et arrière, lesquelles sont adaptées pour un passage de câble (8) à travers l'écran de protection (7) en vue de le connecter électriquement avec les extrémités arrière des broches (350), l'écran de protection (7) définissant en lui un trou (73) qui présente une partie d'extrémité avant agrandie (75) pour recevoir le corps isolant (3), lequel s'y adapte, l'extrémité avant de l'écran de protection (7) étant formée avec une bride s'étendant vers l'extérieur (71), laquelle vient en butée contre la bride (51) du logement (5) et laquelle est connectée de façon fixe à la bride (51) du logement (5), **caractérisé en ce que :**

l'une des brides (51, 71) du logement (5) et de l'écran de protection (7) possède une pé-

- riphérie extérieure, laquelle est formée solidairement avec une structure annulaire continue (718) qui s'étend axialement et vers l'extérieur à partir d'elle et qui confine à l'intérieur l'autre bride (51, 71) du logement (5) et de l'écran de protection (7), réduisant de ce fait une interférence électromagnétique dans le connecteur électrique. 5
2. Connecteur électrique selon la revendication 1, dans lequel chacune des brides (51, 71) du logement (5) et de l'écran de protection (7) comporte deux trous qui sont formés à travers elles des deux côtés de l'ouverture de connexion (55), le connecteur électrique comportant, de plus, deux tiges de rivet (58), chacune d'elles s'étendant à travers l'un des trous respectif (57) dans le logement (5) et à travers l'un des trous respectif de l'écran de protection (7) pour interconnecter les brides (51, 71) du logement (5) et de l'écran de protection (7). 10 15 20
3. Connecteur électrique selon la revendication 1 ou la revendication 2, comprenant, de plus, un logement isolant (5), lequel est moulé par injection sur l'écran de protection (7). 25
4. Connecteur électrique selon l'une quelconque des revendications précédentes, dans lequel l'écran de protection (7) est tubulaire. 30

35

40

45

50

55

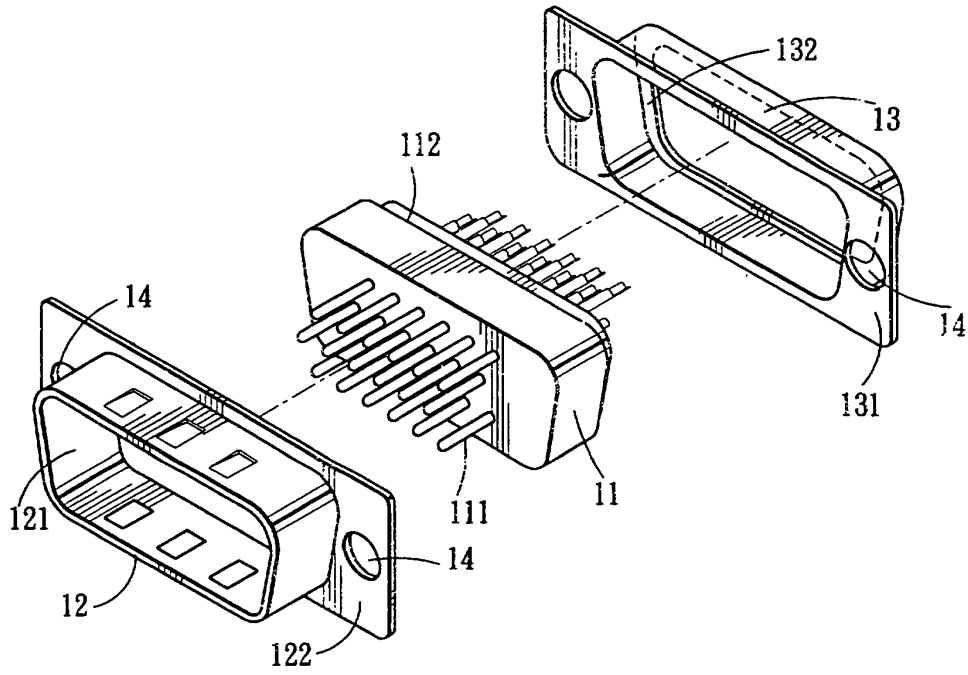


FIG.1 PRIOR ART

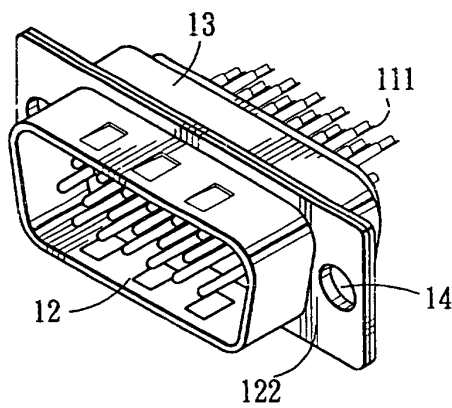


FIG.2 PRIOR ART

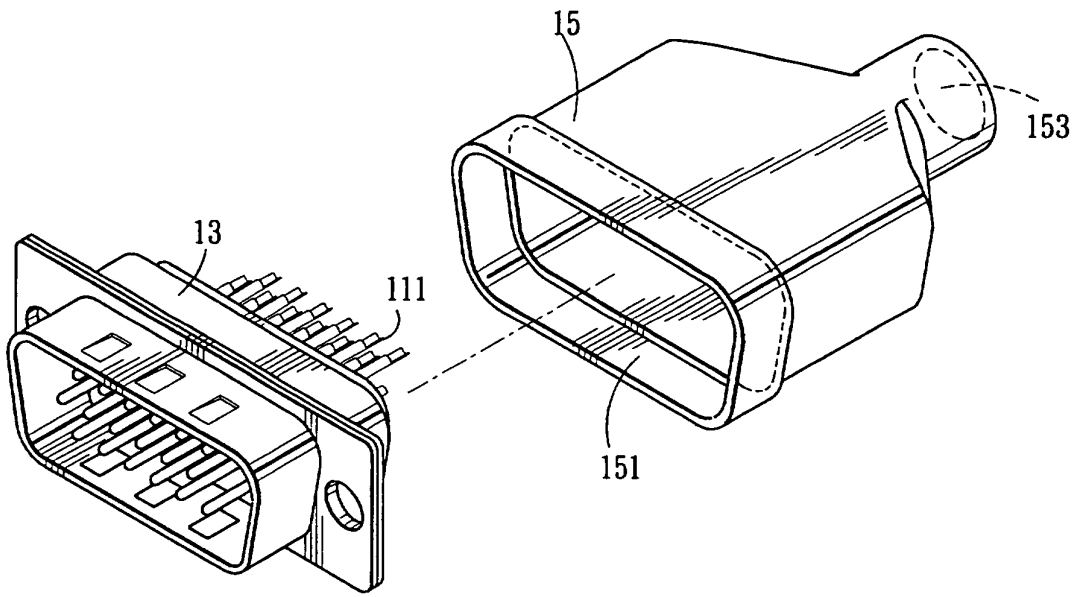


FIG. 3 PRIOR ART

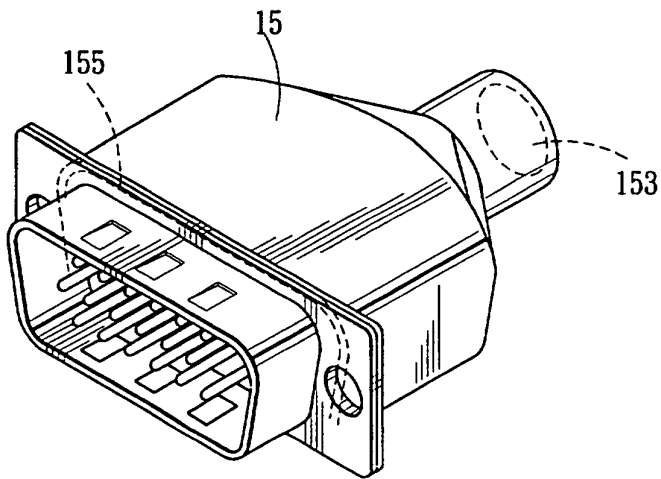


FIG. 4 PRIOR ART

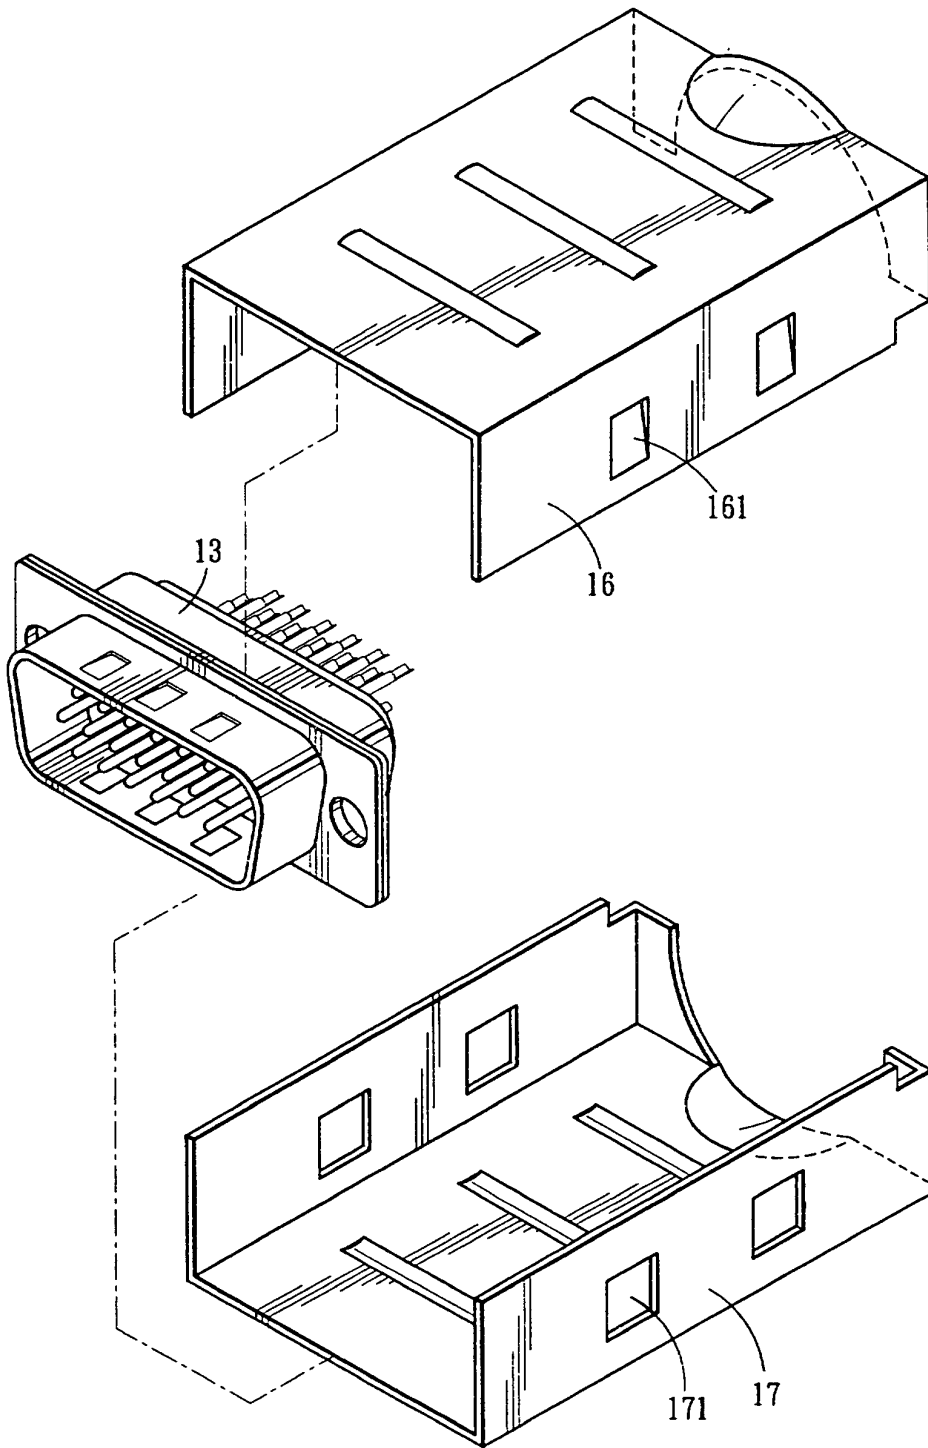


FIG. 5 PRIOR ART

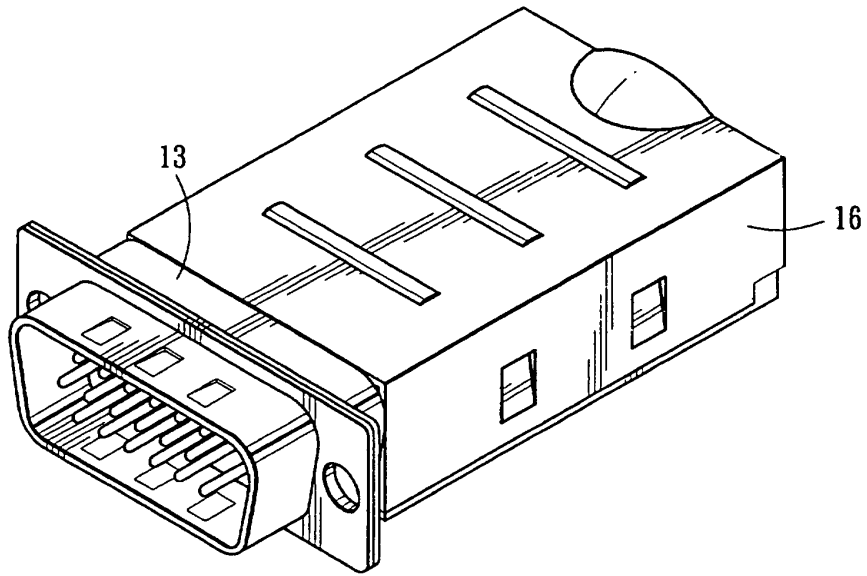


FIG. 6 PRIOR ART

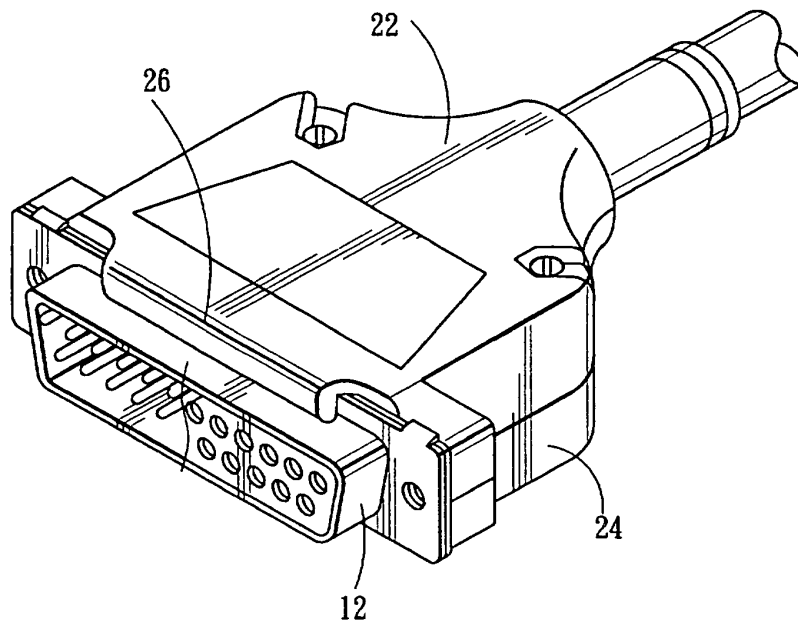


FIG. 8 PRIOR ART

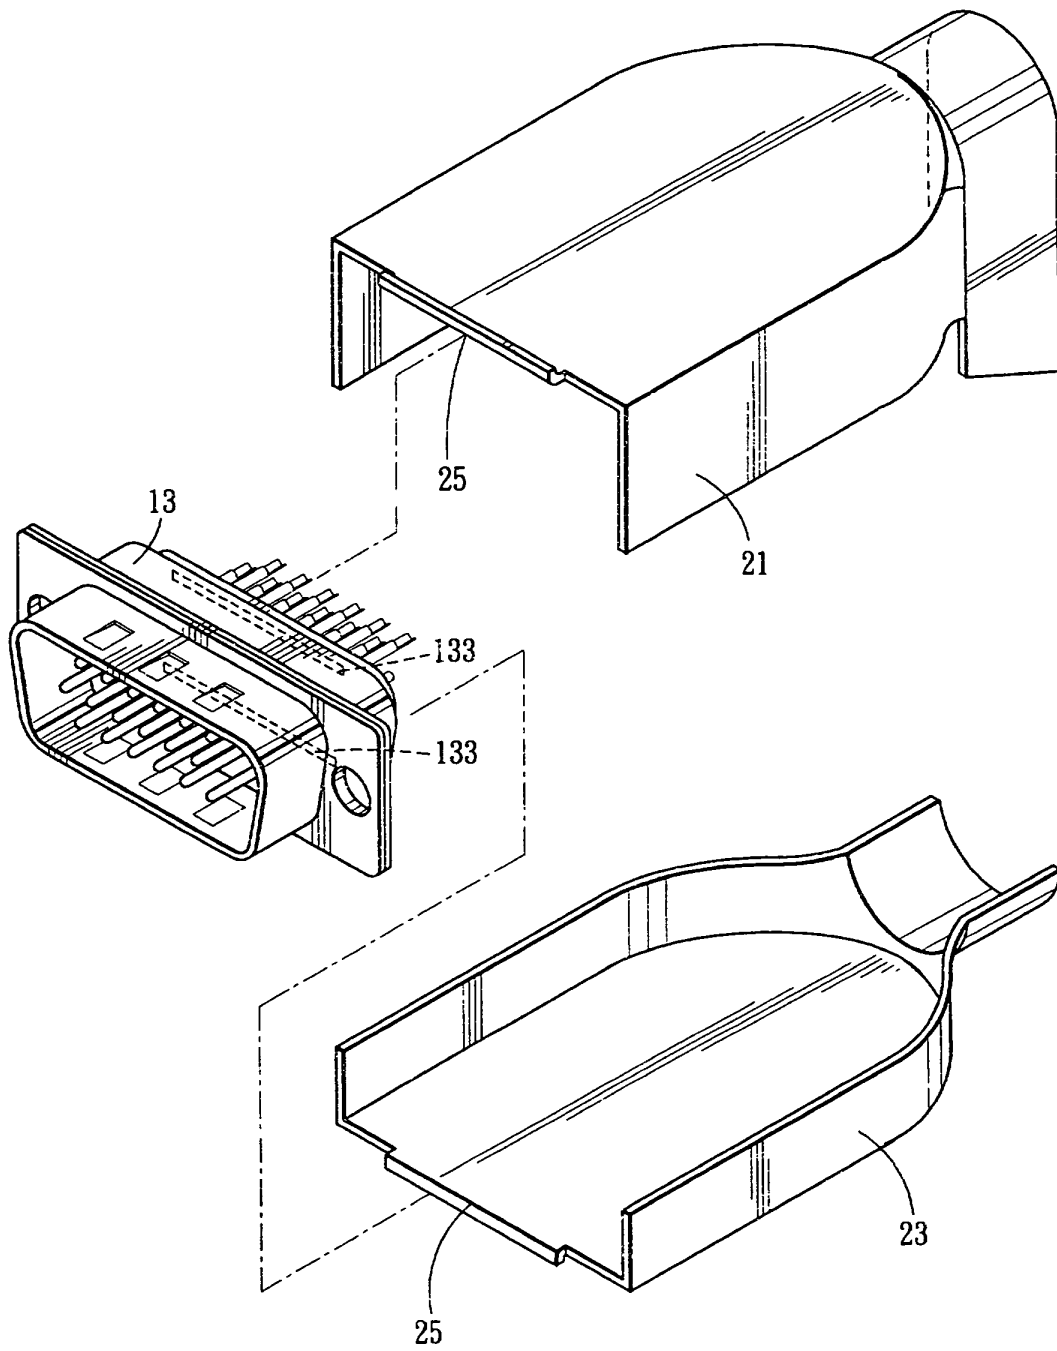


FIG. 7 PRIOR ART

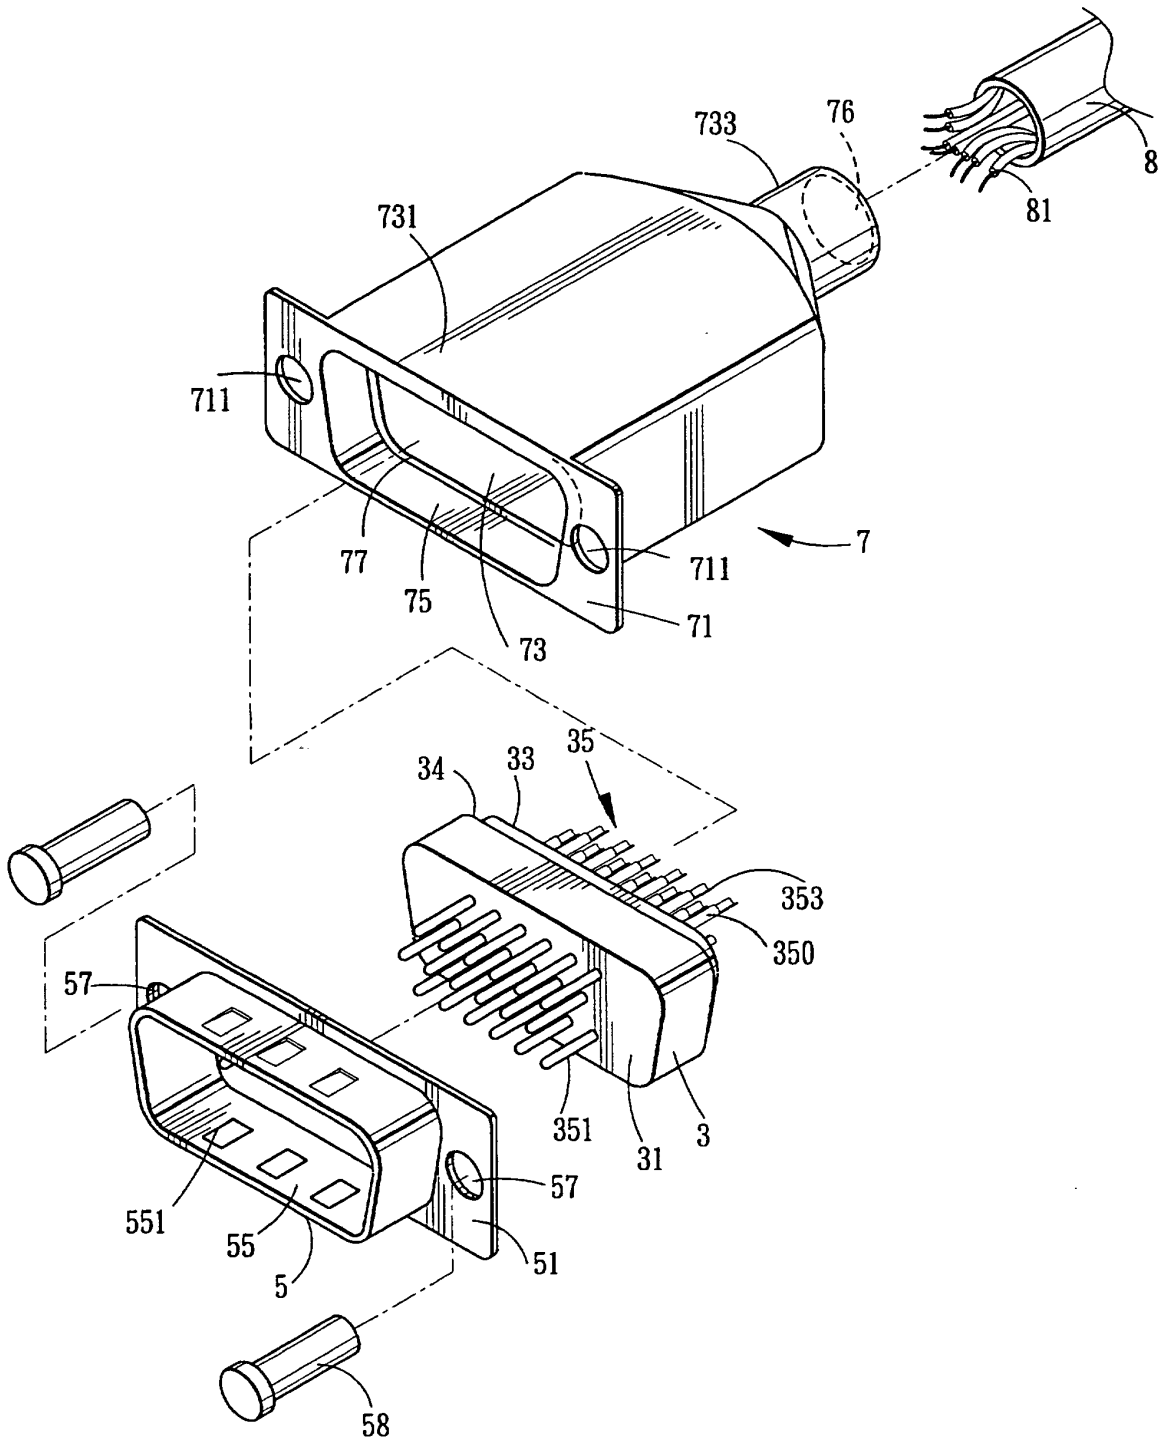


FIG. 9

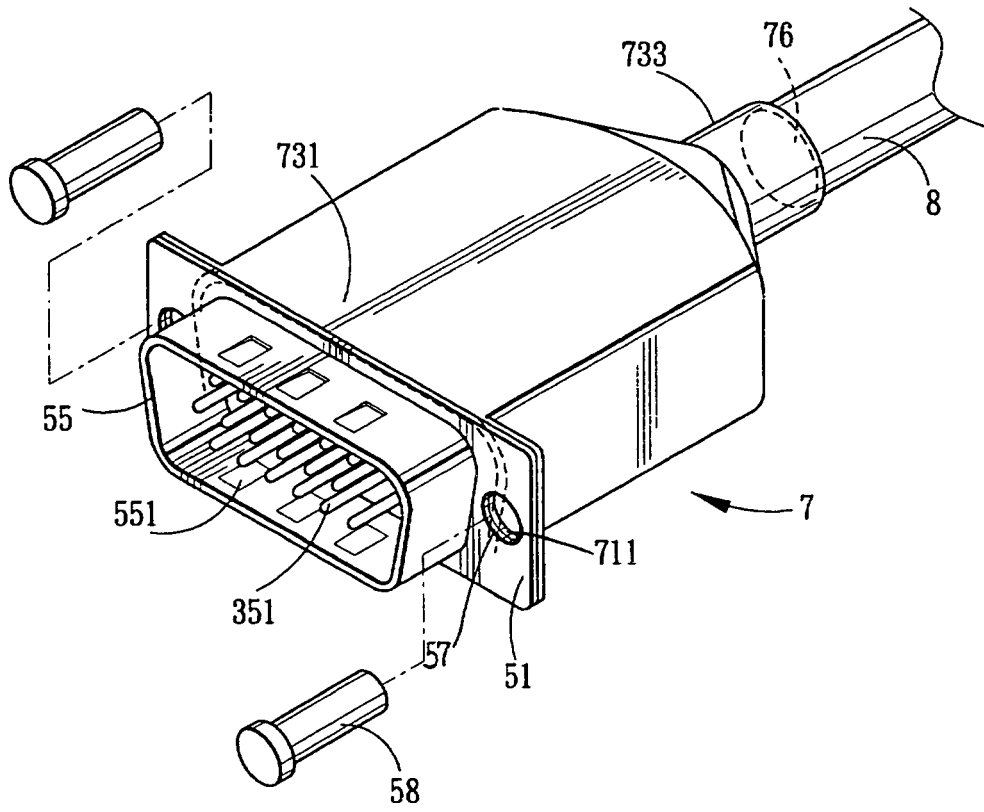


FIG. 10

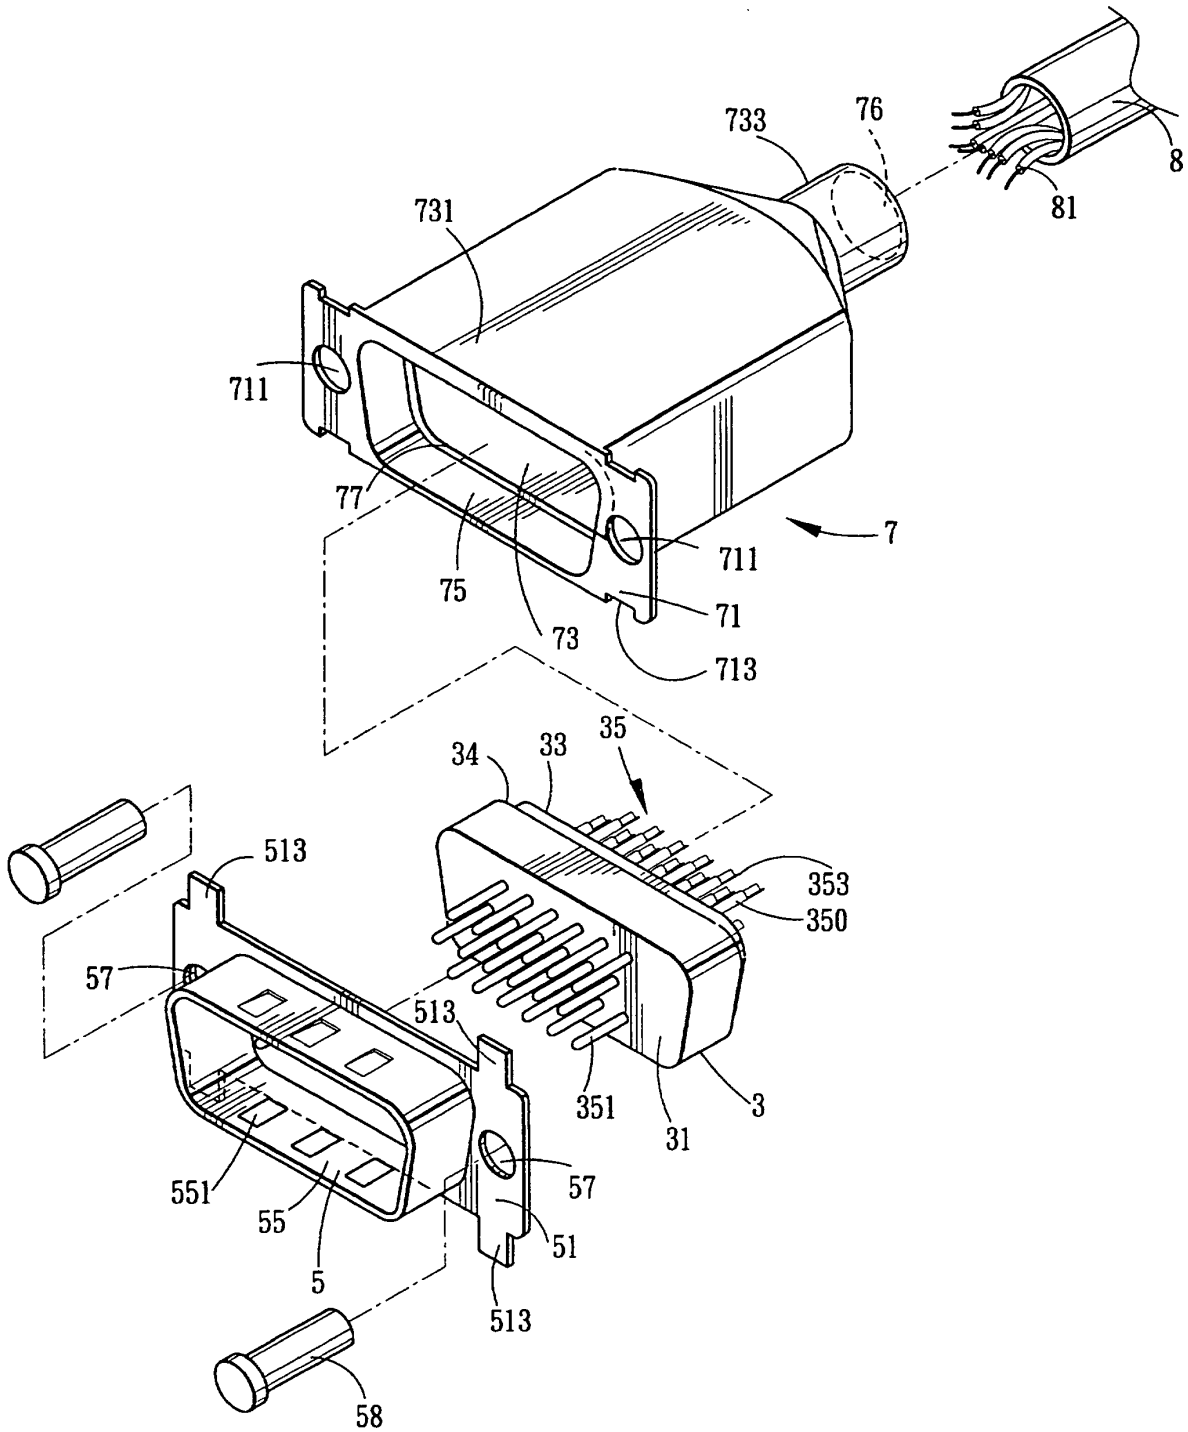


FIG. 11

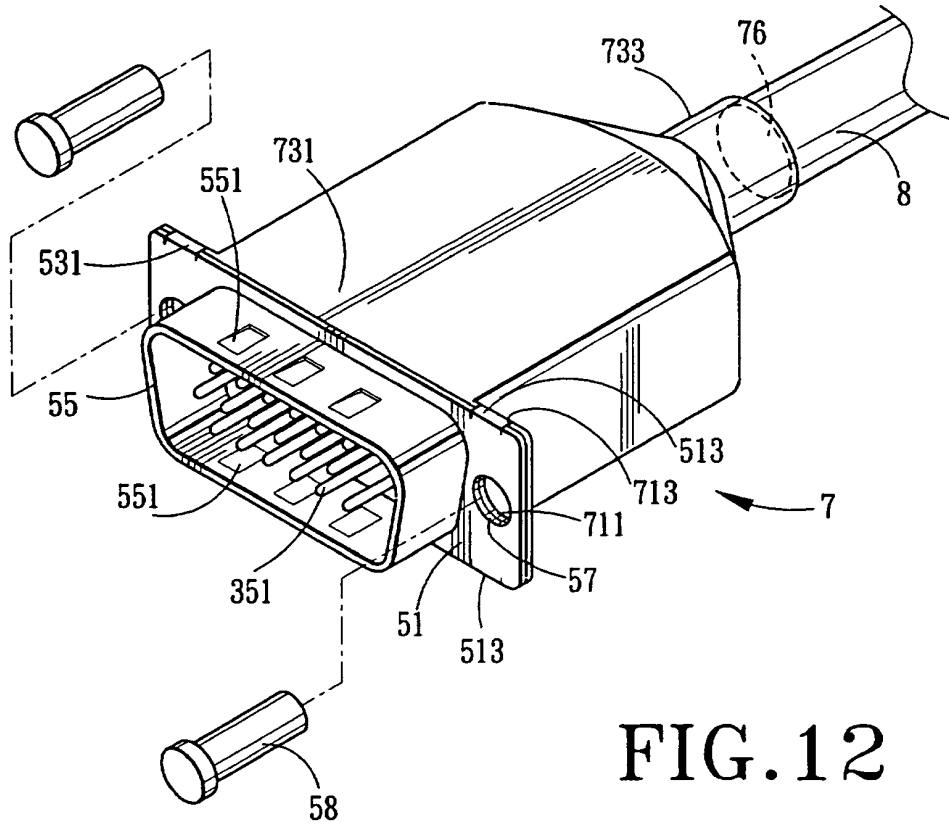


FIG. 12

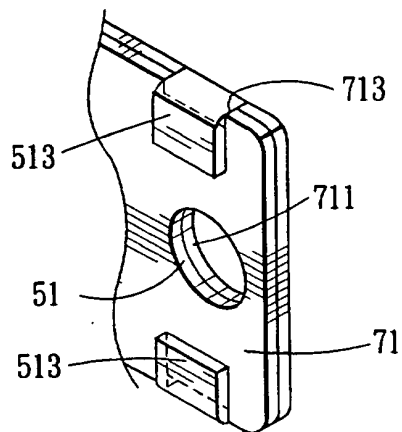


FIG. 12C

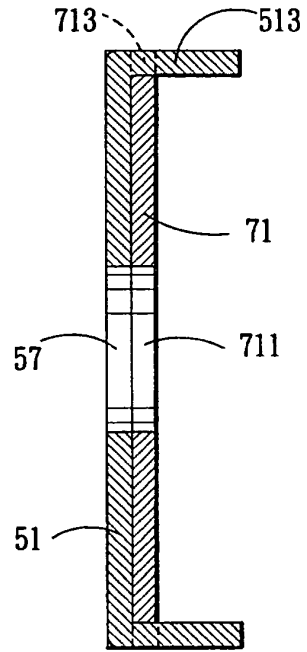


FIG. 12A

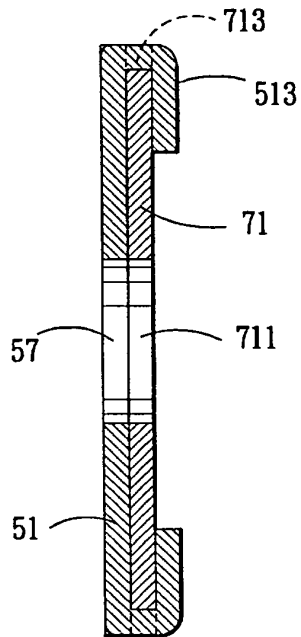


FIG. 12B

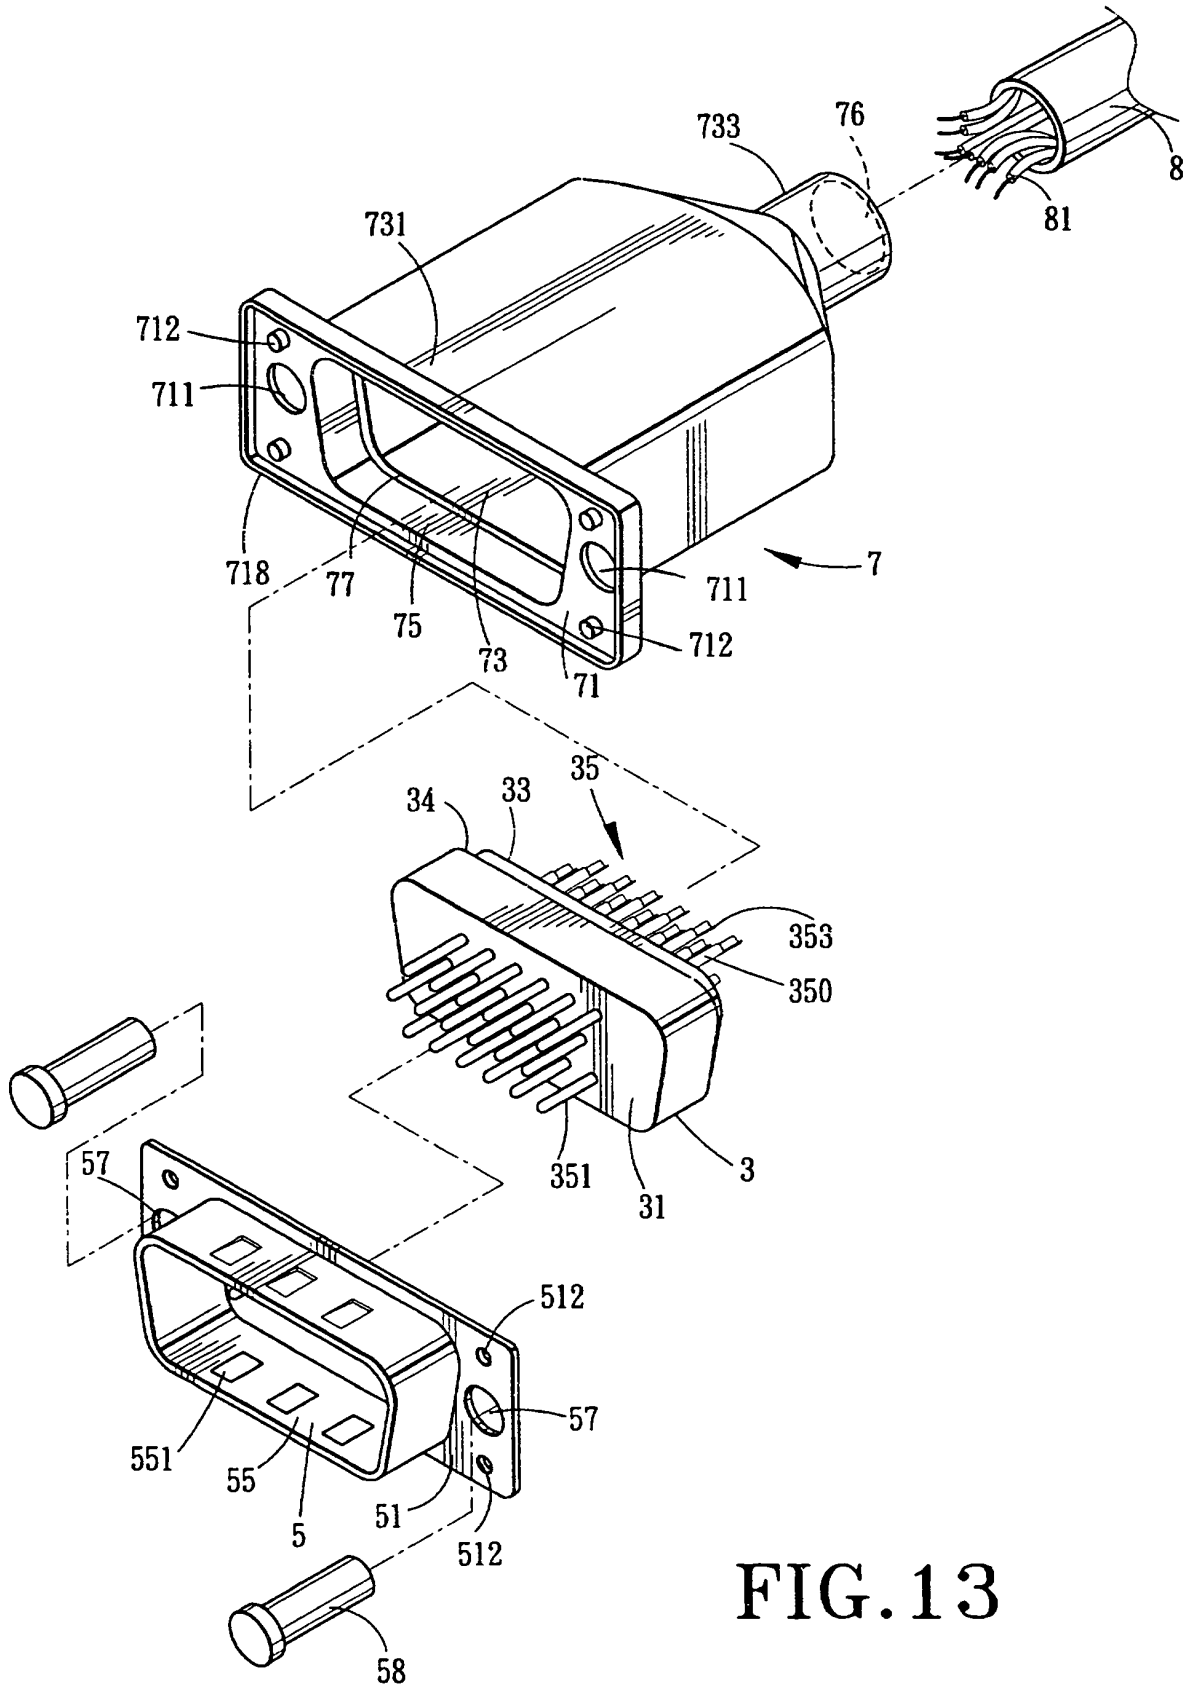


FIG. 13

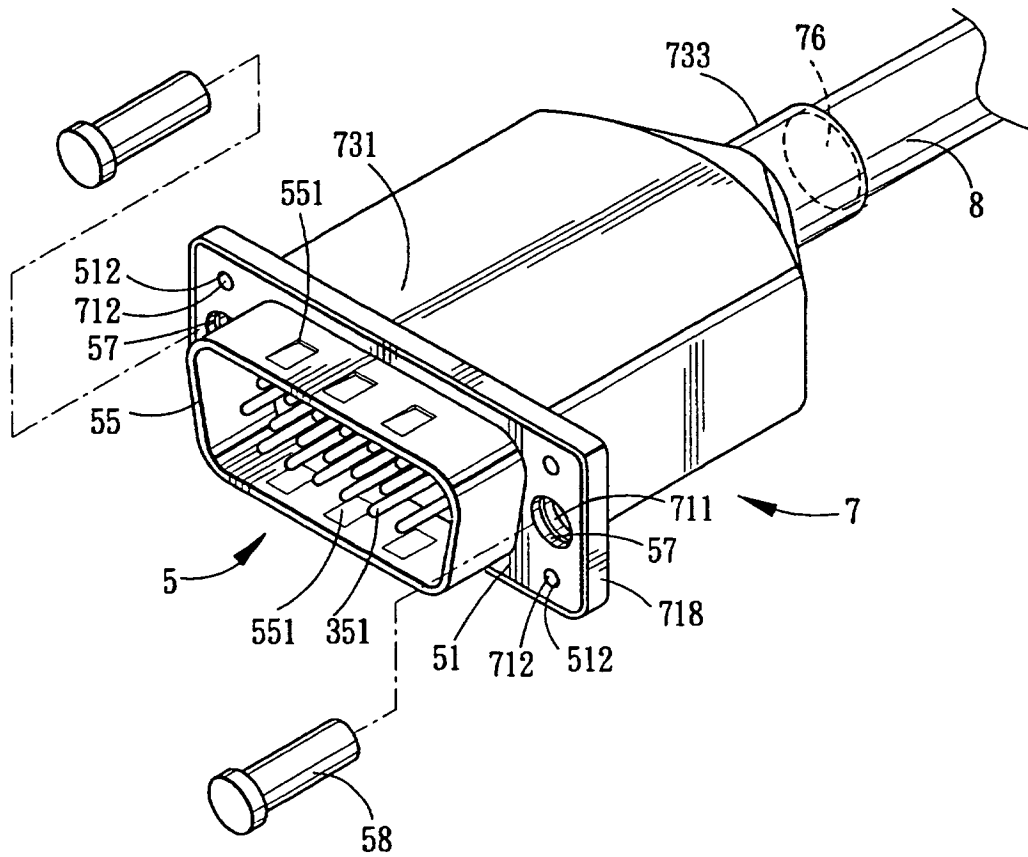


FIG. 14

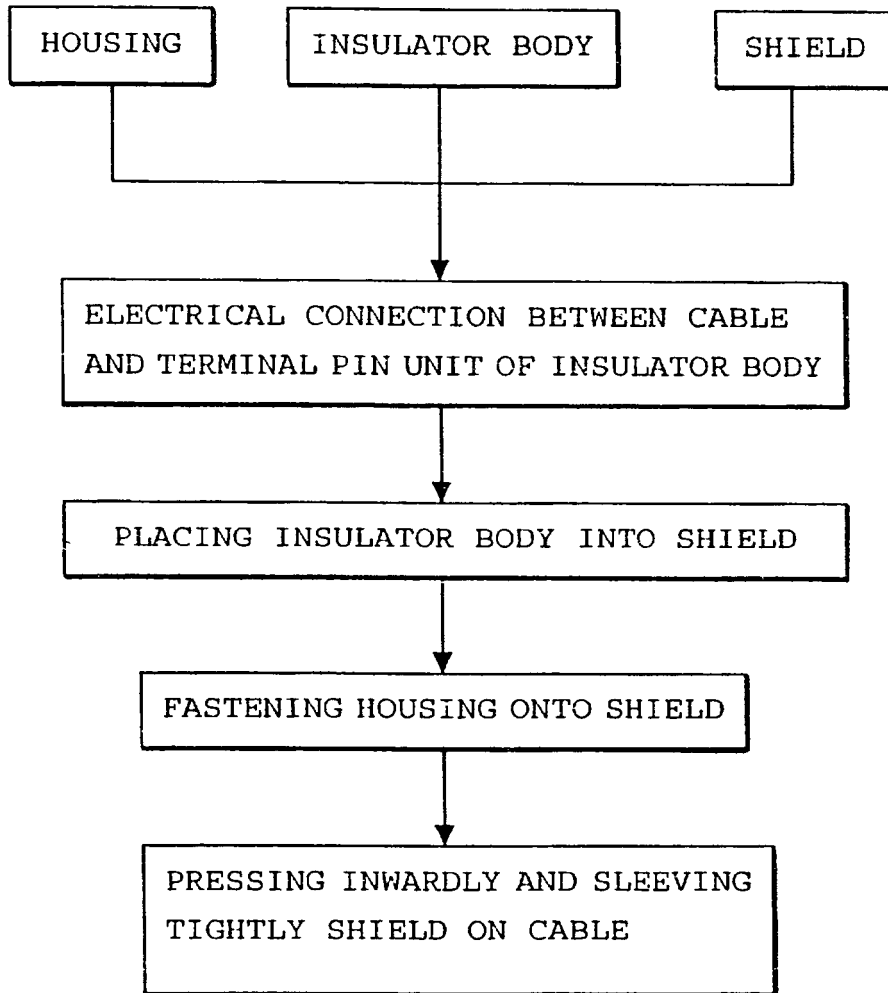


FIG. 15

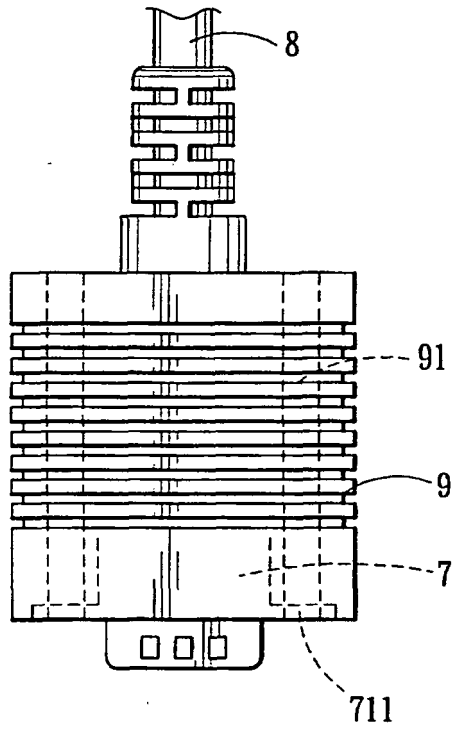


FIG. 16