



- (51) **International Patent Classification:**
C08K 5/36 (2006.01) *C08K 3/06* (2006.01)
- (21) **International Application Number:**
PCT/US2016/040067
- (22) **International Filing Date:**
29 June 2016 (29.06.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/186,618 30 June 2015 (30.06.2015) US
- (71) **Applicant:** THE ARIZONA BOARD OF REGENTS
ON BEHALF OF THE UNIVERSITY OF ARIZONA
[US/US]; The University of Arizona, Tech Transfer Arizona,
University Services Annex, 4th Floor, P. O. Box 210300a,
Tucson, AZ 85721 (US).
- (72) **Inventor:** PYUN, Dong-Chul; The University of Arizona,
1306 E. University Blvd, P. O. Box 210041, Tucson, AZ
85721 (US).
- (74) **Agent:** NGUYEN, Quan; Nguyen & Tarbet, 4199 Campus
Drive, Suite 550, Irvine, CA 92612 (US).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** METHODS OF UTILIZING ELEMENTAL SULFUR FOR FLAME RETARDANT POLYMERS AND ADDITIVES

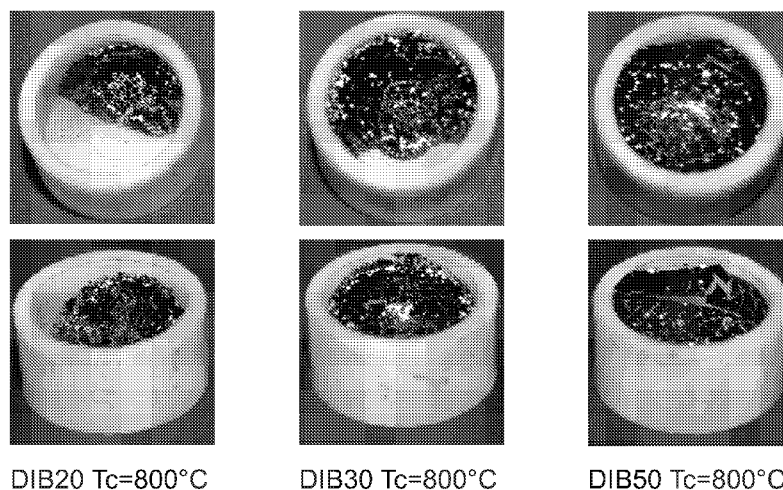


FIG. 1

(57) **Abstract:** Compositions of flame retardants and methods of enhancing char formation in a flame retardant-treated substrate. A base material is combined with a flame retardant to form the flame retardant-treated substrate. The flame retardant contains a sulfur copolymer prepared by the polymerization of sulfur monomers with organic monomers. The flame retardant can be deposited on a surface of the base material, coated on the base material, or mixed into the base material. When the flame resistant substrate is on fire, the flame retardant forms a charring layer on the flame retardant-treated substrate. The charring layer can extinguish and prevent the fire from spreading.

METHODS OF UTILIZING ELEMENTAL SULFUR FOR FLAME RETARDANT POLYMERS AND ADDITIVES

CROSS REFERENCE

[0001] This application claims priority to U.S. Provisional Patent Application No. 62/186,618, filed June 30, 2015, the specification(s) of which is/are incorporated herein in their entirety by reference.

FIELD OF THE INVENTION

[0002] The present invention relates to flame retardants, in particular, a high sulfur content polymer having flame retardant properties.

BACKGROUND OF THE INVENTION

[0003] Synthetic polymers are often highly flammable and often do not meet fire safety standards on their own. Polymers, such as polyurethane foams used in furniture cushions and polymers used in electrical applications or for personal protective equipment (PPE), such as those used by firefighters, must be treated to be flame retardant. For example, the Occupational Safety and Health Administration (OSHA) can cite employers for code violations if employees who are exposed to electric arcs or flame are found to wear any clothing that is not flame resistant or flame-retardant-treated, if said clothing can ignite under the electric arc and flame exposure conditions found at the workplace. Moreover, OSHA prohibits the use of clothing constructed from acetate, nylon, polyester, rayon, or blends thereof unless the fabric is demonstrated to have been treated to withstand the conditions that may be encountered, that is, made flame resistant or flame-retardant-treated. Flame resistant protective garments are designed to be used in a variety of industrial applications in order to reduce or prevent the severity or fatality of burns caused by fire hazards.

[0004] In order to meet fire safety standards, synthetic polymers that are often highly flammable must be treated with toxic compounds to be flame retardant. For instance, fire safety guidelines require the use of flame retardant chemicals for treating polyurethane foams, which is highly flammable, and when burned, melts at higher temperatures and further spreads the fire. According to the US National Fire Protection Association, furniture and bedding were the first objects to catch fire in an average of

17,300 fires annually, which have resulted in 871 civilian deaths and damage to property worth millions of dollars. According to a report published by the US National Fire Protection Association, soft foam-based home furniture and upholstered furniture were the items that initiated the ignition in about 20% of home fire-related deaths that occurred from 2006 to 2010.

[0005] These flame retardant chemicals are toxic and harmful to human health and the environment. Most of the current flame-retardant materials are based on halogenated compounds and many of them have been already banned due to concerns over their potential toxicity. Toxic chemicals, such as polyurethane foam and some brominated compounds have been shown to act as endocrine disrupters or lead to neurological problems. Hence, regulatory agencies, such as those in the European Union, Canada, and the United States, have begun to scrutinize the use of these chemicals.

[0006] For these reasons, there is a strong need for flame retardant material to protect foam-based furniture, as well as other highly flammable polymers, from catching fire. Recent advancements have occurred in the past few years in the flame retardant polymers industry and as safety standards become more stringent, the importance of finding non-toxic flame retardant polymers continues to grow.

[0007] Standards for testing flammability can determine the effectiveness of a flame retardant. As with any testing, the tests for flammability of a specimen are designed for the laboratory and quality control. Examples of such testing include Limiting Oxygen Index (LOI) and Underwriters Laboratory (UL94). The LOI test is a measure of the percentage of oxygen that has to be present to support combustion of the plastic. Since air contains approximately 21% oxygen, higher LOI values greater than 21 are desirable for indicating lower flammability.

[0008] The UL testing is a method of classifying a material's tendency to either extinguish or spread a flame once it has been ignited. This has been incorporated into many National and International Standards (ISO 9772 and 9773). For example, the UL vertical burning test (UL94-V) requires a specimen to be tested in a vertical orientation with the ignition placed at the lower end of the specimen. A UL94-V rating of V-1 is acceptable if the tests results in the following: duration of flaming for each flaming

application is less than 30 seconds, the total duration of flaming for 5 samples (10 flame applications) is less than 250 seconds, and there is no dripping of flaming material. A UL94-V rating of V-0 is superior if the tests results in the following: duration of flaming for each flaming application is less than 10 seconds, the total duration of flaming for 5 samples (10 flame applications) is less than 50 seconds, and there is no dripping of flaming material.

[0009] US5811470 teaches a composition which comprises a styrenic polymer and as a flame retardant therefor, a combination of the following ingredients: at least one organic phosphorus additive that (i) is halogen-free, and (ii) is composed solely of carbon, hydrogen, and phosphorus, and optionally one or more of the elements nitrogen, oxygen, and sulfur; and elemental sulfur.

[0010] US3542701 discloses the manufacture of polystyrene foams of decreased inflammability which comprises incorporating from 5 to 35% by weight of elemental sulfur in a polystyrene bead precursor mix and expanding the mix to form a foam.

[0011] US20120264837 reports a halogen-free, flameproof expandable styrene polymers (EPS) and styrene polymer extruded foams (XPS) may be produced by admixing a blowing agent, one or more phosphorus compound(s) and elemental sulfur and/or a sulfur-containing compound or sulfur compound into the polymer melt and subsequent extrusion to give foam sheets, foam strands, or expandable granules

[0012] Any feature or combination of features described herein are included within the scope of the present invention provided that the features included in any such combination are not mutually inconsistent as will be apparent from the context, this specification, and the knowledge of one of ordinary skill in the art. Additional advantages and aspects of the present invention are apparent in the following detailed description and claims.

SUMMARY OF THE INVENTION

[0013] The subject disclosure features a flame retardant composition comprising a sulfur copolymer. The sulfur copolymer is prepared using inverse vulcanization, thereby resulting in a sulfur copolymer having a high sulfur content. This present invention can

be used to treat polymers, such as polyurethane, commonly used in applications that require fire retardant properties or in personal protective equipment.

[0014] One of the unique and inventive technical features of the present invention is that the flame retardant composition comprising a sulfur copolymer having a high sulfur content was surprisingly found to have higher char yields than other synthetic polymers. Without wishing to limit the invention to any theory or mechanism, it is believed that the technical feature of the present invention advantageously provides for a more effective flame retardant that is non-halogenated. None of the presently known prior arts or work has the unique inventive technical feature of the present invention. Further, the present invention allows for the direct use of low cost elemental sulfur to form inexpensive high sulfur content copolymers that can promote a higher carbon char content than other prior arts. The sulfur copolymers described herein are readily solution, or melt processed into thin films, coatings, or blends for use as a flame retardant.

[0015] According to one embodiment, the present invention features a fire retardant composition comprising a sulfur copolymer. The sulfur copolymer may comprise sulfur monomers prepared from elemental sulfur, wherein the sulfur monomers are at least about 40 wt% of the sulfur copolymer; and organic comonomers at about 10 wt% to 50 wt% of the sulfur copolymer, wherein the organic comonomers are polymerized with the sulfur monomers. In some embodiments, the fire retardant composition may be used as a fire retardant intumescent coating. When a substrate is combined with fire retardant composition is on fire, the fire retardant composition forms a charring layer on a surface of the substrate, thereby extinguishing the fire. The charring layer may comprise at least 20 wt% char. Preferably, the fire retardant composition provides for test specimens that are combined with the fire retardant composition to exhibit an LOI of at least 25 and a UL94-V rating of V-1 or V-0.

[0016] Another embodiment featuring a method of enhancing char formation in a substrate is described herein. The method may comprise combining a base material with a fire retardant composition to form the substrate. The fire retardant composition may comprise a sulfur copolymer comprising at least about 40 wt% of the sulfur copolymer; and organic comonomers at about 10 wt% to 50 wt% of the sulfur copolymer, wherein the organic comonomers are polymerized with the sulfur monomers.

The fire retardant composition may be deposited on a surface of the base material, coated on the base material, or mixed into the base material. Preferably, when the substrate is on fire, the fire retardant composition forms a charring layer on the substrate, thereby extinguishing and preventing the fire from spreading.

[0017] In some embodiments, the organic comonomers used in herein may be selected from a group consisting of amine monomers, thiol monomers, sulfide monomers, alkynylly unsaturated monomers, epoxide monomers, nitron monomers, aldehyde monomers, ketone monomers, thirane monomers, and ethylenically unsaturated monomers.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] The features and advantages of the present invention will become apparent from a consideration of the following detailed description presented in connection with the accompanying drawings in which:

[0019] FIG. 1 shows examples of charred samples of the present invention for a combustor temperature of 800 °C.

[0020] FIG. 2 shows an exemplary chart of temperature vs. heat release rate (HRR) for samples of the present invention at a combustor temperature of 900 °C.

[0021] FIG. 3 shows an exemplary chart of temperature vs. heat release rate (HRR) for samples of the present invention at a combustor temperature of 800 °C.

DESCRIPTION OF PREFERRED EMBODIMENTS

[0022] As used herein, the term “char” is defined as a carbonaceous residue resulting from the conversion of an organic matter, usually through pyrolysis. Char formation results from the action of substances which are able to reticulate a burning substrate and to create a charring insulating layer.

[0023] As used herein, the term “intumescence” is defined as a mechanism that creates a foamed charring structure which forms a barrier to prevent flame and oxygen from reaching a substrate. Typically, an intumescent substance will swell as a result of heat exposure, thus increasing in volume and decreasing in density. When heated, an intumescent can produce charring.

[0024] As used herein, the term “amine monomer” is a monomer having at least one amine functional group. The amine monomer may be polymerizable through its amine functional group. In one embodiment, aromatic amines and multi-functional amines may be used. Amine monomers include, but are not limited to, *m*-phenylenediamine, and *p*-phenylenediamine. The various types of phenylenediamines are inexpensive reagents due to their wide-spread use in the preparation of many conventional polymers, e.g., polyurethanes, polyamides. In the reaction of 1,3-phenylenediamine with S₈ a surprising substitution of the aromatic ring with sulfur groups in the copolymerization. Furthermore, the resulting sulfur copolymer carried reactive amine moieties that were further reacted with comonomers, such as, isocyanates, acid chlorides, epoxides, carboxylic acids, esters, amides, alkyl halides, or acrylates to either modify the sulfur copolymer, or make new copolymeric materials, such as, polyamides, polyurethanes, polyamides, and polyethers.

[0025] As used herein, the term “thiol monomer” is a monomer having at least one thiol functional group. The thiol monomer may be polymerizable through its thiol functional group. Thiol monomers include, but are not limited to, 4,4'-thiobisbenzenethiol and the like. The term “sulfide monomers” are those that have at least one sulfide functional group. The sulfide monomers may be polymerizable through its sulfide functional group.

[0026] As used herein, an alkynylly unsaturated monomer is a monomer having at least alkynylly unsaturated functional group. The alkynylly unsaturated monomer may be polymerizable through its alkynyl unsaturation (i.e., its triple bond). The term “alkynylly unsaturated monomer” does not include compounds in which the alkynyl unsaturation is part of a long chain alkyl moiety (e.g., unsaturated fatty acids, or carboxylic salts, or esters such as oleates, and unsaturated plant oils). In one embodiment, aromatic alkynes, both internal and terminal alkynes, multi-functional alkynes may be used. Examples of alkynylly unsaturated monomers include, but are not limited to, ethynylbenzene, 1-phenylpropyne, 1,2-diphenylethyne, 1,4-diethynylbenzene, 1,4-bis(phenylethynyl)benzene, and 1,4-diphenylbuta-1,3-diyne.

[0027] As used herein, the term “nitron monomer” is a monomer having at least one nitron functional group. The nitron monomer may be polymerizable through its nitron functional group. In one embodiment, nitrones, dinitrones, and multi-nitrones may be

used. Examples include, but are not limited to, N-benzylidene-2-methylpropan-2-amine oxide.

[0028] As used herein, the term "aldehyde monomer" is a monomer having at least one aldehyde functional group. The aldehyde monomer may be polymerizable through its aldehyde functional group. In one embodiment, aldehydes, dialdehydes, and multi-aldehydes may be used.

[0029] As used herein, the term "ketone monomer" is a monomer having at least one ketone functional group. The ketone monomer may be polymerizable through its ketone functional group. is a monomer that is polymerizable through its ketone groups. In one embodiment, ketones, diketones, and multi- ketones may be used.

[0030] As used herein, the term "epoxide monomer" is a monomer having at least one epoxide functional group. The epoxide monomer may be polymerizable through its epoxide functional group. Non-limiting examples of such monomers include, generally, mono- or polyoxiranylbenzenes, mono- or polyglycidylbenzenes, mono- or polyglycidyloxybenzenes, mono- or polyoxiranyl(hetero)aromatic compounds, mono-or polyglycidyl(hetero)aromatic compounds, mono- or polyglycidyloxy(hetero)aromatic compounds, diglycidyl bisphenol A ethers, mono- or polyglycidyl(cyclo)alkyl ethers, mono- or polyepoxy(cyclo)alkane compounds and oxirane-terminated oligomers. In one preferred embodiment, the epoxide monomers may be benzyl glycidyl ether and tris(4-hydroxyphenyl)methane triglycidyl ether. In certain embodiments, the epoxide monomers may include a (hetero)aromatic moiety such as, for example, a phenyl, a pyridine, a triazine, a pyrene, a naphthalene, or a polycyclic (hetero)aromatic ring system, bearing one or more epoxide groups. For example, in certain embodiments, the one or more epoxide monomers are selected from epoxy(hetero)aromatic compounds, such as styrene oxide and stilbene oxide and (hetero)aromatic glycidyl compounds, such as glycidyl phenyl ethers (e.g., resorcinol diglycidyl ether, glycidyl 2-methylphenyl ether), glycidylbenzenes (e.g., (2,3-epoxypropyl)benzene) and glycidyl heteroaromatic compounds (e.g., N-(2,3-epoxypropyl)phthalimide). In certain desirable embodiments, an epoxide monomer will have a boiling point greater than 180 °C, greater than 200 °C, or even greater than 230 °C at the pressure at which polymerization is performed (e.g., at standard pressure, or at other pressures).

[0031] As used herein, the term "thiirane monomer" is a monomer having at least one thiirane functional group. The thiirane monomer may be polymerizable through its thiirane functional group. Non-limiting examples of thiirane monomers include, generally, mono- or polythiiranylbenzenes, mono- or polythiiranylmethylbenzenes, mono- or polythiiranyl(hetero)aromatic compounds, mono- or polythiiranylmethyl(hetero)aromatic compounds, dithiiranylmethyl bisphenol A ethers, mono- or polydithiiranyl (cyclo)alkyl ethers, mono- or polyepisulfide(cyclo)alkane compounds, and thiirane-terminated oligomers. In some embodiments, thiirane monomers may include a (hetero)aromatic moiety such as, for example, a phenyl, a pyridine, a triazine, a pyrene, a naphthalene, or a poly cyclic (hetero)aromatic ring system, bearing one or more thiirane groups. In certain desirable embodiments, a thiirane monomer will have a boiling point greater than 180 °C, greater than 200 °C, or even greater than 230 °C at the pressure at which polymerization is performed (e.g., at standard pressure).

[0032] As used herein, an ethylenically unsaturated monomer is a monomer having at least one ethylenically unsaturated functional group. The ethylenically unsaturated monomer may be polymerizable through its ethylenic unsaturation (i.e., its double bond). The term "ethylenically unsaturated monomer" does not include cyclopentadienyl species such as cyclopentadiene and dicyclopentadiene. The term "ethylenically unsaturated monomer" does not include compounds in which the ethylenic unsaturation is part of a long chain alkyl moiety (e.g. unsaturated fatty acids such as oleates, and unsaturated plant oils).

[0033] In certain embodiments, the one or more ethylenically unsaturated monomers are selected from the group consisting of vinyl monomers, (meth)acryl monomers, unsaturated hydrocarbon monomers, and ethylenically-terminated oligomers. Examples of such monomers include, generally, mono- or polyvinylbenzenes, mono- or polyisopropenylbenzenes, mono- or polyvinyl(hetero)aromatic compounds, mono- or polyisopropenyl(hetero)aromatic compounds, alkylene di(meth)acrylates, bisphenol A di(meth)acrylates, benzyl (meth)acrylates, phenyl(meth)acrylates, heteroaryl (meth)acrylates, terpenes (e.g., squalene) and carotene. As molten sulfur is non-polar in character, in certain desirable embodiments the one or more ethylenically unsaturated monomers are non-polar. For example, in certain embodiments, the one or more ethylenically unsaturated monomers include a (hetero)aromatic moiety such as, for

example, phenyl, pyridine, triazine, pyrene, naphthalene, or a polycyclic (hetero)aromatic ring system, bearing one or more vinylic, acrylic or methacrylic substituents. Examples of such monomers include benzyl (meth)acrylates, phenyl (meth)acrylates, divinylbenzenes (e.g., 1,3-divinylbenzene, 1,4-divinylbenzene), isopropenylbenzene, styrenics (e.g., styrene, 4-methylstyrene, 4-chlorostyrene, 2,6-dichlorostyrene, 4-vinylbenzyl chloride), diisopropenylbenzenes (e.g., 1,3-diisopropenylbenzene), vinylpyridines (e.g., 2-vinylpyridine, 4-vinylpyridine), 2,4,6-tris((4-vinylbenzyl)thio)-1,3,5-triazine and divinylpyridines (e.g., 2,5-divinylpyridine). In certain embodiments, the one or more ethylenically unsaturated monomers (e.g., including an aromatic moiety) bears an amino (i.e., primary or secondary) group, a phosphine group or a thiol group. One example of such a monomer is vinylidiphenylphosphine. While not intending to be bound by theory, the inventors surmise that the amino or thiol group will undergo a ring-opening nucleophilic attack on an S_8 ring, thus incorporating a short sulfide chain that promotes solubility in molten sulfur. Of course, a person of skill in the art will identify other ethylenically unsaturated monomers that can be used in forming the copolymers described herein. In certain desirable embodiments, an ethylenically unsaturated monomer will have a boiling point greater than 180 °C, greater than 200 °C, or even greater than 230 °C at the pressure at which polymerization is performed (e.g., at standard pressure).

[0034] As used herein, an “elemental carbon material” is a material that is primarily formed as an allotrope of carbon, with a minor amount of chemical modification. For example, graphene, graphene oxide, graphite, carbon nanotubes, fullerenes, carbon black, carbon flakes and carbon fibers are examples of elemental carbon materials. Such materials can be made, for example, by first dispersing the elemental carbon material in molten sulfur, then copolymerizing the molten sulfur with one or more monomers (e.g., one or more polyfunctional monomers). As a general guideline for the person of skill in the art to use in formulating such materials, up to about 15 wt% elemental carbon material can be dispersed in sulfur at temperatures high enough that the sulfur is molten, but low enough that significant ring opening and polysulfide polymerization does not occur (e.g., at temperatures in the range of about 120 °C to about 160 °C). Higher loadings of elemental carbon materials in sulfur can be achieved by pre-dissolution of the sulfur and dispersion of the elemental carbon material into a

suitable solvent (e.g., carbon disulfide) followed by removal of the solvent under reduced pressure to yield a blended composite powder which can be melted and allowed to with the one or more monomers. To induce curing of the dispersed carbon, or other nanoinclusions with the sulfur matrix, direct heating of the dispersion above $T = 160\text{ }^{\circ}\text{C}$, typically below $200\text{ }^{\circ}\text{C}$ affords a polymerized nanocomposite.

[0035] As used herein, the terms “those defined above” and “those defined herein” when referring to a variable incorporates by reference the broad definition of the variable as well as any narrow and/or preferred definitions, if any.

[0036] Referring now to FIGs. 1-3, the present invention features a coating composition for a fire retardant intumescent coating. The composition may comprise a sulfur copolymer comprising sulfur monomers prepared from elemental sulfur, wherein the sulfur monomers are at least about 40 wt% of the sulfur copolymer; and organic comonomers at about 10 wt% to 50 wt% of the sulfur copolymer. The organic comonomers are polymerized with the sulfur monomers to form the sulfur copolymer. In preferred embodiments, the coating composition provides for test specimens that are coated with the intumescent coating to exhibit an LOI of at least 25 and a UL94-V rating of V-1 or V-0. When a substrate coated with said intumescent coating is on fire, the intumescent coating forms a charring layer on a surface of the substrate. The charring layer is effective for extinguishing and preventing the spread of the fire by preventing oxygen from fueling the fire.

[0037] According to another embodiment, the present invention features a fire retardant composition comprising a sulfur copolymer. The sulfur copolymer may comprise sulfur monomers prepared from elemental sulfur, wherein the sulfur monomers are at least about 40 wt% of the sulfur copolymer; and organic comonomers at about 10 wt% to 50 wt% of the sulfur copolymer wherein the organic comonomers are polymerized with the sulfur monomers. Preferably, the fire retardant composition provides for test specimens that are combined with the fire retardant composition to exhibit an LOI of at least 25 and a UL94-V rating of V-1 or V-0. When a substrate combined with the fire retardant composition is on fire, the fire retardant composition forms a charring layer on a surface of the substrate, effective for extinguishing and preventing spread of the fire.

[0038] In some embodiments, the organic comonomers may be selected from a group consisting of amine comonomers, thiol comonomers, sulfide comonomers, alkynylly unsaturated comonomers, epoxide comonomers, nitron comonomers, aldehyde comonomers, ketone comonomers, thiirane comonomers, and ethylenically unsaturated comonomers.

[0039] In other embodiments, the substrate is a fabric, a polymeric article, or a foam. For example, the substrate may be clothing, plastic-coated wire, an electronic device, or furniture such as mattresses. The substrate may be constructed from materials such as polyurethane, polystyrene, polyethylene, nylon, polyester, rayon, acetates, or combinations thereof.

[0040] In some embodiments, the compositions described herein may further comprise binders, fillers, or combinations thereof. Suitable binders include organic binders, inorganic binders and mixtures of these two types of binders. For example, the organic binders may be provided as a solid, a liquid, a solution, a dispersion, a latex, or similar form. The organic binder may comprise a thermoplastic or thermoset binder, which after cure is a flexible material. According to certain embodiments, the filler material may include clay materials, such as bentonite or kaolinite, and fiber materials, such as ceramic fibers and polycrystalline fibers.

[0041] In yet another embodiment, the present invention features a method of enhancing char formation in a substrate. The method may comprise combining a base material with a fire retardant composition to form the substrate. Preferably, the substrate exhibits an LOI of at least 25 and a UL94-V rating of V-1 or V-0. In some embodiments, the fire retardant composition comprises a sulfur copolymer comprising sulfur monomers prepared from elemental sulfur, wherein the sulfur monomers are at least about 40 wt% of the sulfur copolymer; and organic comonomers at about 10 wt% to 50 wt% of the sulfur copolymer wherein the organic comonomers are polymerized with the sulfur monomers. In preferred embodiments, when the substrate is on fire, the fire retardant composition is effective in forming a charring layer on the substrate. The charring layer can extinguish and prevent the fire from spreading. In some embodiments, the charring layer may comprise at least 20 wt% char. For example, the charring layer may comprise at least 25 wt% char.

[0042] In some embodiments, the step of combining the base material with the fire retardant composition comprises coating the base material with an intumescent coating comprising the fire retardant composition. In other embodiments, the step of combining the base material with the fire retardant composition comprises depositing the fire retardant composition on the surface of the base material. In still other embodiments, the step of combining the base material with the fire retardant composition may comprise mixing monomers of the base material with monomers of the fire retardant composition to form a comonomer mixture, polymerizing the comonomer mixture to form a flame resistant polymer, and molding the flame resistant polymer to a shape of the substrate.

[0043] Another embodiment of the present invention may feature a method of forming a flame retardant-treated polymeric article. The method may comprise providing a polymeric base substrate, providing a flame retardant material comprising a sulfur copolymer, and depositing the flame retardant material on at least a portion of an outer surface of the polymeric base substrate to form the flame retardant-treated polymeric article. Preferably, the flame retardant-treated polymeric article provides for test specimens that exhibit an LOI of at least 25 and a UL94-V rating of V-1 or V-0. The sulfur copolymer may be any of the sulfur copolymers described herein. Preferably, when the flame retardant-treated polymeric article is on fire, the flame retardant material forms a charring layer on the flame retardant-treated polymeric article to extinguish the fire. The charring layer may comprise at least 20 wt% char.

[0044] Alternate embodiments of the present invention may feature a method of forming a flame resistant polymeric composite. The method may comprise providing a flame retardant filler comprising a sulfur copolymer, providing a polymeric base material, and mixing the flame retardant filler with the polymeric base material to form the flame resistant polymeric composite. The flame retardant filler can enhance char formation. In some embodiments, the composite may comprise between about 1.0 to 20.0 wt% of the flame retardant filler. For example, the composite may comprise about 10 wt% of the flame retardant filler. In some embodiments, the sulfur copolymer may be any of the sulfur copolymers described herein.

[0045] As shown in FIG. 1, sulfur copolymers of sulfur monomers and organic comonomers, namely diisopropenylbenzene (DIB), were prepared in varying ratios. For example, DIB20 refers to 80 wt% sulfur and 20 wt% DIB. Samples of the sulfur copolymers were burned at a combustor temperature of $T_c = 800^\circ\text{C}$. Residues thereof are the blackened areas shown in FIG. 1. This experiment demonstrates that sulfur copolymers having higher sulfur content are more effective fire retardants. The residue of DIB20 shows a significantly smaller charring layer than DIB30 or DIB50, which indicates that the charring layer of DIB20 extinguished and prevented the fire from spreading further.

[0046] The peak heat release rate (HRR) is a numerical indicator of the intensity of a fire; hence, it is desirable that the peak heat release rate of a flame retarded system be lower than that of the non-flame retarded system. Effective flame retardants are capable of lowering the heat released in a fire. FIG. 2 and TABLE 1 below shows exemplary char and energy data for pyrolysis of the sulfur copolymer samples at a combustor temperature of $T_c = 900^\circ\text{C}$. FIG. 3 and TABLE 2 below shows exemplary char and energy data for pyrolysis of the sulfur copolymer samples at a combustor temperature of $T_c = 800^\circ\text{C}$. DIB20 had a significantly smaller heat release rate (HRR) and heat release capacity (HRC) than DIB30 or DIB50, which again indicates that sulfur copolymers with higher sulfur content are effective flame retardants.

[0047] TABLE 1 shows exemplary char and energy data for pyrolysis of the copolymer material.

T combustor 900°C _ T pyrolyzer from 70°C to 900°C _ $\text{O}_2=20\%$ $\text{N}_2=80\%$					
Sample ID	Weight (mg)	Residue (%)	THR (kJ/g)	HRC (J/gK)	Peak max ($^\circ\text{C}$)
DIB20	4.549	13.0%	11.6	126	295
DIB30	4.375	18.4%	12.3	163	293
DIB50	4.649	25.4%	15.5	231	291

[0048] TABLE 2 shows exemplary char and energy data for pyrolysis of the copolymer material.

T combustor 800°C _ T pyrolyzer from 70°C to 900°C _ $\text{O}_2=20\%$ $\text{N}_2=80\%$					
Sample ID	Weight (mg)	Residue (%)	THR (kJ/g)	HRC (J/gK)	Peak max ($^\circ\text{C}$)

DIB20	4.733	13.4%	11.4	124	295
DIB30	4.868	19.2%	12.2	160	293
DIB50	4.835	25.5%	15.4	226	293

[0049] Additional aspects of the polymers are described below. In some embodiments, the sulfur copolymer is produced by providing elemental sulfur, heating the elemental sulfur into molten sulfur, and adding organic comonomers to the molten sulfur, thereby forming the sulfur copolymer.

[0050] For example, a mixture including sulfur and the organic monomers is heated together at a temperature sufficient to initiate polymerization (i.e., through free radical polymerization, through anionic polymerization, or through both, depending on the monomers used). For example, in one embodiment, the mixture including sulfur and the organic monomers is heated together at a temperature in the range of about 120 °C to about 230 °C, e.g., in the range of about 120 °C to 140 °C or about 160 °C to 230 °C. The person of skill in the art will select conditions that provide the desired level of polymerization. In one embodiment, the mixture comprising sulfur and organic monomers is formed by first heating a mixture comprising sulfur to form a molten sulfur, then adding the organic monomers to the molten sulfur. In certain embodiments, the polymerization reaction is performed under ambient pressure. However, in other embodiments, the polymerization reaction can be performed at elevated pressure (e.g., in a bomb or an autoclave). Elevated pressures can be used to polymerize more volatile monomers, so that they do not vaporize under the elevated temperature reaction conditions.

[0051] The sulfur can be provided as elemental sulfur, for example, in powdered form. Under ambient conditions, elemental sulfur primarily exists in an eight-membered ring form (S_8) which melts at temperatures in the range of 120-124 °C and undergoes an equilibrium ring-opening polymerization (ROP) of the S_8 monomer into a linear polysulfane with diradical chain ends.

[0052] As the person of skill in the art will appreciate, while S_8 is generally the most stable, most accessible and cheapest feedstock, many other allotropes of sulfur can be used (such as other cyclic allotropes, derivable by melt-thermal processing of S_8). Any

sulfur species that yield diradical or anionic polymerizing species when heated as described herein can be used in practicing the present invention.

[0053] Because both anionic and radical polymerization can occur in the polymerization reaction mixtures, any desirable combination of amine monomers, thiol monomers, sulfide monomers, alkynylly unsaturated monomers, nitron and/or nitroso monomers, aldehyde monomers, ketone monomers, thiirane monomers, ethylenically unsaturated monomers, and/or epoxide monomers can be used in the copolymers.

[0054] In other embodiments, the sulfur copolymer may further comprise one or more polyfunctional comonomers selected from a group consisting of polyvinyl comonomers, polyisopropenyl comonomers, polyacryl comonomers, polymethacryl comonomers, polyunsaturated hydrocarbon comonomers, polyepoxide comonomers, polythiirane comonomers, polyalkynyl comonomers, polydiene comonomers, polybutadiene comonomers, polyisoprene comonomers, polynorbornene comonomers, polyamine comonomers, polythiol comonomers, polysulfide comonomers, polyalkynylly unsaturated comonomers, polynitron comonomers, polyaldehyde comonomers, polyketone comonomers, and polyethylenically unsaturated comonomers. The polyfunctional comonomers may be present in an amount ranging from about 0.5 wt% to 1 wt%, or about 1 wt% to 5 wt%, or about 5 wt% to 15 wt%, or about 15 wt% to 25 wt%, or about 25 wt% to 35 wt%, or about 35 wt% to 45 wt%, or about 45 wt% to 50 wt%.

[0055] In some embodiments, the sulfur copolymer as described herein may comprise sulfur monomers at a level of at least about 5 wt% of the sulfur copolymer. The sulfur copolymer may comprise sulfur monomers at a level of at least about 10 wt%, or at least about 20 wt%, or at least about 30 wt%, or at least about 40 wt%, or at least about 50 wt%, or at least about 60 wt%, or at least about 70 wt%, or at least about 80 wt%, or at least about 90 wt% of the sulfur copolymer. For example, the sulfur monomers may be about 50 wt%, or about 60 wt%, or about 70 wt%, or about 80 wt%, or about 90 wt%, or about 95 wt% of the sulfur copolymer. In other embodiments, the sulfur copolymer as described herein may comprise sulfur monomers at a level in the range of about 5 to about 10 wt% of the sulfur copolymer. The sulfur copolymer may comprise sulfur monomers at a level in the range of about 10 to 20 wt%, or in the range of about 20 to 30 wt%, or in the range of about 30 to 40 wt%, or in the range of about 40 to 50 wt%, or

in the range of about 50 to 60 wt%, or in the range of about 60 to 70 wt%, or in the range of about 70 to 80 wt%, or in the range of about 80 to 90 wt%, or in the range of about 90 to 95 wt% of the sulfur copolymer.

[0056] In some embodiments, the sulfur copolymer as described herein may comprise organic comonomers at a level of at least 0.1 wt% of the sulfur copolymer. The sulfur copolymer may comprise organic comonomers at a level of at least about 0.5 wt%, or at least about 1 wt%, or at least about 5 wt%, or at least about 10 wt%, or at least about 20 wt%, or at least about 30 wt%, or at least about 40 wt%, or at least about 50 wt%, or at least about 60 wt% of the sulfur copolymer. For example, the organic comonomers may be about 5 wt%, or about 10 wt%, or about 20 wt%, or about 30 wt%, or about 40 wt%, or about 50 wt% of the sulfur copolymer. In other embodiments, the sulfur copolymer as described herein may comprise organic comonomers at a level in the range of about 0.1 wt% to 0.5 wt% of the sulfur copolymer. The sulfur copolymer may comprise organic comonomers at a level in the range of about 0.5 wt% to 1 wt%, or about 1 wt% to 5 wt%, or about 5 wt% to 15 wt%, or about 15 wt% to 25 wt%, or about 25 wt% to 35 wt%, or about 35 wt% to 45 wt%, or about 45 wt% to 55 wt%, or about 55 wt% to 65 wt% of the sulfur copolymer.

[0057] In some embodiments, the sulfur copolymer may further comprise up to about 50 wt% elemental carbon material dispersed in the sulfur copolymer. For example, the sulfur copolymer may comprise the elemental carbon material at a level in the range of about 10 to 20 wt%, or in the range of about 20 to 30 wt%, or in the range of about 30 to 40 wt%, or in the range of about 40 to 50 wt% of the sulfur copolymer.

[0058] In certain embodiments, it can be desirable to use a nucleophilic viscosity modifier in liquefying the elemental sulfur when preparing the sulfur monomers, for example, before adding the comonomers. The nucleophilic viscosity modifier can be, for example, a phosphorus nucleophile (e.g., a phosphine), a sulfur nucleophile (e.g., a thiol) or an amine nucleophile (e.g., a primary or secondary amine). When elemental sulfur is heated in the absence of a nucleophilic viscosity modifier, the elemental sulfur rings can open to form sulfur radicals that can combine to form linear polysulfide chains, which can provide a relatively high overall viscosity to the molten material. Nucleophilic viscosity modifiers can break these linear chains into shorter lengths, thereby making

shorter polysulfides that lower the overall viscosity of the molten material, making the sulfur monomers easier to mix with other species, and easier to stir for efficient processing. Some of the nucleophilic viscosity modifier will react to be retained as a covalently bound part of the copolymer, and some will react to form separate molecular species, with the relative amounts depending on nucleophile identity and reaction conditions. While some of the nucleophilic viscosity modifier may end up as a separate molecular species from the polymer chain, as used herein, nucleophilic viscosity modifiers may become part of the copolymer. Non-limiting examples of nucleophilic viscosity modifiers include triphenylphosphine, aniline, benzenethiol, and N,N-dimethylaminopyridine. Nucleophilic viscosity modifiers can be used, for example, in an amount up to about 5 wt%, or even up to about 10 wt% of the sulfur copolymer. When a nucleophilic viscosity modifier is used, in certain embodiments it can be used in the range of about 1 wt% to about 10 wt% of the sulfur copolymer

[0059] As used herein, the term “about” refers to plus or minus 10% of the referenced number.

[0060] Various modifications of the invention, in addition to those described herein, will be apparent to those skilled in the art from the foregoing description. Such modifications are also intended to fall within the scope of the appended claims. Each reference cited in the present application is incorporated herein by reference in its entirety.

[0061] Although there has been shown and described the preferred embodiment of the present invention, it will be readily apparent to those skilled in the art that modifications may be made thereto which do not exceed the scope of the appended claims. Therefore, the scope of the invention is only to be limited by the following claims. In some embodiments, the figures presented in this patent application are drawn to scale, including the angles, ratios of dimensions, etc. In some embodiments, the figures are representative only and the claims are not limited by the dimensions of the figures. In some embodiments, descriptions of the inventions described herein using the phrase “comprising” includes embodiments that could be described as “consisting of”, and as such the written description requirement for claiming one or more embodiments of the present invention using the phrase “consisting of” is met.

WHAT IS CLAIMED IS:

1. A fire retardant composition comprising a sulfur copolymer, the sulfur copolymer comprising:

- a. sulfur monomers prepared from elemental sulfur, wherein the sulfur monomers are at least about 40 wt% of the sulfur copolymer; and
- b. organic comonomers at about 10 wt% to 50 wt% of the sulfur copolymer wherein the organic comonomers are polymerized with the sulfur monomers;

wherein when a substrate combined with the fire retardant composition is on fire, the fire retardant composition forms a charring layer on a surface of the substrate, the charring layer effective for extinguishing the fire, wherein the charring layer comprises at least 20 wt% char, and wherein the fire retardant composition provides for test specimens that are combined with the fire retardant composition to exhibit a limiting oxygen index (LOI) of at least 25 and a UL94-V rating of V-1 or V-0.

2. A fire retardant composition comprising a sulfur copolymer, the sulfur copolymer comprising:

- c. sulfur monomers prepared from elemental sulfur, wherein the sulfur monomers are at least about 40 wt% of the sulfur copolymer; and
- d. organic comonomers at about 10 wt% to 50 wt% of the sulfur copolymer wherein the organic comonomers are polymerized with the sulfur monomers;

wherein when a substrate combined with the fire retardant composition is on fire, the fire retardant composition forms a charring layer on a surface of the substrate, the charring layer effective for extinguishing the fire, wherein the charring layer comprises at least 20 wt% char.

3. The fire retardant composition of claim 1 or 2, wherein the organic comonomers are selected from a group consisting of amine comonomers, thiol comonomers, sulfide comonomers, alkynylly unsaturated comonomers, epoxide comonomers, nitrone comonomers, aldehyde comonomers, ketone comonomers, thiirane comonomers, and ethylenically unsaturated comonomers.

4. The fire retardant composition according to any of claims 1-3, wherein the substrate is constructed from polyurethane, polystyrene, polyethylene, nylon, polyester, rayon, acetates, or combinations thereof.
5. The method according to any of claims 1-4, wherein the sulfur copolymer further comprises one or more polyfunctional comonomers selected from a group consisting of polyvinyl comonomers, polyisopropenyl comonomers, polyacryl comonomers, polymethacryl comonomers, polyunsaturated hydrocarbon comonomers, polyepoxide comonomers, polythiirane comonomers, polyalkynyl comonomers, polydiene comonomers, polybutadiene comonomers, polyisoprene comonomers, polynorbornene comonomers, polyamine comonomers, polythiol comonomers, polysulfide comonomers, polyalkynylly unsaturated comonomers, polynitrone comonomers, polyaldehyde comonomers, polyketone comonomers, and polyethylenically unsaturated comonomers.
6. The method according to any of claims 1-5, wherein the sulfur copolymer further comprises about 10 wt % nucleophilic viscosity modifier.
7. The method according to any of claims 1-6, wherein the sulfur copolymer further comprises up to about 50 wt% elemental carbon material dispersed in the sulfur copolymer.
8. A coating composition for a fire retardant intumescent coating, said composition comprising a sulfur copolymer, the sulfur copolymer comprising:
 - a. sulfur monomers prepared from elemental sulfur, wherein the sulfur monomers are at least about 40 wt% of the sulfur copolymer; and
 - b. organic comonomers at about 10 wt% to 50 wt% of the sulfur copolymer, wherein the organic comonomers are polymerized with the sulfur monomers;

wherein when a substrate coated with said intumescent coating is on fire, the intumescent coating forms a charring layer on a surface of the substrate, the charring layer is effective for extinguishing the fire, wherein the charring layer comprises at least 20 wt% char, and wherein the coating composition provides for test specimens that are coated with the intumescent coating to exhibit a

limiting oxygen index (LOI) of at least 25 and a UL94-V rating of V-1 or V-0.

9. A coating composition for a fire retardant intumescent coating, said composition comprising a sulfur copolymer, the sulfur copolymer comprising:
 - a. sulfur monomers prepared from elemental sulfur, wherein the sulfur monomers are at least about 40 wt% of the sulfur copolymer; and
 - b. organic comonomers at about 10 wt% to 50 wt% of the sulfur copolymer, wherein the organic comonomers are polymerized with the sulfur monomers;wherein when a substrate coated with said intumescent coating is on fire, the intumescent coating forms a charring layer on a surface of the substrate, the charring layer is effective for extinguishing the fire, wherein the charring layer comprises at least 20 wt% char.
10. The coating composition of claim 8 or 9, wherein the organic comonomers are selected from a group consisting of amine comonomers, thiol comonomers, sulfide comonomers, alkynylly unsaturated comonomers, epoxide comonomers, nitrone comonomers, aldehyde comonomers, ketone comonomers, thiirane comonomers, and ethylenically unsaturated comonomers.
11. The coating composition according to any of claims 8-10, wherein the substrate is constructed from polyurethane, polystyrene, polyethylene, nylon, polyester, rayon, acetates, or combinations thereof.
12. A method of enhancing char formation in a substrate, said method comprising combining a base material with a fire retardant composition to form the substrate, wherein the substrate exhibits a limiting oxygen index (LOI) of at least 25 and a UL94-V rating of V-1 or V-0, wherein the fire retardant composition comprises a sulfur copolymer comprising:
 - a. sulfur monomers prepared from elemental sulfur, wherein the sulfur monomers are at least about 40 wt% of the sulfur copolymer; and
 - b. organic comonomers at about 10 wt% to 50 wt% of the sulfur copolymer wherein the organic comonomers are polymerized with the sulfur monomers;







wherein when the substrate is on fire, the fire retardant composition forms a charring layer on a surface of the substrate to extinguish the fire, wherein the charring layer comprises at least 20 wt% char.

13. The method of claim 12, wherein combining the base material with the fire retardant composition comprises coating the base material with an intumescent coating comprising the fire retardant composition.
14. The method of claim 12, wherein combining the base material with the fire retardant composition comprises depositing the fire retardant composition on the surface of the base material.
15. The method of claim 12, wherein combining the base material with the fire retardant composition comprises:
 - a. mixing monomers of the base material with monomers of the fire retardant composition to form a comonomer mixture; and
 - b. polymerizing the comonomer mixture to form a flame resistant polymer; and
 - c. molding the flame resistant polymer to a shape of the substrate.
16. A method of forming a flame retardant-treated polymeric article comprising:
 - a. providing a polymeric base substrate;
 - b. providing a flame retardant material comprising a sulfur copolymer, wherein the sulfur copolymer comprises:
 - i. sulfur monomers prepared from elemental sulfur, wherein the sulfur monomers are at least about 40 wt% of the sulfur copolymer; and
 - ii. organic comonomers at about 10 wt% to 50 wt% of the sulfur copolymer wherein the organic comonomers are polymerized with the sulfur monomers; and
 - c. depositing the flame retardant material on at least a portion of an outer surface of the polymeric base substrate to form the flame retardant-treated polymeric article;wherein the flame retardant-treated polymeric article provides for test specimens that exhibit a limiting oxygen index (LOI) of at least 25 and a UL94-V rating of V-1

or V-0, wherein when the flame retardant-treated polymeric article is on fire, the flame retardant material forms a charring layer on the flame retardant-treated polymeric article to extinguish the fire, wherein the charring layer comprises at least 20 wt% char.

17. The method according to any of claims 12-16, wherein the organic comonomers are selected from a group consisting of amine comonomers, thiol comonomers, sulfide comonomers, alkynylly unsaturated comonomers, epoxide comonomers, nitron comonomers, aldehyde comonomers, ketone comonomers, thiirane comonomers, and ethylenically unsaturated comonomers.
18. The method according to any of claims 12-17, wherein the substrate is constructed from polyurethane, polystyrene, polyethylene, nylon, polyester, rayon, acetates, or combinations thereof.
19. The method according to any of claims 12-18, wherein the sulfur copolymer further comprises one or more polyfunctional comonomers selected from a group consisting of polyvinyl comonomers, polyisopropenyl comonomers, polyacryl comonomers, polymethacryl comonomers, polyunsaturated hydrocarbon comonomers, polyepoxide comonomers, polythiirane comonomers, polyalkynyl comonomers, polydiene comonomers, polybutadiene comonomers, polyisoprene comonomers, polynorbornene comonomers, polyamine comonomers, polythiol comonomers, polysulfide comonomers, polyalkynylly unsaturated comonomers, polynitron comonomers, polyaldehyde comonomers, polyketone comonomers, and polyethylenically unsaturated comonomers.
20. The method according to any of claims 12-19, wherein the sulfur copolymer further comprises about 10 wt % nucleophilic viscosity modifier.
21. The method according to any of claims 12-20, wherein the sulfur copolymer further comprises up to about 50 wt% elemental carbon material dispersed in the sulfur copolymer.

1/3

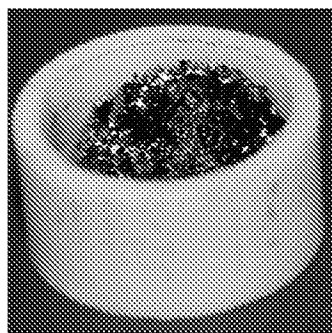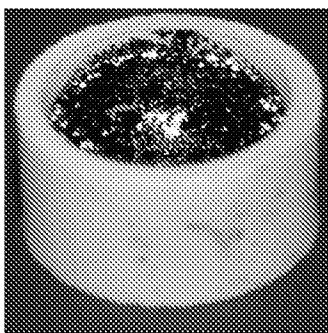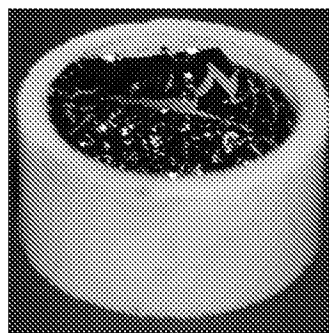

DIB20 $T_c=800^{\circ}\text{C}$

DIB30 $T_c=800^{\circ}\text{C}$

DIB50 $T_c=800^{\circ}\text{C}$

FIG. 1

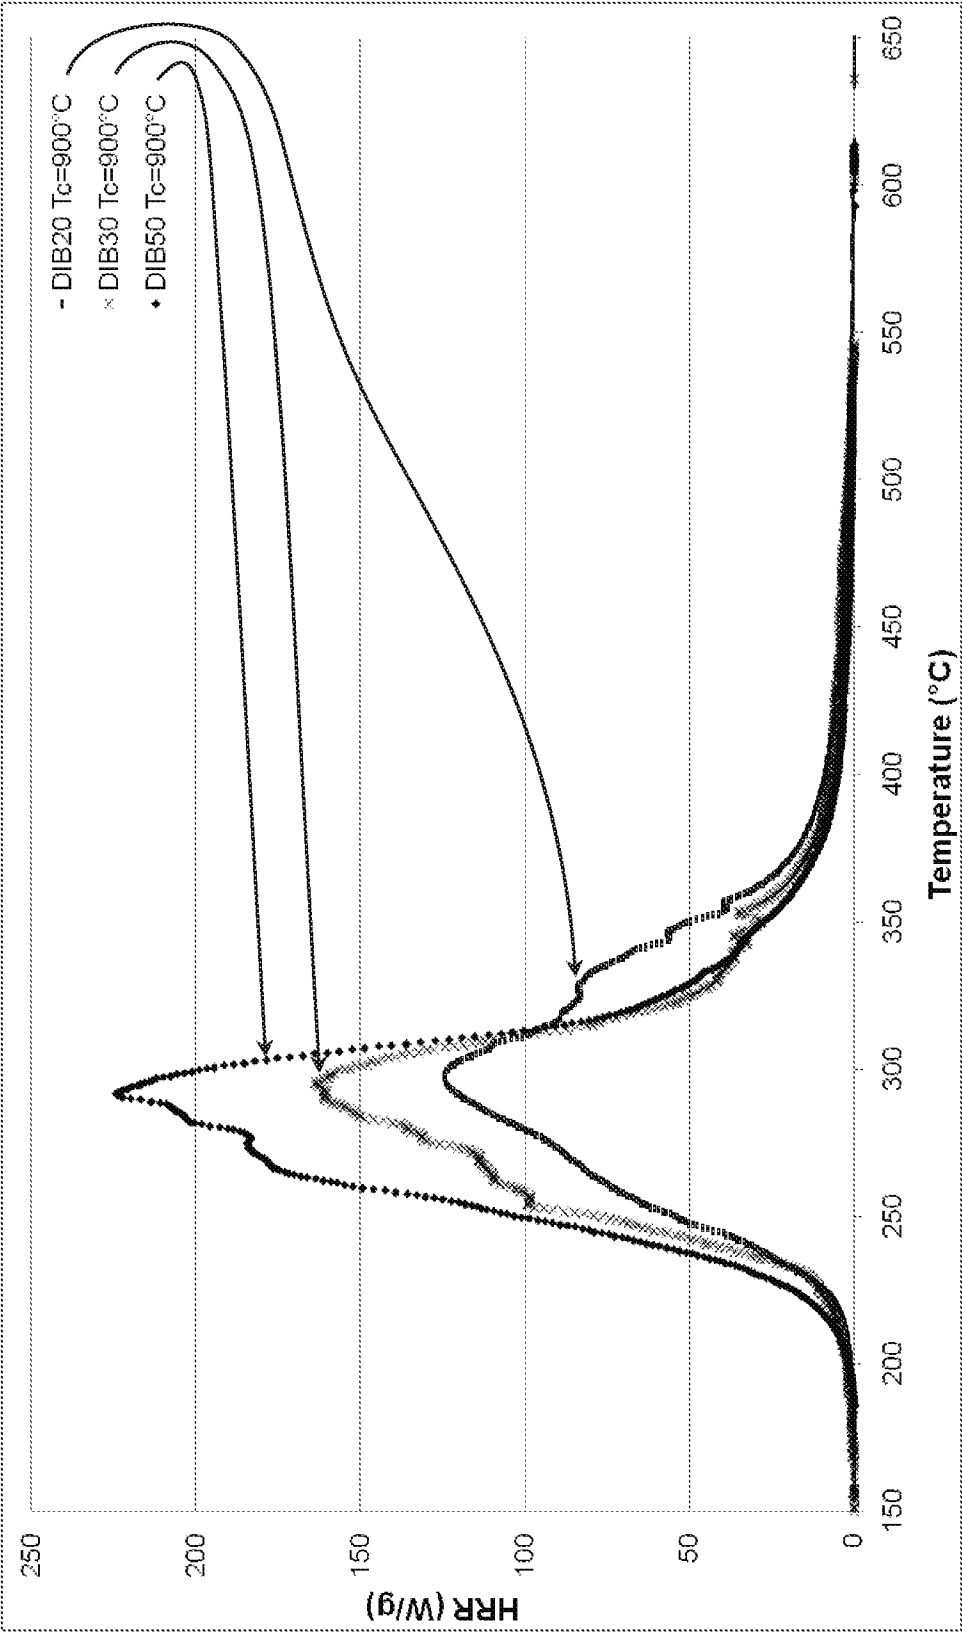


FIG. 2

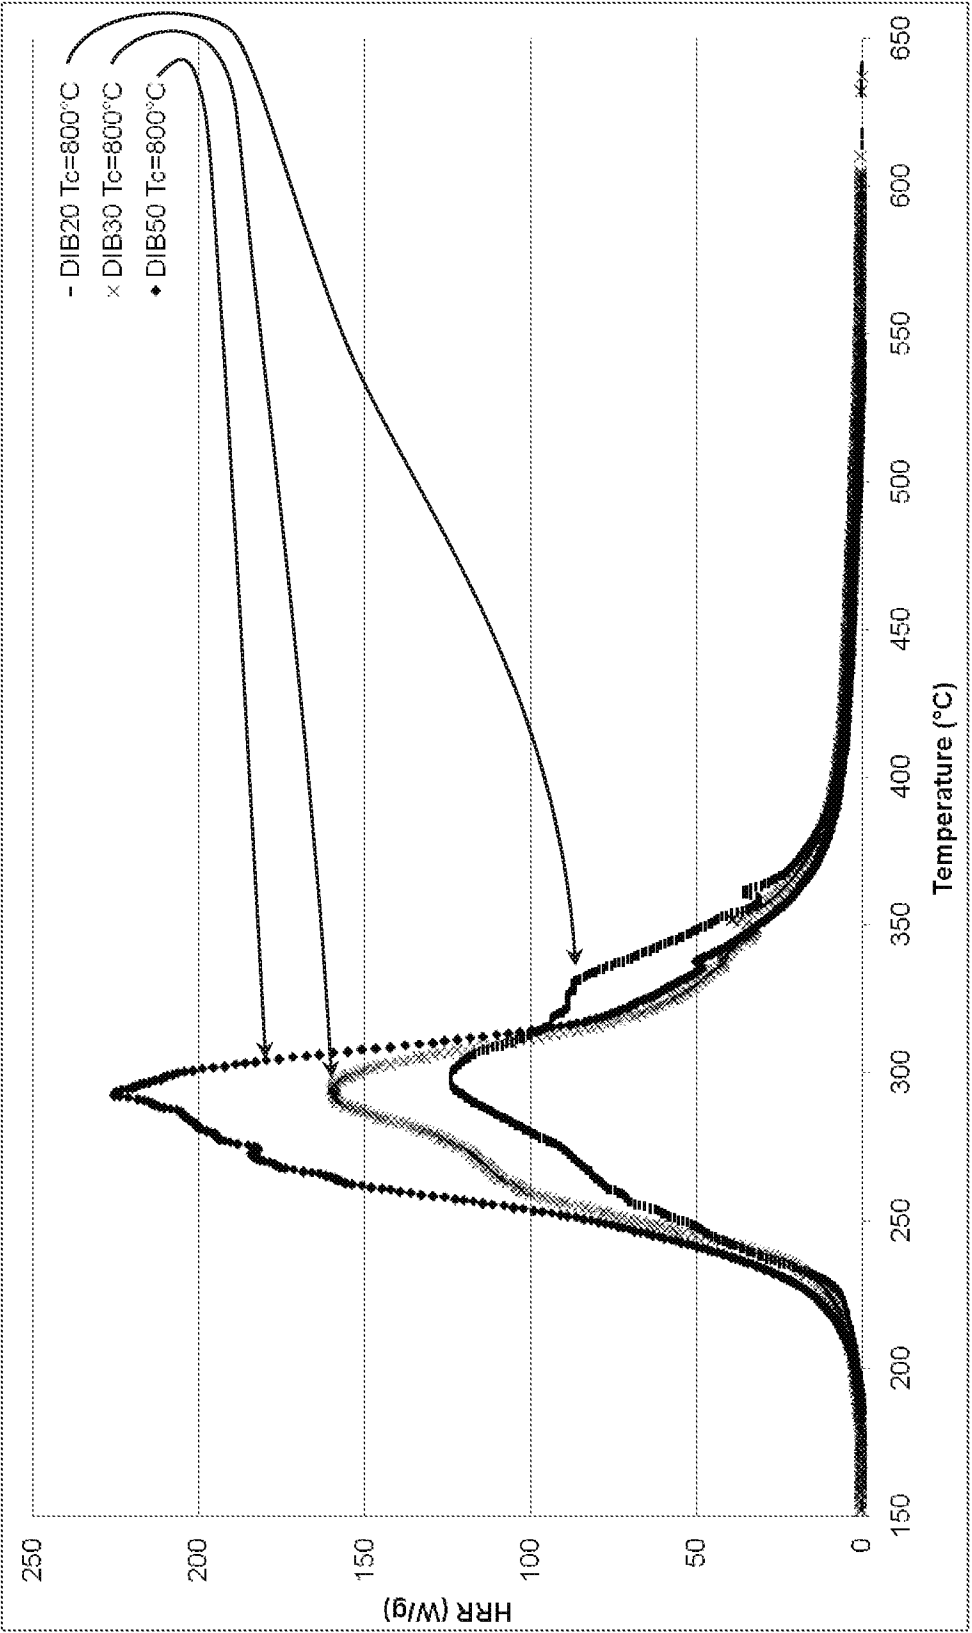


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 16/40067

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - C08K 5/36; C08K 3/06 (2016.01)

CPC - C08K5/36; C08K5/43; C08K3/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - C08K 5/36; C08K 3/06 (2016.01)

CPC - C08K5/36; C08K5/43; C08K3/06

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
USPC - 524/418; 523/453; 524/750

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Minesoft patbase, Google Scgolar, keywords: flame retardant composition/coating, sulfur monomer, elemental sulfur/sulphur, organic monomers, polymerize/copolymerize, charring layer

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2014/0199592 A1 (Pyun et al.) 17 July 2014 (17.07.2014) abstract, para [0008]	1-3, 8-10, 12-17
Y	US 2007/0010600 A1 (Goodman et al.) 11 January 2007 (11.01.2007) para [0004], [0035], [0097], [0102], [0105]	1-3, 8-10, 12-17
Y	US 2010/0029163 A1 (Ogle et al.) 04 February 2010 (04.02.2010) para [0004], [0005], [0062]	12-15
A	US 2011/0245360 A1 (Hahn et al.) 06 October 2011 (06.10.2011) para [0009], [0011], [0041], [0050], [0149], [0153], [0160], [0185], [0186], [0198], [0201]	1-3, 8-10, 12-17

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 August 2016 (17.08.2016)

Date of mailing of the international search report

22 SEP 2016

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 16/40067

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☒ Claims Nos.: 4-7, 11 and 18-21
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.