

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2005200906 B2**

(54) Title
Security seal

(51) International Patent Classification(s)
E05B 67/22 (2006.01)

(21) Application No: **2005200906**

(22) Date of Filing: **2005.02.28**

(30) Priority Data

(31) Number
04257828.6

(32) Date
2004.12.16

(33) Country
EP

(43) Publication Date: **2006.07.06**

(43) Publication Journal Date: **2006.07.06**

(44) Accepted Journal Date: **2006.08.24**

(71) Applicant(s)
ITW Limited

(72) Inventor(s)
Benning, Christopher; Weedon, Derrick

(74) Agent / Attorney
Phillips Ormonde & Fitzpatrick, Level 22 367 Collins Street, Melbourne, VIC, 3000

(56) Related Art
RU 2261974 RU 2065524 GB 2139154 DE 3322633 BE 896306 US 2004 00061340 US 6749235 US 4681355 GB 2042424 FR 2801407

ABSTRACT

Padlock-type Security Seal

5 The application describes a seal of the type comprising a housing and a J- or U-
shaped hasp, the housing having first and second openings to receive the legs of the
hasp. The first opening communicating with a third opening of the housing to form a
channel for a first leg of the hasp. A locking mechanism is provided within the housing
which is biased to resist withdrawal of the first leg of the hasp through the first
10 opening. The hasp being lockable within the housing such that it can only be removed
by cutting of the first leg of the hasp. The legs of the hasp are substantially rigid and
are connected together by a resilient hinge such that in a first, relaxed position the legs
adopt a position in which they are not parallel, the legs being moveable to a second,
parallel position against the resilient force of the hinge for insertion into the housing.
15 The housing may be formed of a main body and a cover, the cover being sealed onto
the body part, the cover having at least one protrusion which engages in a
corresponding recess within the body part, and the protrusion having an aperture
therethrough which in use receives one leg of the hasp.

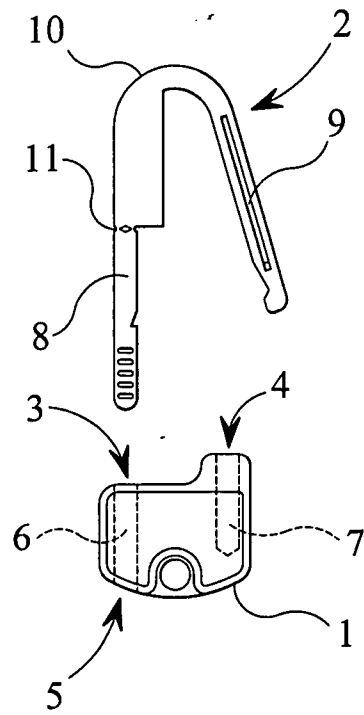


FIG 1A

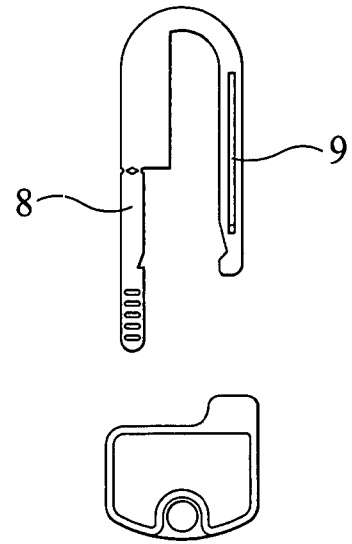


FIG 1B

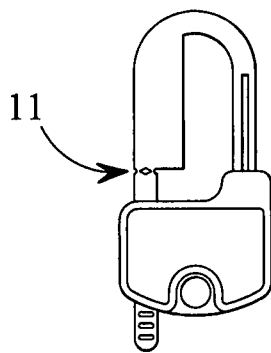


FIG 1C

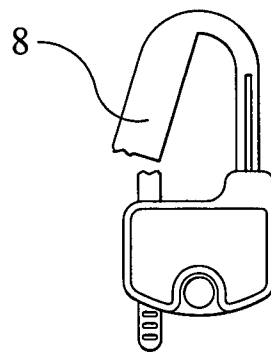


FIG 1D

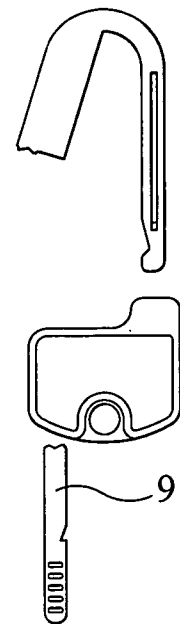


FIG 1E

2005200906 28 Feb 2005

AUSTRALIA

Patents Act

**COMPLETE SPECIFICATION
(ORIGINAL)**

Class Int. Class

Application Number:
Lodged:

Complete Specification Lodged:
Accepted:
Published:

Priority

Related Art:

Name of Applicant:

ITW Limited

Actual Inventor(s):

Derrick Weedon, Christopher Benning

Address for Service and Correspondence:

PHILLIPS ORMONDE & FITZPATRICK
Patent and Trade Mark Attorneys
367 Collins Street
Melbourne 3000 AUSTRALIA

Invention Title:

SECURITY SEAL

Our Ref : 737589
POF Code: 31245/46050

The following statement is a full description of this invention, including the best method of performing it known to applicant(s):

SECURITY SEAL

5 The present invention relates to a security seal of the padlock type. The seal has a housing which can receive the legs of a U- or J-shaped hasp. The hasp can be broken and removed from the housing, allowing the seal to be reused with a new hasp.

10 The discussion below of the background to the invention is included to explain the context of the invention. This is not to be taken as an admission that any of the material referred to was published, known or part of the common general knowledge in the art as at the priority date established by the present application.

15 The Applicant is aware of EP-A-0223905, which discloses a padlock-type seal which comprises a plastic housing having a pair of apertures for receiving a shackle formed of a U-shaped piece of wire. The shackle can be passed over the member to be locked and pushed into the housing, to irreversibly lock therein. The seal is released by cutting of the wire. This particular seal cannot be reused.

20 The Applicant is also aware of US-A-5230541, which discloses a seal which is in the form of a fastener for cabinets. The fastener is closed by means of a flexible, elongated band which engages on first and second latches within the fastener body. The band can be released for reuse.

25 The Applicant is further aware of WO-A-97/48603, which discloses a seal having a J-shaped hasp which may be locked in the seal housing by means of a pressure sensitive catch. The seal can be opened by one leg of the hasp being cut. A product based on the design of WO-A-97/48603 is manufactured and sold by ITW Envopak under the name "Padseal" (registered trade mark). This product has a J-shaped hasp with parallel arms which are inserted into slots within the seal housing. The arms are locked within the housing by means of a sprung catch. The hasp is removed by one leg being cut, the lower part of that leg then being pulled out of the bottom of the housing, which allows the remainder of the hasp to be removed from the top.

30

It would be desirable to provide a seal of the above mentioned type which has a high degree of security and tamper evidence.

5 According to a first aspect of the invention, there is provided a seal including a housing and a J-or U-shaped hasp, the housing having first and second openings to receive legs of the hasp, the first opening communicating with a third opening of the housing to form a channel for a first leg of the hasp, a locking mechanism being provided within the housing which is biased to resist withdrawal of the first leg of the hasp through the first opening, the hasp being
10 lockable within the housing such that it can only be removed by cutting of the first leg of the hasp, wherein the legs of the hasp are substantially rigid and are connected together by a resilient hinge such that in a first, relaxed position the legs adopt a position in which they are not parallel, the legs being moveable to a second, parallel position against the resilient force of the hinge for insertion
15 into the housing.

One advantage of the invention is that on breakage or cutting of the hasp, one leg will spring away from the parallel position which it adopts for insertion into the housing. This spring force makes it more difficult to tamper
20 with the hasp and then seek to reconnect the broken leg parts. Furthermore, the fact that the hasp has been broken and the seal is thus no longer secure is immediately evident because the hasp adopts a different shape than in its locked condition.

25 Preferably, the hasp is formed as a unitary member and of a material which is substantially rigid but which can form a resilient hinge at the juncture between the legs of the hasp.

Another preferred feature is that a point of weakening is provided in the
30 first leg of the hasp, which extends fully through the leg, the hasp being designed to be broken at this point of weakening. This preferred feature further increases security, in that it is more difficult to rejoin the broken legs of the hasp without the join being obvious to an observer.

According to another aspect of the invention, there is provided a seal including a housing and a J-or U-shaped hasp, the housing having first and second openings to receive legs of the hasp, the first opening communicating with a third opening of the housing to form a channel for a first leg of the hasp, a locking mechanism being provided within the housing which is biased to resist withdrawal of the first leg of the hasp through the first opening, the hasp being lockable within the housing such that it can only be removed by cutting of the first leg of the hasp, wherein the housing is formed of a main body and a cover, the cover being sealed onto the main body, the cover having at least one protrusion which engages in a corresponding recess within the main body, the protrusion having an aperture therethrough which in use receives one leg of the hasp.

Preferably, the cover has two apertures which may be through separate protrusions, so that both legs of the hasp are received through apertured parts of the cover when the seal is in its locked position.

One advantage of the second aspect of the invention is that the seal housing is more tamper-proof. The seal cover cannot easily be removed from the housing body, when the seal is in the locked condition, because the legs of the hasp hold the cover on the body, in addition to the normal seals which are used to bond the parts of the housing together.

For the avoidance of any doubt, the first and second aspect of the invention can be used together.

Further advantages of the invention will be understood from the filing detailed description of preferred embodiments that the invention, which are described below, by example only, with reference to the accompanying figures. In the drawings:

Figs 1A to 1E show a first embodiment of the invention, the different figures showing the connection and removal of the hasp in the seal body;

3a

Figs 2A to 2H are similar to the views of 1A to 1E, except that the inside of the housing body is visible;

5 Figs 3A and 3B show an embodiment of the second aspect of the invention, wherein the seal has a cover with at least one apertured protrusion.

10 As shown in Fig 1A, the seal comprises a seal housing (1) and a hasp (2). The housing has first and second openings (3, 4), the first opening (4) communicating with a third opening (5) at the opposite side of the housing to form a passage or channel (6).

The second opening (4) communicates with a blind bore or passage (7). The passage (6) and passage (7) are substantially parallel to one another, within the housing body.

5 The hasp is U- or J-shaped and in the embodiment shown has a longer leg (8) and a shorter leg (9). At the juncture of the legs (8, 9) is a resilient hinge (10). In this embodiment, the hasp is formed of a suitably stiff yet resilient plastics material (for example acetal, nylon, styrene, ABS, PP or PE) such that the legs are substantially rigid yet can be flexed towards or away one another. A weakened point (11) is formed in leg (8). Leg (8) has a notch (29) and leg (9) has a notch (30). The hasp may, for example,
10 be 6.5mm by 3.5mm in its maximum dimensions, and 2mm thick.

As illustrated, legs (8, 9) in the relaxed condition assume a position relative to one another such that they are not parallel. In the preferred example illustrated, the legs diverge or are splayed, that is they open away from each other away from the hinge.
15 The resilience of the hinge is such that the legs can, however, be squeezed together so that they adopt a parallel orientation.

The parallel condition of the legs (8, 9) as seen in Fig 1B. With the legs parallel, they are able to be engaged in the housing body, leg (8) passing through
20 passage (6) and leg (9) passing into passage (7). This position is seen in Fig 1C. The locking of the hasp within the housing will be explained in more detail below, with reference to Figs 2A to 2H.

Thus, Fig 1C shows the locked position of the seal. In practice, the hasp will of
25 course be fitted over the element to be locked. To open the seal, the hasp is broken or cut at weakened point (11). Because of the resilience of the hinge (10), the legs of the hasp will now move apart and in particular the upper part of leg (8) will move away from leg (9). It is thus immediately obvious that the hasp has been broken and thus that the seal is no longer secure.

30

The hasp is removed entirely from the housing, as shown in Fig 1E, by means of the lower part of leg (8) being pulled out of the bottom of passage (6). The remainder of the hasp can then be pulled out from the top of the housing - this is

described in more detail below. The seal can now be re-use with a new hasp, which in practice will have a new identification code thereon for increased security. The removal of the hasp from the seal is done in the same manner as is known from the existing "Padseal" product (Registered trade mark).

5

Figs 2A to 2H are similar to Figs 1A to 1E, except that the inside of the seal housing (1) is visible. In practice, the housing is formed of a main body part (20) and a cover (not seen in Figs 2A to 2H) which is sealed onto the housing body in a known fashion. Typically, the cover would be welded on the housing body, pins on the cover locating within corresponding recesses in the housing body.

Within the seal housing is an angled, resilient catch member (21) which has arms (22, 23) which join at a curved juncture (24) and extend away from each other from this juncture to form an 'A' shape. The housing body (20) is moulded so as to create the first passage (6) and the passage (7) described with reference to Fig 1A. In addition, the body has a groove (25) to receive the catch (21). A supporting portion (26) forms a fulcrum on which the catch (21) can rock, the groove (25) being shaped to allow the arms (22, 23) to move as the catch rocks. The supporting part (26) also has a lateral recess (27) in which is fitted a spring (28), this spring forcing the arm (22) of the catch into the passage (6). In this position of arm (22), the arm (21) of the catch does not enter into passage (7).

After the legs of the hasp are squeezed together so that they are parallel (as shown in Fig 2B), the hasp is inserted into the seal housing as shown in Fig 2C. Because leg (8) is longer than leg (9), this leg (8) will push arm (22) of catch (21) against spring (27), forcing arm (23) of catch (21) into passage (7), as shown in Fig 2C. However, on further insertion of the hasp into the seal, as shown in Fig 2D, the spring (28) forces arm (22) of catch (21) into notch (29) of leg (8) of the hasp. Arm (22) of catch (21) cannot now move to its outermost position, because of the presence of leg (8) of the hasp, and so arm (23) of catch (21) extends partly into passage (7) and engages in notch (30) of leg (9) of the hasp.

In this position, the hasp is locked within the seal body. In particular, the hasp cannot be pulled out of the seal body in the direction it was inserted, because the arms of catch (21) are engaged in the notches of both legs of the hasp.

5 Upon breakage at the point of weakness (11), as seen in Fig 2E, the lower part of leg (8) of the hasp is disconnected from the upper part. The lower part of leg (8) can be pulled out from the bottom of the seal body, as shown in Figs 2F and 2G, the leg passing over and depressing the end of leg (22) of the catch. It will be understood that passage (6) of the seal housing is again empty, as shown in Fig 2G. This means that
10 arm (22) of the catch (21) can be moved fully by spring (28) into passage (6). This in turn releases arm (23) of catch (21) from passage (7). The top part of the hasp, with the legs (8,9) splayed apart, can now be pulled out from the top of the housing as seen in Fig 2H. For the avoidance of any doubt, we confirm this removal process is known, except that in known hasps the legs do not splay after breakage of the hasp shown in Fig
15 2 E.

Figs 3A and 3B illustrate another aspect of the invention, Figs 3A being a perspective view of the seal with the cover off and Fig 3B showing the cover on. Cover (30) is fitted on to seal housing body (20) in order to close the housing. Pins
20 (31, 32) on the cover engage in recesses (not seen) in the body (20) and the cover can be welded onto the housing body in a known fashion (other pins may be included, but are not fully visible in Fig 3A).

In addition to the pins, or in an alternative embodiment instead of the pins, the
25 cover (30) includes protrusions (35, 36) which in this example are square or rectangular. These protrusions engage in correspondingly shaped recesses (37, 38) in the housing body. The recesses (37, 38) interrupt passages (6, 7) in the housing body.

The protrusions (35, 36) are formed with apertures (39, 40) such that when the
30 cover is fitted on to the seal body, the apertures are in registration with passages (6, 7) and thus form part of the seats for the legs (8, 9) of the hasp. This means that when the seal is locked, with the hasp engaged in the housing, the cover will be physically held onto the housing body not only by its normal connection (gluing, welding, or

mechanical fix, etc.) but by the arms of the hasp itself. This means that removal of the cover for unwanted tampering is prevented.

5 The seal body and cover described above can be used with a flexible hasp as described in relation to Figs 1 and 2, or with a rigid hasp formed, for example, of rigid plastics or of metal.

10 Throughout the description and claims of this specification the word "comprise" and variations of that word, such as "comprises" and "comprising", are not intended to exclude other additives or components or integers.

15 The invention described herein is susceptible to variations, modifications and/or additions other than those specifically described and it is to be understood that the invention includes all such variations, modifications and/or additions which fall within the scope of the following claims.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A seal including a housing and a J- or U-shaped hasp, the housing having first and second openings to receive legs of the hasp, the first opening communicating with a third opening of the housing to form a channel for a first leg of the hasp, a locking mechanism being provided within the housing which is biased to resist withdrawal of the first leg of the hasp through the first opening, the hasp being lockable within the housing such that it can only be removed by cutting of the first leg of the hasp, wherein the legs of the hasp are substantially rigid and are connected together by a resilient hinge such that in a first, relaxed position the legs adopt a position in which they are not parallel, the legs being moveable to a second, parallel position against the resilient force of the hinge for insertion into the housing.
2. A seal according to claim 1, wherein the hasp is formed as a unitary member and of a material which is substantially rigid but which can form a resilient hinge at the juncture between the legs of the hasp.
3. A seal according to claim 1 or 2, wherein the housing is formed of a main body and a cover, the cover being sealed onto the main body, the cover having at least one protrusion which engages in a corresponding recess within the main body, the protrusion having an aperture therethrough which in use receives one leg of the hasp.
4. A seal according to claim 3, wherein the cover has two apertures, which are optionally through separate protrusions, whereby both legs of the hasp are received through the apertures of the cover when the seal is in its locked position.
5. A seal according to any one of the preceding claims, wherein a point of weakening is provided in the first leg of the hasp, which extends fully through the first leg, the hasp being designed to be broken at this point of weakening.

6. A seal according to any one of the preceding claims, wherein the legs of the hasp in the relaxed position diverge.

5 7. A seal including a housing and a J- or U-shaped hasp, the housing having first and second openings to receive legs of the hasp, the first opening communicating with a third opening of the housing to form a channel for a first leg of the hasp, a locking mechanism being provided within the housing which is biased to resist withdrawal of the first leg of the hasp through the first opening,
10 the hasp being lockable within the housing such that it can only be removed by cutting of the first leg of the hasp, wherein the housing is formed of a main body and a cover, the cover being sealed onto the main body, the cover having at least one protrusion which engages in a corresponding recess within the main body, the protrusion having an aperture therethrough which in use receives one
15 leg of the hasp.

8. A seal according to claim 7, wherein the cover has two apertures, which are optionally through separate protrusions, whereby both legs of the hasp are received through apertured parts of the cover when the seal is in its locked
20 position.

9. A seal according to claim 7 or 8, wherein the legs of the hasp are substantially rigid and are connected together by a resilient hinge such that in a first, relaxed position the legs adopt a position in which they are not parallel, the
25 legs being moveable to a second, parallel position against the resilient force of the hinge for insertion into the housing.

10. A seal according to claim 9, wherein the hasp is formed as a unitary member and of a material which is substantially rigid but which can form a
30 resilient hinge at the juncture between the legs of the hasp.

11. A seal according to any one of claims 7 to 10, wherein a point of weakening is provided in the first leg of the hasp, which extends fully through the first leg, the hasp being designed to be broken at this point of weakening.

12. A seal according to any of the embodiments substantially as herein described and illustrated.

DATED: 28 February 2005

5 PHILLIPS ORMONDE & FITZPATRICK

Attorneys for:

ITW LIMITED

David P. Fitzpatrick

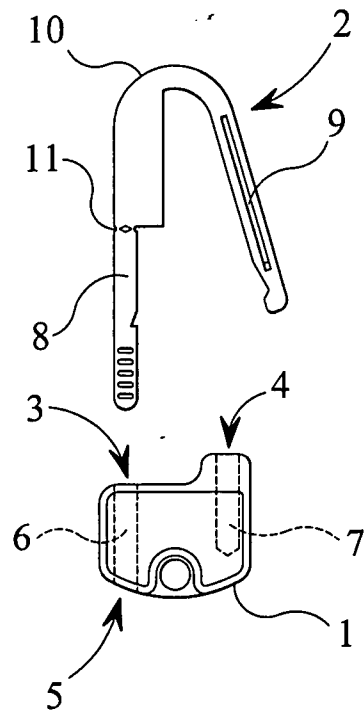


FIG 1A

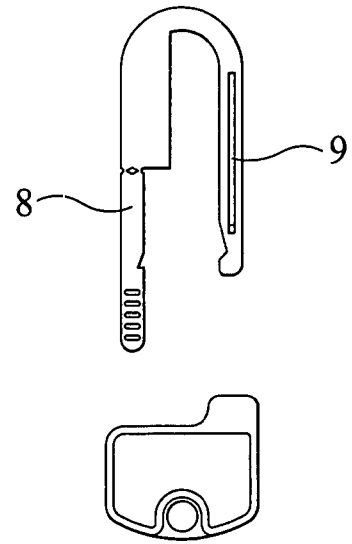


FIG 1B

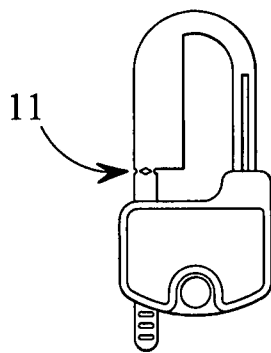


FIG 1C

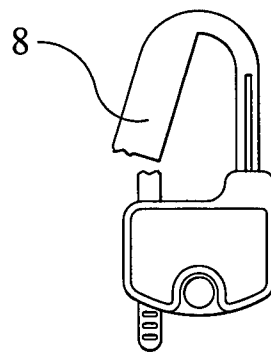


FIG 1D

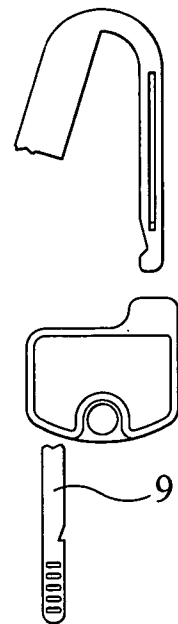


FIG 1E

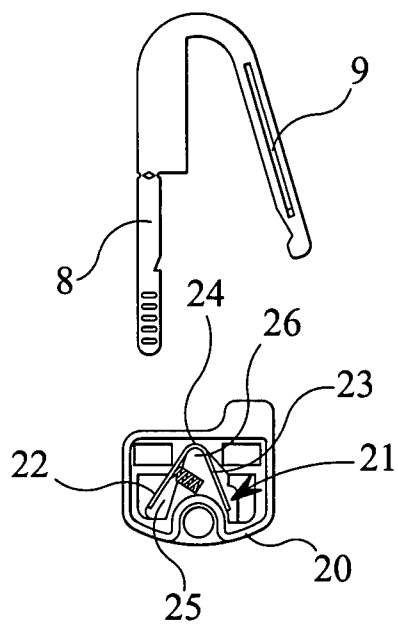


FIG 2A

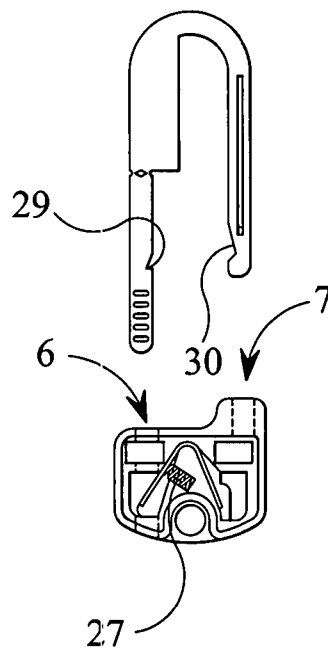


FIG 2B

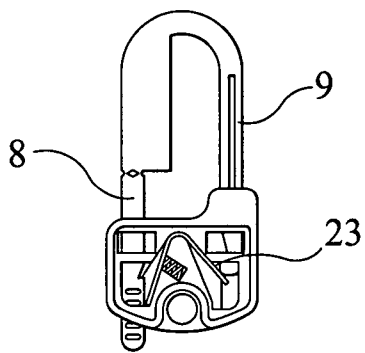


FIG 2C

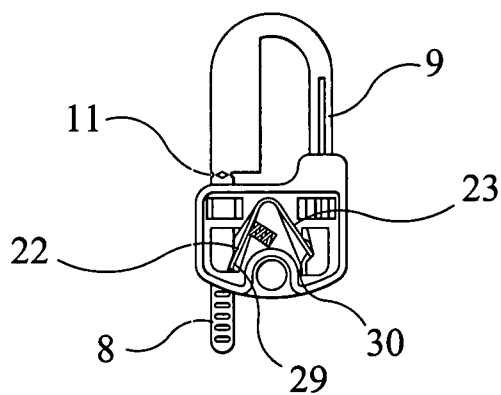


FIG 2D

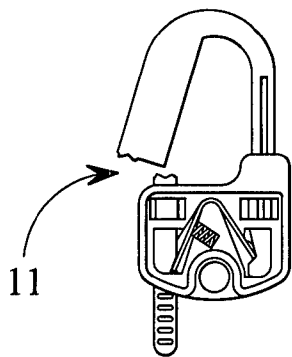


FIG 2E

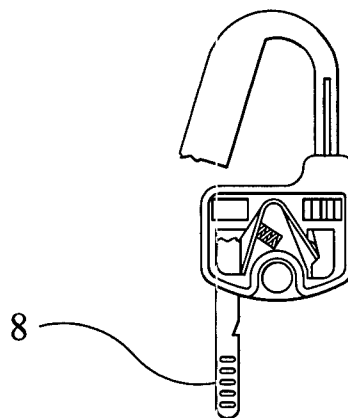


FIG 2F

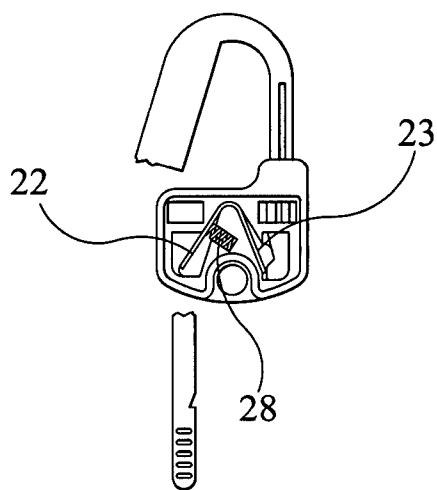


FIG 2G

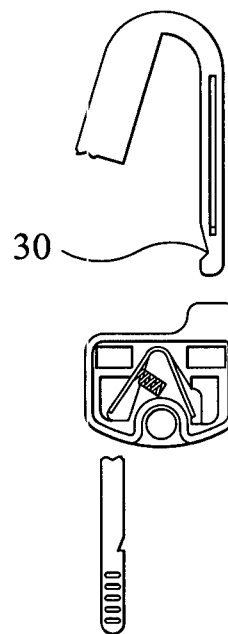


FIG 2H

