



- (51) **International Patent Classification:**
A61F 5/44 (2006.01) *A61F 5/442* (2006.01)
- (21) **International Application Number:**
PCT/US2016/052388
- (22) **International Filing Date:**
17 September 2016 (17.09.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/220,316 18 September 2015 (18.09.2015) US
15/268,571 17 September 2016 (17.09.2016) US
- (72) **Inventor; and**
- (71) **Applicant :** WASHINGTON, Eric A. [US/US]; 846 Grant Street, Gary, IN 46404 (US).
- (74) **Agent:** HARTMAN, Domenica, N.S.; Hartman Global IP Law, Suite A, 2621 Chicago Street, Valparaiso, IN 46383 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) **Title:** URINARY COLLECTION SYSTEM AND PROCEDURE FOR DECREASING CATHETER-ASSOCIATED BACTERIURIA

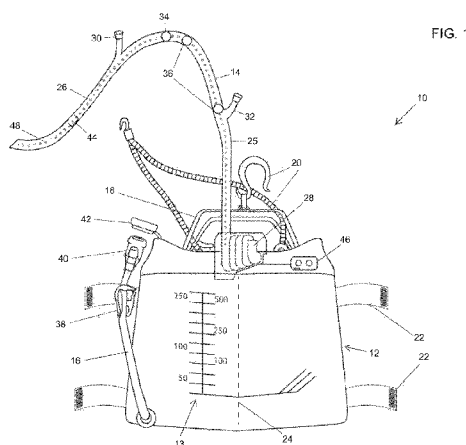

- (57) **Abstract:** Systems and methods suitable for decreasing catheter-associated bacteriuria in a catheterized patient include a urinary collection system having a collection bag, a drain tube fluidically connected to the collection bag to enable emptying urine collected in the collection bag, and a flexible continuous tube formed as an integral one-piece component and fluidically connected to the collection bag to enable urine to flow into the collection bag from a patient's bladder. Catheter-associated bacteriuria may be decreased in the system by instilling a sterile acetic acid solution into the collection bag via the continuous tube, dispersing the solution in the collection bag, draining the solution from the collection bag via the drain tube, and then allowing urine to flow from the catheterized patient through the continuous tube and into the collection bag.

URINARY COLLECTION SYSTEM AND PROCEDURE FOR DECREASING CATHETER-ASSOCIATED BACTERIURIA

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 62/220,316, filed September 18, 2015, the contents of which are incorporated herein by reference. In addition, this application is related to United States Patent No. 6,858,021, the contents of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] The present invention generally relates to equipment and techniques for reducing the incidence of infections in patients. The invention particularly relates to a urinary collection system suitable for use in reducing the incidence of urinary tract infections in patients with indwelling catheters.

[0003] Research data suggest that indwelling urethral catheters are the management techniques of choice for intractable urinary incontinence or chronic bladder outlet obstruction. The literature indicates that persistent, irreversible urinary incontinence may affect an estimated 50% of patients in tertiary care settings. However, patients who have an indwelling urinary catheter show a high incidence of urinary tract infections as demonstrated by numerous research studies. The catheterized urinary tract has been demonstrated to account for most nosocomial urinary tract infections with resulting bacteriuria. Complications of bacteriuria include obstructed catheters, acute pyelonephritis, bacteremia, periurethral purulent infections, vesicourethral reflux, chronic tubulointerstitial nephritis, chronic renal failure, and death. In addition, systemic symptoms of bacteriuria include fever above 38.4°C, nausea, vomiting, and costovertebral angle

tenderness, as well as catheter-related hypovolemic sepsis. The literature supports nontreatment for asymptomatic bacteriuria. Long-term urethral catheterization has been linked with symptomatic bacteriuria (e.g., fever, costovertebral angle, or suprapubic tenderness). Notwithstanding, long-term urethral catheter-associated bacteriuria is said to be the most common nosocomial infection in secondary and tertiary care settings, as well as in home health care environments.

[0004] Research studies have indicated that about 40% of all nosocomial infections in the United States are associated with the urinary tract, of which 75% are related directly to indwelling catheterization. Bacteriuria has been demonstrated as a universal consequence of long-term urethral catheterization, where the majority of urinary tract infections occur through microbial ascension from the distal urethral tubule into the bladder cavity. The bladder normally resists infection by two known mechanisms: (1) mechanical factors (i.e., residual urine and the bladder urine volume) and (2) intrinsic factors (i.e., the antibacterial property of the bladder mucosa, urea concentration, osmolarity, and pH, as well as antimicrobial drugs). Factors that contribute to urinary tract infections include structural defects, systemic disorders, sexually transmitted diseases, insertion of a urethral catheter, and long-term indwelling catheterization. Urethral catheterization obliterates the natural cleansing of the urinary mucosa, encouraging the migration of pathogens into the bladder.

[0005] Antibiotic-resistant microorganisms are prevalent in long-term care facilities, and long-term indwelling catheters are convenient for transmission of antibiotic-resistant bacterial flora such as (in descending order of frequency) *Providencia stuartii*, *Proteus mirabilis*, *Morganella morganii*, Group D *Streptococcus*, *Staphylococcus aureus*, *Pseudomonas aeruginosa*, *Escherichia coli*, *Klebsiella pneumoniae*, *Enterococcus*, and *Enterobacter*. Moreover, research studies have

found that antiseptic bladder irrigation did not prevent bacteriuria in patients with long-term catheters but, rather, promoted antibiotic-resistant microorganisms. Accordingly, routine antiseptic bladder irrigation was not recommended for patients with long-term indwelling catheters. Instead, patient education with regard to long-term catheterization has been recommended as an effective measure in reducing the incidence of catheter-related bacteriuria. However, education of patients by medical personnel appears to be inconsistent and not comprehensive, especially in the case of the elderly.

[0006] In summary, the use of an indwelling catheter has been frequently associated with acute bacteriuria, regardless of strict adherence to urinary catheter care guidelines, and though the use of antibiotic bladder irrigation has been found to reduce the incidence of infection, it has also been shown to lead to the emergence of resistant organisms. As a solution, United States Patent No. 6,858,021 to Washington provides a method for reducing the incidence of urinary tract infection in patients having indwelling catheters through the use of a weak acidic solution to treat the catheter collection bag used by the patient. The method decreases catheter-associated bacteriuria in a catheterized patient by instilling a sterile acetic acid solution (e.g., distilled vinegar) into the catheter collection bag, dispersing the solution in the bag, and then draining the solution from the bag. Thereafter, urine is allowed to flow from the catheterized patient through a catheter and into the bag.

[0007] While the teachings of Washington are able to substantially reduce both the type and number of colony-forming bacteria in a catheter drainage receptacle, and such a capability is particularly beneficial to patients with long-term indwelling urethral catheters by decreasing a patient's risk in polymicrobial bacterial propagation within the catheter drainage system, further advancements in such

treatments are continuously desired.

BRIEF DESCRIPTION OF THE INVENTION

[0008] The present invention provides systems and methods suitable for decreasing catheter-associated bacteriuria in a catheterized patient.

[0009] According to one aspect of the invention, a urinary collection system is provided that includes a collection bag having an interior equipped with means for creating a hinge at which the collection bag is able to bend, a drain tube fluidically connected to the collection bag to enable emptying urine collected in the collection bag, a flexible continuous tube fluidically connected to the collection bag to enable urine to flow into the collection bag from a patient's bladder wherein the continuous tube is an integral one-piece component, an irrigation port on the continuous tube for instilling an irrigation solution at the drainage tube portion, a urine collection port on the continuous tube for withdrawing urine from the continuous tube, one or more turn valves on the continuous tube to prevent reflux of the irrigation solution into the patient's bladder, means for performing one or more chemical measurements of urine flowing through the continuous tube, diagnostic means interfacing with the chemical measurement means to quantitatively and/or qualitatively analyze the one or more chemical measurements of the urine, and one or more connectors that enable the collection bag to be mounted to a surface.

[0010] According to another aspect of the invention, a method of using a urinary collection system to decrease catheter-associated bacteriuria in a catheterized patient is provided. The urinary collection system includes a collection bag, a drain tube fluidically connected to the collection bag to enable emptying urine collected in the collection bag, and a flexible continuous tube formed as an integral one-piece

component and fluidically connected to the collection bag to enable urine to flow into the collection bag from a patient's bladder. The method includes instilling a sterile acetic acid solution into the collection bag via the continuous tube, dispersing the solution in the collection bag, draining the solution from the collection bag via the drain tube, and then allowing urine to flow from the catheterized patient through the continuous tube and into the collection bag.

[0011] Technical effects of the system and method described above preferably include the ability to decrease catheter-associated bacteriuria in a catheterized patient by reducing the number of extraneous sources of contamination and infection, as well as performing and quantitatively and/or qualitatively analyzing one or more chemical measurements directly on the urine within the system.

[0012] Other aspects and advantages of this invention will be further appreciated from the following detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] FIG. 1 is a nonlimiting schematic representation of a urinary collection system suitable for use in the present invention.

[0014] FIG. 2 schematically represents a second nonlimiting embodiment of a collection bag suitable for use with the urinary collection system of FIG. 1.

[0015] FIG. 3 schematically represents the collection bag of FIG. 2 secured to a patient's leg with a sleeve in accordance with a nonlimiting aspect of the invention.

[0016] FIGS. 4 and 5 schematically represent a carrying case for use with the

collection bag of FIG. 2 depicted in closed and open positions, respectively, in accordance with a nonlimiting aspect of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0017] In part, the present invention was prompted by research reported in United States Patent No. 6,858,021 to Washington, which evidenced that the instillation of a weak acidic irrigation solution into a urinary collection system is capable of significantly reducing the type and number of certain kinds of microorganisms in urinary collection systems that use catheter collection bags, thereby reducing the incidence of urinary tract infections in patients having indwelling catheters. The present invention offers additional features for urinary collection systems that enable periodic catheter irrigation. A nonlimiting embodiment of such a urinary collection system 10 shown in FIG. 1 and nonlimiting embodiments of collection bags (receptacles) 12 and 112 shown in FIG. 1 through 3 allow for the convenient instillation of an irrigation solution (preferably a sterile acetic acid solution, e.g., distilled acetic vinegar, or other antimicrobial agent), as well as decreased cross-contamination during changing of the collection receptacle (bag). To facilitate the description provided below of the embodiments represented in the drawings, relative terms, including but not limited to, “vertical,” “horizontal,” “lateral,” “front,” “rear,” “side,” “forward,” “rearward,” “upper,” “lower,” “above,” “below,” “right,” “left,” etc., may be used in reference to the orientations of the collection bags 12 and 112 during their use by a patient as represented in the drawings, and therefore are relative terms that indicate the construction and use of the invention and therefore help to define the scope of the invention.

[0018] The nonlimiting embodiment of the urinary collection system 10 schematically represented in the FIG. 1 shows the collection bag 12 thereof

equipped with a continuous tube 14 through which urine flows into the bag 12 from the bladder of an individual (hereinafter, "patient"), and a drain tube 16 for emptying urine collected in the bag 12. The continuous tube 14 is preferably formed of a soft, flexible and antimicrobial material of any suitable type known in the art. The drain tube 16 is not required to be antimicrobial, and may be formed of a soft and flexible material such as rubber, polyurethane, silicone, etc. The collection bag 12 may be made of a soft antimicrobial vinyl and preferably has a capacity sufficient for the intended patient. A removable handle 18 is shown as being provided for carrying the bag 12. The system 10 is further equipped with one or more connectors 20 that permit the collection bag 12 to be mounted to a fixed surface, such as a bed, in any suitable manner, or secured to the patient, for example, to the patient's leg in any suitable manner. For purposes of the latter, the bag 12 is represented as being equipped with leg straps 22 by which the bag 12 can be secured around a patient's leg. The interior of the bag 12 is equipped with a "zip-lock" or other reversible separator 24 that facilitates placement of the bag 12 around the leg by creating a vertical hinge at which the bag 12 is able to bend at or near its midsection. The bag 12 may include markings 13 thereon, for example, for use in measuring a volume of urine contained in the bag 12.

[0019] The continuous tube 14 generally comprises a portion identified as a drainage tube 25 and a portion identified as a Foley catheter 26, though other types of indwelling urinary catheters are also within the scope of the invention. The drainage tube 25 is disposed between the catheter 26 and the collection bag 12. The continuous tube 14 is represented as further comprising a portion identified as an extendable/retractable tubing 28 disposed between the drainage tube 25 and the collection bag 12 that enables the continuous tube 14 to be extended or retracted as may be desired for the convenience or comfort of the patient. The continuous tube 14 is preferably an integrally-formed one-piece component. The lack of any

separation between the catheter 26, drainage tube 25, and extendable/retractable tubing 28 reduces the number of extraneous sources of contamination and infection within the system 10.

[0020] The continuous tube 14 is also represented as comprising various ports, in particular, an inflation port 30 that can be used to inflate a balloon (not shown) commonly associated with Foley catheters, and an irrigation port 32 for instilling the irrigation solution at the drainage tube 25 of the continuous tube 14. A urine collection port 34 is provided that permits the withdrawal of urine from the continuous tube 14 (as well as instillation of fluids), and one or more turn valves 36 are provided that may be used to prevent reflux of the irrigation solution into the patient's bladder, perform diagnostic investigations, and/or use for other purposes that may entail fluidically isolating the catheter 26 from the drainage tube 25 and/or collection bag 12.

[0021] The drain tube 16 includes a one-way turn valve 38 (or other suitable closure), a retractable drain spigot bell 40, and a cap 42. The drain spigot bell 40 preferably includes a viscous chlorine gel to inhibit bacterial growth when emptying the bag 12, and the turn valve 38 prevents back flow of urine into the bag 12.

[0022] The catheter portion 26 of the continuous tube 14 preferably includes a sensing device in the form of a urine analyzer 44 adapted to perform one or more chemical measurements on urine as it flows through the continuous tube 14. The urine analyzer 44 is preferably hypo-allergic, nonhazardous to humans, and resistant to deterioration and biodegradation within the bio-environment in which it operates. Such a urine analyzer 44 may be a microfluidic system fabricated on a silicon semiconductor chip and specifically adapted for biomedical analysis, commonly referred to as a laboratory on a chip (lab-on-a-chip). A nonlimiting

example of such a device is disclosed in a paper published online and entitled "A Lab-on-a-Chip for Biological Fluids Analysis," incorporated herein by reference and available from Graca Minas through the ResearchGate website, www.researchgate.net. The urine analyzer 44 is preferably configured to measure and/or detect levels of one or more of nitrates, urobilinogen, proteins, glucose, pH, hemoglobin, blood, volume, specific gravity, ketones, bilirubin, bacteria, and yeast.

[0023] The urine analyzer 44 preferably interfaces with a diagnostic unit 46 that performs quantitative and/or qualitative analysis of the data relating to the composition of the urine sensed with the urine analyzer 44. The urine analyzer 44 may wirelessly communicate with the diagnostic unit 46, allowing the diagnostic unit 46 to be located anywhere on the collection bag (for example, as shown in FIG. 1), or remotely located from the collection bag. For this purpose, FIG. 1 schematically represents the catheter 26 as incorporating a conductor 48 that serves as an antenna for wirelessly transmitting data from the urine analyzer 44 to the diagnostic unit 46. In some embodiments, the function of the antenna can be performed with a radiopaque strip of a type commonly provided in catheters to promote their visibility under X-ray examination, in which case the radiopaque strip may be formed of or contain an electrically-conductive radiocontrast material (nonlimiting examples include titanium and tungsten) and is electrically connected to the output of the urine analyzer 44.

[0024] The diagnostic unit 46 may include any components suitable for communicating with the urine analyzer 44 and performing the desired analysis, including but not limited to a microprocessor, solid-state memory, and a replaceable and/or rechargeable battery. The diagnostic unit 46 may include a visual indicator, screen, or other means for communicating results of the quantitative and/or qualitative analysis of the data relating to the composition of the urine, as well as

push-buttons or the like for direct user interfacing. As a nonlimiting example, the diagnostic unit 46 may be configured to enable the patient to wirelessly access the results of the quantitative and/or qualitative analysis from a personal computer, website, mobile phone, or other means. Measurements performed on the urine and the quantitative and/or qualitative analysis thereof may be performed on demand, periodically, or continuously in order to monitor the health of the patient. The urine collection port 34 can be used to withdraw urine for the purpose of verifying results obtained with the urine analyzer 44.

[0025] FIGS. 2 and 3 represent the collection bag 112 and components thereof as another embodiment suitable for use in place of the bag 12 represented in the system 10 of FIG. 1. In FIGS. 2 and 3, consistent reference numbers are used to identify the same or functionally equivalent elements, but with a numerical prefix (1, 2, or 3, etc.) added to distinguish the particular embodiment from the embodiment of FIG. 1. Other aspects of the bag 112 and its interaction with other components of the system 10 not discussed in any detail can be, in terms of structure, function, materials, etc., essentially as was described for the first embodiment.

[0026] FIG. 2 schematically represents the collection bag 112 as having an inlet 115 connected to a continuous tube 114 through which urine flows from the bladder of a patient and collects in the bag 112. FIG. 2 also schematically represents a drain tube 116 connected to an outlet 117 of the bag 112 for emptying urine 111 that has been collected in the bag 112. The continuous tube 114 may include some or all of the features discussed in regards to the continuous tube 14 of FIG. 1. Similar to the drain tube 16 of FIG. 1, the drain tube 116 preferably includes a one-way turn valve 138 (or other suitable closure) and a drain spigot 140. While not in use, the drain spigot 140 may be removably stowed in an anti-bacterial pocket 152.

[0027] The interior of the bag 112 is equipped with multiple separators 124 along which the bag 112 is able to bend. The separators 124 effectively form pivot joints or hinges of the bag 112, and may be arranged in a grid such that bending of the bag 112 is promoted in multiple directions at multiple locations. For example, in the embodiment represented in FIG. 2, the separators 24 of the bag 112 define a grid that enables the bag 112 to bend along two vertical hinges and two horizontal hinges (relative to the orientation in FIG. 2) and effectively create nine fluidically connected volumes or sections within the bag 112. The bag 112 may include markings 113 thereon, for example, for use in measuring the volume of urine 111 contained in the bag 112.

[0028] The bag 112 includes a sensing device in the form of a urine analyzer 144 adapted to perform one or more chemical measurements on urine as it flows through the continuous tube 114 and into the bag 114. As such, the urine analyzer 144 is represented as being located at the inlet 115 or directly above the inlet 115, and in-line with the flow of the incoming urine from the continuous tube 114. The urine analyzer 144 may be functionally equivalent to the urine analyzer 44 of FIG. 1, and may interface, either directly or wirelessly, with a diagnostic unit 146 that performs quantitative and/or qualitative analysis of the data relating to the composition of the urine sensed with the urine analyzer 144. According to one nonlimiting aspect of the bag 112, as represented in FIG. 2, the urine analyzer 144 may be built into the bag 112 and disposable therewith, whereas the diagnostic unit 146 may be removed prior to disposal of the bag 112. For example, FIG. 2 represents the diagnostic unit 146 as being configured to functionally couple to the urine analyzer 144 via electrodes 145 located on the bag 112.

[0029] The bag 112 is represented as being equipped with tabs 121 by which the bag 112 can be secured to a fixed surface in any suitable manner, or secured to a

patient, for example, to the patient's leg in any suitable manner. For example, FIG. 2 represents the tabs 121 as including slots formed therein that are configured to accept fastening devices for securing the bag 112 to another object. As a nonlimiting example, FIG. 3 represents the slots as accepting fasteners 154 for removably securing the bag 112 to a sleeve 150 worn on a patient's leg 100. In this nonlimiting embodiment, the fasteners 154 (represented as buttons) are located on the sleeve 150 and inserted into the slots of the tabs 121, which are located at four corners of the bag 112 in order to hold the bag 112 against the sleeve 150. As represented, the hinges in the bag 112 defined by the separators 124 promote the ability of the bag 112 to conform to the shape of the patient's leg 100, thereby promoting comfort and reducing the profile of the bag 112. The sleeve 150 may be formed of any material, preferably washable, moisture wicking, and/or breathable fabrics of the types commonly used for sporting or medical applications.

[0030] FIGS. 4 and 5 schematically represent a nonlimiting embodiment of a carrying case 180 configured to hold the bag 112 during transport. The case 180 has an interior cavity closable by a cover 188. An interior surface 186 of the cavity comprises protrusions 198 (FIG. 5) configured to be inserted into the slots in the tabs 121 of the bag 112 and thereby secure the bag 112 against the surface 186 within the case 180. The cover 188 may be used to conceal the bag 112 within the cavity during use of the case 180 as represented in FIG. 6, which further represents the cover 188 as being secured in a closed position with a flap 190 and fastener 192. The cover 188 is represented as including a hole 196 at its upper end to allow the continuous tube 114 to be routed from the interior cavity of the bag 112 to its exterior. In addition, a hole 194 is provided at the upper end of the cover 188 to provide access to the urine analyzer 144, for example, to visually observe a visual indicator (such as a light) or a display screen (not shown) on the analyzer 144. The case 180 may include straps 182 and/or a handle 184 in order to promote

convenient transportation of the case 180 and the bag 112 stowed therein.

[0031] The urinary collection system 10 represented in the drawings has the potential for reducing catheter-associated urinary tract infections and the nosocomial spread of bacteria. In use, a sterile acetic acid solution can be installed into the collection bag 12 or 112 via the continuous tube 14 or 114, after which the solution can be dispersed in the collection bag 12 or 112 and then drained from the bag 12 or 112 via the drain tube 16 or 116. Afterwards, use of the system 10 by a catheterized patient can resume by allowing urine to flow from the patient through the continuous tube 14 or 114 and into the collection bag 12 or 112. To provide certain benefits believed to be associated with the use of the system 10, an effective amount of irrigation solution is generally that which will coat at least the entire interior of the collection bag 12 or 112. As such, the amount of solution necessary to reduce the incidence of bacterial growth and its subsequent propagation into the bladder will depend in part of the capacity of the bag 12 or 112. However, it is believed that a standard instillation dose of about thirty to about fifty milliliters is sufficient to lower bacterial colony counts below pathogenic levels, with the use of lower and higher doses being foreseeable. Using such solutions to reduce bacterial colony count within a collection bag, that is, decreasing a patient's risk in polymicrobial bacterial propagation within the urinary collection system 10, can reduce the incidence of catheter-acquired bladder bacteriuria.

[0032] While the invention has been described in terms of specific embodiments, it is apparent that other forms could be adopted by one skilled in the art. For example, the physical configuration of the system 10 or its components could differ from that shown, and materials and processes/methods other than those noted could be used. In addition, the invention encompasses additional embodiments in which one or more features or aspects of different disclosed embodiments may be

combined. Therefore, the scope of the invention is to be limited only by the following claims.

CLAIMS:

1. A urinary collection system comprising:
 - a collection bag having an interior equipped with means for creating at least one hinge at which the collection bag is able to bend;
 - a drain tube fluidically connected to the collection bag to enable emptying urine collected in the collection bag;
 - a flexible continuous tube fluidically connected to the collection bag to enable urine to flow into the collection bag from a patient's bladder, the continuous tube being an integral one-piece component;
 - an irrigation port on the continuous tube for instilling an irrigation solution at the drainage tube portion;
 - a urine collection port on the continuous tube for withdrawing urine from the continuous tube;
 - one or more turn valves on the continuous tube to prevent reflux of the irrigation solution into the patient's bladder;
 - means for performing one or more chemical measurements of urine flowing through the continuous tube; and
 - diagnostic means interfacing with the chemical measurement means to quantitatively and/or qualitatively analyze the one or more chemical measurements of the urine.
2. The urinary collection system of claim 1, wherein the continuous tube comprises a catheter portion, an extendable/retractable tubing that fluidically connects the continuous tube to the collection bag, and a drainage tube portion therebetween.
3. The urinary collection system of claim 1, wherein the means for

performing one or more chemical measurements is located on the catheter portion of the continuous tube.

4. The urinary collection system of claim 1, wherein the chemical measurement means is located at or adjacent to an inlet of the collection bag and inline with the continuous tube.

5. The urinary collection system of claim 1, further comprising one or more connectors on the collection bag that enable the collection bag to be secured to a surface.

6. The urinary collection system of claim 5, wherein the connectors are configured to mount the collection bag to the surface of a bed or the patient's leg.

7. The urinary collection system of claim 1, wherein the drain tube comprises a closure, a retractable drain spigot bell, and a cap.

8. The urinary collection system of claim 7, wherein the drain spigot bell includes a viscous chlorine gel to inhibit bacterial growth when emptying the collection bag through the drain tube.

9. The urinary collection system of claim 1, wherein the collection bag includes a pocket configured to store at least an end of the drain tube and to inhibit bacterial growth.

10. The urinary collection system of claim 1, wherein the means for creating the at least one hinge at which the collection bag is able to bend includes a grid that enables the collection bag to bend in at least two different directions.

11. The urinary collection system of claim 1, further comprising a sleeve configured to be worn on the patient's leg and having fasteners thereon for securing the collection bag.

12. The urinary collection system of claim 1, further comprising a hanging bracket having fasteners thereon for supporting the collection bag and configured to be hung from a bed.

13. The urinary collection system of claim 1, further comprising a carrying case having fasteners thereon for supporting and securing the collection bag to the carrying case, and a cover for concealing at least a portion of the collection bag within the carrying case.

14. A method of using the urinary collection system of claim 1 to decrease catheter-associated bacteriuria in a catheterized patient, the method comprising:

instilling a sterile acetic acid solution into the collection bag via the continuous tube;

dispersing the solution in the collection bag;

draining the solution from the collection bag; and then

allowing urine to flow from a catheterized patient through the continuous tube and into the collection bag.

15. A method of using a urinary collection system to decrease catheter-associated bacteriuria in a catheterized patient, the urinary collection system comprising a collection bag, a drain tube fluidically connected to the collection bag to enable emptying urine collected in the collection bag, and a flexible continuous tube formed as an integral one-piece component and fluidically connected to the

collection bag to enable urine to flow into the collection bag from a patient's bladder, the method comprising:

instilling a sterile acetic acid solution into the collection bag via the continuous tube;

dispersing the solution in the collection bag;

draining the solution from the collection bag via the drain tube; and then

allowing urine to flow from the catheterized patient through the continuous tube and into the collection bag.

16. The method of claim 15, wherein the sterile acetic acid solution is instilled into the collection bag via an irrigation port on the continuous tube.

17. The method of claim 15, further comprising:

performing one or more chemical measurements on urine flowing through the continuous tube with a urine analyzer of the urinary collection system; and

interfacing the urine analyzer with a diagnostic unit of the urinary collection system to quantitatively and/or qualitatively analyze the one or more chemical measurements of the urine.

18. The method of claim 15, further comprising:

withdrawing urine from a urine collection port on the continuous tube;

performing one or more chemical measurements on the collected urine;

and


comparing the one or more chemical measurements performed on the collected urine with the one or more chemical measurements performed on the urine with the urine analyzer of the urinary collection system.

19. A urinary collection system comprising:

- a collection bag;
- a drain tube fluidically connected to the collection bag to enable emptying urine collected in the collection bag;
- a flexible continuous tube fluidically connected to the collection bag to enable urine to flow into the collection bag from a patient's bladder, the continuous tube being an integral one-piece component;
- an irrigation port on the continuous tube for instilling an irrigation solution at the drainage tube portion;
- a urine collection port on the continuous tube for withdrawing urine from the continuous tube; and
- means on the continuous tube for performing one or more chemical measurements on urine as the urine is flowing through the continuous tube.

20. The urinary collection system of claim 19, further comprising diagnostic means interfacing with the chemical measurement means to quantitatively and/or qualitatively analyze the one or more chemical measurements of the urine.

FIG. 1

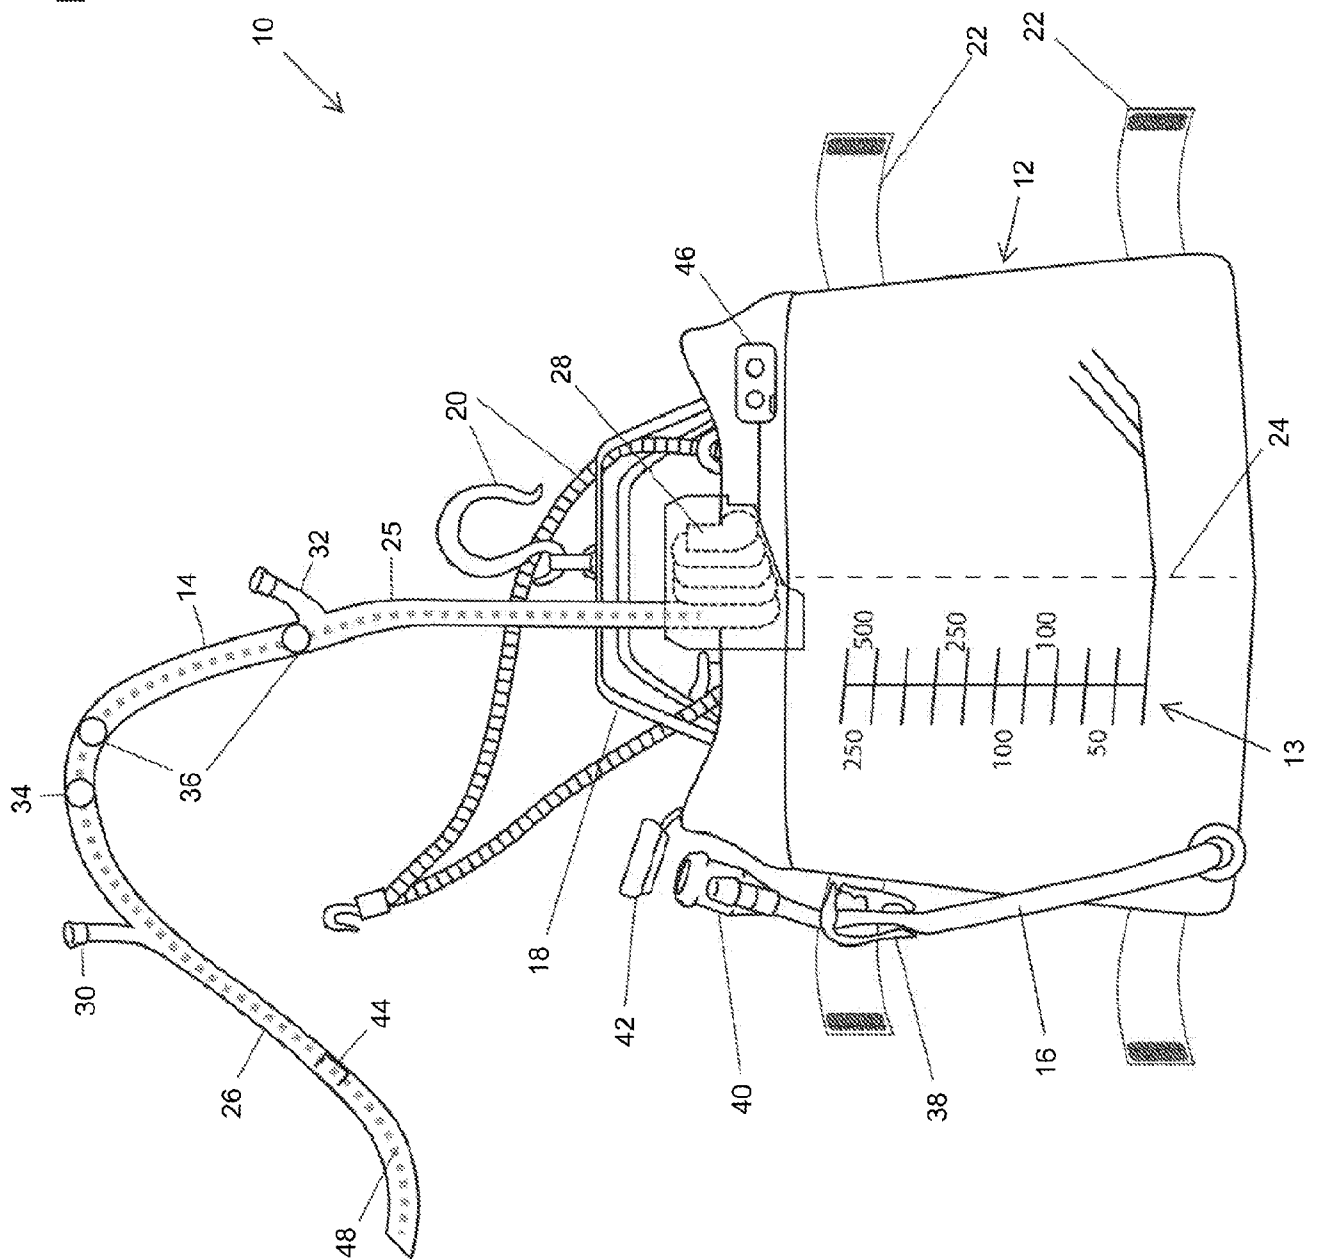

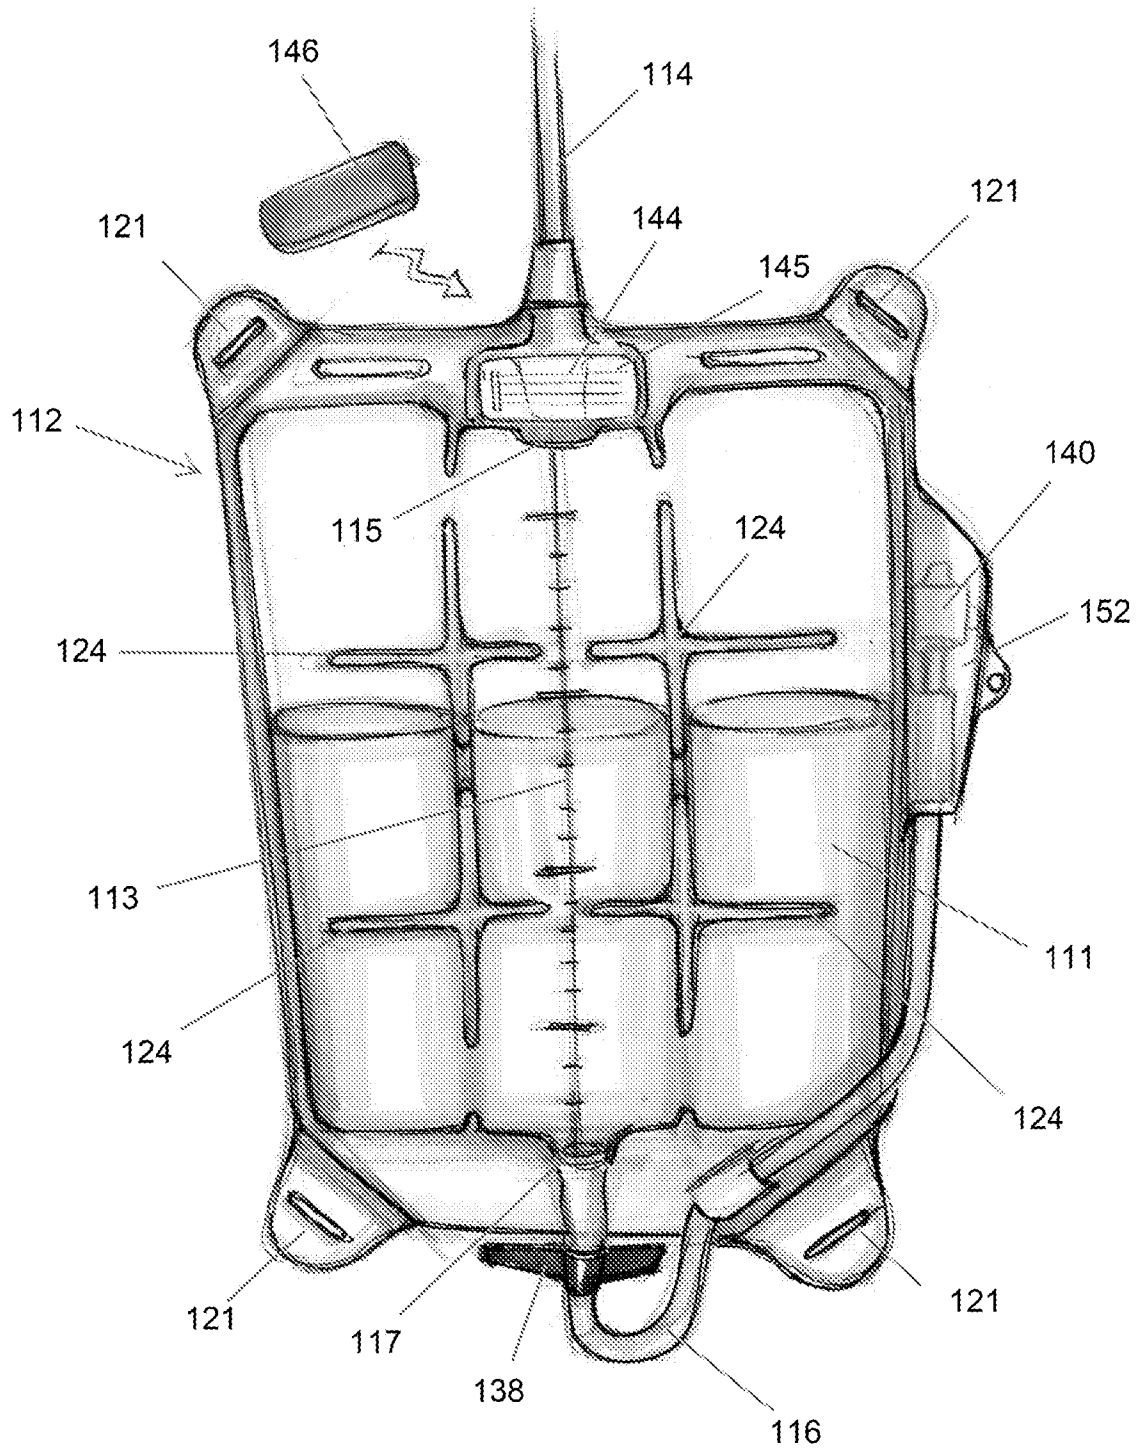


FIG. 2

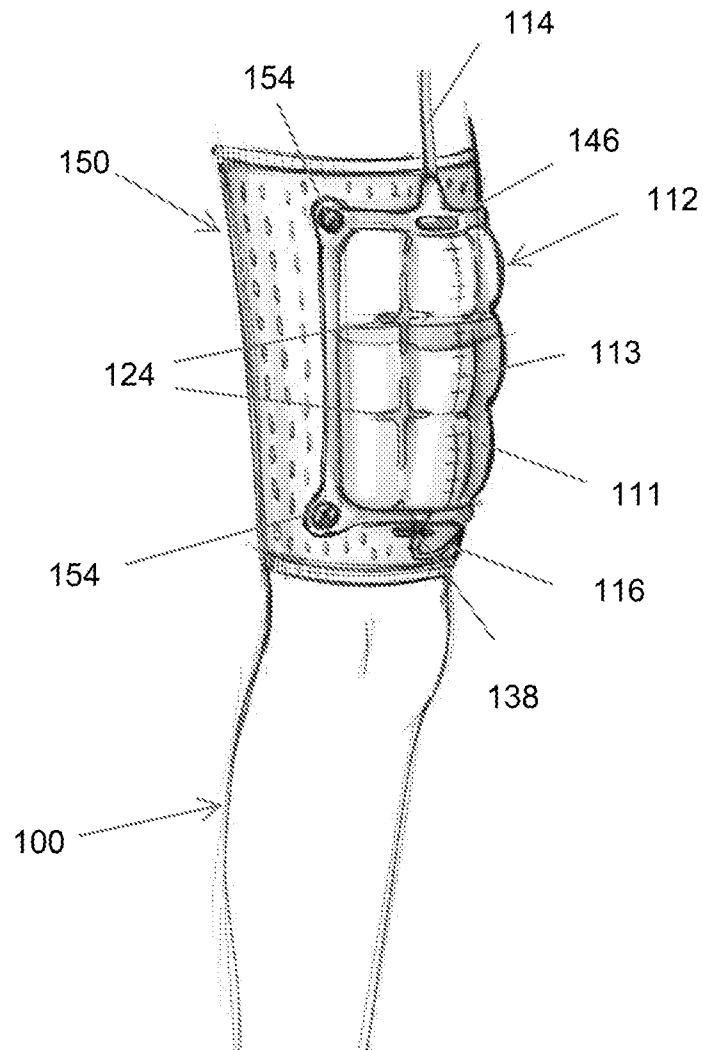


FIG. 3

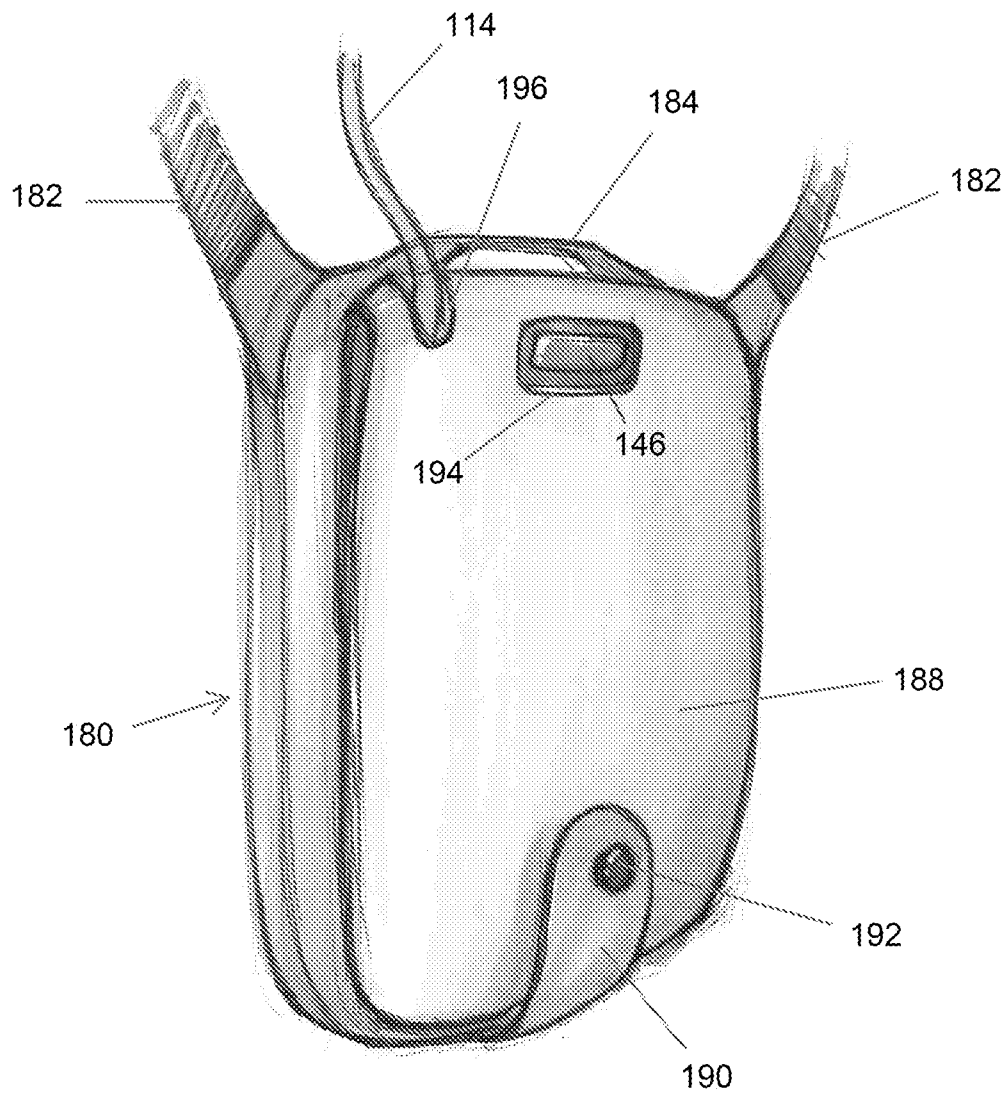


FIG. 4

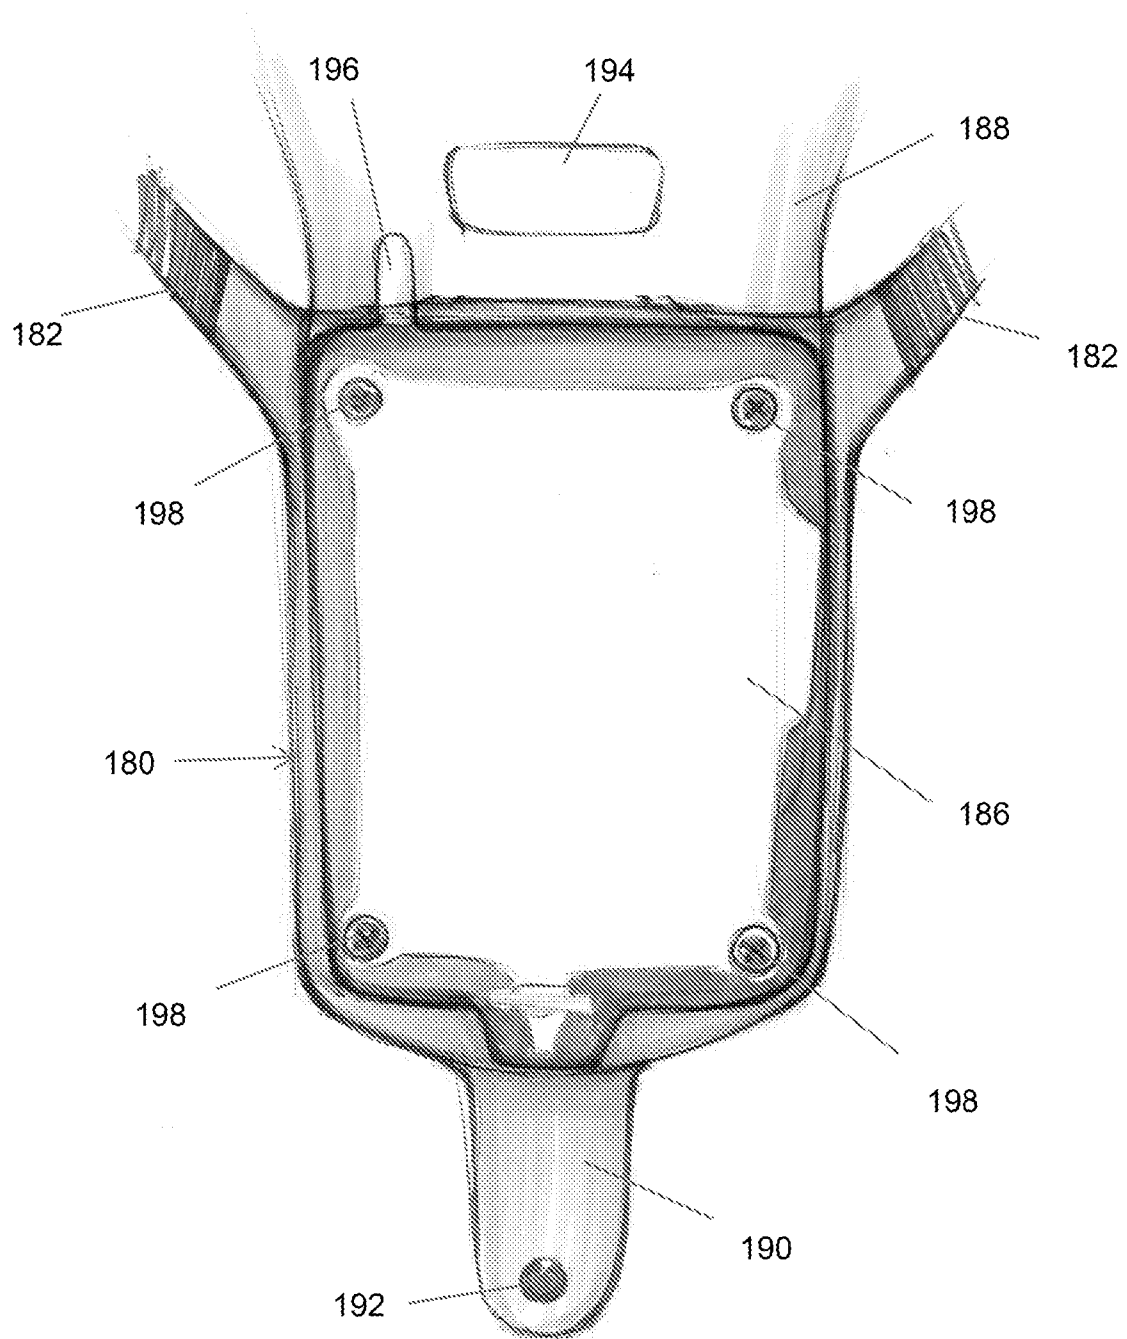


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2016/052388**A. CLASSIFICATION OF SUBJECT MATTER****A61F 5/44(2006.01)i, A61F 5/442(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61F 5/44; A61B 19/00; A61B 6/00; A01N 59/00; A61M 1/00; A61B 5/0205; A45F 3/20; A61M 27/00; A61F 5/442

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: urine collection, catheter, bag, drain tube, port, valve, chemical measurement, analyzer, diagnostic unit

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4233263 A (SCHAEFFER, A. J.) 11 November 1980 See column 1, line 44 - column 5, line 44; claims 1-7.	1-13, 19, 20
Y	US 2013-0030262 A1 (BURNETT, D. R. et al.) 31 January 2013 See paragraphs [0073]-[0120]; claims 1-20; figures 1-13.	1-13, 19, 20
Y	US 2012-0184944 A1 (TOMES, J. E. et al.) 19 July 2012 See paragraphs [0017]-[0050]; claims 1-23; figures 1-11.	2
Y	US 2011-0251572 A1 (NISHTALA, V. et al.) 13 October 2011 See paragraphs [0015]-[0037]; claims 1-20; figures 1-4E.	7-9
Y	US 8361044 B2 (MARSHALL, M.) 29 January 2013 See column 2, line 26 - column 13, line 4; claims 1-23; figures 1-9.	11, 13

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

02 January 2017 (02.01.2017)

Date of mailing of the international search report

03 January 2017 (03.01.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea



Facsimile No. +82-42-481-8578

Authorized officer

HAN, Inho

Telephone No. +82-42-481-3362



INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2016/052388**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 14-18
because they relate to subject matter not required to be searched by this Authority, namely:
Claims 14-18 pertain to a method for treatment and/or diagnosis of the human body and thus relate to a subject matter which this International Searching Authority is not required, under PCT Article 17(2)(a)(i) and PCT Rule 39.1(iv), to search.
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of any additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/052388

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4233263 A	11/11/1980	CA 1112836 A JP 1004459 B JP 55-158047 A	24/11/1981 25/01/1989 09/12/1980
US 2013-0030262 A1	31/01/2013	EP 2683422 A1 EP 2683422 A4 US 2013-0066166 A1 WO 2012-122267 A1	15/01/2014 20/08/2014 14/03/2013 13/09/2012
US 2012-0184944 A1	19/07/2012	None	
US 2011-0251572 A1	13/10/2011	CA 2727176 A1 CN 102112071 A EP 2293747 A1 JP 2011-522624 A WO 2009-149387 A1	10/12/2009 29/06/2011 16/03/2011 04/08/2011 10/12/2009
US 8361044 B2	29/01/2013	US 2009-0234310 A1	17/09/2009