



AU9465033

(12) PATENT ABRIDGMENT (11) Document No. AU-B-65033/94
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 681880

- (54) Title
STABILIZED VACUUM APPARATUS FOR INDUSTRIAL MULTIPLE-BED HIDE DRIERS
- International Patent Classification(s)
(51)⁵ **F26B 005/04 C14B 001/58**
- (21) Application No. : **65033/94** (22) Application Date : **21.03.94**
- (87) PCT Publication Number : **WO94/23255**
- (30) Priority Data
- (31) Number (32) Date (33) Country
VI93A0046 26.03.93 IT ITALY
- (43) Publication Date : **24.10.94**
- (44) Publication Date of Accepted Application : **11.09.97**
- (71) Applicant(s)
OFFICINE DI CARTIGLIANO S.P.A.
- (72) Inventor(s)
ANTONIO CORNER
- (74) Attorney or Agent
CALLINAN LAWRIE , Private Bag 7, KEW VIC 3101
- (56) Prior Art Documents
**WO 87/05944
US 3302303**
- (57) Claim


1. Stabilized vacuum apparatus for industrial hide driers with multiple evaporation beds, comprising a main vacuum source (P_A) that can be connected to a series of evaporation beds (1; 1'; 1'') in order to create a negative pressure having a preset value in said beds, in steady-state conditions; characterized in that it has a secondary vacuum source (P_B) which is suitable to produce, in one bed at a time, a negative pressure whose value is close to that of the steady-state conditions, a valve means being provided to selectively connect each bed, which is initially at ambient pressure, first to said secondary vacuum source (P_B) and then to said main vacuum source (P_A) so as to eliminate substantial pressure variations in the remaining beds when each bed is connected to the main vacuum source.



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5: F26B 5/04, C14B 1/58		A1	(11) International Publication Number: WO 94/23255
			(43) International Publication Date: 13 October 1994 (13.10.94)
(21) International Application Number: PCT/EP94/00876		(81) Designated States: AU, BB, BG, BR, BY, CA, CN, CZ, FI, HU, JP, KP, KR, KZ, LK, MG, MN, MW, NO, NZ, PL, RO, RU, SD, SI, SK, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 21 March 1994 (21.03.94)			
(30) Priority Data: VI93A000046 26 March 1993 (26.03.93) IT			
(71) Applicant (for all designated States except US): OFFICINE DI CARTIGLIANO S.P.A. [IT/IT]; Via S. Giuseppe, 2, I-36050 Cartigliano (IT).		Published With international search report. 68 1880	
(72) Inventor; and			
(75) Inventor/Applicant (for US only): CORNER, Antonio [IT/IT]; Via I° Maggio, I-36016 Thiene (IT).			
(74) Agent: FORATTINI, A.; Internazionale Brevetti, Zini, Maranesi & C. S.R.L., Piazza Castello, 1, I-20121 Milano (IT).			

(54) Title: STABILIZED VACUUM APPARATUS FOR INDUSTRIAL MULTIPLE-BED DRIERS

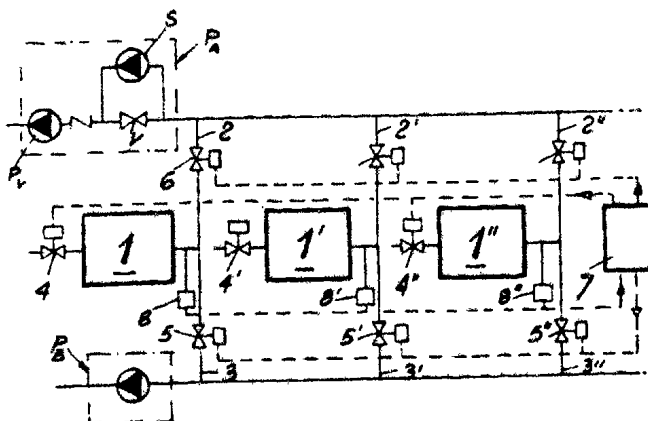

(57) Abstract

The apparatus includes a main vacuum source (PA) that can be connected to a series of evaporation beds (1, 1', 1'') to produce a negative pressure having a preset value in the beds, in steady-state operating conditions. There is a secondary vacuum source (PB) which is suitable to produce, in one bed at a time, a negative pressure which is close to the steady-state value, and there is a valve means to selectively connect each bed, which is initially at ambient pressure, first to the secondary vacuum source (PB) and then to the main vacuum source (PA), so as to eliminate substantial pressure variations in the remaining beds when each bed is connected to the main vacuum source. The valve means includes, for each bed, a first electric valve (4, 4', 4'') on a line for connection to the secondary vacuum source (PB), and a third electric valve (6, 6', 6'') on a line (2, 2', 2'') for connection to the main vacuum source (PA). There is also a control unit (7) suitable to control the cyclic sequential opening and closure of the first, second and third electric valves of each bed.

STABILIZED VACUUM APPARATUS FOR INDUSTRIAL MULTIPLE-BED
HIDE DRIERS

The present invention relates to a stabilized vacuum
5 apparatus for industrial hide driers with multiple
evaporation beds, of the type that includes a main vacuum
source that can be connected to a series of evaporation
beds and is suitable to produce a negative pressure
having a preset value in the beds, when the system is
10 running in the steady state, so as to facilitate
evaporation and condensation of the moisture contained in
the hides applied to the beds.

A vacuum system of the above mentioned type is disclosed
15 for example, in the ^{Australian} ~~Italian~~ patent application No.
64259/94
VI93A000041, the contents of which are considered as
reference in the present invention.

As is known, the beds of vacuum driers have covers that can
20 be opened to load and unload the hides to be dried. Once a
bed has been opened, it is disconnected from the vacuum
source and is reconnected to it after placing the hides and
closing the cover again. During this step, the pressure
produced in the remaining beds, which are still closed,
25 rises suddenly because the beds are simultaneously
connected to the same vacuum source, which is normally
constituted by one or more vacuum pumps and/or blowers.

Accordingly, a cyclic variation of the pressure occurs in
the beds, increasing the time required to stabilize the



pressure at its normal operating value. This negatively affects the productivity and quality of the hides, which are accordingly stressed in a cyclic manner and can have unevenly dried regions at the end of the treatment.

The aim of the present invention is to eliminate this drawback by providing a vacuum apparatus that in steady-state running conditions can produce in the beds a negative pressure whose value is substantially constant, independently of the opening and closing of each bed during the unloading and loading of the hides from it.

This aim is achieved by virtue of a secondary vacuum source which is suitable to create, in one bed at a time, after the bed has closed, a negative pressure which is close to the steady-state pressure, a valve means being provided to selectively connect each bed, which is initially at ambient pressure, first to the secondary vacuum source and then to the main vacuum source.

This arrangement allows to gradually reduce the pressure in each bed that is initially at atmospheric pressure without affecting at all the remaining beds and eliminates pressure variations in all beds when the bed that is initially at atmospheric pressure is connected to the main vacuum source.

Preferably the main vacuum source and the secondary vacuum source comprise at least one vacuum pump which is suitable to produce an absolute pressure of 1013 to 100 mbar. In a practical embodiment the main vacuum source comprises an auxiliary suction device which is suitable to operate in series with the first vacuum pump to reach an absolute pressure of 100 to 10 mbar.

Further characteristics and advantages will become apparent from the detailed description of a preferred embodiment, illustrated only by way of non-limitative example in the



accompanying drawings, wherein:

Figure 1 is a diagram of a system according to the invention, applied to a three-bed drier;

5

Figures 2 to 5 illustrate successive steps of the operation of the system shown in Figure 1.

10 With reference to Figure 1, this figure schematically illustrates a drier with three evaporation beds, respectively designated by the reference numerals 1, 1', 1'', which are connected to a main vacuum source, generally lines 2, 2', 2''.

15 The vacuum source P_A can be of the "high-vacuum" type, as described in the above mentioned application, i.e. it can be constituted by a vacuum pump P_V which is arranged in series to a blower S which is parallel-connected to a bypass valve V . With this layout it is possible to create a
20 vacuum of approximately 10 mbar. Of course, it is possible to use just a vacuum pump P_V without altering the inventive concept.

25 According to the invention, the beds 1, 1', 1'' may be connected, by virtue of respective lines 3, 3', 3'', to a secondary vacuum source, generally designated by P_B , which for example is constituted by a single vacuum pump which is similar to P_V but has a lower power rating and capacity and can accordingly be termed "low-vacuum" pump.

30

- 4 -

A valve means is also associated with each bed and is suitable to connect each bed either to the main vacuum source P_A or to the secondary one P_B .

Since the valve means is identical for each bed, only one
5 valve means is described hereinafter for the sake of simplicity, designating the other ones with respective single and double primes.

The valve means of the bed 1 can be constituted by a first
10 valve 4 which is meant to connect the bed 1 to the outside or to close it hermetically. A second valve 5 can be inserted on the line 3 to connect the bed 1 only to the secondary vacuum source P_B , whereas the third valve 6 is meant to connect the bed 1 to the main vacuum source P_A .

15

There is an electronic control unit 7 that receives input signals from a pressure control device 8 and sends control signals to sequentially open and close the valves 4, 5 and 6 in order to gradually reduce the pressure in each bed and
20 achieve minimal pressure changes when the bed is connected to the main vacuum source.

The operation of the system is clearly shown in Figures 2 to 5, wherein the closed valves are colored in black.

25

In Figure 2, the bed 1 is connected to the outside environment, and this corresponds to the step of loading and unloading the hides from the bed. The bed 1' is instead connected to the secondary or low-vacuum source P_B in order
30 to gradually reduce the vacuum. The bed 1'' is instead

connected to the high-vacuum source P_A and is at the steady-state pressure, for example 20 mbar.

In Figure 3, the valve 4 for connection to the outside has
5 been closed in the bed 1. A vacuum, close in value to the steady-state vacuum, has been reached in the bed, and therefore the valve 6' has been opened, connecting it to the high-vacuum source P_A exactly as in the bed 1".

10 In Figures 4 and 5, the beds 1" and respectively 1' are connected to the outside to unload and load the hides, whereas in the other beds the pressures rise gradually by virtue of the source P_B or are maintained at steady-state values by the vacuum source P_A .

15

From what has been described above it is evident that the apparatus according to the invention achieves the intended aim of gradually decreasing the pressure in one bed at a time, leaving the pressure in the remaining beds
20 substantially unchanged and at steady-state values, eliminating the cyclic pressure variations that were typical of prior systems.

The apparatus according to the invention is susceptible to
25 numerous modifications and variations, all of which are within the scope of the inventive concept expressed in the accompanying claims.

Where technical features mentioned in any claim are
30 followed by reference signs, those reference signs have

- 6 -

been included for the sole purpose of increasing the intelligibility of the claims and accordingly, such reference signs do not have any limiting effect on the scope of each element identified by way of example by such

5 reference signs.

CLAIMS

1. Stabilized vacuum apparatus for industrial hide driers with multiple evaporation beds, comprising a main vacuum source (P_A) that can be connected to a series of
5 evaporation beds (1; 1'; 1'') in order to create a negative pressure having a preset value in said beds, in steady-state conditions; characterized in that it has a secondary vacuum source (P_B) which is suitable to produce, in one bed at a time, a negative pressure whose value is close to that
10 of the steady-state conditions, a valve means being provided to selectively connect each bed, which is initially at ambient pressure, first to said secondary vacuum source (P_B) and then to said main vacuum source (P_A) so as to eliminate substantial pressure variations in the
15 remaining beds when each bed is connected to the main vacuum source.
2. Apparatus according to claim 1, characterized in that said valve means comprises, for each bed, at least one
20 first electric valve (4; 4'; 4'') on a line for connection to the outside environment.
3. Apparatus according to claim 1, characterized in that said valve means comprises, for each bed, at least one
25 second electric valve (5; 5'; 5'') on a line (3; 3'; 3'') for connection to said secondary vacuum source.
4. Apparatus according to claim 1, characterized in that said valve means comprises, for each bed, at least one
30 third electric valve (6; 6'; 6'') on a line (2; 2'; 2'') for






connection to said main vacuum source.

5. Apparatus according to claims 1 to 4, characterized in that it has a control means (7; 8; 8'; 8'') which is
5 suitable to control the cyclic sequential closure of said first electric valve (4; 4'; 4''), of said second electric valve (5; 5'; 5''), and of said third electric valve (6; 6'; 6'').

10 6. Apparatus according to the preceding claims, characterized in that said main vacuum source and said secondary vacuum source comprise at least one vacuum pump which is suitable to produce an absolute pressure of 1013 to 100 mbar.

15

7. Apparatus according to claim 6, characterized in that said main vacuum source comprises an auxiliary suction device (S; V) which is suitable to operate in series with said first vacuum pump to reach an absolute pressure of 100
20 to 10 mbar.

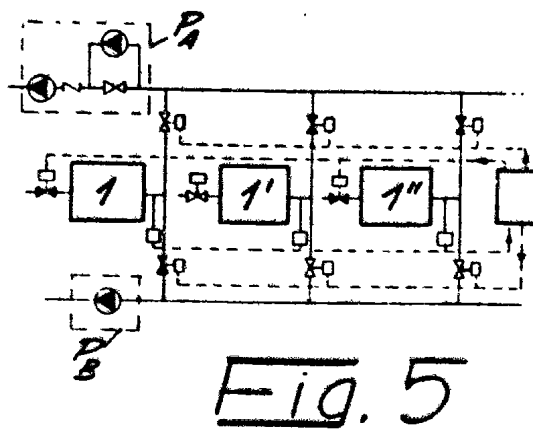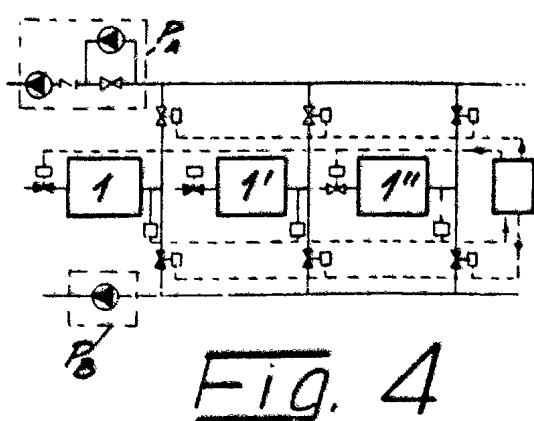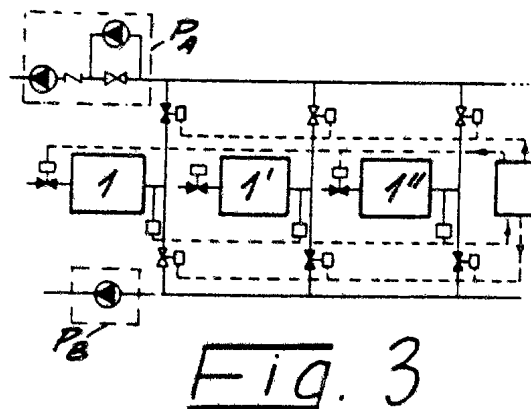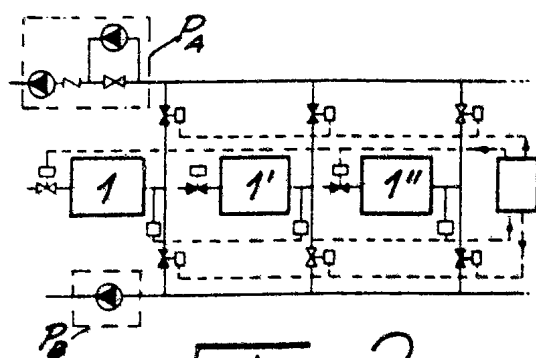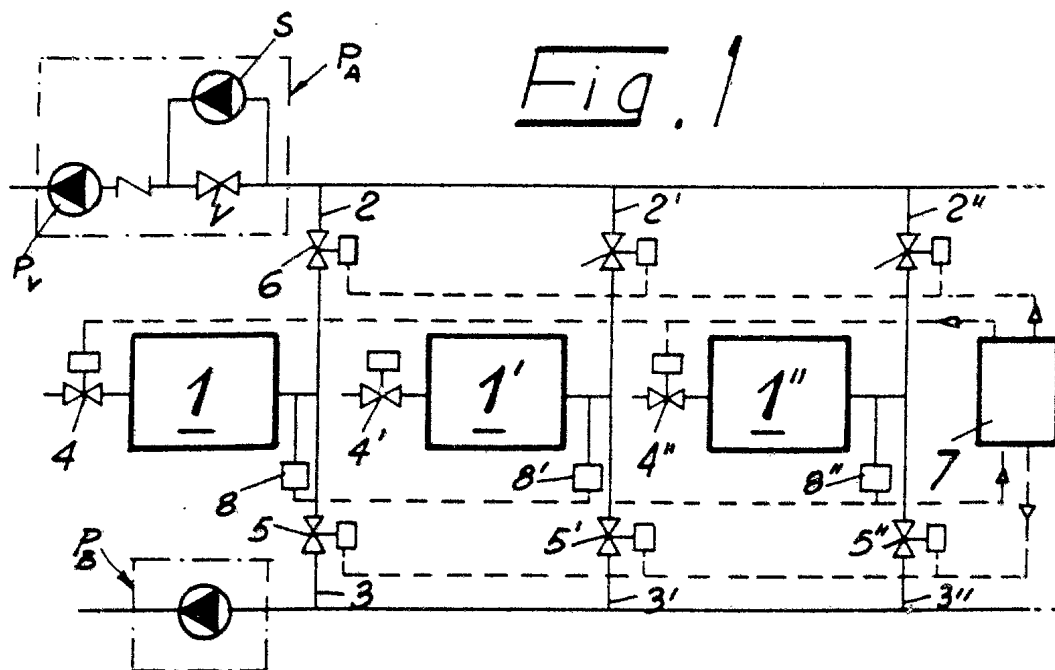

INTERNATIONAL SEARCH REPORT

Int. Application No.

PCT/EP 94/00876

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 5 F26B5/04 C14B1/58

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 5 F26B C14B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A,3 302 303 (AUPOIX) 7 February 1967 see the whole document ---	1
A	FR,A,376 426 (MOREL) 8 August 1907 see the whole document ---	1
A	GB,A,625 703 (ANDERSEN) 28 July 1949 see the whole document ---	1
A	WO,A,87 05944 (OFFICINE DI CARTIGLIANO S.P.A.) 8 October 1987 -----	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

6 July 1994

Date of mailing of the international search report

22. 07. 94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+ 31-70) 340-3016

Authorized officer

Silvis, H

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No.

PCT/EP 94/00876

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-3302303		NONE	
FR-A-376426		NONE	
GB-A-625703		NONE	
WO-A-8705944	08-10-87	EP-A, B 0266380	11-05-88
		JP-T- 1500039	12-01-89
		SU-A- 1776277	15-11-92
		US-A- 5056239	15-10-91