



US00D648024S

(12) **United States Design Patent**
Harkin et al.

(10) **Patent No.:** **US D648,024 S**

(45) **Date of Patent:** **** Nov. 1, 2011**

(54) **LANCING DEVICE**

(75) Inventors: **Thomas Harkin**, Bristol (GB); **Michael Keil**, Ludwigshafen (DE); **Wolfgang Baeuml**, Maxhuetten-Haidhof (DE); **Susanne Gentsch**, Viernheim (DE); **Tiina Lappi**, Mannheim (DE); **Lindley Herpichboehm**, Mannheim (DE); **Sebastian Liedtke**, Heidelberg (DE)

(73) Assignee: **Roche Diagnostics Operations, Inc.**, Indianapolis, IN (US)

(**) Term: **14 Years**

(21) Appl. No.: **29/386,742**

(22) Filed: **Mar. 4, 2011**

(30) **Foreign Application Priority Data**

Sep. 10, 2010 (EM) 001233571-0001

(51) **LOC (9) Cl.** **26-02**

(52) **U.S. Cl.** **D24/146**

(58) **Field of Classification Search** D24/130,
D24/133, 143-149, 112, 150; 606/166, 161;
D8/83, 99, 91, 107; 30/151, 162, 329, 333,
30/335, 295, 282, 286, 337

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

D429,814 S * 8/2000 Lorwald et al. D24/147
6,558,402 B1 * 5/2003 Chelak et al. 606/182
D493,532 S * 7/2004 Levaughn et al. D24/146
D501,253 S * 1/2005 Bainton D24/114
D550,363 S 9/2007 Hannant et al.
D567,938 S * 4/2008 Shinohara D24/114

D586,465 S * 2/2009 Faulkner et al. D24/146
D586,916 S * 2/2009 Faulkner et al. D24/146
D617,904 S * 6/2010 Lai D24/146
D619,244 S * 7/2010 Van der Stappen D24/113
D623,732 S * 9/2010 Brady et al. D24/113
D627,061 S * 11/2010 Van der Stappen D24/113
D633,034 S * 2/2011 Heine et al. D13/103

FOREIGN PATENT DOCUMENTS

EM 001002695-0001 9/2008
EM 001002695-0002 9/2008
EM 001002695-0003 9/2008
EM 001002695-0004 9/2008
EM 001002695-0005 9/2008
EM 001002695-0006 9/2008
EM 001002695-0007 9/2008
EM 001002695-0008 9/2008
EM 001002695-0009 9/2008
EM 001002695-0010 9/2008

* cited by examiner

Primary Examiner — Ian Simmons

Assistant Examiner — Carissa C Fitts

(74) *Attorney, Agent, or Firm* — Bose McKinney & Evans LLP


(57) **CLAIM**

The ornamental design for a lancing device, as shown and described.

DESCRIPTION

FIG. 1 is a perspective view of the lancing device that illustrates the novel design;
FIG. 2 is a top view of the lancing device of FIG. 1;
FIG. 3 is a left side view of the lancing device of FIG. 1;
FIG. 4 is a bottom view of the lancing device of FIG. 1;
FIG. 5 is a right side view of the lancing device of FIG. 1;
FIG. 6 is a front view of the lancing device of FIG. 1; and,
FIG. 7 is a rear view of the lancing device of FIG. 1.

1 Claim, 4 Drawing Sheets

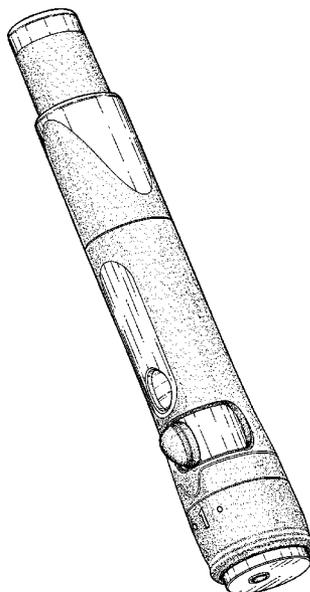

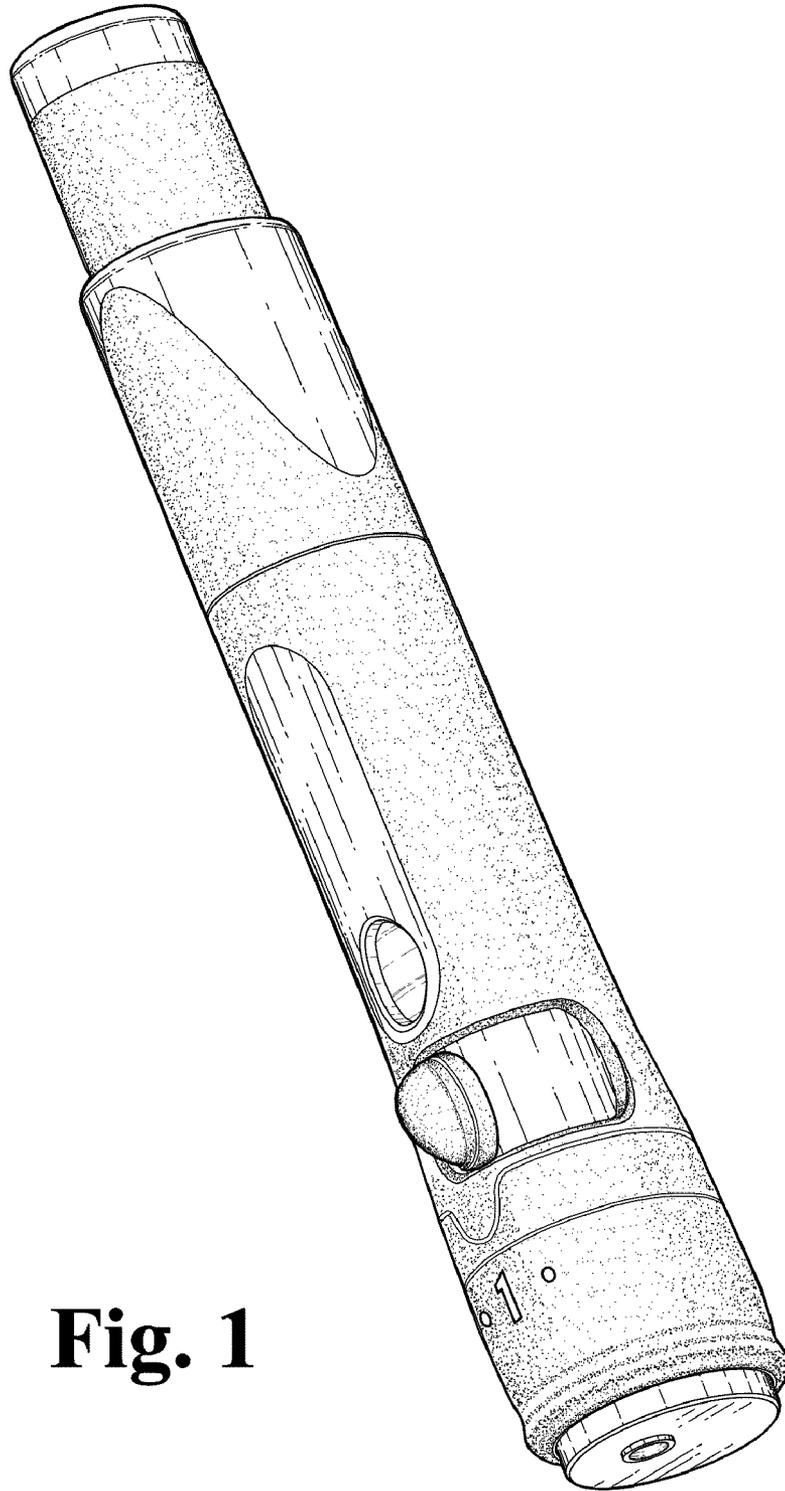


Fig. 1

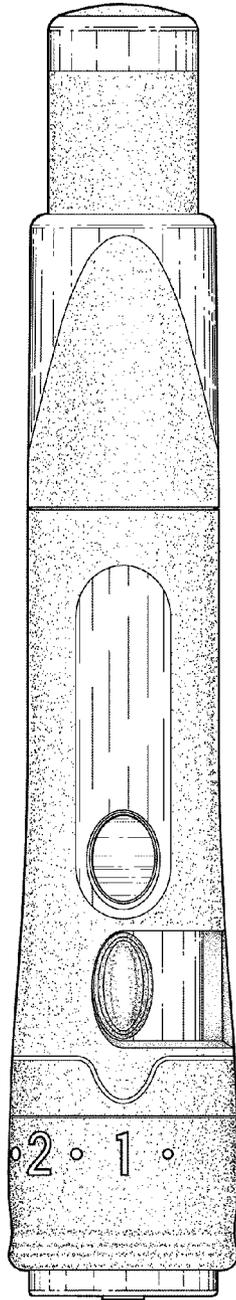


Fig. 2

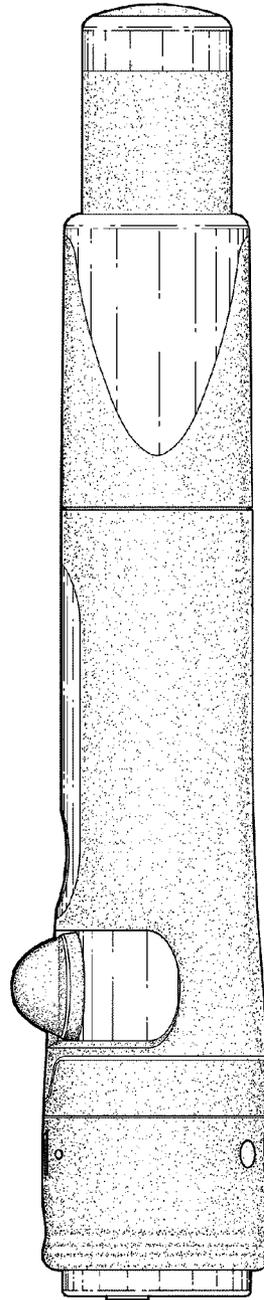


Fig. 3

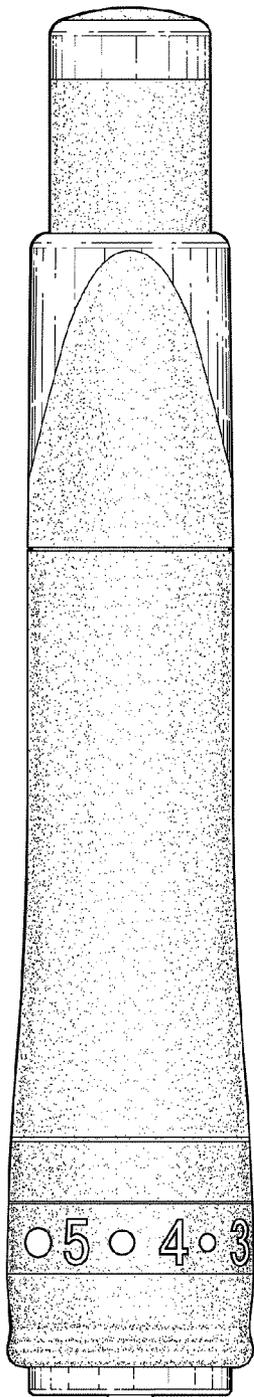


Fig. 4

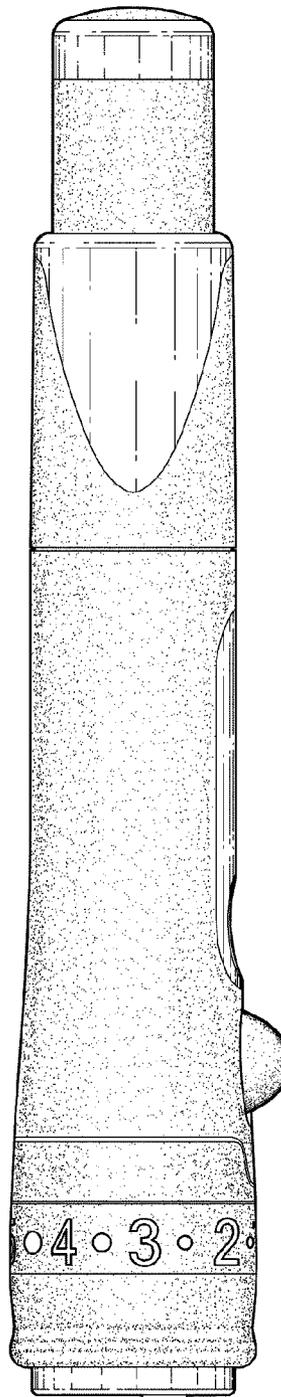


Fig. 5

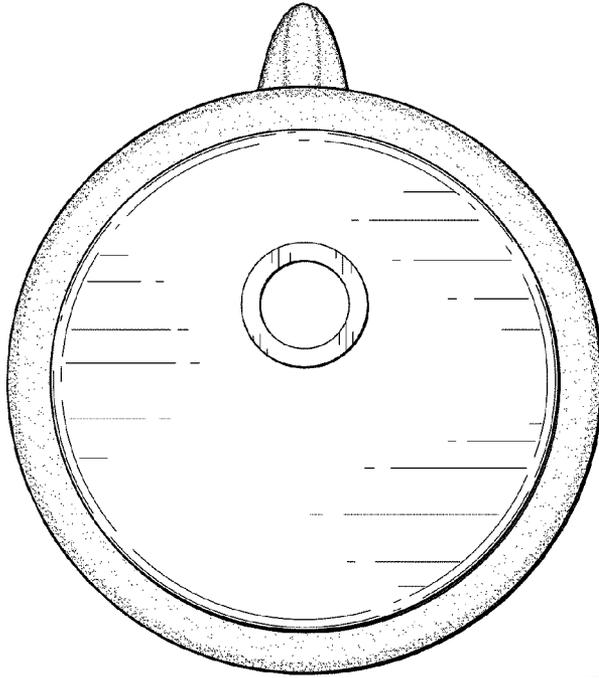


Fig. 6

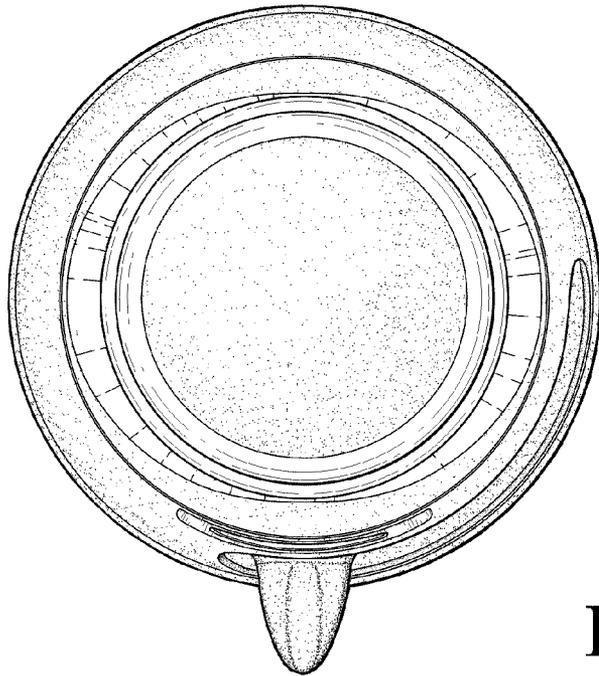


Fig. 7