

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 199937396 B2**
(10) Patent No. **739920**

(54) Title
General asphere-conic conformal optical windows

(51)⁶ International Patent Classification(s)
G02B 005/00

(21) Application No: **199937396** (22) Application Date: **1998 .12 .07**

(87) WIPO No: **WO99/38033**

(30) Priority Data

(31) Number	(32) Date	(33) Country
60/067914	1997 .12 .08	US
09/187432	1998 .11 .05	US

(43) Publication Date : **1999 .08 .09**

(43) Publication Journal Date : **1999 .10 .14**

(44) Accepted Journal Date : **2001 .10 .25**

(71) Applicant(s)
Raytheon Company

(72) Inventor(s)
Blake G. Crowther; Dean B. McKenney; Scott W. Sparrold; James B. Mills

(74) Agent/Attorney
GRIFFITH HACK,GPO Box 3125,BRISBANE QLD 4001

(56) Related Art
US 6018424
US 4195919
US 5648868

CORRECTED
VERSION*

CORRECTED
VERSION**

PCT

pages 1-8, description, replaced by new pages 1-12; pages 9-11, claims,
renumbered as pages 13-15; due to late transmittal by the receiving Office



37396/99


N.P.

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G02B		(11) International Publication Number: WO 99/38033
A2		(43) International Publication Date: 29 July 1999 (29.07.99)
(21) International Application Number: PCT/US98/25911		(81) Designated States: AU, CA, IL, JP, KR, NO, NZ, TR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
(22) International Filing Date: 7 December 1998 (07.12.98)		
(30) Priority Data: 60/067,914 8 December 1997 (08.12.97) US 09/187,432 5 November 1998 (05.11.98) US		
(71) Applicant: RAYTHEON COMPANY [US/US]; 2000 E. El Segundo Boulevard, P.O. Box 902, El Segundo, CA 90245-0902 (US).		
(72) Inventors: CROWTHER, Blake, G.; 1161 N. 230 West, Logan, UT 84341 (US). McKENNEY, Dean, B.; 6101 N. Camino Esquina, Tucson, AZ 85718 (US). SPARROLD, Scott, W.; 253 N. Fenceline Drive, Tucson, AZ 85748 (US). MILLS, James, B.; 6521 N. Columbus Boulevard, Tucson, AZ 85718 (US).		
(74) Agents: COLLINS, David, W.; Raytheon Company, 2000 E. El Segundo Boulevard, P.O. Box 902, El Segundo, CA 90245-0902 (US) et al.		Published Without international search report and to be republished upon receipt of that report.

IP AUSTRALIA
7 DEC 1999

(54) Title: GENERAL ASPHERE-CONIC CONFORMAL OPTICAL WINDOWS

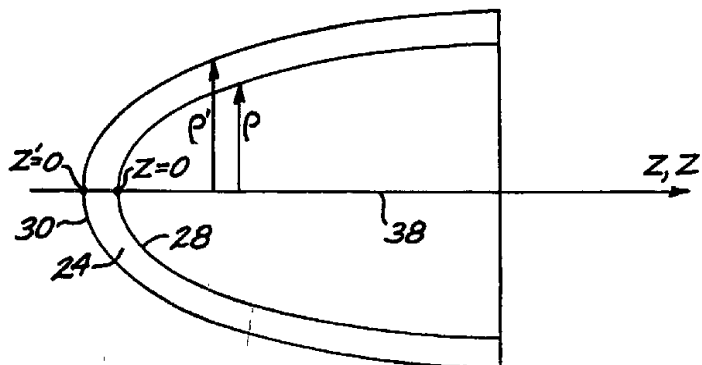

(57) Abstract

An optical system (26) includes a window (24) made of a curved piece of a transparent material having an inner surface (28) and an outer surface (30). The inner surface (28) has a nominal inner surface shape defined by a first conicoidal relationship, and the outer surface (30) has a nominal general aspheric surface shape. The optical system (26) also typically includes a sensor (32) and an optical train (36) on the side of the inner surface (28) of the window (24). The accuracy of the shape of the inner surface (28) is tested by directing a coherent light beam through a remote focus (54) of the inner surface (28), reflecting the light beam from the inner surface (28) toward an adjacent focus (52) of the inner surface (28), reflecting the light beam from a spherical reflector (60) at the adjacent focus (52) of the inner surface (28) and back toward the inner surface (28), reflecting the light beam from the inner surface (28) back toward the remote focus (54), and interferometrically comparing the reflected beam arriving at the remote focus (54) with a reference beam.

*(Referred to in PCT Gazette No. 40/1999, Section II) ** (Referred to in PCT Gazette No. 45/1999, Section II)

BACKGROUND OF THE INVENTION

This application claims the benefit of United States Provisional Application
5 No. 60/067,914, filed 12/08/97, the disclosure of which is hereby incorporated herein
by reference.

This invention relates to an optical system having a window therein, and in
particular to such an optical system used in an aircraft or missile wherein the window
10 is a conformal window.

An optical sensor receives radiated energy from a scene and converts it to an
electrical signal. The electrical signal is provided to a display or further processed for
pattern recognition or the like. Optical sensors are available in a variety of types and
15 for wavelengths ranging from the ultraviolet, through the visible, and into the
infrared. Optical sensors are used in a variety of commercial and military
applications. In some applications the optical sensors are fixed in orientation, and in
others the optical sensor is movable such as by a pivoting motion to allow sensing
over a wide angular range.

The optical sensors generally employ a photosensitive material that faces the
scene and produces an electrical output responsive to the incident energy. The
photosensitive material and remainder of the sensor structure are rather fragile, and
are easily damaged by dirt, erosion, chemicals, or high air velocity. In service, the
sensor is placed behind a window through which it views the scene and which
25 protects the sensor from such external effects. The window must be transparent to the
radiation of the operating wavelength of the sensor and resist attack from the external
forces. The window must also permit the sensor to view the scene over the specified
field of regard.

The window would ideally introduce no wavefront aberration at the center of
30 the field of view, other than possibly spherical aberration, particularly if the sensor is
an imaging sensor. The thicker and more highly curved is the window, the more
likely is the introduction of significant wavefront aberration. A wide variety of sensor
windows have been used in various aircraft applications. In many cases such as low-



speed commercial helicopters, flat windows are acceptable. Windows that are shaped as segments of spheres are used in aircraft and missile applications, but for these windows the wavefront aberration tends to be high if the gimbal location is not at the spherical center of the window. In all of these window types, if the window must be wide or must project a substantial distance into an airflow to permit a large field of regard, the aerodynamic drag introduced by the window is large.

For applications involving aircraft and missiles operating at high speeds, the window should be relatively aerodynamic such that the presence of the window extending into the airstream does not introduce unacceptably high and/or asymmetric aerodynamic drag to the vehicle. A conformal window is therefore beneficial to reducing drag and increasing the range of the aircraft. Some existing conformal windows introduce large wavefront aberrations into the sensor beam, particularly for high azimuthal pointing angles of the sensor.

An important consideration in achieving acceptable cost of the optical system is that the conformal window must be easily tested for its accuracy of shape and must also be readily aligned upon mounting in the flight vehicle. The more complex the shape of the conformal window, the greater the challenge in testing and alignment.

There is a need for an improved window to be used in conformal window applications in high-speed missiles and aircraft. The present invention fulfills this need, and further provides related advantages.

SUMMARY OF THE INVENTION

According to one aspect of the present invention there is provided an optical system comprising a window adapted for attachment to the fuselage of a flight vehicle;

the window being made of a curved piece of transparent material having an inner surface and an outer surface;

the inner surface having a nominal inner surface shape defined by a conicoidal mathematical relationship; and the



outer surface having a nominal outer surface shape defined by a general aspheric mathematical relationship that provides a shape which, in combination with the inner surface shape, imparts a desired net refraction.

5 The present invention according to one embodiment provides an optical system including a window whose shape is selected to be conformal for aerodynamic purposes and capable of optimization to achieve excellent optical properties. The window is designed to preselected nominal shape, and the actual fabricated shape is readily
10 determined and compared to the nominal shape to assess whether the actual window is within specified manufacturing tolerances and also whether any inaccuracies may be compensated for with optical compensation systems.

15 In accordance with one embodiment of the invention, an optical system comprises a window made of a curved piece of a transparent material having an inner surface and an outer surface. The inner surface preferably has a nominal inner surface conicoidal shape whose shape is defined by a first conic sag relationship. The first conic sag relationship
20 may be expressed in the mathematical form

$$z = c\rho^2 / (1 + (1 - (1+k)c^2\rho^2)^{1/2}),$$

where z is the distance along an axis of symmetry of the surface, ρ is the distance from the centerline to the surface and, k and c are constants. Other equivalent
25 expressions for a conicoidal shape may be used to describe the shape of the inner surface.

The outer surface preferably has a nominal outer surface shape of a general aspheric form, but which may for
30 many useful cases be defined as a second conic sag relationship modified by at least one aspheric term. The second conic sag relationship, which may be modified by at least one aspheric term, is preferably expressed in the mathematical form

35
$$z' = c'\rho'^2 / (1 + (1 - (1+k')c'^2\rho'^2)^{1/2}) + A\rho'^4 + B\rho'^6 + C\rho'^8 + D\rho'^{10},$$

where z' is the distance along an axis of symmetry of the surface, ρ' is the distance from the centerline to the



surface and k' , c' , A, B, C and D are constants. Many other mathematics relationships may be used to express a general aspheric shape. For the present purposes, such other general aspheric mathematical forms are equivalent to those expressed herein.

Far less desirably, the outer surface may be defined by a first conic sag relationship and the inner surface may be defined by a second conic sag relationship modified by at least one aspheric term. This approach would, however, negate some of the testing and alignment advantages discussed subsequently.

One surface of the window, preferably the inner surface, is therefore necessarily conicoidal to facilitate the testing and alignment described subsequently. The other surface of the window, preferably the outer surface, is selected to have another shape which, in combination with the conicoidal surface of the window, will impart to the window the desired net refraction as part of the optical system. That is, the selection of the one surface as conicoidal is a key to the invention in order to



facilitate testing and alignment, and the shape of the other surface is selected in conjunction with the shape of the conicoidal surface to achieve the desired optical performance.

5 The optical system preferably includes a sensor sensitive to energy of an operating wavelength. The sensor is positioned interiorly to the window, that is, closer to the inner surface of the window than to the outer surface. The transparent material is transparent to energy of the operating wavelength. There is typically in addition an optical train positioned between the inner surface of the window and the sensor to direct the optical beam onto the sensor.

10 The window is designed so that the nominal inner surface shape is conicoidal in form to facilitate testing and subsequent alignment of the window in an aircraft or other structure. The fact that the conicoidal shape has two focal points, an adjacent focus close to the inner surface and a remote focus further from the inner surface, is used in the testing and alignment. The testing is required because, even though the
15 nominal inner surface shape is designed to a particular nominal relationship, manufacturing operations usually result in some variations in the shape from the idealized nominal shape that is desired. To assess these variations and determine whether they are within acceptable tolerances, the window is conveniently tested by passing a test beam of a two-beam interferometer through the remote focus, reflecting the beam from the inner surface toward the adjacent focus, reflecting the beam from a
20 spherical mirror at the adjacent focus back along generally the same ray path (but which may not be perfectly the same ray path due to defects in the inner surface) to the interferometer, and interferometrically combining the test beam and a reference beam of the interferometer. Defects in the inner surface are indicated by fringe displacements, which may be counted to determine the number of $1/2$ wavelengths by
25 which the inner surface varies from that desired. With this information, it is determined whether the window actual inner surface shape falls within selected tolerance limits. The same principles are also used to align the window as it is mounted in the structure.

30 The nominal outer surface shape of the window is selected so that, in conjunction with the conicoidal inner surface shape, there is acceptably low aberration of the image as it passes through the window. The nominal outer surface shape is determined using conventional optical design codes. Stated another way, the window



nominally is of nonuniform thickness, with the intentional nonuniformity being the basis for intentional shaping of the wavefront as it passes through the window, for minimal aberration.

Other features and advantages of the present invention will be apparent from the following more detailed description of the preferred embodiment, taken in conjunction with the accompanying drawings, which illustrate, by way of example, the principles of the invention. The scope of the invention is not, however, limited to this preferred embodiment.

BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1A-1B are perspective views of a missile having a window therein, wherein Figure 1A shows a chin mounted window and Figure 1B shows a nose dome window;

Figure 2 is a schematic diagram of an optical system according to the invention;

Figure 3 is a segment of a window;

Figure 4 is a block flow diagram for an approach to designing and manufacturing the window;

Figure 5 is a graph of coefficient of drag of a dome-type window;

Figure 6 is a schematic diagram of an apparatus for testing the window; and

Figure 7 is a block flow diagram of an approach to testing and aligning the window.

DETAILED DESCRIPTION OF THE INVENTION

Figures 1A-1B depict a flight vehicle, in this case a supersonic missile 20, having a fuselage 22 with a curved window 24 attached thereto. In Figure 1A, the window 24 is chin-mounted, and in Figure 1B the window 24 is a nose dome. In each case, the window 24 protrudes partially into the airstream of the missile 20, and therefore may be termed a "dome-type window".

The window 24 is part of an optical system 26, which is shown generally in Figure 2. The optical system 26 includes the window 24 attached to the fuselage 22.



An inner surface 28 of the window 24 is the concave surface of the window 24 that faces the inside of the fuselage 22. An outer surface 30 of the window 26 is the convex surface of the window 24 that faces outwardly and projects into the airstream as the missile 20 flies. The optical system 26 further includes a sensor 32 within the fuselage 22, and thence closer to the inner surface 28 than to the outer surface 30 of the window 24. The sensor 32 is of any operable type which is functional at a preselected wavelength or wavelength range of the incident energy. The output of the sensor 32 is an electrical signal provided to electronics 34, which may be inside the fuselage 22 or remotely located. An optical train 36, schematically indicated by a single lens, is positioned between the inner surface 28 of the window 24 and the sensor 32. The optical train 36 may include reflective elements, refractive elements, and other optical processing elements such as image compensators. The sensor 32, electronics 34, and optical train 36 may be of any operable type, including those known in the art.

Figure 3 illustrates a segment of the window 24 in greater detail. The inner surface 28 of the window 24 is conicoidal, whose shape is defined mathematically by a first conic sag relationship. The first conic sag relationship may preferably be expressed in the mathematical form

$$z = c\rho^2 / (1 + (1 - (1 + k)c^2\rho^2)^{1/2}),$$

where z is the distance along an axis of symmetry 38 of the inner surface 28 (measured from the point at which the inner surface 28 intersects the axis of symmetry 38), ρ is the distance, measured perpendicular to the axis of symmetry 38, from the axis of symmetry 38 to the inner surface 28, and k and c are constants. In a most preferred case, $c = 0.60626 \text{ in}^{-1}$ and $k = -0.77011$. A useful property of a conicoidal shape is that it has two foci, which property is used to advantage in testing and alignment of the fabricated window.

The outer surface 30 of the window 24 has a nominal outer surface shape whose profile is not conicoidal, and which for many cases may be defined as a second conic sag relationship modified by at least one aspheric term. The second conic sag relationship modified by at least one aspheric term may preferably be expressed in the



mathematical form

$$z' = c' \rho'^2 / (1 + (1 + k') c'^2 \rho'^2)^{1/2} + A \rho'^4 + B \rho'^6 + C \rho'^8 + D \rho'^{10},$$

5 where z' is the distance along the axis of symmetry 38 of the outer surface 30 (measured from the point at which the outer surface 30 intersects the axis of symmetry 38--that is, z and z' are measured from different locations), ρ' is the distance, measured perpendicular to the axis of symmetry 38, from the axis of symmetry 38 to the outer surface 30, and k' , c' , A , B , C , and D are constants. Many
 10 other mathematic forms may used to express a conic sag relationship modified by at least one aspheric term, which forms are equivalent for the present purposes. In a most preferred case using the above relationship, $c' = 0.57145 \text{ in}^{-1}$, $k' = -0.76747$, $B = 9.2152 \times 10^{-7}$, and A , C , and D are zero.

Thus, as shown in Figure 3, the window 24 is, in general, not of constant
 15 thickness, although it could be of constant thickness in some special cases. The inner surface 28 is nominally described by the first conic sag relationship, and the outer surface 30 is nominally defined by the second conic sag relationship modified by the addition of at least one aspheric term. The result is that the distance between the inner surface 28 and the outer surface 30 varies as a function of position across the surface
 20 of the window 24. In Figure 3, the relative distances between the inner surface 28 and the outer surface 30 as a function of position across the surface of the window 24 are exaggerated for purposes of illustration.

The window 24 is made of a transparent material selected in conjunction with the operating wavelength of the sensor 32 which is to be protected by the window 24.
 25 The sensor 32 may be responsive to, for example, all or part of the ultraviolet, visible, and infrared ranges, and the window 24 must be transparent to the range of interest at which the sensor 32 operates. Transparent materials of construction for windows 24 in specific wavelength transparency ranges are known in the art.

The window 24 is preferably designed and fabricated in the following manner.
 30 That is, the following procedure is used to select the constants in the mathematical relationships defining the nominal window surfaces, and to then fabricate and test the window. The basic shape of the window 24 is selected in order to fit with and attach



to the structure of the fuselage 22 and to achieve the necessary structural characteristics and mechanical properties. Its outer surface shape is thereafter fine-tuned for acceptable optical performance, within the constraint that the inner surface 28 must remain a conicoidal shape. Once designed, the window is thereafter
5 fabricated and tested.

Figure 4 illustrates this process in greater detail. The shape of the fuselage 22, the shape and size of the opening therein for the window 24, and the nature of the mission (velocity, altitude, and other flight parameters) are provided, numeral 100, and the nature of the sensor is provided, numeral 102. These are system requirements
10 established prior to the selection of the window and according to the design and mission of the missile. From the information of box 100, the physical size and constraints on the window 24 are determined, as well as aerodynamic and aerothermal loadings on the window, numeral 104. This information is determined from geometrical considerations and conventional aerodynamics and aerothermal analysis.
15 From the type of sensor, numeral 102, the material of the window 24 is selected from available materials which are sufficiently transparent to energy at the operating wavelength(s) of the sensor and have acceptable mechanical properties, numeral 106. Such materials and their properties for sensor wavelength(s) of interest are known in the art.

The physical size (i.e., diameter) and edge slope of the window, such that it
20 fits smoothly into the shape of the fuselage, is determined geometrically, together with the thickness and fineness (length-to-diameter) ratio of the window, numeral 108. The fineness ratio is the ratio of the length to diameter of the window (where the diameter is the cross sectional distance along the plane at which the window section is cut by the base conic surface). The aerodynamic performance of a nose dome
25 window (as in Figure 1B) protruding symmetrically into an airstream as a function of the velocity of the missile in Mach number and fineness ratio, as shown in Figure 5. The selection of the fineness ratio is made to achieve an acceptably low coefficient of drag at the service velocity of the missile. The window must also have sufficient
30 structural strength, fit within the geometric area of the surface of the fuselage that is provided, and be sufficiently large to receive the optical train and sensor.

An approximate conicoidal shape for the outer surface 30 is determined to meet the diameter, edge slope, and fineness ratio requirements, numeral 110. In this



step, approximate conic sag coefficients for the outer surface 30 are determined to match the approximate conicoidal shape to the required geometry of the window. In this first design iteration, the coefficients are only approximations, because the exact shape of the outer surface 30 will be later modified with aspheric terms.

5 The detailed optical design of the inner surface 28 and the outer surface 30 window is then performed, numeral 112. In the optical design, conventional design codes are used to select the constants for the above-described shape equations, keeping in mind that the shape of the inner surface 28 is constrained to be a conicoidal shape. This limitation is established to facilitate subsequent testing, as will be
10 described. The shape of the outer surface 30 is permitted to depart from the approximate conicoidal form established in step 110 in order to provide the necessary shape for optical performance. The result is a change in the shape of the outer surface 30 and in the fineness ratio of the window 24. However, as seen in Figure 5, the coefficient of drag is a relatively slowly varying function of the fineness ratio and the
15 Mach number. The relatively small difference in shape resulting from the inclusion of the aspheric terms of the outer surface shape does not materially affect the aerodynamic performance of the window.

However, the optical properties of the window are a strongly varying function of the overall shape of the window and the relative shapes of the inner and outer
20 surfaces. The nominal shape of the outer surface, numeral 114, and the inner surface, numeral 116, are therefore established by utilizing optical design codes to calculate ray paths of energy passing through sectors of the window, to minimize the aberration of an image viewed through the window. The design of optical elements such as lenses and windows using such design codes is well established in the art. See, for
25 example, Donald P. Feder, "Automatic Lens Design Methods," J. Optical Society of America, vol. 47, No. 10 (1957), pages 902-912, and G.W. Forbes, "Optical system assessment for design: numeral ray tracing in the Gaussian pupil," J. Optical Society of America A, Vol. 5, No. 11 (1988), pages 1943-1956. Examples of commercially available optical design codes include "Code V" by Optical Research Associates,
30 "OSLO" by Sinclair Optics, and "ZEEMAX" by Focus Software.

Using the design code, the RMS spot size, wavefront aberration, or other performance criteria of the image when viewed through the window and optical train are assessed and optimized. The nominal shape of the outer surface 30 is determined



as that shape which minimizes the RMS (root mean square) spot size or wavefront aberration. In a convenient mathematical implementation preferably used by the inventors, the shape of the outer surface 30 is the second conic sag modified by aspheric terms, as discussed previously. However, other aspheric mathematical forms may be used in the description of the window shape, and these other mathematical forms are equivalent to the present approach for these purposes. Using the design code, the nominal shape of the inner surface 28 is conveniently determined as the first conic relationship.

After the nominal inner and outer shapes are defined, the window is fabricated, numeral 118. Techniques for manufacturing windows of various materials are known in the art. In one approach, molds for the inner and outer surface are made, and the material of the window is cast into the space between these molds. In another approach, the material of the window is machined to the desired shape.

After manufacturing, the window is tested, numeral 120, preferably using procedures to be described next. The prior discussion has dealt with the procedure for determining the "nominal" shapes of the inner and outer surfaces. When a window is manufactured from the transparent material, there are inevitably deviations from the desired nominal values and shapes. If those deviations are too large, the performance of the window becomes unacceptable and the window cannot be used or must be reworked to bring the deviations within acceptable limits. The allowable tolerances may be calculated mathematically from the optical design codes. One of the costly procedures in the manufacture of optical systems of this type is determining whether the actual shapes of the surfaces of the actual manufactured window exceed the allowable dimensional tolerances for acceptable optical performance. If they do exceed the allowable tolerances, the window cannot be used in that form.

The present approach facilitates the determination of the actual shapes of the inner and the outer surfaces of the manufactured windows, and thence the determination of whether the window is within the allowable tolerances. Figure 6 illustrates a preferred apparatus 50 for making these determinations. The first conicoidal mathematical form of the nominal shape of the inner surface 28 has two foci, an adjacent focus 52 that is close to the window 24 and a remote focus 54 that is remote from the window 24. If the inner surface of the actual manufactured window has the perfect nominal mathematical form of the first conicoidal relationship, light



emitted from the remote focus 54 is reflected from all points on the inner surface 28 to the adjacent focus 52. The light may be reflected from a sphere at the adjacent focus 52, back along the same ray path to the inner surface 28 and the remote focus 54, and there measured. If, however, there is a deviation in the actual inner surface
5 manufactured shape from the nominal conicoidal shape, the ray paths of beams reflected from the various points on the actual inner surface 28 do not focus precisely in phase back at the remote focus 54. The extent of variation in the shape of the inner surface is determined by focusing the rays to a spherical ball 60 at the adjacent focus 52 using a lens 56 and into an interferometer 58. If the extent of variation of the inner
10 surface 28 is less than the allowable dimensional tolerance for all points, as determined by counting interference fringes of a reference beam and the reflect beam at the interferometer 58, the actual shape of the inner surface is acceptable. If the tolerances are exceeded, the inner surface 28 of the window 24 may be reworked or, in some cases, the window must be scrapped.

15 After the shape of the inner surface 28 is established, the shape of the outer surface 30 is determined by measuring the thickness of the window 24 between the inner surface 28 and the outer surface 30. From that information, the actual values of the constants in the second conicoidal form modified by the at least one aspheric term are determined. If these constants are within the allowed dimensional tolerances, the
20 window is acceptable for use. Other testing procedures such as interferometry, sub aperture interferometry, and profilometry may also be used, as appropriate.

Figure 7 illustrates the steps followed in the above-described approach of the invention for testing and installing the window 24 in the fuselage 22. The window is prepared using the design approach discussed above and then fabricated to the determined shape using any operable approach, numeral 70, but preferably that discussed above in relation to Figure 4. The test apparatus 50 is provided, numeral
25 72. The accuracy of the actual inner surface shape is determined, numeral 74. If it is within the permitted tolerances, the accuracy of the actual outer surface shape is determined, numeral 76. If both actual surfaces are within the accuracy tolerances,
30 the window 24 is judged acceptable, and is mounted and aligned in the fuselage 22, numeral 78. To achieve the installation with the optical system 26 properly aligned, an apparatus like that of Figure 6 may be used in the optical system of Figure 2, in place of the optical train 36 and the sensor 32. Once the alignment is achieved, the



elements 56, 58, and 60 are removed, and the elements 36 and 32 are installed in with body of the missile 20. The optical system 26 is thereby precisely aligned.

Although a particular embodiment of the invention has been described in detail for purposes of illustration, various modifications and enhancements may be
5 made without departing from the spirit and scope of the invention. Accordingly, the invention is not to be limited except as by the appended claims.

8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
220

CLAIMS

1. An optical system comprising a window adapted for attachment to the fuselage of a flight vehicle; the window being made of a curved piece of transparent material having an inner surface and an outer surface; the inner surface having a nominal inner surface shape defined by a conicoidal mathematical relationship; and the outer surface having a nominal outer surface shape defined by a general aspheric mathematical relationship that provides a shape which, in combination with the inner surface shape, imparts a desired net refraction.
2. The optical system of claim 1 wherein the nominal inner surface shape has a mathematical form:
$$z = c\rho^2 / (1 + (1 - (1 + k)c^2\rho^2)^{1/2}),$$
where z is the distance along an axis of symmetry of the inner surface, ρ is the distance from the axis of symmetry to the inner surface, and k and c are constants.
3. The optical system of claim 1, wherein the nominal outer surface shape has a mathematical form
$$z' = c'\rho'^2 / (1 + (1 - (1 + k')c'^2\rho'^2)^{1/2}) + A\rho'^4 + B\rho'^6 + C\rho'^8 + D\rho'^{10},$$
where z' is the distance along an axis of symmetry to the outer surface (30), and k' , c' , A , B , C , and D are constants.
4. The optical system of claim 1, wherein the transparent material is ultraviolet energy.
5. The optical system of claim 1, wherein the transparent material is transparent to visible light.
6. The optical system of claim 1, wherein the transparent material is transparent to infrared energy.
7. The optical system of claim 1, further including:
a sensor sensitive to energy of an operative wavelength, the sensor being positioned closer to the inner surface of the window than to the outer surface; and



wherein the transparent material is transparent to energy of the operating wavelength.

8. The optical system of claim 7, further including:

5 an optical train positioned between the inner surface of the window and the sensor.

9. A method for testing the window of claim 1, comprising the steps of:

10 preparing the window made of a curved piece of a transparent material having the inner surface and the outer surface;

15 determining the accuracy of an actual inner surface shape as compared with the nominal inner surface shape as defined by a first conicoidal mathematical relationship, the step of determining including the step of:

20 assessing the inner actual inner surface shape imaged at a remote focus of the nominal inner surface shape, and comparing the viewed actual inner surface shape with the nominal inner surface shape.

10. The method of claim 9, wherein the step of preparing a window includes the step of:

25 providing the window with the outer surface having a nominal outer surface shape defined by a general aspheric manufacturing mathematical relationship.

11. The method of claim 9, wherein the step of assessing includes the step of positioning a spherical test element at an adjacent focus of the minimal inner surface shape; and

30 viewing light reflected from the spherical test element at the remote focus of the nominal inner surface shape.

12. The method of claim 9, wherein the step of assessing includes the steps of directing a coherent light beam through a remote focus of the inner surface;

35 reflecting the light from the inner surface toward an adjacent focus of the inner surface;



reflecting the light beam from a spherical reflector at the adjacent focus of the inner surface and back toward the inner surface;

reflecting the light beam from the surface back
5 toward the remote focus; and

interferometrically comparing the reflected beam arriving at the remote focus with a reference beam.

13. An optical system as claimed in claim 1 wherein the inner surface is defined by a first conic sag relationship and the outer surface is defined by a second conic sag relationship modified by at least one aspheric term.
10

14. A flight vehicle having a fuselage comprising the window of the optical system of any of the preceding claims attached to the fuselage.
15

15. A flight vehicle as set forth in the preceding claim, further comprising a sensor sensitive to energy of an operating wavelength, the sensor being positioned closer to the inner surface of the window than to the outer surface, and wherein the transparent material is transparent to energy of the operating wavelength.
20

16. A flight vehicle as set forth in the preceding claim, wherein the sensor provides an electrical output and wherein an electronics device receives the electrical output of the sensor.
25

17. A flight vehicle as set forth in the preceding claims wherein the electronics device is located within the fuselage.

18. A flight vehicle as set forth in any of the three preceding claims wherein an optical train is positioned between the window and the sensor.
30

19. An optical system substantially as hereinbefore described with reference to the accompanying drawings.
35



- 16 -

Dated this 14th day of August 2001

RAYTHEON COMPANY

By their Patent Attorneys

GRIFFITH HACK





5 Fellows Institute of Patent and
Trade Mark Attorneys of Australia

8
8
8
8
7
8
8
8
7



H:\SueB\Keep\spec\p34862.doc 13/08/01

1/4

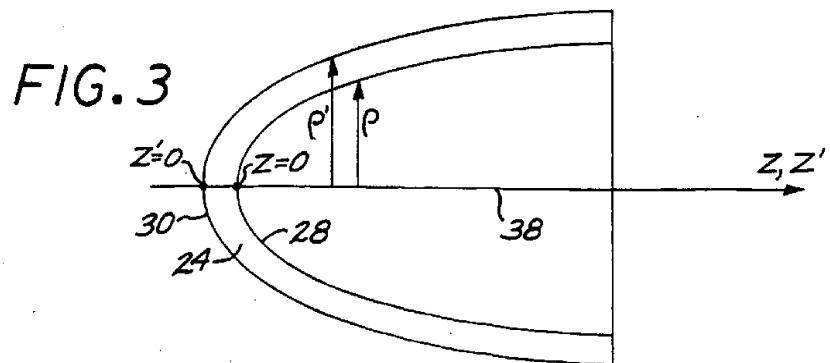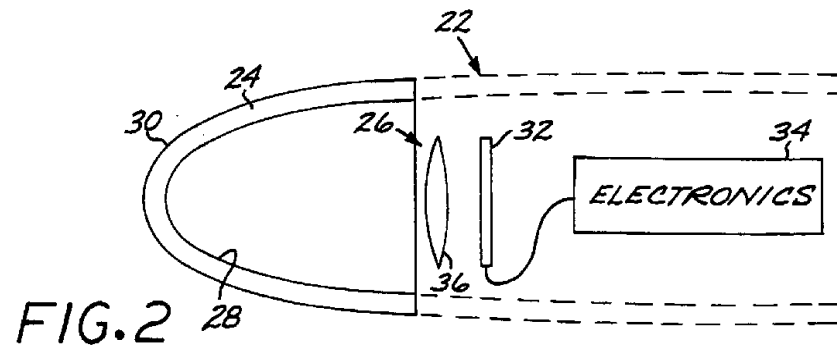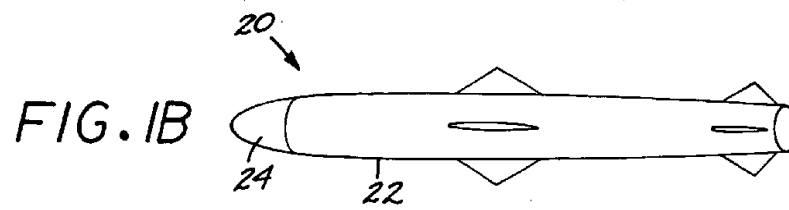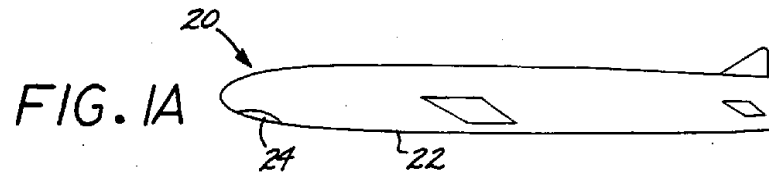

2/4

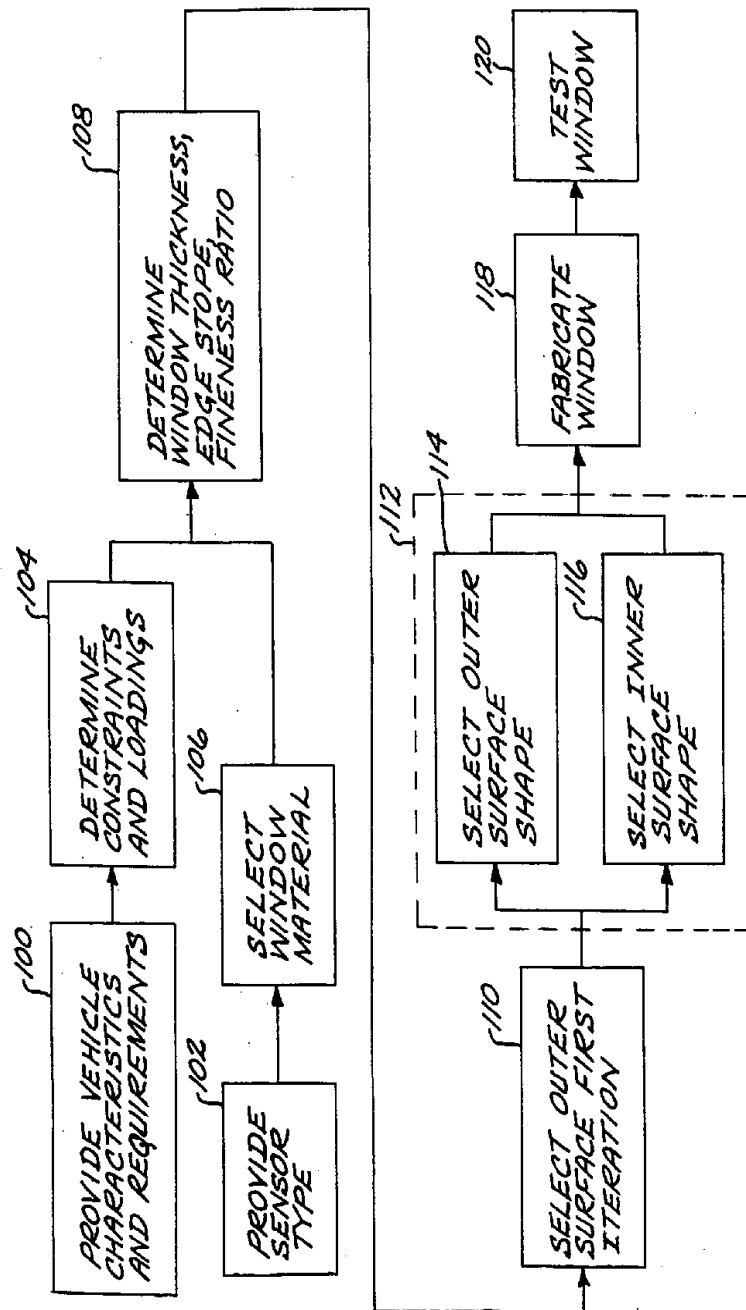


FIG. 4

3/4

FIG. 5


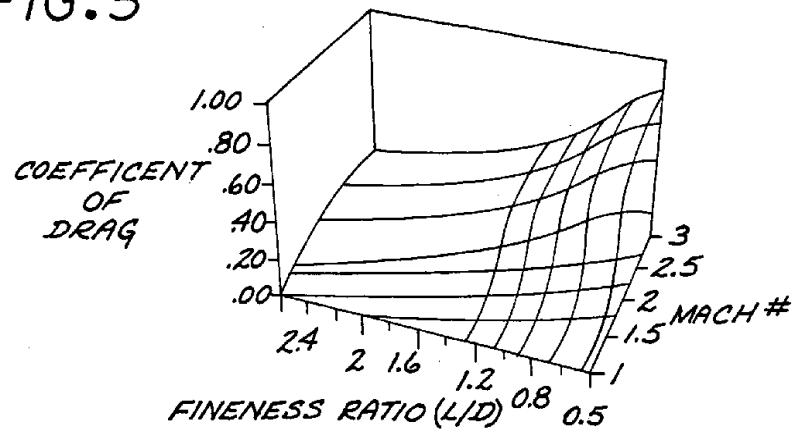


FIG. 6

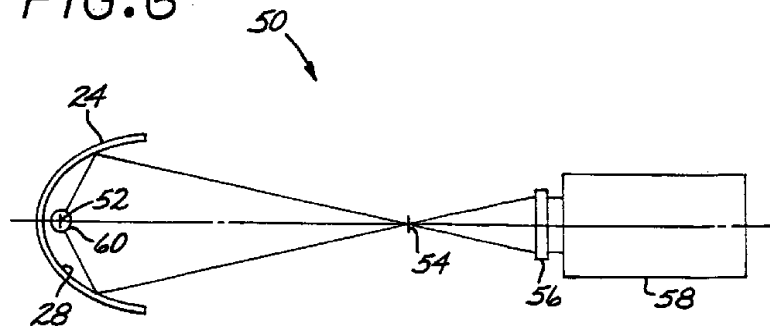

4/4

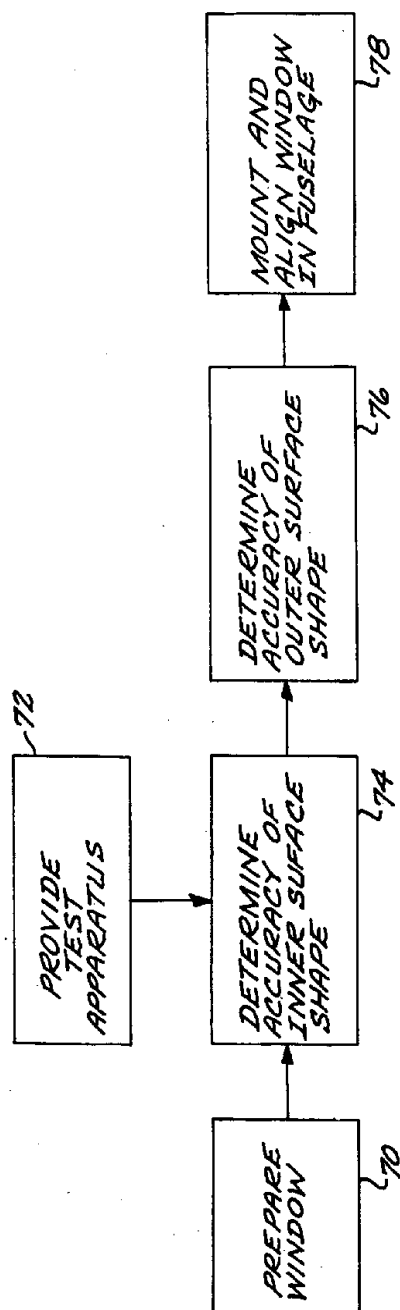


FIG. 7