



(51) International Patent Classification:

B62D 21/18 (2006.01) *B62D* 55/24 (2006.01)
B62D 55/06 (2006.01) *B62D* 55/253 (2006.01)
B62D 55/10 (2006.01) *B62D* 55/30 (2006.01)

(21) International Application Number:

PCT/EP2015/072138

(22) International Filing Date:

25 September 2015 (25.09.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/173,990 11 June 2015 (11.06.2015) US

(71) Applicant: **PRINOTH LTD.** [CA/CA]; Brunswick House,
 44 Chipman Hill, Suite 1000, St. John, New Brunswick
 (CA).

(72) Inventors: **MARLEAU, Benoit**; 23 Rue de la Baie,
 Granby, Québec J2J-0R2 (CA). **CHABOT, Alain**; 540
 Rue de la Cour, Waterloo, Québec J0E-2N0 (CA).
GAGNE', Carl; 96 Rue de Nicolet, Bromont, Québec J2L-
 1R7 (CA).

(74) Agents: **ECCETTO, Mauro** et al.; STUDIO TORTA
 S.p.A., Via Viotti, 9, 10121 Torino (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: TRACKED VEHICLE AND CHASSIS THEREFOR

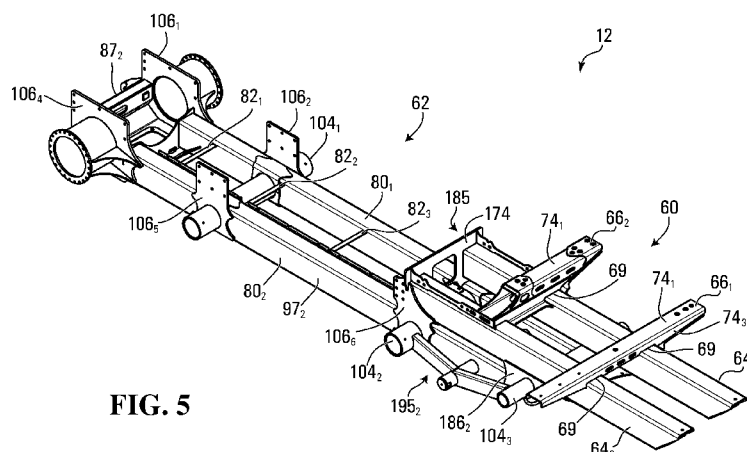


FIG. 5

(57) Abstract: A tracked vehicle with a chassis comprising an upper frame structure connected to a lower frame structure, the lower frame structure spanning a longitudinal distance along a longitudinal direction of the vehicle, wherein over a first portion of the longitudinal distance, the lower frame structure overlaps with the upper frame structure and wherein over a second portion of the longitudinal distance, the lower frame structure does not overlap with the upper frame structure. The tracked vehicle may also comprise an operator cabin, power plant mounted to the upper frame structure and a plurality of track assemblies for traction of the tracked vehicle. Each track assembly is mounted to the lower frame structure of the chassis and comprises a drive wheel; an end wheel; and a plurality of support wheels therebetween; and an endless track disposed around the plurality of wheels for engaging a ground on which the tracked vehicle travels.

TRACKED VEHICLE AND CHASSIS THEREFOR**CROSS-REFERENCE TO RELATED APPLICATION**

- 5 The present application claims the benefit of U.S. Provisional Application Serial No. 62/173,990, filed on June 11, 2015, which is hereby incorporated by reference herein.

FIELD

- 10 The invention relates to tracked vehicles designed to travel on various terrains, including rugged terrain, for example, tracked utility vehicles carrying work equipment.

BACKGROUND

- 15 One type of tracked vehicle is a tracked utility vehicle, sometimes referred to as a “tracked carrier” or “tracked equipment carrier” vehicle, which carries and enables use of work equipment, such as a crane, an aerial device, a drill rig, a digger derrick, and/or any other industrial apparatus, on various terrains, including rugged terrain (e.g., with mud, steep hills, swamps, rocks, mud, and/or snow).
- 20 It is often desirable for a tracked utility vehicle to have a carrying capacity as large as possible but yet be sized such that the vehicle can fit a public road infrastructure. For example, it may be desirable that the vehicle be low enough to fit below an underpass or otherwise respect a vehicle height limit of the public road infrastructure (e.g., when transported on a truck’s deck trailer). This typically imposes certain limitations on components of the vehicle. For instance, this may limit a size of a chassis of the vehicle, to
- 25 avoid interference of the work equipment with public road infrastructures (e.g., bridges) or to otherwise respect the vehicle height limit of the public road infrastructure.

Moreover, it may also be desirable to facilitate the installation of the work equipment onto the chassis of the vehicle.

- 30 The work equipment carried by a tracked utility vehicle is normally mounted to the vehicle’s frame. This can often present issues or challenges. For example, the work equipment is often designed to be installed on a truck’s frame. Since the tracked utility vehicle’s frame is typically very different from a truck’s frame, the work equipment cannot be mounted as readily to the tracked utility vehicle’s frame than to a truck’s
- 35 frame. Rather, modifications may have to be made to the work equipment and/or to the tracked utility vehicle to allow the work equipment to be installed on the tracked utility vehicle’s frame. For instance, in some cases, an intermediate support structure may need to be installed between the work equipment and the tracked utility vehicle’s frame to support and anchor the work equipment.

- 40 Challenges similar to those discussed above in respect of a tracked utility vehicle may be encountered in other types of industrial tracked vehicles.

Accordingly, there is a need for improvements in tracked utility vehicles and other tracked vehicles.

SUMMARY

5 In accordance with an aspect of the invention, there is provided a tracked vehicle.

Accordingly, there may be provided a tracked vehicle that comprises a chassis comprising an upper frame structure connected to a lower frame structure, the lower frame structure spanning a longitudinal distance along a longitudinal direction of the tracked vehicle, wherein over a first portion of the longitudinal distance, the lower frame structure overlaps with the upper frame structure and wherein over
10 a second portion of the longitudinal distance, the lower frame structure does not overlap with the upper frame structure. The tracked vehicle may also comprise an operator cabin mounted to the upper frame structure of the chassis; a power plant mounted to the upper frame structure of the chassis and comprising a prime mover; and a plurality of track assemblies for traction of the tracked vehicle, a first
15 one of the track assemblies being on a first lateral side of the tracked vehicle, a second one of the track assemblies being on a second lateral side of the tracked vehicle. Each track assembly of the plurality of track assemblies may be mounted to the lower frame structure of the chassis may comprise a plurality of wheels including a drive wheel; an end wheel spaced apart from the drive wheel in the longitudinal direction of the tracked vehicle; and a plurality of support wheels arranged between the drive wheel and
20 the end wheel; and may also comprise an endless track disposed around the plurality of wheels for engaging a ground on which the tracked vehicle travels, the drive wheel being in driving engagement with the endless track to impart motion to the endless track.

There may also be provided a tracked vehicle that comprises a) a chassis extending in a longitudinal direction of the tracked vehicle; b) an operator cabin mounted on top of the chassis; c) a power plant mounted to the chassis and comprising a prime mover; and d) a plurality of track assemblies for traction of the tracked vehicle, a first one of the track assemblies being on a first lateral side of the tracked vehicle, a second one of the track assemblies being on a second lateral side of the tracked vehicle. Each track assembly of the plurality of track assemblies may be mounted to the chassis and may comprise a
30 plurality of wheels including: a drive wheel; an end wheel spaced apart from the drive wheel in the longitudinal direction of the tracked vehicle; and a plurality of support wheels arranged between the drive wheel and the end wheel; and may comprise an endless track disposed around the plurality of wheels for engaging a ground on which the tracked vehicle travels, the drive wheel being in driving engagement with the endless track to impart motion to the endless track. The chassis may have a first portion directly
35 under the operator cabin and a second portion behind the operator cabin in the longitudinal direction of the tracked vehicle, the first portion being structurally reinforced so as to provide a greater resistance to torsion than the second portion.

There may also be provided a tracked vehicle comprising: a chassis with a lowered portion in which a torque box is received; an operator cabin mounted to the chassis; a power plant mounted to the chassis and comprising a prime mover; and a plurality of track assemblies for traction of the tracked vehicle, a first one of the track assemblies being on a first lateral side of the tracked vehicle, a second one of the

track assemblies being on a second lateral side of the tracked vehicle. Each track assembly of the plurality of track assemblies may be mounted to the chassis and may comprise a plurality of wheels including: a drive wheel; an end wheel spaced apart from the drive wheel in a longitudinal direction of the tracked vehicle; and a plurality of support wheels arranged between the drive wheel and the end wheel; and also having an endless track disposed around the plurality of wheels for engaging a ground on which the tracked vehicle travels, the drive wheel being in driving engagement with the endless track to impart motion to the endless track.

There may also be provided a tracked vehicle comprising: a) a chassis comprising an upper frame structure and a lower frame structure; the lower frame structure spanning a longitudinal distance along a longitudinal direction of the vehicle; over a first portion of the longitudinal distance spanned by the lower frame structure, the lower frame structure overlapping with a first section of the upper frame structure; over a second portion of the longitudinal distance, the lower frame structure overlapping with a second section of the upper frame structure, the second section of the upper frame structure comprising a torque box; the first and second sections of the upper frame structure being secured to the lower frame structure; b) an operator cabin mounted to the chassis; c) a power plant mounted to the chassis and comprising a prime mover; and d) a plurality of track assemblies for traction of the tracked vehicle, a first one of the track assemblies being on a first lateral side of the tracked vehicle, a second one of the track assemblies being on a second lateral side of the tracked vehicle, where each track assembly of the plurality of track assemblies may be mounted to the chassis and comprise: i) a plurality of wheels including: a drive wheel; an end wheel spaced apart from the drive wheel in the longitudinal direction of the tracked vehicle; and a plurality of support wheels arranged between the drive wheel and the end wheel; and also an endless track disposed around the plurality of wheels for engaging a ground on which the tracked vehicle travels, the drive wheel being in driving engagement with the endless track to impart motion to the endless track.

In accordance with another aspect of the invention, there is provided a method of installing a torque box on a tracked vehicle.

Accordingly, there may be provided a method for installing a torque box on a tracked vehicle, the tracked vehicle comprising a chassis extending in a longitudinal direction of the tracked vehicle and a plurality of track assemblies for traction of the vehicle, a first one of the track assemblies being on a first lateral side of the tracked vehicle, a second one of the track assemblies being on a second lateral side of the tracked vehicle, the method comprising: placing the torque box within a lowered channel defined by side walls and a frame structure of the chassis; and securing the torque box to at least the side walls.

Also, there may be provided a method for installing a torque box on a tracked vehicle, the tracked vehicle comprising a chassis extending in a longitudinal direction of the tracked vehicle, a plurality of track assemblies for traction of the vehicle, and an operator cabin mounted to the chassis, the method comprising: without removing the operator cabin from the chassis of the tracked vehicle, securing the torque box to a reinforced portion of the chassis under the operator cabin and to a lowered portion of the chassis behind the operator cabin.

In accordance with another aspect of the invention, there is provided a chassis for a tracked vehicle.

Accordingly, there may be provided a chassis for a tracked vehicle, comprising: an upper frame structure; and a lower frame structure connected to the upper frame structure, the lower frame structure spanning a longitudinal distance along a longitudinal direction of the tracked vehicle; wherein over a first portion of the longitudinal distance, the lower frame structure overlaps with the upper frame structure and wherein over a second portion of the longitudinal distance, the lower frame structure does not overlap with the upper frame structure.

Also, there may be provided a chassis extending in a longitudinal direction for a tracked vehicle having an operator cabin, comprising: a first portion directly under the operator cabin; and a second portion behind the operator cabin in the longitudinal direction, the second portion being lower to the ground than the first portion, the first portion being reinforced so as to provide a greater resistance to torsion than the second portion.

Also, there may be provided a chassis for a tracked vehicle, comprising: an upper frame structure; and a lower frame structure; wherein the lower frame structure spans a longitudinal distance along a direction of travel of the vehicle; wherein over a first portion of the longitudinal distance spanned by the lower frame structure, the lower frame structure overlaps with a first section of the upper frame structure; wherein over a second portion of the longitudinal distance, the lower frame structure overlaps with a second section of the upper frame structure, the second section of the upper frame structure comprising a torque box; and wherein the first and second sections of the upper frame structure are secured to each other and to the lower frame structure.

These and other aspects of the invention will now become apparent to those of ordinary skill in the art upon review of the following description of embodiments of the invention in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

A detailed description of embodiments of the invention is provided below, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 shows a perspective view of an example of a tracked vehicle equipped with work equipment in accordance with an embodiment of the invention;

Figure 2 shows a top view of the tracked vehicle equipped with work equipment;

Figures 3 and 4 respectively show a side and a front view of the tracked vehicle without an equipment-mounting platform, such as a torque box, for mounting work equipment;

Figures 5 and 6 respectively show top and bottom perspective views of a chassis of the tracked vehicle;

Figures 7 and 8 respectively show a top and a side view of the chassis;

Figure 9 shows a perspective view of the chassis with an operator cabin and a power plant of the tracked vehicle mounted to an upper frame structure of the chassis;

Figure 10 shows a perspective view of the chassis with the operator cabin, the power plant and the torque box mounted to a lower frame structure of the chassis;

Figure 11 shows a cross-sectional view of a beam of the upper frame structure of the chassis taken along line 11-11 in Figure 6;

Figure 12 shows a front view of an example of a lateral plate of the plurality of lateral plates of the lower frame structure of the chassis;

Figure 13 shows a cross-sectional view of the lateral plate taken along line 13-13 in Figure 12;

Figures 14 and 15 respectively show a top and a front view of a rear lateral plate of the lower frame structure;

Figure 16 shows a top view of the chassis including a channel defined by the lateral plates of the lower frame structure for receiving the torque box;

Figures 17 and 18 respectively show a top view and a side view of the torque box;

Figure 19 shows a top view of the torque box in an embodiment where spacers are used to mount the torque box to the lateral plates of the lower frame structure;

Figure 20 shows a side view of the chassis with the torque box mounted to its lower frame structure and a stabilizer leg support assembly mounted to the upper frame structure frontwardly of the operator cabin;

Figure 21 shows a perspective view of an example of longitudinal ends of rail sections that are joined to form rails of the lower frame structure;

Figure 22 shows a cross-section of the lower frame structure where a joint member is used to join the rail sections to form the rails;

Figure 23 shows an example of an attachment device used to secure the work equipment to the torque box;

Figure 24 shows a perspective view of the power plant of the tracked vehicle;

Figure 25 shows another perspective view of the power plant of the tracked vehicle with panels of a housing of the power plant removed;

Figure 26 shows a side view of a track assembly of the vehicle mounted to the lower frame structure of the chassis;

Figure 27 and 28 show a top view of an inner side, and a cross-sectional view, of an endless track in accordance with an embodiment of the invention;

Figures 29 and 30 show a perspective view of a ground-engaging outer side, and a perspective view of an inner side, of an endless track in accordance with another embodiment of the invention;

Figure 31 shows a perspective view of a support wheel of a track assembly in accordance with another embodiment of the invention;

Figures 32 and 33 show a perspective view and a cross-sectional view of a track tensioner in relation to wheels of a track assembly;

Figures 34 and 35 show track tensioners of the track assemblies hydraulically connected to a hydraulic drive system of the tracked vehicle;

Figure 36 shows an operator cabin of the tracked vehicle configured in a one-person configuration;

Figure 37 shows components of a user interface of the operator cabin connected to other components of the tracked vehicle;

Figure 38 shows a rear view of the lower frame structure and the track assemblies with a rear drawbar of the lower frame structure to reveal the rails of the lower frame structure;

Figure 39 shows a side view of the chassis mounted with the torque box, the operator cabin and the power plant;

Figure 40 shows an example of an embodiment where adjacent ones of the rail sections of the rails of the lower frame structure are spaced apart from one another such that the rails are discontinuous rails;

Figure 41 shows a top view of the chassis of the vehicle mounted with wheels of the track assemblies of the vehicle mounted thereto;

Figure 42 shows a side of the chassis of the vehicle with an idler wheel, a drive wheel and bogies mounted thereto;

Figure 43 shows a perspective view of the chassis in accordance with a variant, where the lateral plates are configured are not connected directly to the torque box;

Figure 44 shows a perspective view of the chassis in accordance with a variant in which the lateral plates are configured such that the torque box is disposed substantially on the rails of the lower frame structure of the chassis;

Figures 45 and 46 show a top view and a side view of a lateral middle plate of the chassis of Figure 44;

Figure 47 and 48 show a top view and a side view of a lateral frontal plate of the chassis of Figure 44; and

Figure 49 shows a connection between the torque box and the lateral frontal plate of Figures 47 and 48.

In the drawings, embodiments of the invention are illustrated by way of example. It is to be expressly understood that the description and drawings are only for the purpose of illustrating certain embodiments of the invention and are an aid for understanding. They are not intended to be a definition of the limits of the invention.

DETAILED DESCRIPTION OF EMBODIMENTS

Figures 1 to 4 show an example of a tracked utility vehicle 10 in accordance with an embodiment of the invention. The tracked utility vehicle 10 is designed to carry and enable use of work equipment 41, which includes one or more work implements such as, for example, a crane, a ladder, an aerial device, an aerial work platform, a lift, a drill rig, a digger derrick, a material handler, a mulcher or other vegetation management apparatus, and/or any other industrial apparatus, on various terrains, including rugged terrain (e.g., with mud, steep hills, swamps, rocks, mud, and/or snow). This type of vehicle can sometimes be referred to as a “tracked carrier” or “tracked equipment carrier” vehicle.

The tracked utility vehicle 10 has a length L_v , a width W_v , and a height H_v (measured without taking into account the work equipment 41). These dimensions may allow the vehicle 10 to have a large payload capacity while being able to be used on a public road infrastructure. For example, in some embodiments, the length L_v may be at least 5 m, such as between 5 m and 10 m, in some cases between 6 m and 9 m, and in some cases between 7 m and 8 m; the width W_v may be at least 2 m, such as between 2 m and 5 m, in some cases between 2.5 m and 4.5 m, and in some cases between 3 m and 4 m; and the height H_v may be no more than 4 m, in some cases no more than 3.5 m, and in some cases no more than 3 m. The length L_v , width W_v , and height H_v may take on various other values in other embodiments.

The tracked utility vehicle 10 has a payload capacity which can be quite large. For example, in some embodiments, the payload capacity of the vehicle 10 may be at least 10000 lbs (about 4536 kg), in some cases at least 15000 lbs (about 6804 kg), in some cases at least 20000 lbs (about 9072 kg), in some cases at least 30000 lbs (about 13608 kg), in some cases at least 40000 lbs (18144 kg), in some cases at

least 46000 lbs (20865 kg) and in some cases even more than 46000 lbs (e.g., 50000 lbs). The payload capacity may take on various other values in other embodiments.

In this embodiment, the tracked utility vehicle 10 comprises a chassis 12, a power plant 14, a plurality of track assemblies 16₁, 16₂, and an operator cabin 20. The vehicle 10 has a longitudinal axis 59 defining a longitudinal direction of the vehicle 10 (i.e., a direction generally parallel to its longitudinal axis 59) and transversal directions (i.e., directions transverse to its longitudinal axis 59), including a widthwise direction (i.e., a lateral direction generally perpendicular to its longitudinal axis 59). The vehicle 10 also has a height direction which is normal to both its longitudinal direction and its widthwise direction.

As will be described in more detail later on, in some embodiments, the tracked utility vehicle 10 may be configured to allow the work equipment 41 to be mounted on the chassis 12 at a lowered position such as to allow a greater clearance between the work equipment 41 and the vehicle height limit of the public road infrastructure and/or to allow taller work equipment 41 to be installed without surpassing the vehicle height limit of the public road infrastructure. In one non-limiting embodiment, a "lowered" position may refer to a position that is lower than a floor of an operator cabin of the vehicle, but the lowered position may also be defined in other ways and relative to other aspects of the tracked vehicle, as will be described herein below.

a) Chassis

The chassis 12 extends along the longitudinal axis 59 of the tracked utility vehicle 10 and has a length L_C measured between opposite longitudinal ends of the chassis 12. The chassis 12 supports various components of the vehicle 10, including the power plant 14, the track assemblies 16₁, 16₂, and the operator cabin 20. The chassis 12 also supports the work equipment 41 carried by the vehicle 10.

As further discussed below, in this embodiment, the chassis 12 is configured such as to receive an equipment-mounting platform 102, such as a torque box for example, onto which can be mounted the work equipment 41. The equipment-mounting platform 102 may be similar in certain aspects to torque boxes used in trucks to transport work equipment. For instance, a manner in which the equipment-mounting platform 102 is mounted to the chassis 12 may be akin to a manner in which torque boxes are installed on truck frames. As a result, work equipment such as the work equipment 41 may be as easily installable on the tracked utility vehicle 10 as on trucks. Work equipment such as the work equipment 41 which may be primarily designed for trucks due to a potentially larger market for trucks can therefore also be easily installed on the tracked utility vehicle 10.

In addition, in this embodiment, the chassis 12 is configured to receive the equipment-mounting platform 102 at a lowered height portion of the chassis 12 such as to reduce an overall height H_{v-o} of the vehicle 10 (i.e., a height including the work equipment 41) and/or to allow taller work equipment to be transported without exceeding vehicle height limits. The overall height H_{v-o} of the vehicle 10, measured with the work equipment 41 in a retracted nonworking state, may thus be designed taking into account the vehicle height limit and a height of a trailer on which the vehicle 10 may be transported on the public road

infrastructure. For example, if a trailer having a height of 24 inches is expected to be used for transporting the vehicle 10, the overall height H_{v-o} of the vehicle 10 may be no more than 11.5 feet (3.5 m) if the vehicle height limit is 13.5 feet or no more than 12 feet (3.7 m) if the vehicle height limit is 14 feet. As another example, if a trailer having a height of 18 inches is expected to be used for transporting the vehicle 10, the overall height H_{v-o} of the vehicle 10 may be no more than 12 feet if the vehicle height limit is 13.5 feet or no more than 12.5 feet if the vehicle height limit is 14 feet. Thus, in various examples, the overall height H_{v-o} of the vehicle 10 may be no more than 12.5 feet, in some cases no more than 12 feet, and in some cases no more than 11.5 feet.

- 10 With additional reference to Figures 5 to 10, in this embodiment, the chassis 12 comprises an upper frame structure 60 and a lower frame structure 62, the upper and lower frame structures 60, 62 being connected to one another.

15 The upper frame structure 60 is that portion of the chassis 12 on which rests and to which are secured the operator cabin 20 and the power plant 14. For its part, the lower frame structure 62 is that portion of the chassis 12 to which is secured the equipment-mounting platform 102 onto which the work equipment 41 is mounted.

20 In this embodiment, the upper frame structure 60 comprises a pair of beams 64_1 , 64_2 extending in the longitudinal direction of the vehicle 10 and spaced apart in the widthwise direction of the vehicle 10. In this embodiment, the upper frame structure 60 also comprises first and second crossmembers 66_1 , 66_2 extending transversally to the beams 64_1 , 64_2 and thus transversally to the longitudinal direction of the vehicle 10.

25 In this embodiment, each beam 64_i is a hollow beam (i.e., a beam defining a hollow interior) and more specifically a rectangular box beam. As shown in Figure 11, the beam 64_i comprises a top surface 65, a bottom surface 67 opposite the top surface 65, and a pair of lateral surfaces 68_1 , 68_2 opposite one another. The beam 64_i is made of metallic material, in this case steel. Moreover, each beam 64_i is dimensioned such that the beams 64_1 , 64_2 are able to support the operator cabin 20 and the power plant 14. For example, in some examples of implementation, the beam 64_i may have a height H_B measured between its top and bottom surfaces 65, 67 of at least 8 inches, in some cases at least 10 inches, in some cases at least 12 inches, and in some cases at least 16 inches. In some examples of implementation, the beam 64_i may have a width W_B measured between its lateral surfaces 68_1 , 68_2 of at least 4 inches, in some cases at least 8 inches, and in some cases at least 12 inches. Moreover, in some examples of implementation, the beam 64_i may have a wall thickness T_W of at least 1/4 inches, in some cases at least 5/8 inches, and in some cases at least 3/4 inch. In this example, the beam 64_i can be made by forming different sections of steel plates and subsequently welding them together, although other processes are possible such as an extrusion process or any other suitable process. Dimensions of the beams 64_1 , 64_2 may take on various other values in other embodiments.

40 The beams 64_1 , 64_2 may be configured in various other ways in other embodiments. For instance, in some embodiments, each one of the beams 64_1 , 64_2 may have a cross-sectional shape other than

rectangular (e.g., circular or otherwise curved, square, etc.). In some examples, the beams 64₁, 64₂ may be C-beams, I-beams, or any other suitable elongated structural member. As another example, in some embodiments, the beams 64₁, 64₂ may be made of material other than steel.

- 5 Furthermore, in some embodiments, the beams 64₁, 64₂ may be joined via a plate fastened to the top surface 65 of each beam 64_i and another plate fastened to the bottom surface 67 of each beam 64_i. For instance, such plates may be steel plates that are welded to the beams 64₁, 64₂ or fastened in any other suitable way to the beams 64₁, 64₂. In such embodiments, the beams 64₁, 64₂ along with the steel plates fastened thereto may form a hollow structure having a cross-sectional span greater than the combined
10 cross-sectional spans of each of the beams 64₁, 64₂. This may be useful to reinforce the beams 64₁, 64₂ such that they have a greater stiffness to resist applied torques.

The crossmembers 66₁, 66₂ are secured to the beams 64₁, 64₂ to interconnect the beams 64₁, 64₂. More particularly, in this embodiment, the crossmembers 66₁, 66₂ are secured to the beams 64₁, 64₂ via
15 fasteners (e.g., bolts and/or rivets). The crossmembers 66₁, 66₂ may be secured to the beams 64₁, 64₂ in other ways in other embodiments (e.g., by welding). Each crossmember 66_i is an elongated and hollow structural member including a top surface 74₁, a bottom surface 74₂, and opposite lateral surfaces 74₃, 74₄. The lateral surfaces 74₃, 74₄ comprise recesses 69 configured for positioning the crossmember 66_i onto the beams 64₁, 64₂. The crossmember 66_i is made of metallic material, in this case steel.

20 In this embodiment, the first crossmember 66₁ has a length greater than a length of the second crossmember 66₂. Moreover, in this embodiment, the first crossmember 66₁ is connected to the beams 64₁, 64₂ such that it extends beyond a widthwise span of the beams 64₁, 64₂ (i.e., a span between outboard lateral walls of the beams 64₁, 64₂ in the widthwise direction of the vehicle 10) on both sides of
25 the widthwise span of the beams 64₁, 64₂. In this example, the second crossmember 66₂ is connected to the beams 64₁, 64₂ such that the second crossmember 66₂ extends beyond the widthwise span of the beams 64₁, 64₂ on a single side of the widthwise span of the beams 64₁, 64₂. In this embodiment, the second crossmember 66₂ has a height greater than the first crossmember 66₁ such that a distance between the top surface 74₁ of the second crossmember 66₂ and the top surface 65 of the beams 64₁,
30 64₂ is greater than a distance between the top surface 74₁ of the first crossmember 66₁ and the top surface 65 of the beams 64₁, 64₂.

The crossmembers 66₁, 66₂ may be any other suitable elongated structural member in other embodiments. As another example, in some embodiments, the crossmembers 66₁, 66₂ may be made of
35 material other than steel.

The lower frame structure 62 provides a main structure for supporting the track assemblies 16₁, 16₂ and the equipment-mounting platform 102 onto which the work equipment 41 is mounted. In this embodiment, the lower frame structure 62 comprises a pair of parallel rails 80₁, 80₂ extending along the longitudinal
40 direction of the vehicle 10 and spaced apart in the widthwise direction of the vehicle 10. More specifically, the lower frame structure 62 is generally centered in relation to the longitudinal axis 59 of the vehicle 10 such that the longitudinal axis 59 bisects a width of the lower frame structure 62. The lower frame

structure 62 also comprises a plurality of crossmembers 82₁-82₃ extending transversally to the longitudinal direction of the vehicle 10 between the rails 80₁, 80₂. The lower frame structure 62 also comprises a front drawbar 87₁ and a rear drawbar 87₂. The lower frame structure 62 has a length L_{LF} defined between its opposite longitudinal ends 91₁, 91₂.

5

Although the rails 80₁, 80₂ of the lower frame structure 62 and the beams 64₁, 64₂ of the upper frame structure 60 are respectively described as "rails" and "beams", this is merely done to avoid confusion when referring to them. In some embodiments, the rails 80₁, 80₂ and the beams 64₁, 64₂ may be similarly structured, while in others they may be quite different. For instance, in this embodiment, each of the rails 80₁, 80₂ is a rectangular box beam similar to the beams 64₁, 64₂. Each rail 80_i comprises a top surface 93, a bottom surface 94 opposite the top surface 93, and a pair of lateral surfaces 97₁, 97₂ opposite one another. The rails 80₁, 80₂ are made of metallic material, in this case steel. The rails 80₁, 80₂ may be configured in various other ways in other embodiments. For example, in some embodiments, each of the rails 80₁, 80₂ may be a hollow beam having a cross-sectional shape other than rectangular (e.g., circular or otherwise curved). In other examples, each of the rails 80₁, 80₂ could be implemented as a non-hollow beam, such as a C-beam or an I-beam (or H-beam), or any other suitable elongated structural member. As another example, in some embodiments, the rails 80₁, 80₂ may be made of material other than steel.

Each rail 80_i is dimensioned such that the rails 80₁, 80₂ are able to support the equipment-mounting platform 102 and the work equipment 41. For example, in this embodiment, the rail 80_i may have dimensions similar to those of the beams 64₁, 64₂ and may be manufactured in a similar manner. In this example, the rail 80_i can be made by forming different sections of steel plates and subsequently welding them together, although other processes are possible such as an extrusion process or any other suitable process. Dimensions of the rails 80₁, 80₂ may take on various other values in other embodiments.

25

In this embodiment, the rails 80₁, 80₂ of the lower frame structure 62 are aligned with the beams 64₁, 64₂ of the upper frame structure 60 in the widthwise direction of the vehicle 10. More specifically, in this embodiment, a position of each of the rails 80₁, 80₂ in the widthwise direction of the vehicle 10 corresponds to a position of each of the beams 64₁, 64₂ in the widthwise direction of the vehicle 10. For example, the rail 80₁ is positioned such that its outboard lateral wall 97₁ is coplanar with the outboard lateral wall 68₁ of the beam 64₁. Moreover, in this embodiment, the rails 80₁, 80₂ and the beams 64₁, 64₂ have a same width (i.e., a distance between their respective lateral walls) and thus the inboard lateral wall 97₂ of the rail 80₁ is also coplanar with the inner lateral wall 68₂ of the beam 64₁. In other embodiments, the rails 80₁, 80₂ and the beams 64₁, 64₂ may not be aligned with one another. For example, the rails 80₁, 80₂ and the beams 64₁, 64₂ may be offset relative to one another in the widthwise direction of the vehicle 10.

The crossmembers 82₁-82₃ of the lower frame structure 62 are secured to the rails 80₁, 80₂ and are configured to support an electric harness and hydraulic hoses of the tracked utility vehicle 10. In this embodiment, the crossmembers 82₁-82₃ comprise elongated L-beams. The crossmembers 82₁-82₃ may be any other suitable type of beams in other embodiments. Moreover, in this embodiment, the crossmembers 82₁-82₃ are welded to the rails 80₁, 80₂. The crossmembers 82₁-82₃ may be secured to

the rails 80₁, 80₂ in other ways in other embodiments (e.g., by fasteners such as bolts and/or rivets). Although in this embodiment only three crossmembers are depicted, more or less crossmembers may be included in other embodiments.

- 5 The lower frame structure 62 also comprises a plurality of support members 104₁-104₃ that extend transversally to the longitudinal direction of the vehicle 10. These support members 104₁-104₃ are configured to stiffen the chassis 12 by providing support in its lateral direction and to receive respective wheel mounting structures of the track assemblies 16₁, 16₂. More specifically, the support members 104₁, 104₂ extend between the rails 80₁, 80₂ and are connected thereto (e.g., via welding) while the support
- 10 member 104₃ extends at a connection between the upper and lower frame structures 60, 62. In this embodiment, the support members 104₁-104₃ comprise a hollow cylindrical body.

- In this embodiment, each rail 80_i comprises a plurality of separate rail sections 35₁-35_S that are joined to form the rail 80_i. Adjacent ones of the rail sections 35₁-35_S are joined at locations where the support
- 15 members 104₁, 104₂ extend between the rails 80₁, 80₂. To that end, as shown in Figure 21, the rail sections 35₁-35_S are similarly structured, each rail section 35_i being elongated and comprising an aperture 55 at one of its longitudinal ends (or at both longitudinal ends in the case of the rail section positioned between the support members 104₁, 104₂). The aperture 55 is configured to fit a shape and size of a support member 104_i. To that end, in this example, the aperture 55 is in the shape of a semi-circle such
- 20 that adjacent ones of the rail sections 35₁-35_S together form a circular opening to fit a support member 104_i. The rail sections 35₁-35_S may be joined in any suitable way. For instance, adjacent rail sections 35₁-35_S may be welded together to form the rail 80_i. Additionally or alternatively, as shown in Figure 22, the rail sections 35₁-35_S may be joined via joint members 81₁-81_R configured to join adjacent ones of the rail sections 35₁-35_S to form the rail 80_i. Each joint member 81_i comprises an opening for fitting a respective
- 25 support member 104_i and is positioned to contact adjacent ones of the rail section 35₁-35_S at a portion of their top surfaces, bottom surfaces, and inboard lateral surfaces (corresponding to the top surface 93, the bottom surface 94 and an inboard one of the lateral surfaces 97₁, 97₂ of the rails 80₁, 80₂).

- In some embodiments, as shown in Figure 40, the rail sections 35₁-35_S of each rail 80_i may be arranged
- 30 such that they do not form a continuous rail 80_i. In other words, the rail 80_i may be a "discontinuous" rail in that its rail sections 35₁-35_S do not contact one another. In such embodiments, the rail sections 35₁-35_S do not comprise an aperture and adjacent ones of the rail sections 35₁-35_S are spaced apart by a distance equal to or greater than a diameter of the support member 104_i. A joint member 81_i is then fastened to (e.g., welded to) each of the adjacent rail sections (denoted as 35_i, 35_j in Figure 40) to form a
- 35 "bridge" (i.e., a connection) between each one of the adjacent rail sections 35₁-35_S.

- The lower frame structure 62 also comprises a plurality of side walls for positioning and attaching the equipment-mounting platform 102 to the lower frame structure 62. The side walls may be made of lateral plates 106₁-106₆. As shown in Figures 12 and 13, each lateral plate 106_i comprises an interior surface
- 40 107 facing a center of the vehicle 10 in the widthwise direction of the vehicle 10 and an exterior surface 108 opposite the interior surface 107. The interior and exterior surfaces 107, 108 of the lateral plate 106_i are substantially flat. Each lateral plate 106_i is secured to a respective one of the rails 80₁, 80₂ such that

the interior and exterior surfaces 107, 108 of the lateral plate 106_i are parallel to the longitudinal direction of the vehicle 10. More particularly, a lower portion 110 of the lateral plate 106_i is fastened to a respective one of the rails 80₁, 80₂ while an upper portion 111 of the lateral plate 106_i is configured to be fastened to the equipment-mounting platform 102. To that end, the lateral plate 106_i is positioned such that its upper
5 portion 111 extends beyond the top surface 93 of the rail 80_i to which the lateral plate 106_i is mounted.

In this embodiment, the upper portion 111 of the lateral plate 106_i has a generally rectangular shape and comprises a plurality of holes 109₁-109_H for inserting a fastening element configured to engage the equipment-mounting platform 102. The lateral plates 106₁-106₆ may be configured similarly to "fishplates"
10 typically found on truck frames and used to attach a torque box thereto. Therefore, the lateral plates 106₁-106₆ may be familiar to a person accustomed to using fishplates on truck frames. This may thus facilitate the installation of the equipment-mounting platform 102 onto the lower frame structure 62.

In this embodiment, some of the lateral plates 106₁-106₆ are positioned such that they are aligned with
15 respective ones of the support members 104₁-104₃ in the longitudinal direction of the vehicle 10. For example, the lateral plates 106₂, 106₅ are aligned with the support member 104₁ in the longitudinal direction of the vehicle 10. Each of these lateral plates may comprise an opening 113 in its lower portion 110 that is shaped and dimensioned to fit the support member 104_i with which it is aligned such as to enable the inner surface 107 of the lateral plate 106_i to be placed in contact with a respective one of the
20 rails 80₁, 80₂. In some cases, the lower portion 110 of the lateral plate 106_i may be fastened to a respective one of the support members 104₁-104₃.

While in this embodiment the lateral plates 106₁-106₆ are welded to the rails 80₁, 80₂, the lateral plates 106₁-106₆ may be fastened to the rails 80₁, 80₂ in any other suitable way in other embodiments (e.g., via
25 bolts and/or rivets). Moreover, in some embodiments, the lateral plates 106₁-106₆ may be made integrally with the rails 80₁, 80₂. That is, the lateral plates 106₁-106₆ may be manufactured together with the rails 80₁, 80₂ such that they constitute a single component.

In embodiments where adjacent ones of the rail sections 35₁-35_S of the rails 80₁, 80₂ are spaced apart
30 from one another such that each one of the rails 80₁, 80₂ is a discontinuous rail, as shown in Figure 40, a lateral plate 106_i is fastened to each of the adjacent rail sections 35_i, 35_j to connect, along with the joint member 81_i, the adjacent rail sections 35_i, 35_j to one another.

Each lateral plate 106_i may be dimensioned such as to support the equipment-mounting platform 102. For
35 instance, in some examples of implementation, the lateral plate 106_i may have a thickness T_p of at least 3/8 inch, in some cases at least 1/2 inch, in some cases at least 5/8 inch, and in some cases at least 1 inch.

In this embodiment, the plurality of lateral plates 106₁-106₆ includes a pair of frontal plates 106₃, 106₆, a
40 pair of middle plates 106₂, 106₅, and a pair of rear plates 106₁, 106₄. Besides being connected to the rails 80₁, 80₂ of the lower frame structure 62, the frontal plates 106₃, 106₆ are also connected to the upper frame structure 60. More specifically, each of the frontal plates 106₃, 106₆ is connected to a respective

one of the beams 64₁, 64₂ of the upper frame structure 60. For example, the frontal plates 106₃, 106₆ may be welded to the beams 64₁, 64₂ or otherwise connected to the beams 64₁, 64₂ (e.g., via bolts and/or rivets).

Moreover, in this embodiment, the rear plates 106₁, 106₄ are positioned such that they extend beyond the span of the rails 80₁, 80₂ in the longitudinal direction of the vehicle 10. As such, in this embodiment, the rear plates 106₁, 106₄ define the longitudinal end 91₂ of the lower frame structure 62 (i.e., a rearmost endpoint of the lower frame structure 62).

In this embodiment, the rear plates 106₁, 106₄ are structured differently than the remainder of the lateral plates in that they do not comprise an opening for fitting a support member 104_i since they are not aligned with any of the support members 104₁-104₃. Rather, as shown in Figures 14 and 15, each of the rear plates 106₁, 106₄ comprises a plate portion 115 configured similarly to the frontal plates 106₃, 106₆ and the middle plates 106₂, 106₅, and a drive wheel support structure 117 for supporting a drive wheel of a respective one of the track assemblies 16₁, 16₂. The drive wheel support structure 117 comprises a cylindrical body 119 protruding from the outer surface 108 of the plate portion 115 and terminating in a flange 121. The flange 121 comprises a plurality of openings 127₁-127_n for mounting a planetary gearbox (not shown) configured to drive the drive wheel of each track assembly 16₁, 16₂. The cylindrical body 119 defines an opening 123 in which an axle of a respective one of the drive wheels of the track assemblies 16₁, 16₂ may be disposed. The drive wheel support structure 117 further comprises a pair of webs 125₁, 125₂ attached to the plate portion 115 and to the cylindrical body 119 in order to support the cylindrical body 119 of the drive wheel support structure 117.

While in this embodiment the plurality of lateral plates 106₁-106₆ includes six lateral plates, the plurality of lateral plates may include any other suitable number of lateral plates. More specifically, the plurality of lateral plates includes at least two lateral plates. For example, in some embodiments, the side walls may include only two opposing lateral plates, each lateral plate spanning a majority of the length of the lower frame structure 62.

The positioning of the lateral plates 106₁-106₆ may facilitate the installation of the equipment-mounting platform 102 onto the lower frame structure 62. More specifically, as shown in Figure 16, the lateral plates 106₁-106₆ are secured to the rails 80₁, 80₂ such that some of the lateral plates 106₁-106₆ are separated in the widthwise direction of the vehicle 10 to define a channel 162 for laterally bounding the equipment-mounting platform 102. A width W_C of the channel 162 defined between the side walls / lateral plates 106₁-106₆ may take on various values. The channel 162 is also longitudinally bound at one end by a transversal connection plate 174 which is configured to connect the upper frame structure 60 to the lower frame structure 62 and will be described in more detail later.

In a non-limiting embodiment, the width W_C of the channel 162 may correspond to a "nominal truck frame side rail spacing". The nominal truck frame side rail spacing may be different for different jurisdictions. The nominal truck frame side rail spacing may be 34 inches (about 0.86 m) in the United States, and 700 mm (about 27.5 inches) in Europe and in Japan). Accordingly, the width W_C of the channel 162 may thus

be 34 inches, or 700 mm, in various embodiments, depending on the jurisdiction. For a given jurisdiction, one way of defining the "nominal truck frame side rail spacing" is to refer to the average (mean, median or mode) an industry-standard advertised spacing of side rails of a frame of a truck chassis for across all trucks with a gross vehicle weight rating (GVWR) over 14000 lbs (6351 kg) sold in the given jurisdiction during a given time frame. By "advertised" one may take the spacing listed in the owner's manual or other specification sheet. (A truck's GVWR corresponds to a curb weight of the truck plus a cargo and passenger weight capacity of the truck. In the United States, a GVWR over 14000 lbs would be a class 4 or higher class according to the U.S. Department of Transportation's truck classification.) Other ways of defining the nominal truck frame side rail spacing may be relied upon.

In other non-limiting embodiments, the width W_C of the channel 162 may be greater than the nominal truck frame side rail spacing, in order to accommodate manufacturing tolerances and/or equipment variations. For example, in a particular jurisdiction, the width W_C of the channel 162 may be between 0 and 3 inches greater than the nominal truck frame side rail spacing in that jurisdiction. Thus, by way of non-limiting example, in countries where the nominal truck frame side rail spacing is 34 inches, the width W_C of the channel 162 may be 35 $\frac{1}{4}$ inches, 36 inches or 36 $\frac{1}{2}$ inches.

In still other non-limiting embodiments, the width W_C of the channel 162 may not bear a particular relationship to a nominal truck frame side rail spacing at all, but may be selected by the manufacturer according to other criteria. For example, the width W_C of the channel 162 may have any suitable value, such as 32 inches, 36 inches, 40 inches and the like. In other embodiments, the width W_C of the channel 162 may be between 30 and 34 inches, between 32 inches and 34 inches, or even between 33 inches and 34 inches. In still other embodiments, the W_C of the channel 162 may be less than 30 inches.

The lower frame structure 62 may be positioned such that a portion of a longitudinal distance along the longitudinal direction of the vehicle 10 that is spanned by the lower frame structure 62 (i.e., its length L_{LF}) does not overlap (i.e., is non-overlapping with respect to) the upper frame structure 60. With additional reference to Figure 8, in this embodiment, the lower frame structure 62 is positioned such that it overlaps with the upper frame structure 60 over a first portion P_1 of its length L_{LF} and does not overlap with (i.e., is non-overlapping with respect to) the upper frame structure 60 over a second portion P_2 of its length L_{LF} . It is also noted that the first portion P_1 of the length L_{LF} of the lower frame structure 62 is located further towards a front of the vehicle 10 than the second portion P_2 of the length L_{LF} of the lower frame structure 62.

In this embodiment, the second portion P_2 of the length L_{LF} of the lower frame structure 62 is longer than the first portion P_1 of the length L_{LF} of the lower frame structure 62. That is, in this embodiment, a longitudinal span of the lower frame structure 62 over which the upper and lower frame structures 60, 62 do not overlap is greater than the longitudinal span of the lower frame structure 62 over which the upper and lower frame structures 60, 62 do overlap. For instance, in some cases, the second portion P_2 of the length L_{LF} of the lower frame structure 62 may be at least 10% longer than the first portion P_1 , in some cases at least 20% longer, in some cases at least 30% longer, in some cases at least 40% longer and in

some cases even greater than 40% longer than the first portion P_1 (e.g., 50%, 60% or even 100% if not more).

In this manner, the second portion P_2 of the length L_{LF} of the lower frame structure 62 may define a lowered platform-receiving area (e.g., to receive the equipment-mounting platform 102) that would otherwise not be available if the entire length L_{LF} of the lower frame structure 62 overlapped the upper frame structure 60.

In this embodiment, the rails 80_1 , 80_2 of the lower frame structure 62 extend along at least the second portion P_2 of the length L_{LF} of the lower frame structure 62. Moreover, in this embodiment, the rails 80_1 , 80_2 also extend along the first portion P_1 of the length L_{LF} of the lower frame structure 62.

The equipment-mounting platform 102 is a platform that is positioned intermediate the work equipment 41 and the lower frame structure 62. In this embodiment, the equipment-mounting platform 102 is a torque box and will thus be referred to as such. In this embodiment, as shown in Figures 17 and 18, the torque box 102 is generally rectangular and comprises a top surface 164, a ground-facing bottom surface 166 opposite the top surface 164, lateral surfaces 168_1 , 168_2 , and longitudinal end surfaces 170_1 , 170_2 . In this embodiment, the torque box 102 comprises equipment-mounting structures 182 protruding from the top surface 164 of the torque box 102 for mounting the work equipment 41 onto the torque box 102. The torque box 102 has a width W_{TB} defined between its lateral surfaces 168_1 , 168_2 and a height H_{TB} defined between its top and bottom surfaces 164, 166.

In this embodiment, the torque box 102 further comprises a stabilizer leg support assembly 172 affixed to the torque box 102 at its rear end such that the stabilizer leg support assembly 172 defines the rear longitudinal end surface 170_1 of the torque box 102. The stabilizer leg support assembly 172 is configured to receive stabilizer legs (shown in Figure 2) that may engage the ground for providing support to the work equipment 41 when it is deployed (i.e., in an extended state).

In this embodiment, the torque box 102 also comprises a front plate 178 at its front end such that the front plate 178 defines the front longitudinal end surface 170_2 of the torque box 102. The front plate 178 is configured to connect the torque box 102 to the transversal connection plate 174.

The torque box 102 is mounted to the lower frame structure 62 via the lateral plates 106_1 - 106_6 of the lower frame structure 62. More specifically, the torque box 102 is configured to fit the channel 162 defined by the lateral plates 106_1 - 106_6 . To that end, in this embodiment, the width W_C of the channel 162 is at least as large as the width W_{TB} of the torque box 102. In other embodiments, the width W_C of the channel 162 may be greater than the width W_{TB} of the torque box 102. In such embodiments, as shown in Figure 19, at least one spacer 180 may be provided between the torque box 102 and at least one of the lateral plates 106_1 - 106_6 such as to securely fix the torque box 102 within the channel 162.

The torque box 102 may be secured to the lateral plates 106_1 - 106_6 in any suitable manner. For instance, in this embodiment, the torque box 102 is riveted to the lateral plates 106_1 - 106_6 via rivets extending

through the holes 109₁-109_H of the lateral plates 106₁-106₆. In other embodiments, the torque box 102 may be bolted or welded to the lateral plates 106₁-106₆. In yet other embodiments, the torque box 102 may be welded and riveted and/or bolted to the lateral plates 106₁-106₆. In this embodiment, the torque box 102 is also secured to the transversal connection plate 174 (e.g., via rivets).

5

In this embodiment, the torque box 102 is mounted above the rails 80₁, 80₂. More specifically, in this embodiment, as shown in Figure 20, when the torque box 102 is mounted to the lower frame structure 62, the bottom surface 166 of the torque box 102 is separated from the top surface 93 of the rails 80₁, 80₂ by a vertical gap 176 (i.e., an empty space). Thus, in this embodiment, when the torque box 102 is mounted to the lower frame structure 62, the torque box 102 does not rest on the rails 80₁, 80₂. That is, the surfaces of the torque box 102 do not contact the surfaces of the rails 80₁, 80₂. The vertical gap 176 between the top surface 93 of the rails 80₁, 80₂ and the bottom surface 166 of the torque box 102 may be useful for routing cables and/or hoses related to the operation of the track assemblies 16₁, 16₂ and/or the torque box 102. In other embodiments, for example where height constraints may be more severe, the torque box 102 may be mounted to the lower frame structure 62 such that the bottom surface 166 of the torque box 102 rests on the rails 80₁, 80₂.

In embodiments where the torque box 102 is mounted to the lower frame structure 62 such that the bottom surface 166 of the torque box 102 rests on the rails 80₁, 80₂, as shown in Figure 23, the torque box 102 may be alternatively or additionally secured to the lower frame structure 62, and more specifically to the rails 80₁, 80₂, by a plurality of attachment devices 92₁-92_R. For example, each of the attachment devices 92₁-92_R includes an attachment threaded rod assembly. Each attachment threaded rod assembly 92_i includes a threaded rod 95 and a bottom link 96 disposed around the rail 80_i. Although the attachment devices 92₁-92_R securing the torque box 102 to the rails 80₁, 80₂ are attachment threaded rod assemblies, various other types of attachment devices may be used in other embodiments.

In this embodiment, the torque box 102 is mounted to the lower frame structure 62 such that the torque box 102 does not extend into the first portion P₁ of the length L_{LF} of the lower frame structure 62. That is, in this embodiment, the torque box 102 extends solely along the second portion P₂ of the length L_{LF} of the lower frame structure 62. For example, the channel 162 defined by the lateral plates 106₁-106₆ is longitudinally bound by the front attachment plate 174 and thus the torque box 102 does not extend beyond the front attachment plate 174.

In this embodiment, the top surface 164 of the torque box 102 is substantially flat over a majority of the second portion P₂ of the length L_{LF} of the lower frame structure 62. In other words, a profile height of the top surface 164 of the torque box 102 is largely —although not necessarily entirely— constant along its longitudinal span. For example, the equipment-mounting structures 182 of the torque box 102 may define locations at which the profile height of the top surface 164 of the torque box 102 varies.

The stabilizer leg support assembly 172 of the torque box 102 receives a pair of stabilizer legs (shown in Figure 2) that are configured to support the vehicle 10 on the ground when the work equipment 41 is deployed (i.e., extended and ready to use). In this embodiment, the stabilizer leg support assembly 172 is

a first stabilizer leg support assembly 172, the torque box 102 working in conjunction with a second stabilizer leg support assembly 184 that is separate from (i.e., not directly physically connected to) the torque box 102. The second stabilizer leg support assembly 184 is configured to receive another pair of stabilizer legs for supporting the vehicle 10 on the ground. The second stabilizer leg support assembly 184 is positioned at a front portion of the vehicle 10. More specifically, the second stabilizer leg support assembly 184 is connected to the beams 64_1 , 64_2 of the upper frame structure 60 at a position frontwardly of the operator cabin 20.

The lower frame structure 62 is generally disposed at a lower height off the ground than the upper frame structure 60 in order to receive the torque box 102 at a lower height off the ground than if the torque box 102 were secured to the upper frame structure 60.

For instance, in this embodiment, the top surface 93 of each rail 80_i of the pair of parallel rails 80_1 , 80_2 is closer to the ground than the top surface of the pair of parallel beams 64_1 , 64_2 of the upper frame structure 60. For instance, in some cases, a vertical distance between the top surface 93 of a rail 80_i of the lower frame structure 62 and the top surface of a beam 64_i of the upper frame structure 60 is at least 8 inches, in some cases at least 12 inches, in some cases at least 16 inches and in some cases even greater than 16 inches (e.g., 20 inches).

The upper and lower frame structures 60, 62 of the chassis 12 are connected at the first portion P_1 of the length L_{LF} of the lower frame structure 62 (i.e., at the portion over which they overlap). More specifically, at the first portion P_1 of the length L_{LF} of the lower frame structure 62, the rails 80_1 , 80_2 of the lower frame structure 62 are located directly under the beams 64_1 , 64_2 of the upper frame structure 60 and are connected thereto.

Connectedness of the upper and lower frame structures 60, 62 provides the chassis 12 with a greater resistance to torsion along the first portion P_1 than along the second portion P_2 of the length L_{LF} of the lower frame structure 62. More specifically, the connectedness of the upper and lower frame structures 60, 62 reinforces the portion of the chassis 12 (including the upper and lower frame structures 60, 62) under the operator cabin to provide a greater resistance to torsion. For example, due to this reinforcement, the portion of the chassis 12 under the operator cabin 20 (i.e., the reinforced portion of the chassis 12) may have a greater resistance to torsion than a portion of the chassis 12 behind the operator cabin 20. For instance, in this embodiment, when a torque is applied to the chassis 12 about the longitudinal axis 59 of the vehicle 10, a von Mises stress generated at a point located halfway along a longitudinal span of the first portion P_1 of the length L_{LF} of the lower frame structure 62 is smaller than a von Mises stress generated at a point located halfway along a longitudinal span of the second portion P_2 of the length L_{LF} of the lower frame structure 62.

Furthermore, the connectedness of the upper and lower frame structures 60, 62 reinforces the chassis 12 such that the reinforced portion of the chassis 12 has a greater rigidity than other portions of the chassis 12. For instance, a point located halfway along the longitudinal portion P_1 of the length L_{LF} of the lower frame structure 62 may be displaced by a smaller distance than a point located halfway along the

longitudinal portion P_2 of the length L_{LF} of the lower frame structure 62 in response to an applied forced thereat. This increased rigidity of the reinforced portion of the chassis 12 may prevent excessive displacement of work implements positioned on a side of the vehicle 10. For example, when the work equipment 41 includes a crane, the increased rigidity of the reinforced portion of the chassis 12 may prevent the crane from being excessively displaced in response to a torque about the longitudinal axis 59 of the vehicle 10 when the crane is positioned on a side of the vehicle 10.

As such, when the work equipment 41 is attached to the torque box 102 which is mounted to the lower frame structure 62, the reinforced portion of the chassis 12 described above, due to its increased rigidity, will transmit forces caused by operation of the work equipment 41 to the stabilizer legs supported by the second stabilizer leg support assembly 184 at the front of the vehicle 10. By transmitting forces to the front stabilizer legs, the reinforced portion of the chassis 12 may avoid overloading the rear stabilizer legs of the vehicle 10, thus preventing excessively elevated stresses from being generated at the rear stabilizer legs.

In this embodiment, the upper frame structure 60 is connected to the lower frame structure 62 by a connection structure 185 which comprises the transversal connection plate 174, the lateral plates 106₃, 106₆, a pair of front connection plates 186₁, 186₂ and a pair of reinforcement arm assemblies 195₁, 195₂. The transversal connection plate 174 extends transversally to the longitudinal direction of the vehicle 10 and is fastened to rear longitudinal ends of each of the beams 64₁, 64₂ and to at least the top surface 93 of each of the rails 80₁, 80₂. Each of the lateral plates 106₃, 106₆ and each of the front connection plates 186₁, 186₂ are fastened to the outboard lateral surfaces of respective ones of the rails 80₁, 80₂ and the beams 64₁, 64₂. In this embodiment, the transversal connection plate 174 is also fastened to each of the lateral plates 106₃, 106₆. In this embodiment, the plates of the connection structure 185 are fastened to the rails 80₁, 80₂ and the beams 64₁, 64₂ via welding, although in other embodiments, these plates may be fastened in any other suitable way (e.g., via bolts and/or rivets).

The reinforcement arm assemblies 195₁, 195₂ are configured to support a load induced by a tension of a track of the track assemblies 16₁, 16₂. Each of the reinforcement arm assemblies 195₁, 195₂ is connected to the support members 104₂, 104₃ via a pair of beams 198, 200 that are in turn connected to a transversal reinforcement element 202 positioned in between the support members 104₂, 104₃ in the longitudinal direction of the vehicle 10. In this embodiment, the beam 198 is fastened to the support member 104₂ and to the transversal reinforcement element 202, while the beam 200 is fastened to the support member 104₃ and to the transversal reinforcement element 202. The beam 198 is oriented at an angle relative to the longitudinal direction of the vehicle 10 while the beam 200 is generally parallel to the longitudinal direction of the vehicle 10. In this embodiment, the transversal reinforcement element 202 consists of a cylindrical hollow metallic member.

As will be appreciated, in this embodiment, the lower frame structure 62 is connected to the upper frame structure 60 over at least the first portion P_1 of the length L_{LF} of the lower frame structure 62. More specifically, in this embodiment, the front connection plates 186₁, 186₂ are spaced apart from the transversal connection plate 174 in the longitudinal direction of the vehicle 10. For instance, in this

embodiment, a frontmost connection point of a front connection plate 186_i is spaced apart from the transversal connection plate 174 by a distance equivalent to the first portion P₁ of the length L_{LF} of the lower frame structure 62.

- 5 The front and rear drawbars 87₁, 87₂ of the lower frame structure 62 are positioned at a front and rear portion of the chassis 12 respectively. As more clearly shown in Figure 6, the front drawbar 87₁ comprises an angled plate fastened to the bottom surfaces 94 of the rails 80₁, 80₂, the front connection plates 186₁, 186₂ and the bottom surfaces 67 of the beams 64₁, 64₂. As such, the front drawbar 87₁ may be considered as part of the connection structure 185. The rear drawbar 87₂ comprises a folded sheet metal structure that extends transversally to the longitudinal direction of the vehicle 10 between the rear lateral plates 106₁, 106₄ and is fastened thereto (e.g., via welding). This may provide additional support to the rear lateral plates in 106₁, 106₄. Each of the front and rear drawbars 87₁, 87₂ may comprise shackles for attaching a load thereto.
- 15 The chassis 12 may be configured in various other ways.

For instance, with additional reference to Figure 43, in a variant, the lateral plates of the lower frame structure 62 may be configured differently. For example, the lower frame structure 62 may comprise lateral plates 206₁-206₆, including a pair of rear plates 206₁, 206₄, a pair of middle plates 206₂, 206₅, and a pair of frontal plates 206₃, 206₆. The rear plates 206₁, 206₄ are substantially similar to the rear plates 106₁, 106₄ described above in that they comprise a plate portion and a drive wheel support structure for supporting the drive wheel of a respective one of the track assemblies 16₁, 16₂. The middle plates 206₂, 206₅ and the frontal plates 206₃, 206₆ are connected to a respective one of the rails 80₁, 80₂ (e.g., via welding) at the top surface 93 of each rail 80_i.

25 The middle plates 206₂, 206₅ are centered in relation to the support member 104₁ in the longitudinal direction of the vehicle 10. Each of the middle plates 206₂, 206₅ is generally rectangular and has a length L_M that is significant in relation to the length L_{LF} of the lower frame structure 62. For instance, a ratio L_M/L_{LF} of the length L_M of each middle plate 206₂, 206₅ over the length L_{LF} of the lower frame structure 62 may be at least 0.1, in some cases at least 0.3, in some cases at least 0.5, and in some cases even more. The middle plates 206₂, 206₅ further comprise openings 215 for engaging a fastener.

Unlike the frontal plates 106₃, 106₆ described above, the frontal plates 206₃, 206₆, which are generally rectangular, are not connected to the upper frame structure 60. That is, the frontal plates 206₃, 206₆ are solely connected to the lower frame structure 62. Moreover, the frontal plates also comprise openings 217 for engaging a fastener.

The middle plates 206₂, 206₅ and the frontal plates 206₃, 206₆ have a relatively low height. That is because, unlike the middle plates 106₂, 106₅ and the frontal plates 106₃, 106₆ described above, the middle plates 206₂, 206₅ and the frontal plates 206₃, 206₆ are not connected directly to the torque box 102. Rather, the middle plates 206₂, 206₅ and the frontal plates 206₃, 206₆ are connected via their respective openings 215, 217 (e.g., via a bolted connection) to "fishplates" which can in turn be

connected directly to the torque box 102 or to a frame similar to a standard truck frame to which the torque box 102 may be connected to (e.g., via rivets, bolts, and/or welding). A ratio of a height of each of the middle and frontal plates 206₂, 206₃, 206₅, 206₆ over a height of each of the rails 80₁, 80₂ may be no more than 0.4, in some cases no more than 0.2, in some cases no more than 0.1, and in some cases even less.

In another variant, with additional reference to Figure 44, the chassis 12 may be configured such that the torque box 102 is disposed substantially on the rails 80₁, 80₂ of the lower frame structure 62. This may allow wider torque boxes to be secured to the lower frame structure 62 because they do not need to fit into a channel.

To that end, the lower frame structure 62 comprises lateral plates 306₁-306₈, including a pair of rear plates 306₁, 306₅, a pair of first middle plates 306₂, 306₆, a pair of second middle plates 306₃, 306₇, and a pair of frontal plates 306₄, 306₈. The rear plates 306₁, 306₅ are substantially similar to the rear plates 106₁, 106₄ described above in that they comprise a plate portion and a drive wheel support structure for supporting the drive wheel of a respective one of the track assemblies 16₁, 16₂. The first middle plates 306₂, 306₆, the second middle plates 306₃, 306₇ and the frontal plates 306₄, 306₈ are connected to a respective one of the rails 80₁, 80₂ (e.g., via welding) at the top surface 93 of each rail 80_i.

The second middle plates 306₃, 306₇ are centered in relation to and supported by the support member 104₁ in the longitudinal direction of the vehicle 10. With additional reference to Figures 45 and 46, the second middle plate 306₃ (to which the second middle plate 306₇ is identical) comprises an inner surface 308 and an outer surface 309 opposite the inner surface 308. The second middle plate 306₃ comprises first and second portions 310, 312 for connecting to a respective one of the rails 80₁, 80₂. More specifically, the first portion 310 is fastened to an inboard one of the lateral surfaces 97₁, 97₂ of the rail 80_i while the second portion 312 is fastened to the top surface 93 of the rail 80_i such that the inner surface 308 of the second middle plate 306₃ faces the inboard lateral surface 97_i and the top surface 93 of the rail 80_i. In this example of implementation, the first and second portions 310, 312 are connected to the rail 80_i via welding. However, the first and second portions 310, 312 may be connected to the rail 80_i in any other suitable way (e.g., via bolts or rivets). The second middle plate 306₃ further comprises a connecting portion 314 comprising at least one opening 316 for affixing the torque box 102, and support flanges 318, 320, 322 projecting from the connecting portion 314 to support the connecting portion 314. The support flanges 318, 320, 322 are configured to provide support to the second middle plate 306₃. For instance, the support flanges 318, 320 are affixed to an outboard one of the lateral surfaces 97₁, 97₂ of the rail 80_i (or to a reinforcing plate that is affixed to the outboard lateral surface 97_i of the rail 80_i) while the support flange 322 is affixed to and supported by the first support member 104₁. The support flanges 318, 320, 322 can be affixed to the rail 80_i or the first support member 104₁ via welding or in any other suitable way (e.g., bolts or rivets).

The first middle plates 306₂, 306₆ are configured similarly to the second middle plates 306₃, 306₇ with the exception that they do not comprise a portion that is affixed to an inboard one of the lateral surfaces 97₁, 97₂ of the rail 80_i and they do not comprise a support flange that is affixed to any of the support members

104₁-104₃. Rather, the first middle plates 306₂, 306₆ comprise a support flange affixed solely to the outboard one of the lateral surfaces 97₁, 97₂ of the rail 80_i. Each of the first middle plates 306₂, 306₆ comprises at least one opening 324 for affixing the torque box 102. In some embodiments, the first and second middle plates 306₂, 306₃, 306₆, 306₇ and the frontal plates 306₄, 306₈ may have a thickness
 5 between 0,25 inch and 1 inch.

With additional reference to Figures 47 and 48, the frontal plate 306₄ (to which the frontal plate 306₈ is identical) comprises an inner surface 340 and an outer surface 342 opposite the inner surface 340. The frontal plate 306₄ further comprises a first portion 344 for affixing the frontal plate 306₄ to the rail 80_i, and
 10 a connecting portion 346 extending beyond the widthwise extent of the rail 80_i and comprising at least one opening 348 for affixing the torque box 102 to the frontal plate 306₄. A lateral edge 349 of the frontal plate 306₄ is affixed (e.g., via welding) to the transversal connection plate 174. The frontal plate 306₄ also comprises a support flange 350 projecting from the connecting portion 346 to support the connecting
 15 portion 346. The support flange 350 is configured to provide support to the frontal plate 306₄. For instance, the support flange 350 is affixed to an outboard one of the lateral surfaces 97₁, 97₂ of the rail 80_i (or to a reinforcing plate that is affixed to the outboard lateral surface 97_i of the rail 80_i) The support flange 350 can be affixed to the rail 80_i via welding or in any other suitable way (e.g., bolts or rivets).

As shown in Figures 49 and 50, in this variant, the torque box 102 is mounted substantially on the rails
 20 80₁, 80₂. That is, when the torque box 102 is mounted to the lower frame structure 62, the bottom surface 166 of the torque box 102 is separated from the top surface 93 of the rails 80₁, 80₂ by no vertical gap (or by a vertical gap 375 that is of negligible size). More specifically, the bottom surface 166 of the torque box 102 is in contact with the outer surface of each of the first and second middle plates 306₂, 306₃, 306₆, 306₇ and the frontal plates 306₄, 306₈ such that the bottom surface 166 of the torque box 102 is separated
 25 from the top surface 93 of each rail 80_i by a spacing approximately equal to a thickness of each of the first and second middle plates 306₂, 306₃, 306₆, 306₇ and the frontal plates 306₄, 306₈. As such, the spacing between the torque box 102 and the rails 80₁, 80₂ may be no more than 4 inches, in some cases no more than 2 inches, in some cases no more than 0,25 inch, and in some cases even less. This may allow the work equipment 41 to be mounted on the chassis 12 at an even further lowered position to allow a greater
 30 clearance between the work equipment 41 and the vehicle height limit of the public road infrastructure and/or to allow taller work equipment 41 to be installed without surpassing the vehicle height limit of the public road infrastructure. The torque box 102 is secured to the first and second middle plates 306₂, 306₃, 306₆, 306₇ and to the frontal plates 306₄, 306₈ by inserting a fastener 380 (e.g., a bolt) in their respective openings 316, 324, 348 and securing the fastener 380 with a fastener-receiving element 382 (e.g., a nut
 35 or an internal thread of the opening 316, 324, 348).

Moreover, as shown in Figure 44, the lower frame structure 62 of the chassis 12 may be reinforced further via reinforcement plates. More specifically, the lower frame structure 62 may comprise reinforcement plates 360, 362 affixed to outboard ones of the lateral surfaces 97₁, 97₂ of the rails 80₁,
 40 80₂. Each of the reinforcement plates 360, 362 extends in the longitudinal direction of the vehicle 10 and spans at least a majority of a length of the second portion P₂ of the length L_{LF} of the lower frame structure

62. In some cases, the reinforcement plates 360, 362 may form of a single continuous reinforcement plate.

Furthermore, the support members 104₁-104₃ of the chassis 12 may be reinforced via reinforcement collars 364 configured for supporting a respective support member 104_i. Each reinforcement collar 364 comprises an annular body sized as to receive therein a respective support member 104_i and is affixed to an outboard one of the lateral surfaces 97₁, 97₂ of the rails 80₁, 80₂ (e.g., via welding). In this example, the support members 104₂, 104₃ are reinforced via a respective reinforcement collar 364. Moreover, in this example, the transversal reinforcement element 202 may also be reinforced via a reinforcement collar 364 that supports the transversal reinforcement element 202.

b) Power plant

The power plant 14 generates power to move the tracked utility vehicle 10. To that end, the power plant 14 comprises a prime mover 17. For example, the prime mover 17 may comprise an internal combustion engine and/or one or more other types of motors (e.g., electric motors, etc.) for generating motive power to move the vehicle 10. In this embodiment, the power plant 14 is affixed to the first and second crossmembers 66₁, 66₂ of the upper frame structure 60.

The power plant 14 is in a driving relationship with each of the track assemblies 16₁, 16₂. That is, power derived from the power plant 14 is transmitted to each of the track assemblies 16₁, 16₂ in order to drive the track assemblies 16₁, 16₂. In this embodiment, with additional reference to Figures 24 and 25, power from the power plant 14 is transmitted to the track assemblies 16₁, 16₂ via a hydraulic drive system 21.

For instance, in this example, the hydraulic drive system 21 comprises, for each of the track assemblies 16₁, 16₂, a hydraulic pump 26 driven by the prime mover 17 and connected to a hydraulic motor (not shown) which drives that track assembly. Power from the power plant 14 may be transmitted to the track assemblies 16₁, 16₂ in various other ways in other embodiments.

In this embodiment, the power plant 14 includes a housing 46 which houses the prime mover 17 and other components of the power plant 14. More particularly, in this embodiment, the housing 46 houses: hydraulic components including each hydraulic pump 26 of the hydraulic drive system 21 and a hydraulic fluid reservoir; a cooling system for cooling the prime mover 17 and hydraulic fluid of the hydraulic drive system 21; batteries; components of an exhaust system; pipes; and cables. Other components of the power plant 14 may be housed in the housing 46 in other embodiments.

The housing 46 and the components of the power plant 14 that it houses are mounted on top of the upper frame structure 60. More particularly, in this embodiment, the housing 46 comprises a back housing portion 47₁ which houses a first portion of the power plant 14 and is located above the upper frame structure 60 behind the operator cabin 20 and a side housing portion 47₂ which houses a second portion of the power plant 14 and is located above the upper frame structure 60 on a right side of the operator cabin 20. Thus, in this embodiment, the housing 46 has a generally L-shaped configuration that extends

behind and next to the operator cabin 20, with the back housing portion 47₁ being elongated in the widthwise direction of the vehicle 10 and the side housing portion 47₂ being elongated in the longitudinal direction of the vehicle 10.

- 5 Mounting of the housing 46 and the components of the power plant 14 that it houses above the upper frame structure 60 may facilitate installation and servicing of the power plant 14. For example, maintenance or other servicing activities may be performed by accessing components of the power plant 14 without being obstructed by the work equipment 41.
- 10 Also, components of the power plant 14, including the prime mover 17, the hydraulic pumps of the hydraulic drive system 21, and the housing 46, may be secured to one another to constitute a “power plant module” that can be installed on and removable from the chassis 12 together as a unit. This may allow the tracked utility vehicle 10 to be easily equipped with a particular one of a plurality of different power plant modules during manufacturing of the vehicle 10 depending on an application or environment in
- 15 which the vehicle 10 will be used. For example, in some embodiments, the plurality of different power plant modules may comprise different types of prime movers. For instance, in some cases, the different types of prime movers may be different types of internal combustion engines, such as different types of engines that conform to requirements of different engine tiers (e.g., an engine conforming to requirements of a T3 engine tier and an engine conforming to requirements of a T4 engine tier). In such examples of
- 20 implementation, a controller controlling the prime mover 17 (e.g., an engine control unit (ECU)) may comprise software that can control the different types of engines and receives an input indicating a particular type of engine to which the prime mover 17 corresponds to control it accordingly.

Furthermore, mounting of the housing 46 and the components of the power plant 14 that it houses above

25 the upper frame structure 60 may allow the height H_v of the tracked utility vehicle 10 to be kept small. This may be beneficial in various cases.

For example, in this embodiment, the operator cabin 20 can have one or more seats to accommodate a number of individuals (e.g., one, two, etc.) as further discussed later on, and the tracked utility vehicle 10

30 carrying the work equipment 41 can travel on a public road infrastructure. The vehicle 10 may travel on the public road infrastructure by self-propulsion or by being transported on another vehicle (e.g., on a flatbed truck). The vehicle 10 may therefore respect a vehicle height limit (i.e., a maximum vehicle height allowable) for travel on the public road infrastructure. The vehicle height limit is normally set by a government responsible for the public road infrastructure. For example, in some cases, the vehicle height

35 limit for travel on the public road infrastructure may be between 13.5 feet (4.1 m) and 14 feet (4.3 m). The vehicle height limit for travel on the public road infrastructure may have any other suitable value in other cases.

More particularly, in this embodiment, when the work equipment 41 is in the retracted nonworking state

40 (i.e., a state in which it is retracted onto the vehicle 10 and not performing any work operation, as opposed to an extended working state in which it is extended outwardly from the vehicle 10 to perform a work operation), the work equipment 41 is arranged such that it extends frontward in the longitudinal

direction of the vehicle 10 beyond a rear side 114 of the operator cabin 20. In this example of implementation, the work equipment 41 extends frontward in the longitudinal direction of the vehicle 10 beyond a front side 112 of the operator cabin 20, next to a right side 116₂ of the operator cabin 20, above the side housing portion 47₂. Mounting part of the power plant 14, including the prime mover 17, on top of the upper frame structure 60 and behind the operator cabin 20 (e.g., as opposed to within an internal space or "tub" defined by the chassis 12) allows the operator cabin 20 to be low enough for installing the work equipment 41 in this manner. For example, in some embodiments, the height H_v of the vehicle 10 to the roof 118 of the operator cabin 20 may be no more than 2.8 m, in some cases no more than 2.7 m, and in some cases no more than 2.6 m. For instance, in this embodiment, the height H_v of the vehicle 10 may be about 2.5 m.

As another example, the tracked utility vehicle 10, without the work equipment 41 installed thereon, may fit in a closed shipping container for transport (e.g., overseas). For instance, in some examples, a maximum height for a shipping container may be no more than 3 m, in some cases no more than 2.8 m, and in some cases no more than 2.6 m, and the vehicle 10 may fit in that shipping container.

As yet another example, keeping the height H_v of the tracked utility vehicle 10 small may permit a vertical distance between a top of the operator cabin 20 and the lower frame structure 62 to be identical or similar to a corresponding distance in trucks to allow work equipment such as the work equipment 41 possibly designed primarily for mounting on trucks to be easily mountable on the vehicle 10.

In addition to generating motive power to propel the tracked utility vehicle 10, in some embodiments, the power plant 14 may power the work equipment 41 carried by the vehicle 10. For instance, in some cases, the prime mover 17 may be used to supply power to the work equipment 41. In other cases, the power plant 14 may comprise an additional prime mover to supply power to the work equipment 41.

c) Track assemblies

The track assemblies 16₁, 16₂ are used to propel the tracked utility vehicle 10 on the ground. The track assembly 16₁ is on a first lateral side of the vehicle 10, while the track assembly 16₂ is on a second lateral side of the vehicle 10. The track assemblies 16₁, 16₂ are mounted to the lower frame structure 62. Each of the track assemblies 16₁, 16₂ supports a portion of a weight of the vehicle 10 in use. In this example, the track assemblies 16₁, 16₂ are similarly configured and are disposed symmetrically relative to the lower frame structure 62 of the chassis 12 and thus the portion of the weight of the vehicle 10 supported by each of the track assemblies 16₁, 16₂ is about half of the weight of the vehicle 10. In other examples, the portion of the weight of the vehicle 10 supported by each of the track assemblies 16₁, 16₂ may be other than one-half of the weight of the vehicle 10.

With additional reference to Figure 26, in this embodiment, each track assembly 16_i comprises a plurality of wheels, which includes a drive wheel 24, an idler wheel 23 (alternatively referred to as an end wheel), and a plurality of support wheels 28₁-28₄, and an endless track 22 disposed around the wheels 24, 23, 28₁-28₄. The track assembly 16_i has a length L_{ta}, a width W_{ta}, and a height H_{ta}. A longitudinal direction of

the track assembly 16_i is generally parallel to the longitudinal direction of the tracked utility vehicle 10. The track assembly 16_i also has transversal directions, including a widthwise direction which is generally parallel to the widthwise direction of the tracked vehicle 10, and a height direction which is generally parallel to the height direction of the vehicle 10.

5

The endless track 22 engages the ground to provide traction. The endless track 22 is disposed around the wheels 24, 23, 28₁-28₄ and includes a top run 40 and a bottom run 42. The top run 40 and the bottom run 42 of the endless track 22 are generally parallel to one another and extend along the longitudinal direction of the tracked utility vehicle 10. The top run 40 of the endless track 22 is generally horizontal and has a length that is generally defined by the distance between the drive wheel 24 and the idler wheel 23. The bottom run 42 of the endless track 22 is that portion of the endless track 22 which is beneath the support wheels 28₁-28₄ and which engages the ground. The bottom run 42 of the endless track 22 has a length that is generally defined by the distance between a frontmost one of the support wheel 28₁-28₄, in this case, the support wheel 28₁, and a rearmost one of the support wheel 28₁-28₄, in this case, the support wheel 28₄.

15

The drive wheel 24 is in a driven relationship with the power plant 14 to impart movement of the endless track 22 in order to propel the vehicle 10 on the ground. The drive wheel 24 is rotatable about an axis of rotation 192 which is transverse to the longitudinal direction of the vehicle 10 by power derived from the power plant 14 to impart movement of the endless track 22. More specifically, the drive wheel 24 is mounted to the drive wheel support structure 117 via a planetary gearbox (not shown). Thus in this embodiment, the drive wheel 24 is located in a rear region of the chassis 12 and therefore a powertrain of the tracked utility vehicle 10 is configured to transmit the motive power of the prime mover 17 to the rear of the vehicle 10. To that end, in this embodiment, the powertrain of the tracked utility vehicle 10 comprises a hydrostatic transmission (not shown) which connects the hydraulic drive system 21 at the front of the vehicle 10 to the drive wheel 24 at the rear of the vehicle 10. In this embodiment, the drive wheel 24 comprises a sprocket that engages the endless track 22. The drive wheel 24 may be configured in various other ways in other embodiments.

20

25

30

35

As shown in Figure 26, the top surface 93 of each rail 80_i of the lower frame structure 62 may be positioned slightly higher than the axis of rotation 192 of the drive wheel 24 of respective ones of the track assemblies 16₁, 16₂. For example, a distance Y₁ measured from the top surface 93 of each rail 80_i to the ground may be greater than a distance Y₂ measured from the axis of rotation 192 of the drive wheel 24 to the ground. For instance, in some cases, the top surface 93 of each rail 80_i may be further from the ground than the axis of rotation 192 of the drive wheel 24 by (i.e., Y₁-Y₂ may be) no more than 320 mm (about 12.6 inches), in some cases no more than 150 mm (about 5.9 inches), in some cases no more than 50 mm (about 2 inches) and in some cases even less than 50 mm (e.g., 25 mm (about 1 inch)).

40

The idler wheel 23 does not convert power derived from the power plant 14 to motive force for movement of the endless track 22, but rather guides the endless track 22 and maintains it under tension as it is driven by the drive wheel 24. The idler wheel 23 is rotatable about an axis of rotation which is transverse to the longitudinal direction of the tracked utility vehicle 10. In this embodiment, the idler wheel 23, which

is located in a rear region of the chassis 12, and more specifically in a rear region of the lower frame structure 62 of the chassis 12, may comprise a sprocket or any other type of wheel that engages the endless track 22.

- 5 The support wheels 28₁-28₄ are arranged in an in-line configuration extending along the longitudinal direction of tracked utility vehicle 10 and roll on the bottom run 42 of the endless track 22 as the vehicle 10 moves on the ground. The support wheels 28₁-28₄ do not convert power derived from the power plant 14 to motive force for movement of the endless track 22, but rather support and distribute onto the ground via the endless track 22 the portion of the weight of the vehicle 10 that is supported by the track assembly 16_i. The support wheels 28₁-28₄ may also maintain the shape and position of the endless track 22, as well as keep the track 22 generally aligned with the general direction of vehicular movement.

Each of the support wheels 28₁-28₄ occupies most of the height H_{ta} of the track assembly 16_i. That is, each of the support wheels 28₁-28₄ has a diameter D_{sw} corresponding to at least half, in some cases at least two-thirds, and in some cases at least three-quarters of the height H_{ta} of the track assembly 16_i. In this case, the diameter D_{sw} of each of the support wheels 28₁-28₄ corresponds to about 65% of the height H_{ta} of the track assembly 16_i. In some embodiments, the diameter D_{sw} of each of the support wheels 28₁-28₄ may be such that the top run 40 of the endless track 22 can contact the support wheels 28₁-28₄ in use. In other embodiments, the support wheels 28₁-28₄ may be made smaller such that there is no contact between the top run 40 of the endless track 22 and the support wheels 28₁-28₄ in use.

The support wheels 28₁-28₄ are carried by a plurality of wheel-carrying assemblies 50₁, 50₂ of the track assembly 16_i. Each of the wheel-carrying assemblies 50₁, 50₂ carries at least two of the support wheels 28₁-28₄ and, since it is an assembly carrying wheels, will be referred to as a "bogie". More particularly, in this embodiment, the bogie 50₁ carries the support wheels 28₁, 28₂ and the bogie 50₂ carries the support wheels 28₃, 28₄.

With additional reference to Figures 26, 41 and 42, the bogie 50₁ comprises a link 70 interconnecting the support wheels 28₁, 28₂ and pivotable relative to the lower frame structure 62 about a pivot 71 which defines a pivot axis. The link 70 is a connecting structure that may have any suitable form (e.g., a single member or a plurality of members connected to one another by one or more fasteners, welding, etc.). More specifically, the link 70 comprises an axle for mounting within an aperture of its corresponding support member 104_i. The axle of the link 70 may be secured to the support member 104_i in any suitable way (e.g., via fasteners). The support wheels 28₁, 28₂ are rotatably mounted to the link 70 via respective axles which define respective axes of rotation of the support wheels 28₁, 28₂. In this embodiment, the pivot axis of the link 70 lies closer to the axis of rotation of the support wheel 28₁ than that of the support wheel 28₂ and above the axes of rotation of the support wheels 28₁, 28₂. The pivot axis of the link 70 and the axes of rotation of the support wheels 28₁, 28₂ may be positioned differently in relation to one another in other embodiments (e.g., the pivot axis of the link 70 may lie equidistant between the axes of rotation of the support wheels 28₁, 28₂). The bogie 50₂ is configured similarly to the bogie 50₁ and will thus not be further discussed.

In this embodiment, each bogie 50_i and the drive wheel 24 are aligned with respective ones of the lateral plates 106₁-106₆ in the longitudinal direction of the vehicle 10. Thus, in this embodiment, a projection of the axis of rotation of each bogie 50_i intersects a projection onto the ground plane of at least one of the lateral plates 106₁-106₆. Also in this embodiment, a projection of the axis of rotation 192 of the drive wheel 24 onto a ground plane intersects a projection onto the ground plane of at least one of the lateral plates 106₁-106₆.

The endless track 22 engages the ground to provide traction to the tracked utility vehicle 10. More particularly, as the drive wheel 24 is rotated by power derived from the power plant 14, the drive wheel 24 imparts motion to the endless track 22 for traction of the vehicle 10 on the ground. The endless track 22 has an inner side 32 facing the wheels 24, 23, 28₁-28₄ and a ground-engaging outer side 33, opposite the inner side 32, for engaging the ground.

In this embodiment, as shown in Figures 27 and 28, the endless track 22 comprises an elastomeric body 37 underlying its inner side 32 and its ground-engaging outer side 33. The body 37 is elastomeric in that it comprises elastomeric material which allows the track 22 to elastically change in shape as it is in motion around the wheels 24, 23, 28₁-28₄. The elastomeric material of the body 37 can be any polymeric material with suitable elasticity. In this embodiment, the elastomeric material includes rubber. Various rubber compounds may be used and, in some cases, different rubber compounds may be present in different areas of the track 22. In other embodiments, the elastomeric material may include another elastomer in addition to or instead of rubber (e.g., polyurethane elastomer).

A plurality of cores 21₁-21_C are embedded in the elastomeric material of the body 37 of the endless track 22, spaced apart along the longitudinal direction of the track 22, and extending transversally to the longitudinal direction of the track 22 to impart transverse rigidity to the track 22. The cores 21₁-21_C are made of rigid material. For instance, in this embodiment, the cores 21₁-21_C are metallic (e.g., steel) cores. This type of track can thus sometimes be referred to as a "metal-embedded rubber track" (MERT).

The cores 21₁-21_C interact with the wheels 24, 23, 28₁-28₄ to impart and/or guide motion of the endless track 22. For example, in this embodiment, the track 22 has a plurality of drive openings 19₁-19_O for receiving teeth of the drive wheel 24 such that the drive wheel 24 can engage parts of the track 22 where are located individual ones of the cores 21₁-21_C in order to apply motive force to the track 22. The cores 21₁-21_C also guide motion of the track 22 as it is driven by the drive wheel 24. More particularly, each core 21_i comprises a pair of wings 29₁, 29₂ and a wheel guide 25 between the wings 29₁, 29₂. The wheel guide 25 comprises at least one, in this case, two guide projections 36₁, 36₂ projecting on the inner side 32 of the endless track 22. In this embodiment, when its teeth enter the drive openings 19₁-19_O of the track 22, the drive wheel 24 engages the wheel guide 25 of the core 21_i between the guide projections 36₁, 36₂ to drive the track 22, while the guide projections 36₁, 36₂ pass in a guiding space 38 defined by each of the support wheels 28₁-28₄ in order to guide the track 22 relative to the support wheels 28₁-28₄.

One or more reinforcements may be embedded in the elastomeric material of the body 37 of the endless track 22. For instance, a reinforcement may be a layer of reinforcing cables 43₁-43_R that are adjacent to

one another and that extend in the longitudinal direction of the track 22 to enhance strength in tension of the track 22 along its longitudinal direction. In some cases, a reinforcing cable 43_i may be a cord or wire rope including a plurality of strands or wires. In other cases, a reinforcing cable 43_i may be another type of cable and may be made of any material suitably flexible longitudinally (e.g., fibers or wires of metal, plastic or composite material). Various other types of reinforcements may be provided in other embodiments.

The ground-engaging outer side 33 of the endless track 22 comprises a tread pattern to enhance traction on the ground. The tread pattern comprises a plurality of traction projections 49₁-49_T, which can be referred to as "traction lugs", spaced apart along the longitudinal direction of the track 22 and engaging the ground to enhance traction. The ground-engaging outer side 33 of the track 22 also comprises a ground-engaging surface 190 in between the traction projections 49₁-49_T.

As shown in Figure 38, in this embodiment, the top surface 93 of each rail 80_i of the lower frame structure 62 is positioned closer to the ground than the ground-engaging surface 190 of the top run 40 of the track 22 of respective ones of the track assemblies 16₁, 16₂. For instance, a distance H₁ measured from the ground-engaging surface 190 of the top run 40 of the track 22 to the ground is greater than a distance H₂ measured from the top surface 93 of the rails 80₁, 80₂ to the ground. For example, in some cases, the top surface 93 of each rail 80_i is closer to the ground than the ground-engaging surface 190 of the top run 40 of each track 22 by (i.e., H₁-H₂ may be) at least 90 mm (about 3.5 inches), in some cases by at least 300 mm (about 11.8 inches), in some cases by at least 500 mm (about 19.7 inches), and in some cases by at least 640 mm (about 25.2 inches).

The distance H₂ itself (i.e., the distance H₂ measured from the top surface 93 of the rails 80₁, 80₂ to the ground) may in some embodiments be 16 inches, in other non-limiting embodiments 28 inches and in still other embodiments, 42 inches, or even more.

The inner side 32 of the endless track 22 comprises the guide projections 36₁, 36₂ of each of the cores 21₁-21_C. In addition, the inner side 32 of the track 22 comprises rolling surfaces 39₁, 39₂ on which the support wheels 28₁-28₄ roll to apply the track 22 onto the ground.

The endless track 22 may be configured in various other ways in other embodiments.

For example, in some embodiments, as shown in Figures 29 and 30, the endless track 22 may comprise a pair of belts 30₁, 30₂ spaced apart to accommodate the wheels 24, 23, 28₁-28₄ and a series of cross-links 31₁-31_N distributed longitudinally along the track 22 and extending transversally to interconnect the belts 30₁, 30₂.

Each belt 30_i is elastomeric in that it comprises rubber and/or other elastomeric material. The belt 30_i may comprise one or more reinforcements such as a layer of cables embedded in its rubber and/or other elastomeric material. In this case, the belt 30_i is made up of a series of belt sections connected to one another. In other cases, the belt 30_i may be a one-piece belt.

The cross-links 31_1 - 31_N interconnect the belts 30_1 , 30_2 and interact with the wheels 24, 23, 28_1 - 28_4 as the endless track 22 moves around these wheels. For example, in this embodiment, as the drive wheel 24 rotates, individual ones of the cross-links 31_1 - 31_N engage recesses between the teeth of the drive wheel 24, thereby causing the track 22 to be driven. Also, the cross-links 31_1 - 31_N help to guide motion of the track 22 by contacting the support wheels 28_1 - 28_4 . More particularly, each cross-link 31_i comprises a wheel guide 44 including a pair of guide projections 45_1 , 45_2 projecting on the inner side 32 of the endless track 22. In this embodiment, when its teeth enter gaps between the cross-links 31_1 - 31_N , the drive wheel 24 engages the wheel guide 44 of the cross-links 28_1 - 28_4 between the guide projections 45_1 , 45_2 to drive the track 22, while the support wheels 28_1 - 28_4 pass between the guide projections 45_1 , 45_2 in order to guide the track 22 relative to the support wheels 28_1 - 28_4 . In such embodiments, each of the support wheels 28_1 - 28_4 may be a unitary support wheel as shown in Figure 31.

Each cross-link 31_i comprises an elongated member 73 extending transversally to the longitudinal direction of the endless track 22 to interconnect the belts 30_1 , 30_2 . The elongated member 73 is made of rigid material, in this case metallic material (e.g., steel). The elongated member 73 is secured to the belts 30_1 , 30_2 by fasteners which extend through the elongated member 73, the belts 30_1 , 30_2 , and backing plates 75_1 , 75_2 disposed on the inner side 32 of the track 22. In this embodiment, the cross-link 31_i comprises a polymeric sole 77 mounted to the elongated member 73. The polymeric sole 77 can be used when the vehicle 10 is to travel on a hard surface (e.g., a paved surface) in order to minimize an impact of the cross-link 31_i on that surface. In other embodiments, the cross-link 31_i may not include any polymeric sole.

As another example, in some embodiments, the endless track 22 may comprise an endless elastomeric body underlying its inner side 32 and its ground-engaging outer side 33, similar to the elastomeric body 37 discussed above in respect of Figures 27 and 28, but without cores embedded in the elastomeric body (e.g., an "all-rubber" track).

The track assembly 16_i comprises a track tensioner 85 for maintaining tension of the endless track 22. In this embodiment, as shown in Figures 41 and 42, the track tensioner 85 is connected between the transversal reinforcement element 202 and the axle of the idler wheel 23 to urge the idler wheel 23 in a direction to maintain the tension of the endless track 22. Also, in this embodiment, the track tensioner 85 is a fluidic tensioning system, e.g., a hydraulic or pneumatic tensioning system, which comprises a piston-cylinder tensioning actuator 79 connected to a fluid reservoir. In this example of implementation, the tensioning actuator 79 is a hydraulic piston-cylinder actuator.

More particularly, in this embodiment, with additional reference to Figures 32 and 33, the tensioning actuator 79 is connected at one end to the transversal reinforcement element 202 and at another end to an idler wheel support arm 83 which is pivotable about a the support member 104_3 . The axle of the idler wheel 23 is fixed to the idler wheel support arm 83. The tensioning actuator 79 can apply the tension in the track 22 by extending or retracting to turn the idler wheel support arm 83 about the support member 104_3 and thus move the idler wheel 23 further or closer to the drive wheel 24.

In this embodiment, the track tensioner 85 becomes active when the tracked utility vehicle 10 is started. That is, the track tensioner 85 applies a force to generate the tension in the endless track 22 when the prime mover 17 of the vehicle 10 is started.

5

With additional reference to Figure 34, in this embodiment, the track tensioner 85 is hydraulically connected to the hydraulic drive system 21 of the vehicle 10 such that the tension in the endless track 22 is generated by the hydraulic fluid of the hydraulic drive system 21. The tensioning actuator 79 is in hydraulic communication with the hydraulic drive system 21 such that, when the prime mover 17 is started and starts to power the hydraulic drive system 21, the hydraulic fluid of the hydraulic drive system 21 acts on the tensioning actuator 79, which applies a force to generate the tension in the endless track 22.

10

More particularly, as shown in Figure 35, in this embodiment, the hydraulic drive system 21 comprises a charge pump 27 hydraulically connected to the tensioning actuator 79 via a track tensioner hydraulic circuit 13.

15

Although in this embodiment the track tensioner 85 is hydraulically connected to the hydraulic drive system 21 of the vehicle 10 via the charge pump 27 such that the tension in the endless track 22 is generated when the prime mover 17 is started and starts to power the hydraulic drive system 21, the track tensioner 85 may be connected in other ways such that it would become active when the vehicle 10 is started (e.g., there may be a dedicated pump for the track tensioner 85).

20

The track assembly 16_i may be configured in various other ways in other embodiments. For example, although in this embodiment it comprises four (4) support wheels 28₁-28₄, the track assembly 16_i may comprise more than four support wheels (e.g., five (5) support wheels) in other embodiments. As another example, while in this embodiment the drive wheel 24 is located in a front region of the lower frame structure 62 and the idler wheel 23 is located in a rear region of the lower frame structure 62, this may be reversed in other embodiments such that the drive wheel 24 is located in a rear region of the lower frame structure 62 and the idler wheel 23 of the track assembly 16_i is located in a front region of the lower frame structure 62. As yet another example, while in this embodiment the idler wheel 23 is not in a driven relationship with the power plant 14, in other embodiments, the idler wheel 23 may be replaced by another drive wheel that is in a driven relationship with the power plant 14.

30

35 d) Operator cabin

The operator cabin 20 is where an operator sits and controls the tracked utility vehicle 10. In this embodiment, the operator cabin 20 is affixed to the first and second crossmembers 66₁, 66₂ of the upper frame structure 60 and comprises a front side 112, a rear side 114, a pair of lateral sides 116₁, 116₂, a roof 118, and a floor 120. The lateral side 116₁ of the operator cabin 20 defines an access opening 122 that can be closed by a door 124 and that allows the operator to enter or exit the operator cabin 20. A plurality of windows 126₁-126_w are provided to allow the operator to see outside of the vehicle 10.

40

In this embodiment, with additional reference to Figure 39, the top surface 93 of each rail 80_i of the pair of parallel rails 80₁, 80₂ is positioned closer to the ground than the floor of the operator cabin 20. For instance, a distance Z₁ measured from the floor 120 of the operator cabin 20 to the ground may be greater than a distance Z₂ measured from the top surface 93 of each rail 80_i to the ground. For example, the top surface 93 of each rail 80_i may be closer to the ground than the floor 120 of the operator cabin 20 by (i.e., Z₁-Z₂ may be) at least 300 mm (about 11.8 inches), in some cases by at least 450 mm (about 17.7 inches), in some cases by at least 550 mm (about 21.7 inches) and in some cases by even more than 550 mm (e.g., 600 mm (about 23.6 inches)).

As another example, in this embodiment, even when the torque box 102 is mounted to the lower frame structure 62, the top surface 164 of the torque box 102 is still closer to the ground than the floor of the operator cabin 20. For instance, the distance Z₁ measured from the floor 120 of the operator cabin 20 to the ground may be greater than a distance Z₃ measured from the top surface 164 of the torque box 102 to the ground. For example, the top surface 164 of the torque box 102 may be closer to the ground than the floor 120 of the operator cabin 20 by (i.e., Z₁-Z₃ may be) at least 200 mm (about 7.9 inches), in some cases by at least 350 mm (about 13.8 inches), in some cases by at least 500 mm (about 19.7 inches) and in some cases by even more than 500 mm (e.g., 550 mm (about 21.7 inches) or more).

With additional reference to Figure 36, the operator cabin 20 comprises a seating area 132 and a user interface 130.

The user interface 130 enables the operator to interact with the tracked utility vehicle 10. For example, the user interface 130 comprises controls allowing the operator to move the tracked utility vehicle 10 on the ground. In some cases, the user interface 130 may also include controls for controlling the work equipment 41 carried by the vehicle 10. The user interface 130 comprises an input portion to allow the operator to input commands for execution by the vehicle 10 and an output portion to convey information to the operator.

In this embodiment, the input portion of the user interface 130 comprises an accelerator 133, a steering device 134, a transmission state selector 135, a starter switch 137, and a control lever 138. More particularly:

- The accelerator 133 allows the operator to control a speed of the vehicle 10 on the ground. In this example, the accelerator 133 comprises a speed pedal operated by a foot of the operator. The accelerator 133 may be implemented in other ways in other examples (e.g., a hand-operated accelerator).

- The steering device 134 allows the operator to steer the vehicle 10 on the ground. In this example, the steering device 134 comprises a steering wheel that is rotatable relative to a steering column 144 about a steering axis. In addition to the steering wheel 134, in this example of implementation, the steering column 144 supports the transmission state selector 135, the starter switch

137, and the control lever 138. The steering device 134 may be implemented in other ways in other embodiments (e.g., a joystick).

- 5 - The transmission state selector 135 allows the operator to control a state of power transmission to the track assemblies 16₁, 16₂. For instance, in this example, the transmission state selector 135 comprises a proportional front-neutral-reverse selector to control whether power is transmitted to the track assemblies 16₁, 16₂ to move in a forward or reverse direction or not transmitted to the track assemblies 16₁, 16₂. The transmission state selector 135 may be implemented in other ways in other embodiments.
- 10 - The starter switch 137 allows the operator to start the prime mover 17 of the vehicle 10. For instance, in this example, the starter switch 137 comprises a key-receiving unit to receive a key to start the prime mover 17 of the vehicle 10. The starter switch 137 may be implemented in other ways in other embodiments (e.g., a start button, a code entry device, a biometric authentication device, etc.).
- 15 - The control lever 138 allows the operator to control various devices of the vehicle 10. For instance, in this example, the control lever 138 includes a wiper control which allows the operator to control a wiper 140 of the front window 126₁ of the operator cabin 20, a washer fluid control which allows the operator to control outflow of washer fluid from a washer fluid nozzle onto the front window 126₁, and a turning indicator control which allows the operator to control a turning indicator of the vehicle 10. The control lever 138 may include any other suitable control in other examples.
- 20

The input portion of the user interface 130 may comprise any other input device (e.g., a set of buttons, a joystick, a trackball, etc.) in other embodiments.

- 25 In this embodiment, the output portion of the user interface 130 comprises a display 140 to visually convey information to the operator. The display 140 may be any suitable type of electronic display (e.g., a liquid-crystal display (LCD), etc.). Various information can be conveyed to the operator on the display 140. For example, in some embodiments, the display 140 may implement an instrument panel that provides: a speedometer indicator which conveys information indicative of the speed at which the vehicle
- 30 10 is moving as measured by a speedometer of the vehicle 10; a tachometer indicator which conveys information indicative of the speed at which the prime mover 17 is running as measured by a tachometer of the vehicle 10; an odometer indicator which conveys information indicative of a distance traveled by the vehicle 10 as measured by an odometer of the vehicle 10; a fuel gauge indicator which conveys information indicative of a quantity of fuel remaining in the vehicle 10; and/or any other indicator
- 35 conveying information to the user. Each of the speedometer indicator, the tachometer indicator, the odometer indicator, and/or other indicators may comprise a digital numerical reading, a digital dial, a digital bar graph, a digital symbol, and/or any other element displayable on the display 140 to convey information to the operator.

- 40 The output portion of the user interface 130 may comprise any other output device (e.g., one or more mechanical dials (e.g., a speedometer dial, a fuel gauge dial, etc.) or other mechanical indicators (e.g., a

mechanical odometer); one or more light indicators (e.g., low fuel light indicator, etc.); a speaker; etc.) in other embodiments.

The user interface 130 is connected to other components of the tracked utility vehicle 10 to cause execution of commands provided by the operator and to present information to the operator. More particularly, in this embodiment, there are a plurality of connections 142₁-142_C between the user interface 130 and other components of the vehicle 10. These connections 142₁-142_C may comprise one or more mechanical links, wires, cables, wireless links, and/or other connecting elements depending on how the user interface 130 is connected to other components of the vehicle 10 (e.g., via mechanical control systems and/or via electromechanical systems (e.g., "drive-by-wire" systems)). For example, with additional reference to Figure 37, in this embodiment:

- The connection 142₁ is between the speed pedal 133 and the prime mover 17. For instance, in this embodiment, the connection 142₁ may comprise a wire connected to a pedal position sensor (e.g., comprising a potentiometer) for sensing a position of the speed pedal 133 and transmitting a signal indicative of this position to a powertrain controller 147 controlling the prime mover 17 (e.g., an engine control unit (ECU)). In other embodiments, the connection 142₁ may comprise a mechanical link between the speed pedal 133 and a throttle for the prime mover 17.

- The connection 142₂ is between the steering wheel 134 and a steering controller 143 which controls a steering direction of the vehicle 10 by controlling the hydraulic motors of the hydraulic drive system 21 to cause the endless track 22 of one of the track assemblies 16₁, 16₂ to move faster than the endless track 22 of the other one of the track assemblies 16₁, 16₂ when the vehicle 10 turns. For instance, in this embodiment, the connection 142₂ comprises a steering device angle sensor for sensing an angle in which the steering wheel 134 is positioned and transmitting a signal indicative of this angle to the steering controller 143.

- The connection 142₃ is between the proportional front-neutral-reverse selector 135 and the powertrain controller 147. For instance, in this embodiment, the connection 142₃ may comprise a wire transmitting a signal indicative of the state of the selector 135 to the powertrain controller 147.

- The connection 142₄ is between the starter switch 137 and the prime mover 17. For instance, in this embodiment, the connection 142₄ may comprise a wire between the starter switch 137 and the powertrain controller 147.

- The connections 142₅-142_C are between the control lever 138 and the wiper 140, the washer fluid nozzle, the turning indicator 141 and/or any other device of the vehicle 10 which can be controlled via inputs at the control lever 138. For instance, in this embodiment, the connections 142₆-142_N may comprise wires between the control lever 138 and an outside functionality controller 149 of the vehicle 10 which sends signals to these devices of the vehicle 10 to control these devices. In other embodiments, the connections 142₆-142_N may comprise wires directly connected to these devices.

Controllers of the tracked utility vehicle 10, such as the powertrain controller 147, the steering controller 143 and the outside functionality controller 149, with which the user interface 130 may interact may be implemented in various manners. A controller comprises suitable hardware and/or software (e.g., firmware) implementing: an interface for receiving and transmitting signals to other components of the vehicle 10 to which it is connected; a processing portion comprising one or more processors for performing processing operations, where a processor may be a general-purpose processor executing program code stored in the controller or a specific-purpose processor comprising one or more preprogrammed hardware or firmware elements (e.g., application-specific integrated circuits (ASICs), electrically erasable programmable read-only memories (EEPROMs), etc.); and a memory portion comprising one or more memories for storing program code executed by the processing portion and/or data used during operation of the processing portion, where a memory may be a semiconductor memory (e.g., read-only memory (ROM) and/or random-access memory (RAM)), a magnetic storage medium, an optical storage medium, and/or any other suitable type of memory. In some embodiments, two (2) or more (e.g., all) controllers of the vehicle 10 may be physically distinct from one another and may be connected to one another via a bus (e.g., a controller-area network (CAN) bus or other suitable bus). In other embodiments, two (2) or more (e.g., all) controllers of the vehicle 10 may be functional entities of a single physical control unit (e.g., a vehicle controller).

The seating area 132 comprises a seat 150 for the operator of the tracked utility vehicle 10. The seat 150, which will be referred to as an "operator seat", is positioned relative to the user interface 130 to allow the operator to easily interact with the user interface 130.

Although the operator cabin 20 is described and depicted as having a one-person cabin configuration, in some embodiments, the operator cabin 20 may have a two-person cabin configuration (i.e., a cabin configuration adapted to fit two persons). For example, in such embodiments, the operator cabin 20 may comprise a passenger seat positioned next to the operator seat 150 for sitting a passenger.

While in embodiments considered above the tracked vehicle 10 is a tracked carrier vehicle carrying work equipment, in other embodiments, certain features of the tracked vehicle 10 may be implemented in other types of industrial tracked vehicles, such as an agricultural vehicle (e.g., a tractor, a harvester, etc.) or a construction vehicle (e.g., a loader, a bulldozer, an excavator, etc.).

Any feature of any embodiment discussed herein may be combined with any feature of any other embodiment discussed herein in some examples of implementation.

Although various embodiments have been illustrated, this was for the purpose of describing, but not limiting, the invention. Various modifications will become apparent to those skilled in the art and are within the scope of this invention, which is defined by the following claims.

CLAIMS

1. A tracked vehicle comprising:

- a chassis comprising an upper frame structure connected to a lower frame structure, the lower frame structure spanning a longitudinal distance along a longitudinal direction of the tracked vehicle, wherein over a first portion of the longitudinal distance, the lower frame structure overlaps with the upper frame structure and wherein over a second portion of the longitudinal distance, the lower frame structure does not overlap with the upper frame structure;
- an operator cabin mounted to the upper frame structure of the chassis;
- a power plant mounted to the upper frame structure of the chassis and comprising a prime mover; and
- a plurality of track assemblies for traction of the tracked vehicle, a first one of the track assemblies being on a first lateral side of the tracked vehicle, a second one of the track assemblies being on a second lateral side of the tracked vehicle, each track assembly of the plurality of track assemblies being mounted to the lower frame structure of the chassis and comprising:

i) a plurality of wheels including:

- a drive wheel;
- an end wheel spaced apart from the drive wheel in the longitudinal direction of the tracked vehicle; and
- a plurality of support wheels arranged between the drive wheel and the end wheel;

and

- ii) an endless track disposed around the plurality of wheels for engaging a ground on which the tracked vehicle travels, the drive wheel being in driving engagement with the endless track to impart motion to the endless track.

2. The tracked vehicle claimed in claim 1, wherein the first portion of the longitudinal distance spanned by the lower frame structure is located further towards a front of the tracked vehicle than the second portion of the longitudinal distance spanned by the lower frame structure.

3. The tracked vehicle claimed in claim 1, wherein the operator cabin is mounted to the upper frame structure.

4. The tracked vehicle claimed in claim 1, wherein the operator cabin is mounted on a top surface of the upper frame structure.

5. The tracked vehicle claimed in claim 1, wherein the second portion of the longitudinal distance spanned by the lower frame structure is greater than the first portion of the longitudinal distance spanned by the lower frame structure.
- 5 6. The tracked vehicle claimed in claim 1, wherein the lower frame structure includes a pair of parallel rails extending along at least the second portion of the longitudinal distance spanned by the lower frame structure.
7. The tracked vehicle claimed in claim 6, wherein the pair of parallel rails also extends into the first
10 portion of the longitudinal distance spanned by the lower frame structure.
8. The tracked vehicle claimed in claim 6, wherein the pair of parallel rails also extends under the upper frame structure.
- 15 9. The tracked vehicle claimed in claim 6, wherein each rail of the pair of parallel rails has a top surface at a height off the ground of no more than 42 inches.
10. The tracked vehicle claimed in claim 1, wherein the second portion of the longitudinal distance spanned by the lower frame structure is greater than a longitudinal distance spanned by the upper
20 frame structure.
11. The tracked vehicle claimed in claim 6, wherein each rail of the pair of parallel rails has a top surface that is separated by at least 8 inches from a top surface of the upper frame structure.
- 25 12. The tracked vehicle claimed in claim 6, wherein the endless track comprises a top run extending between the drive wheel and the end wheel over the support wheels, each rail of the pair of parallel rails having a top surface that is closer to the ground than a ground-engaging surface of the top run of each endless track.
- 30 13. The tracked vehicle claimed in claim 6, wherein the drive wheel has an axis of rotation, and wherein each rail of the pair of parallel rails has a top surface that is no more than 320 mm further from the ground than the axis of rotation of the drive wheel.

14. The tracked vehicle claimed in claim 6, wherein the operator cabin has a floor, and wherein each rail of the pair of parallel rails has a top surface that is at least 300 mm closer to the ground than the floor of the operator cabin.
- 5 15. The tracked vehicle claimed in claim 1, wherein the upper frame structure includes a pair of parallel beams.
16. The tracked vehicle claimed in claim 15, wherein each beam of the pair of parallel beams is hollow and has a rectangular cross-section.
- 10 17. The tracked vehicle claimed in claim 15, wherein the upper frame structure further includes first and second crossmembers disposed transversally to the pair of parallel beams.
18. The tracked vehicle claimed in claim 17, wherein the first crossmember is longer than the second crossmember.
- 15 19. The tracked vehicle claimed in claim 18, wherein the operator cabin and the power plant are affixed to the first and second crossmembers of the upper frame structure.
- 20 20. The tracked vehicle claimed in claim 1, wherein connectedness of the upper and lower frame structures provides the chassis with a greater resistance to torsion along said first portion than along said second portion.
- 25 21. The tracked vehicle claimed in claim 1, wherein the upper frame structure is connected to the lower frame structure by a connection structure.
22. The tracked vehicle claimed in claim 8, wherein the rails are not hollow.
23. The tracked vehicle claimed in claim 1, further comprising a torque box mounted to the lower frame structure.
- 30 24. The tracked vehicle claimed in claim 23, wherein the torque box does not extend into the first portion of the longitudinal distance spanned by the lower frame structure.

25. The tracked vehicle claimed in claim 24, wherein the torque box has a ground-facing bottom surface and wherein each of the rails has a top surface that is separated from the bottom surface of the torque box by a vertical gap.
- 5 26. The tracked vehicle claimed in claim 23, wherein the operator cabin has a floor and wherein the torque box has a top surface that faces away from the ground and is substantially flat over a majority of the second portion of the longitudinal distance spanned by the lower frame structure, the top surface of the torque box being closer to the ground than the floor of the operator cabin.
- 10 27. The tracked vehicle claimed in claim 23, wherein the torque box is mounted to the lower frame structure via a plurality of plates.
28. The tracked vehicle claimed in claim 27, wherein the plurality of plates includes a pair of lateral plates separated in a direction transverse to the direction of forward motion of the vehicle, the pair of lateral plates defining a channel for laterally bounding the torque box.
- 15 29. The tracked vehicle claimed in claim 28, wherein the torque box is riveted to the lateral plates.
30. The tracked vehicle claimed in claim 28, wherein the torque box is welded to the lateral plates.
- 20 31. The tracked vehicle claimed in claim 28, wherein the torque box has a width in a direction transverse to the longitudinal direction of the vehicle, wherein each of the lateral plates has a substantially flat interior surface facing the torque box, wherein the interior surfaces of the pair of lateral plates are separated by a channel width, and wherein the channel width is at least as large as the width of the torque box.
- 25 32. The tracked vehicle claimed in claim 31, wherein the channel width is greater than the width of the torque box.
- 30 33. The tracked vehicle claimed in claim 32, further comprising at least one spacer between the torque box and at least one of the lateral plates.
34. The tracked vehicle claimed in claim 1, wherein the lower frame structure includes a pair of parallel rails.

35. The tracked vehicle claimed in claim 34, wherein the lower frame structure further includes a plurality of plates forming a channel for laterally bounding a torque box to be mounted above the rails.

5

36. The tracked vehicle claimed in claim 35, the plates including at least a first lateral plate and a second lateral plate.

37. The tracked vehicle claimed in claim 36, the first and second lateral plates being fishplates.

10

38. The tracked vehicle claimed in claim 36, the first and second lateral plates being detachably connected to respective ones of the rails.

15

39. The tracked vehicle claimed in claim 36, the first and second lateral plates being integrated with respective ones of the rails.

40. The tracked vehicle claimed in claim 36, the plates further including a first frontal plate and a second frontal plate, the first and second frontal plates being connected to the upper frame structure.

20

41. The tracked vehicle claimed in claim 27, wherein the lower frame structure includes a pair of parallel rails, wherein the plurality of plates are secured to the lower frame structure with a fastener that passes through the rails of the lower frame structure.

25

42. The tracked vehicle claimed in claim 27, each track assembly further comprising at least one wheel-carrying assembly that pivots about a pivot axis that is transverse to a direction of travel of the tracked vehicle, wherein a projection of said pivot axis onto a ground plane intersects a projection onto the ground plane of at least one of the plates.

30

43. The tracked vehicle claimed in claim 6, wherein the lower frame structure comprises support members extending transversely between the rails.

44. A tracked vehicle comprising:

- a) a chassis extending in a longitudinal direction of the tracked vehicle;

- b) an operator cabin mounted on top of the chassis;
- c) a power plant mounted to the chassis and comprising a prime mover; and
- d) a plurality of track assemblies for traction of the tracked vehicle, a first one of the track assemblies being on a first lateral side of the tracked vehicle, a second one of the track assemblies being on a second lateral side of the tracked vehicle, each track assembly of the plurality of track assemblies being mounted to the chassis and comprising:

- i) a plurality of wheels including:

- a drive wheel;
- an end wheel spaced apart from the drive wheel in the longitudinal direction of the tracked vehicle; and
- a plurality of support wheels arranged between the drive wheel and the end wheel;

and

- ii) an endless track disposed around the plurality of wheels for engaging a ground on which the tracked vehicle travels, the drive wheel being in driving engagement with the endless track to impart motion to the endless track;

wherein the chassis has a first portion directly under the operator cabin and a second portion behind the operator cabin in the longitudinal direction of the tracked vehicle, the first portion being structurally reinforced so as to provide a greater resistance to torsion than the second portion.

45. The tracked vehicle claimed in claim 44, wherein the chassis comprises an upper frame structure connected to a lower frame structure, the lower frame structure overlapping the upper frame structure over the first portion of the chassis, the lower frame structure not overlapping the frame structure over the second portion of the chassis.

46. The tracked vehicle claimed in claim 45, wherein the first portion of the chassis is located further towards a front of the tracked vehicle than the second portion.

47. The tracked vehicle claimed in claim 45, wherein the operator cabin is mounted to the upper frame structure.

48. The tracked vehicle claimed in claim 45, wherein the operator cabin is mounted on a top surface of the upper frame structure.

49. The tracked vehicle claimed in claim 45, wherein the second portion is longer than the first portion.

50. The tracked vehicle claimed in claim 45, wherein the lower frame structure includes a pair of parallel rails extending along at least the second portion of the chassis.
51. The tracked vehicle claimed in claim 50, wherein the pair of parallel rails also extends into the first portion of the chassis.
52. The tracked vehicle claimed in claim 50, wherein the pair of parallel rails also extends under the upper frame structure.
53. The tracked vehicle claimed in claim 50, wherein each rail of the pair of parallel rails has a top surface at a height off the ground of no more than 42 inches.
54. The tracked vehicle claimed in claim 44, wherein the chassis comprises an upper frame structure connected to a lower frame structure, and wherein the lower frame structure is longer than the upper frame structure, in a longitudinal direction of the tracked vehicle.
55. The tracked vehicle claimed in claim 50, wherein each rail of the pair of parallel rails has a top surface that is separated by at least 8 inches from a top surface of the upper frame structure.
56. The tracked vehicle claimed in claim 50, wherein the endless track comprises a top run extending between the drive wheel and the end wheel over the support wheels, each rail of the pair of parallel rails having a top surface that is closer to the ground than a ground-engaging surface of the top run of each endless track.
57. The tracked vehicle claimed in claim 50, wherein the drive wheel has an axis of rotation, and wherein each rail of the pair of parallel rails has a top surface that is no more than 320 mm further from the ground than the axis of rotation of the drive wheel.
58. The tracked vehicle claimed in claim 50, wherein the operator cabin has a floor, and wherein each rail of the pair of parallel rails has a top surface that is at least 300 mm closer to the ground than the floor of the operator cabin.
59. The tracked vehicle claimed in claim 45, wherein the upper frame structure includes a pair of parallel beams.

60. The tracked vehicle claimed in claim 59, wherein each beam of the pair of parallel beams is hollow and has a rectangular cross-section.
- 5 61. The tracked vehicle claimed in claim 59, wherein the upper frame structure further includes first and second crossmembers disposed transversally to the pair of parallel beams.
62. The tracked vehicle claimed in claim 61, wherein the first crossmember is longer than the second crossmember.
- 10 63. The tracked vehicle claimed in claim 62, wherein the operator cabin and the power plant are affixed to the first and second crossmembers of the upper frame structure.
- 15 64. The tracked vehicle claimed in claim 45, wherein the upper frame structure is connected to the lower frame structure by a connection structure.
65. The tracked vehicle claimed in claim 50, wherein the rails are not hollow.
- 20 66. The tracked vehicle claimed in claim 45, further comprising a torque box mounted to the lower frame structure.
67. The tracked vehicle claimed in claim 66, wherein the torque box does not extend into the first portion of the chassis.
- 25 68. The tracked vehicle claimed in claim 67, wherein the torque box has a ground-facing bottom surface and wherein each of the rails has a top surface that is separated from the bottom surface of the torque box by a vertical gap.
- 30 69. The tracked vehicle claimed in claim 66, wherein the operator cabin has a floor and wherein the torque box has a top surface that faces away from the ground and is substantially flat over a majority of the second portion of the longitudinal distance spanned by the lower frame structure, the top surface of the torque box being closer to the ground than the floor of the operator cabin.

70. The tracked vehicle claimed in claim 66, wherein the torque box is mounted to the lower frame structure via a plurality of plates.

71. The tracked vehicle claimed in claim 70, wherein the plurality of plates includes a pair of lateral plates separated in a direction transverse to the longitudinal direction of the vehicle, the pair of lateral plates defining a channel for laterally bounding the torque box.

72. The tracked vehicle claimed in claim 71, wherein the torque box is riveted to the lateral plates.

73. The tracked vehicle claimed in claim 71, wherein the torque box is welded to the lateral plates.

74. The tracked vehicle claimed in claim 71, wherein the torque box has a width in the direction transverse to the longitudinal direction of the vehicle, wherein each of the lateral plates has a substantially flat interior surface facing the torque box, wherein the interior surfaces of the pair of lateral plates are separated by a channel width, and wherein the channel width is at least as large as the width of the torque box.

75. The tracked vehicle claimed in claim 74, wherein the channel width is greater than the width of the torque box.

76. The tracked vehicle claimed in claim 75, further comprising at least one spacer between the torque box and at least one of the lateral plates.

77. The tracked vehicle claimed in claim 45, wherein the lower frame structure includes a pair of parallel rails.

78. The tracked vehicle claimed in claim 77, wherein the lower frame structure further includes a plurality of plates forming a channel for laterally bounding a torque box to be mounted above the rails.

79. The tracked vehicle claimed in claim 78, the plates including at least a first lateral plate and a second lateral plate.

80. The tracked vehicle claimed in claim 79, the first and second lateral plates being fishplates.

81. The tracked vehicle claimed in claim 79, the first and second lateral plates being detachably connected to respective ones of the rails.
- 5 82. The tracked vehicle claimed in claim 79, the first and second lateral plates being integrated with respective ones of the rails.
83. The tracked vehicle claimed in claim 79, the plates further including a first frontal plate and a second frontal plate, the first and second frontal plates being connected to the upper frame structure.
- 10
84. The tracked vehicle claimed in claim 70, wherein the lower frame structure includes a pair of parallel rails, wherein the plurality of plates are secured to the lower frame structure with a fastener that passes through the rails of the lower frame structure.
- 15
85. The tracked vehicle claimed in claim 84, each track assembly further comprising at least one wheel-carrying assembly that pivots about a pivot axis that is transverse to a direction of travel of the tracked vehicle, wherein a projection of said pivot axis onto a ground plane intersects a projection onto the ground plane of at least one of the plates.
- 20
86. The tracked vehicle claimed in claim 84, wherein the lower frame structure comprises support members extending transversely between the rails.
87. The tracked vehicle claimed in claim 66, further comprising a plurality of stabilizer legs and a stabilizer leg support assembly configured to support the stabilizer legs to support the vehicle on the ground, the stabilizer leg support assembly being positioned frontwardly of the operator cabin.
- 25
88. The tracked vehicle claimed in claim 87, wherein the stabilizer leg support assembly is a first stabilizer leg support assembly, the torque box comprising a second stabilizer leg support assembly at a rear portion of the torque box, the first stabilizer leg support assembly being spaced apart from the second stabilizer leg support assembly by the operator cabin.
- 30
89. The tracked vehicle claimed in claim 88, wherein the first portion of the chassis under the operator cabin is configured to transmit applied forces to the first stabilizer leg support assembly.
- 35

90. The tracked vehicle claimed in claim 88, wherein when the first and second stabilizer leg support assemblies are separated from the track assemblies in the longitudinal direction of the vehicle.

91. A tracked vehicle comprising:

- 5 a) a chassis with a lowered portion in which a torque box is received;
 - b) an operator cabin mounted to the chassis;
 - c) a power plant mounted to the chassis and comprising a prime mover; and
 - d) a plurality of track assemblies for traction of the tracked vehicle, a first one of the track
10 assemblies being on a first lateral side of the tracked vehicle, a second one of the track
assemblies being on a second lateral side of the tracked vehicle, each track assembly of
the plurality of track assemblies being mounted to the chassis and comprising:
 - i) a plurality of wheels including:
 - a drive wheel;
 - an end wheel spaced apart from the drive wheel in a longitudinal
15 direction of the tracked vehicle; and
 - a plurality of support wheels arranged between the drive wheel
and the end wheel;
- and
- ii) an endless track disposed around the plurality of wheels for engaging a ground
20 on which the tracked vehicle travels, the drive wheel being in driving engagement
with the endless track to impart motion to the endless track.

92. The tracked vehicle claimed in claim 91, wherein the chassis comprises an upper frame structure
25 connected to a lower frame structure, the lower frame structure spanning a longitudinal distance
along the longitudinal direction of the tracked vehicle, wherein over a first portion of the longitudinal
distance, the lower frame structure overlaps with the upper frame structure and wherein over a
second portion of the longitudinal distance, the lower frame structure does not overlap with the
upper frame structure.

30 93. The tracked vehicle claimed in claim 92, wherein the first portion of the longitudinal distance
spanned by the lower frame structure is located further towards a front of the tracked vehicle than
the second portion of the longitudinal distance spanned by the lower frame structure.

35 94. The tracked vehicle claimed in claim 92, wherein the operator cabin is mounted to the upper frame
structure.

95. The tracked vehicle claimed in claim 92, wherein the operator cabin is mounted on a top surface of the upper frame structure.
- 5 96. The tracked vehicle claimed in claim 92, wherein the second portion of the longitudinal distance spanned by the lower frame structure is greater than the first portion of the longitudinal distance spanned by the lower frame structure.
- 10 97. The tracked vehicle claimed in claim 92, wherein the lower frame structure includes a pair of parallel rails extending along at least the second portion of the longitudinal distance spanned by the lower frame structure.
98. The tracked vehicle claimed in claim 97, wherein the pair of parallel rails also extends into the first portion of the longitudinal distance spanned by the lower frame structure.
- 15 99. The tracked vehicle claimed in claim 97, wherein the pair of parallel rails also extends under the upper frame structure.
100. The tracked vehicle claimed in claim 97, wherein each rail of the pair of parallel rails has a top surface at a height off the ground of no more than 42 inches.
- 20 101. The tracked vehicle claimed in claim 1, wherein the second portion of the longitudinal distance spanned by the lower frame structure is greater than a longitudinal distance spanned by the upper frame structure.
- 25 102. The tracked vehicle claimed in claim 97, wherein each rail of the pair of parallel rails has a top surface that is separated by at least 8 inches from a top surface of the upper frame structure.
- 30 103. The tracked vehicle claimed in claim 97, wherein the endless track comprises a top run extending between the drive wheel and the end wheel over the support wheels, each rail of the pair of parallel rails having a top surface that is closer to the ground than a ground-engaging surface of the top run of each endless track.
- 35 104. The tracked vehicle claimed in claim 97, wherein the drive wheel has an axis of rotation, and wherein each rail of the pair of parallel rails has a top surface that is no more than 320 mm further from the ground than the axis of rotation of the drive wheel.

105. The tracked vehicle claimed in claim 97, wherein the operator cabin has a floor, and wherein each rail of the pair of parallel rails has a top surface that is at least 300 mm closer to the ground than the floor of the operator cabin.

5

106. The tracked vehicle claimed in claim 92, wherein the upper frame structure includes a pair of parallel beams.

10

107. The tracked vehicle claimed in claim 106, wherein each beam of the pair of parallel beams is hollow and has a rectangular cross-section.

108. The tracked vehicle claimed in claim 106, wherein the upper frame structure further includes first and second crossmembers disposed transversally to the pair of parallel beams.

15

109. The tracked vehicle claimed in claim 108, wherein the first crossmember is longer than the second crossmember.

110. The tracked vehicle claimed in claim 109, wherein the operator cabin and the power plant are affixed to the first and second crossmembers of the upper frame structure.

20

111. The tracked vehicle claimed in claim 92, wherein connectedness of the upper and lower frame structures provides the chassis with a greater resistance to torsion along said first portion than along said second portion.

25

112. The tracked vehicle claimed in claim 92, wherein the upper frame structure is connected to the lower frame structure by a connection structure.

113. The tracked vehicle claimed in claim 91, wherein the rails are not hollow.

30

114. The tracked vehicle claimed in claim 92, the torque box being mounted to the lower frame structure.

115. The tracked vehicle claimed in claim 114, wherein the torque box does not extend into the first portion of the longitudinal distance spanned by the lower frame structure.

116. The tracked vehicle claimed in claim 115, wherein the torque box has a ground-facing bottom surface and wherein each of the rails has a top surface that is separated from the bottom surface of the torque box by a vertical gap.

5

117. The tracked vehicle claimed in claim 114, wherein the operator cabin has a floor and wherein the torque box has a top surface that faces away from the ground and is substantially flat over a majority of the second portion of the longitudinal distance spanned by the lower frame structure, the top surface of the torque box being closer to the ground than the floor of the operator cabin.

10

118. The tracked vehicle claimed in claim 114, wherein the torque box is mounted to the lower frame structure via a plurality of lateral plates.

15

119. The tracked vehicle claimed in claim 118, wherein the lateral plates define a channel in a longitudinal direction of the vehicle.

120. The tracked vehicle claimed in claim 119, wherein each lateral plate of the plurality of lateral plates has an interior surface, the interior surfaces of two longitudinally aligned lateral plates are separated by a width of the channel.

20

121. The tracked vehicle claimed in claim 120, wherein the channel width is no less than 34 inches and no greater than 36 inches.

25

122. The tracked vehicle claimed in claim 120, wherein the channel width is no greater than 35 $\frac{1}{4}$ inches.

123. The tracked vehicle claimed in claim 118, wherein the torque box is riveted to the lateral plates.

124. The tracked vehicle claimed in claim 118, wherein the torque box is welded to the lateral plates.

30

125. The tracked vehicle claimed in claim 119, wherein the channel width is greater than the width of the torque box.

126. The tracked vehicle claimed in claim 125, further comprising at least one spacer between the torque box and at least one of the lateral plates.
- 5 127. The tracked vehicle claimed in claim 118, wherein the lower frame structure includes a pair of parallel rails.
128. The tracked vehicle claimed in claim 127, wherein the lateral plates laterally bound the torque box to be mounted above the rails.
- 10 129. The tracked vehicle claimed in claim 128, the lateral plates including at least a first lateral plate and a second lateral plate.
130. The tracked vehicle claimed in claim 129, the first and second lateral plates being fishplates.
- 15 131. The tracked vehicle claimed in claim 129, the first and second lateral plates being connected to respective ones of the rails.
132. The tracked vehicle claimed in claim 129, the first and second lateral plates being integrated with respective ones of the rails.
- 20 133. The tracked vehicle claimed in claim 129, the plates further including a first frontal plate and a second frontal plate, the first and second frontal plates being connected to the upper frame structure.
- 25 134. The tracked vehicle claimed in claim 92, wherein the lower frame structure includes a pair of parallel rails, wherein a plurality of plates are secured to the lower frame structure with a fastener that passes through the rails of the lower frame structure
- 30 135. The tracked vehicle claimed in claim 134, each track assembly further comprising at least one wheel-carrying assembly that pivots about a pivot axis that is transverse to a direction of travel of the tracked vehicle, wherein a projection of said pivot axis onto a ground plane intersects a projection onto the ground plane of at least one of the plates.

136. The tracked vehicle claimed in claim 134, wherein the lower frame structure comprises support members extending transversely between the rails.

137. A tracked vehicle comprising:

- 5 a) a chassis comprising an upper frame structure and a lower frame structure;
 - the lower frame structure spanning a longitudinal distance along a longitudinal direction of the vehicle;
 - over a first portion of the longitudinal distance spanned by the lower frame structure, the lower frame structure overlapping with a first section of the upper frame structure;
 - 10 - over a second portion of the longitudinal distance, the lower frame structure overlapping with a second section of the upper frame structure, the second section of the upper frame structure comprising a torque box;
 - the first and second sections of the upper frame structure being secured to the lower frame structure;
 - 15 b) an operator cabin mounted to the chassis;
 - c) a power plant mounted to the chassis and comprising a prime mover; and
 - d) a plurality of track assemblies for traction of the tracked vehicle, a first one of the track assemblies being on a first lateral side of the tracked vehicle, a second one of the track assemblies being on a second lateral side of the tracked vehicle, each track assembly of the plurality of track assemblies being mounted to the chassis and comprising:
 - 20 i) a plurality of wheels including:
 - a drive wheel;
 - an end wheel spaced apart from the drive wheel in the longitudinal direction of the tracked vehicle; and
 - 25 - a plurality of support wheels arranged between the drive wheel and the end wheel;
 - and
 - ii) an endless track disposed around the plurality of wheels for engaging a ground on which the tracked vehicle travels, the drive wheel being in driving engagement with the endless track to impart motion to the endless track.
 - 30

138. The tracked vehicle claimed in claim 137, wherein the first and second sections of the upper frame structure are secured to one another by a plurality of side walls that also secure the first and second sections of the upper frame structure to the lower frame structure.

139. A method for installing a torque box on a tracked vehicle, the tracked vehicle comprising a chassis extending in a longitudinal direction of the tracked vehicle and a plurality of track assemblies for traction of the vehicle, a first one of the track assemblies being on a first lateral side of the tracked

vehicle, a second one of the track assemblies being on a second lateral side of the tracked vehicle, the method comprising:

- placing the torque box within a lowered channel defined by side walls and a frame structure of the chassis; and
- 5 - securing the torque box to at least the side walls.

140. A method for installing a torque box on a tracked vehicle, the tracked vehicle comprising a chassis extending in a longitudinal direction of the tracked vehicle, a plurality of track assemblies for traction of the vehicle, and an operator cabin mounted to the chassis, the method comprising:

- 10 - without removing the operator cabin from the chassis of the tracked vehicle, securing the torque box to a reinforced portion of the chassis under the operator cabin and to a lowered portion of the chassis behind the operator cabin.

141. A chassis for a tracked vehicle, comprising:

- 15 • an upper frame structure; and
- a lower frame structure connected to the upper frame structure, the lower frame structure spanning a longitudinal distance along a longitudinal direction of the tracked vehicle;

wherein over a first portion of the longitudinal distance, the lower frame structure overlaps with the upper frame structure and wherein over a second portion of the longitudinal distance, the lower frame structure
20 does not overlap with the upper frame structure.

142. A chassis extending in a longitudinal direction for a tracked vehicle having an operator cabin, comprising:

- a first portion directly under the operator cabin;
- 25 a second portion behind the operator cabin in the longitudinal direction, the second portion being lower to the ground than the first portion, the first portion being reinforced so as to provide a greater resistance to torsion than the second portion.

143. A chassis for a tracked vehicle, comprising:

- 30 - an upper frame structure; and
- a lower frame structure;
- wherein the lower frame structure spans a longitudinal distance along a direction of travel of the vehicle;
- wherein over a first portion of the longitudinal distance spanned by the lower frame structure,
35 the lower frame structure overlaps with a first section of the upper frame structure;

- wherein over a second portion of the longitudinal distance, the lower frame structure overlaps with a second section of the upper frame structure, the second section of the upper frame structure comprising a torque box; and
- wherein the first and second sections of the upper frame structure are secured to each other and to the lower frame structure.

5

1/41

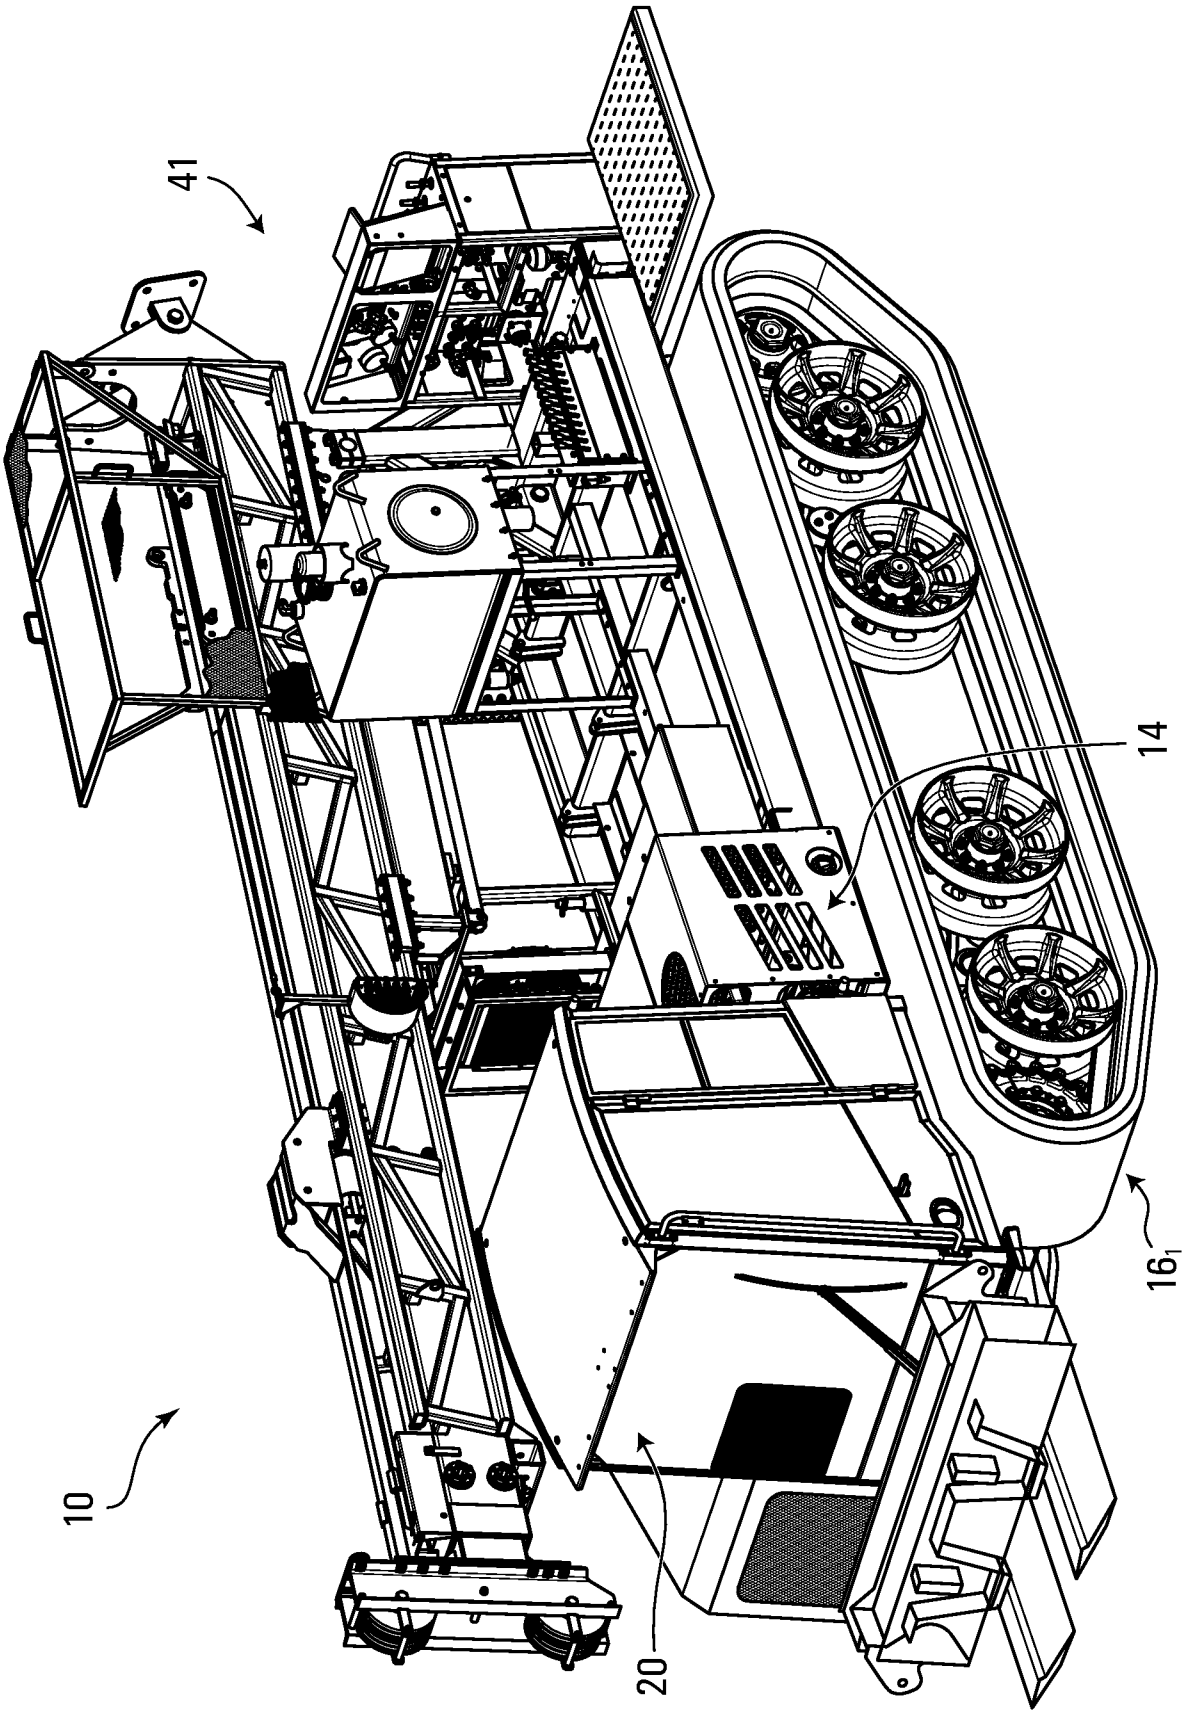


FIG. 1

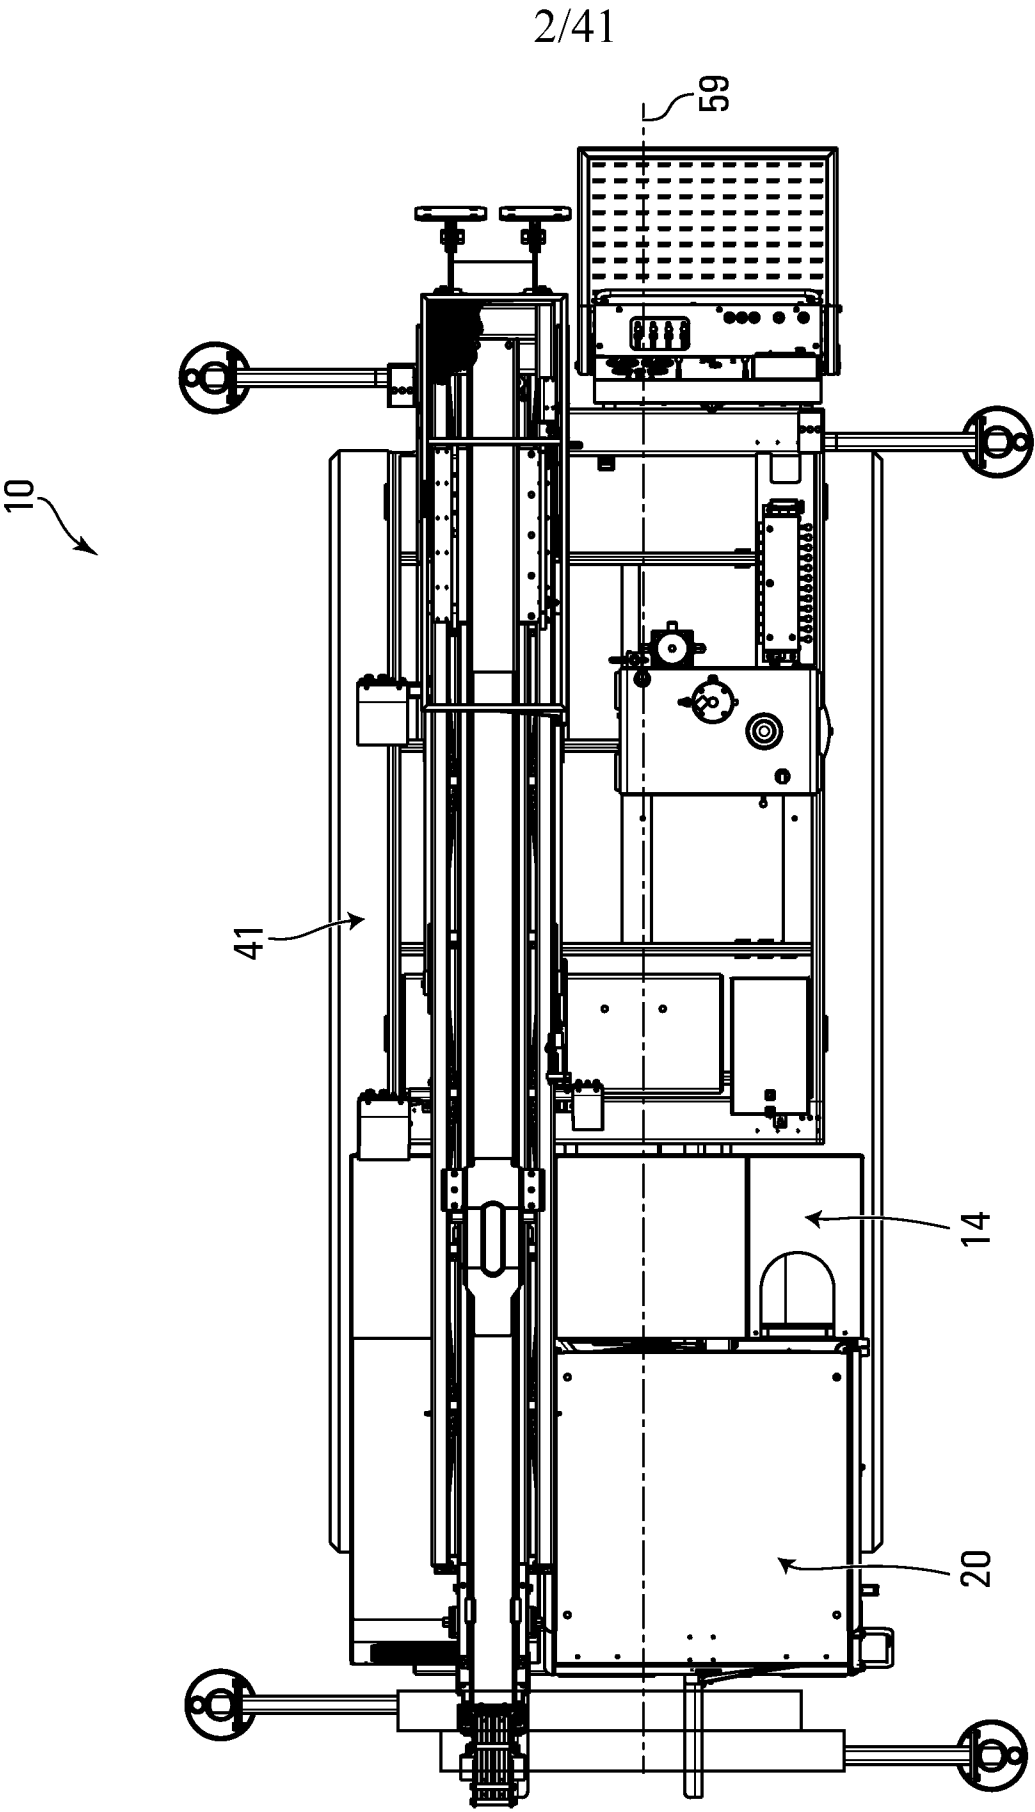


FIG. 2

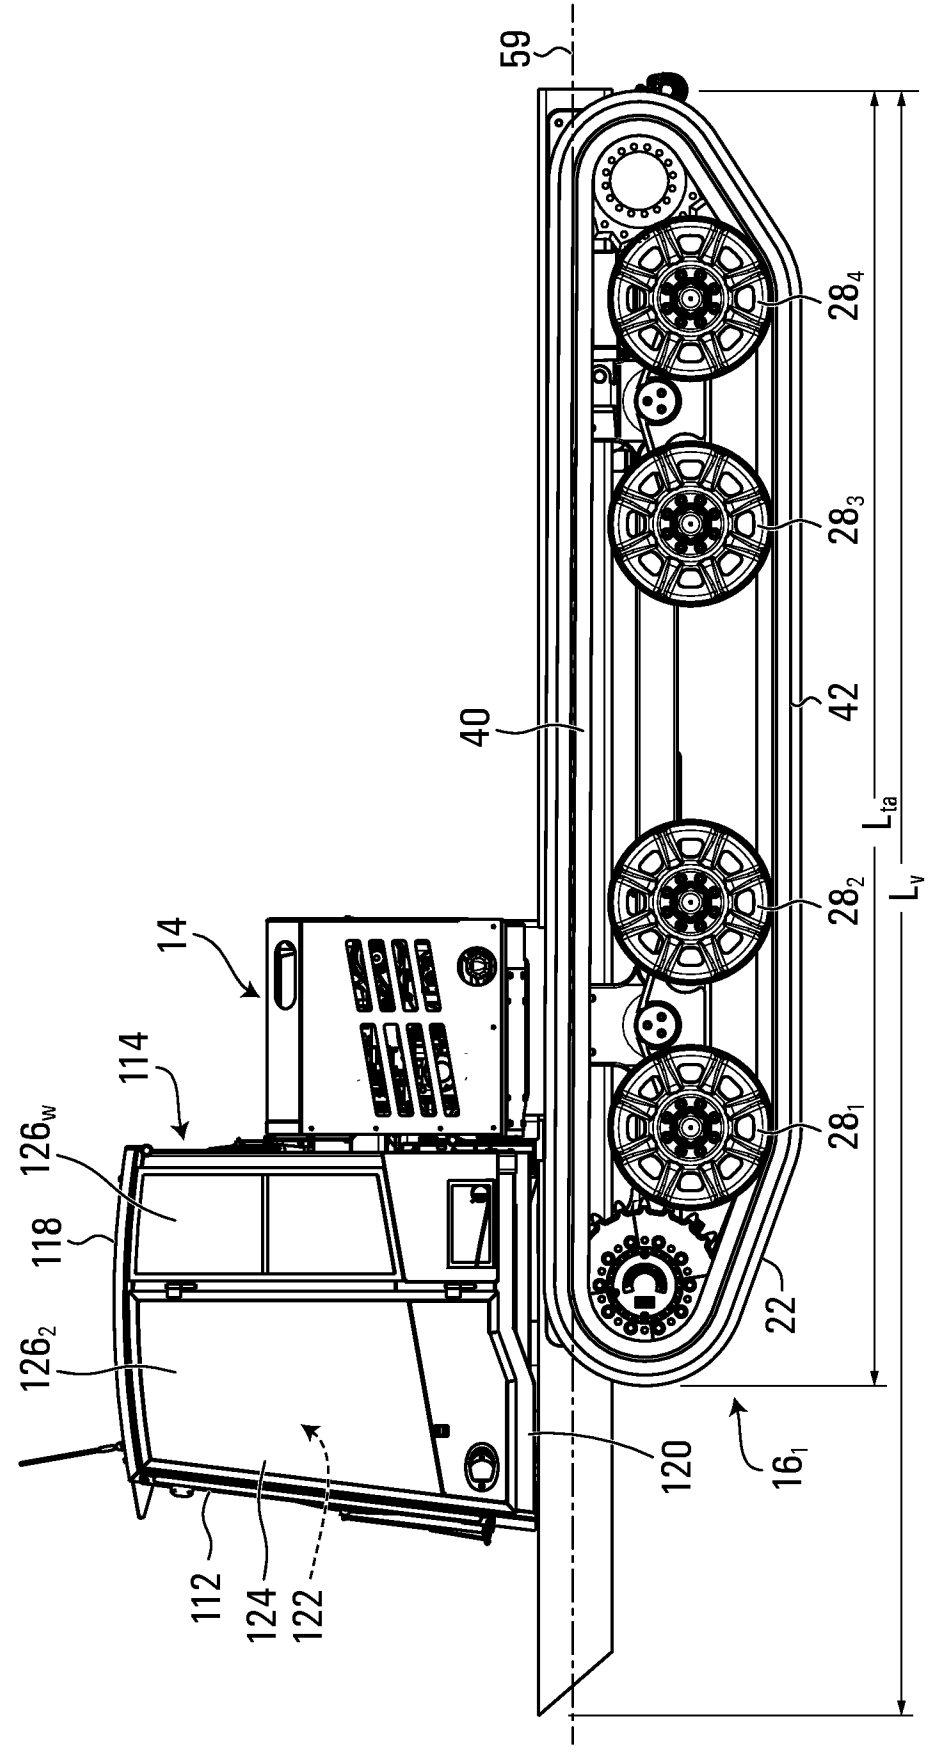


FIG. 3

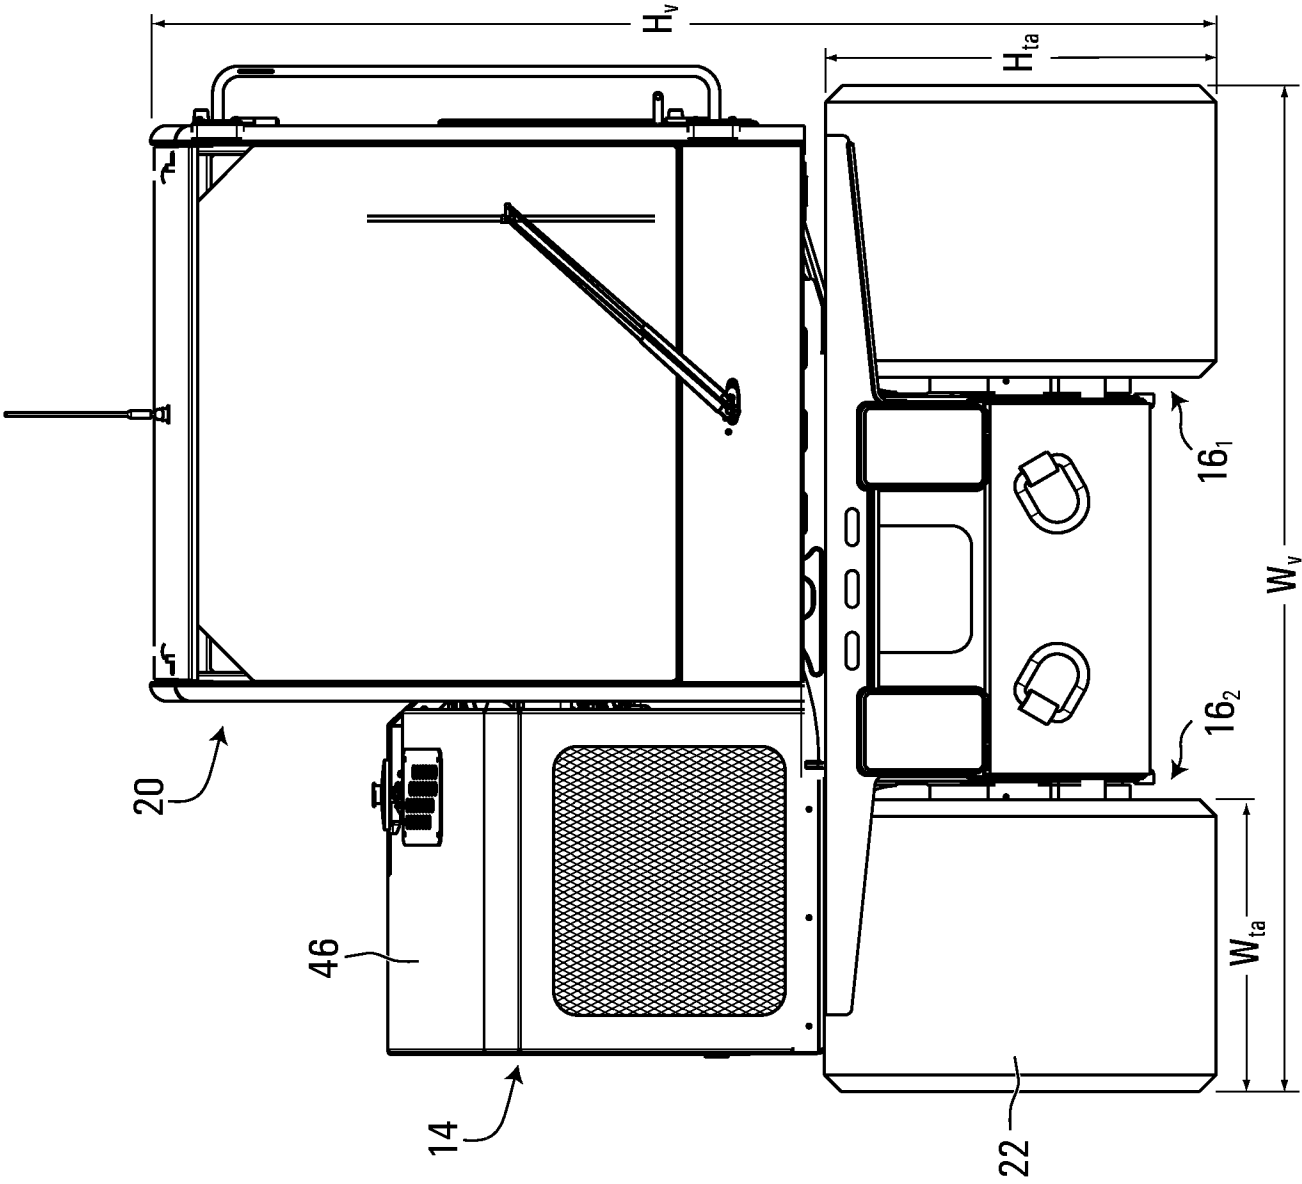


FIG. 4

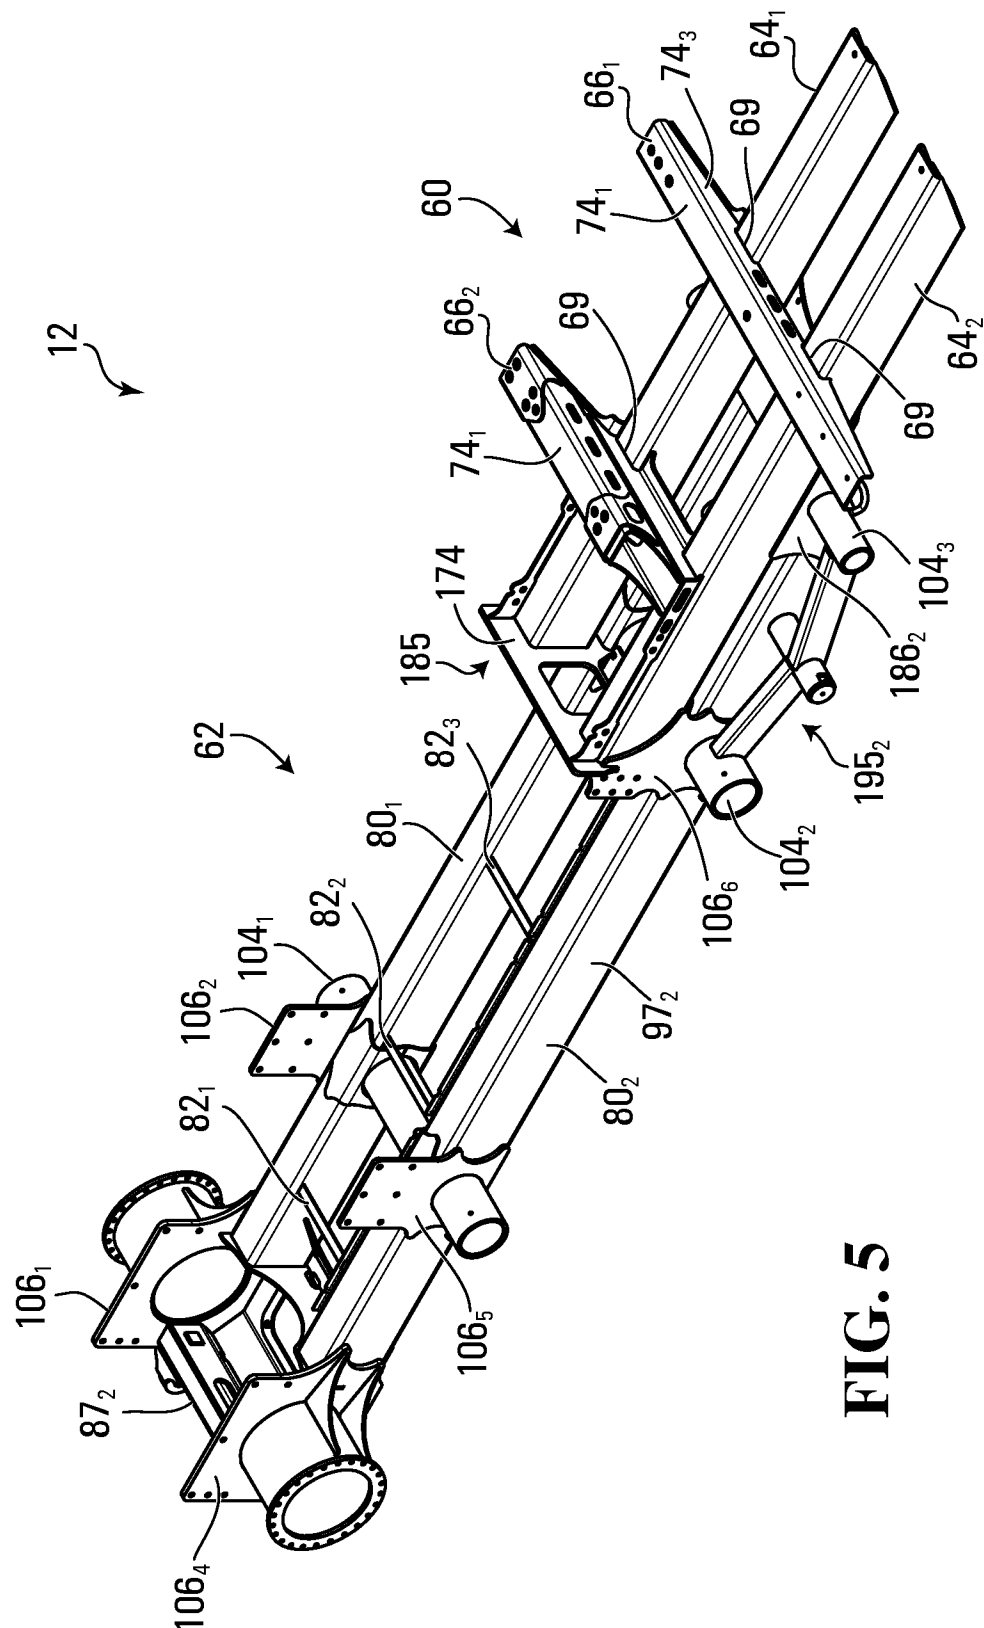


FIG. 5

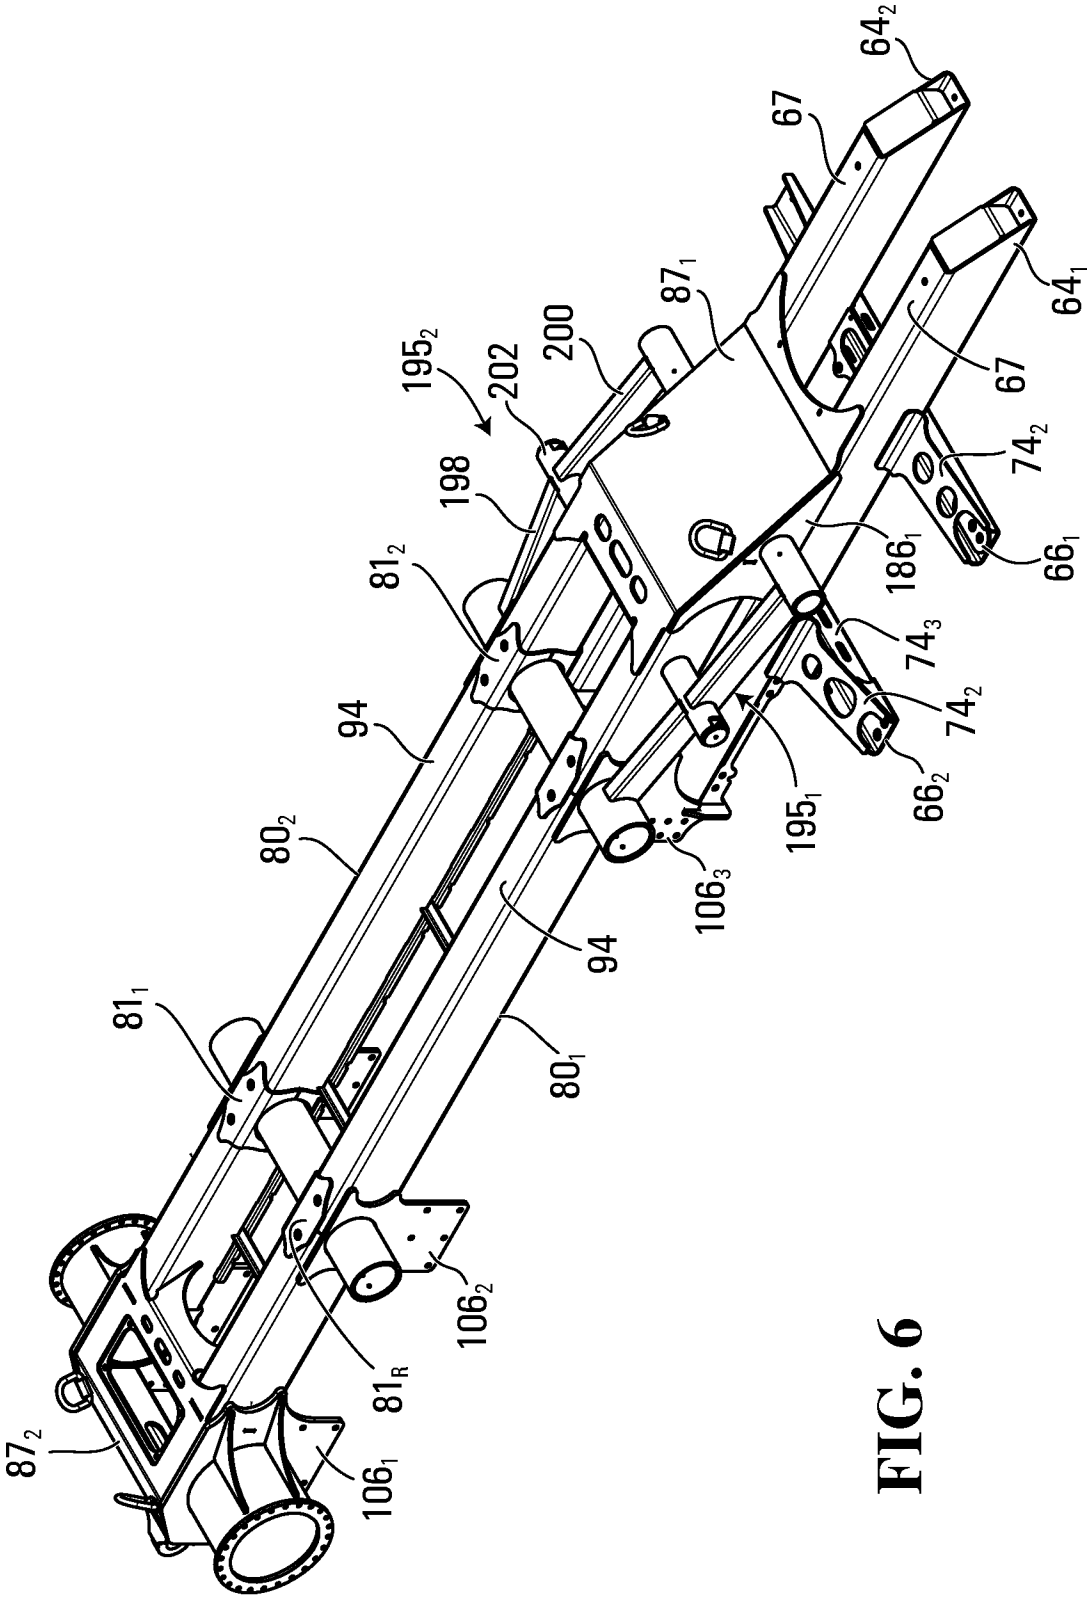
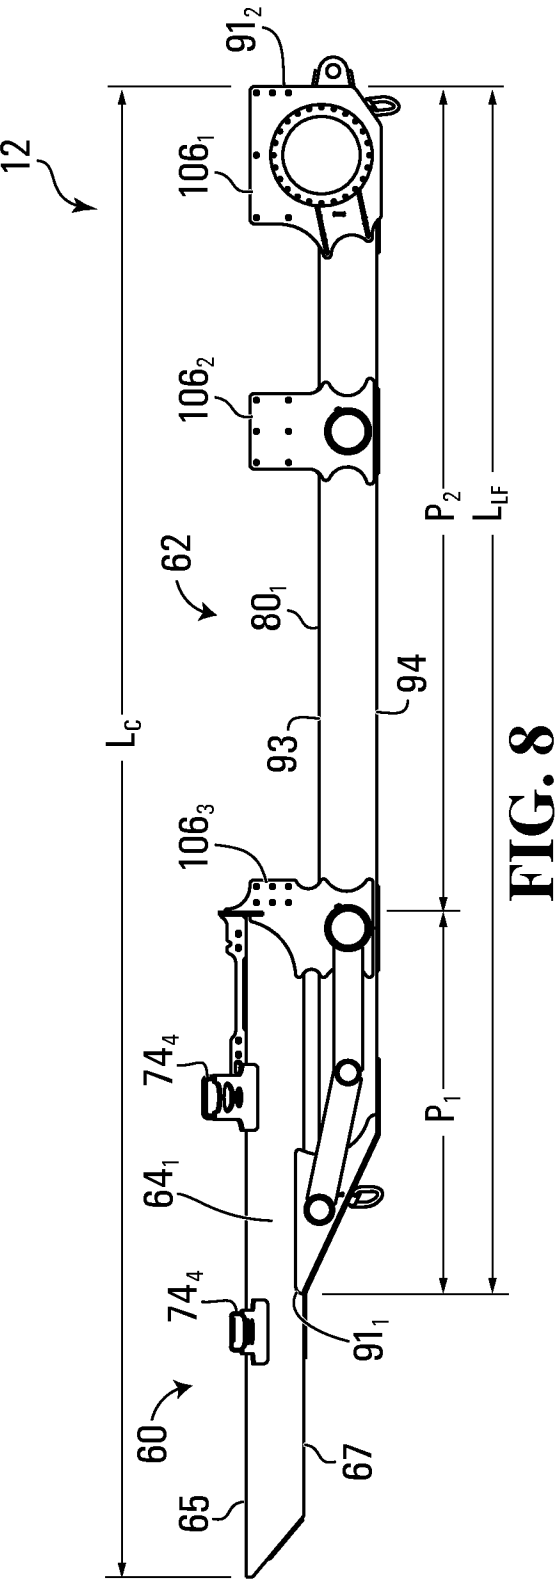
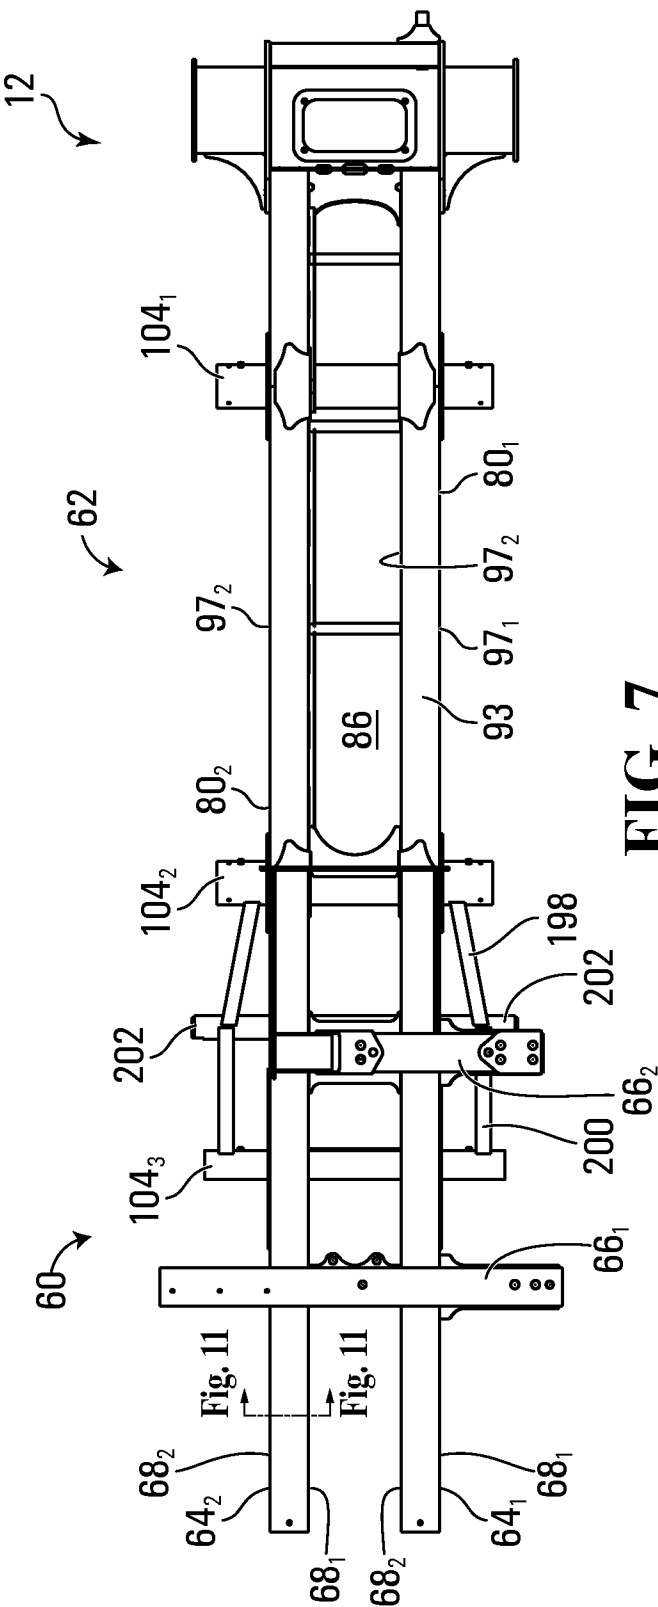


FIG. 6



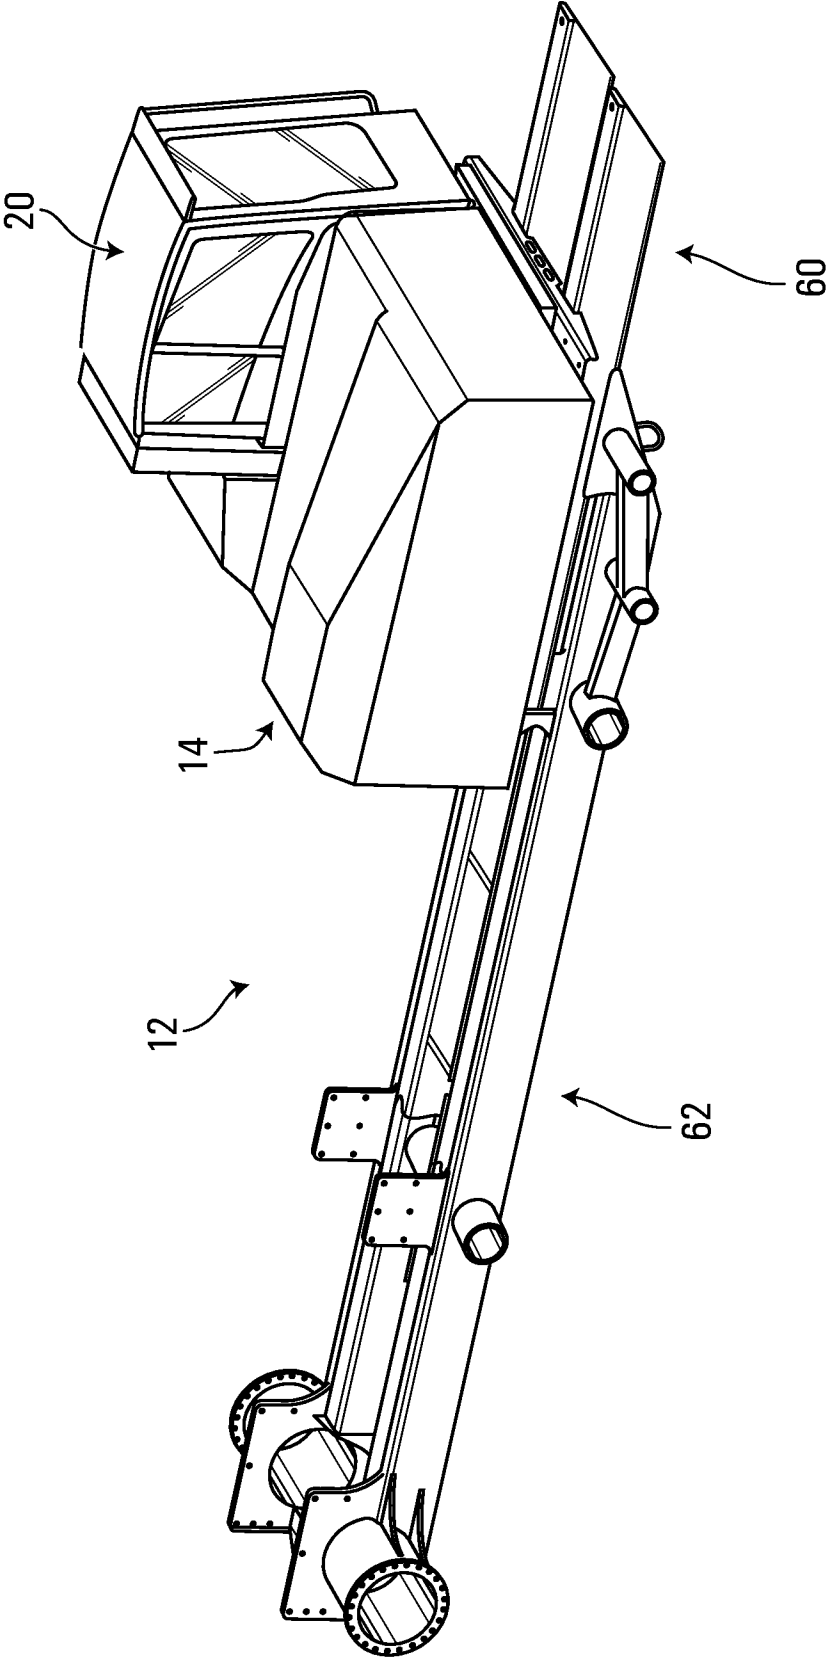


FIG. 9

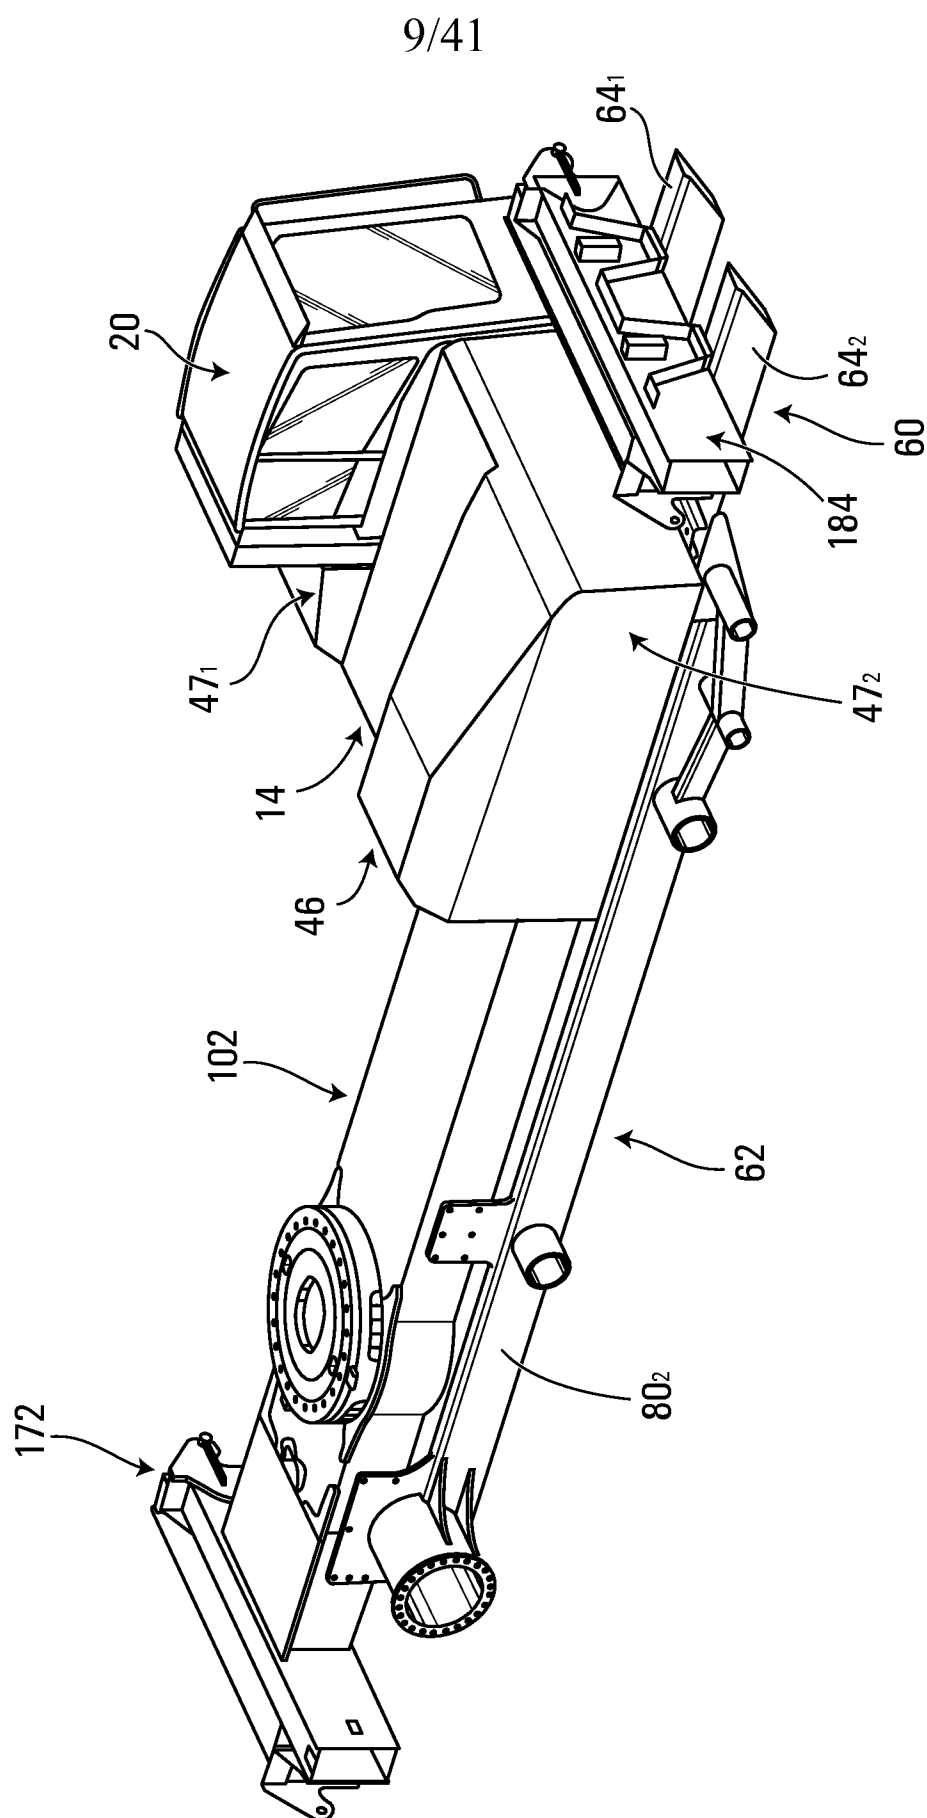


FIG. 10

10/41

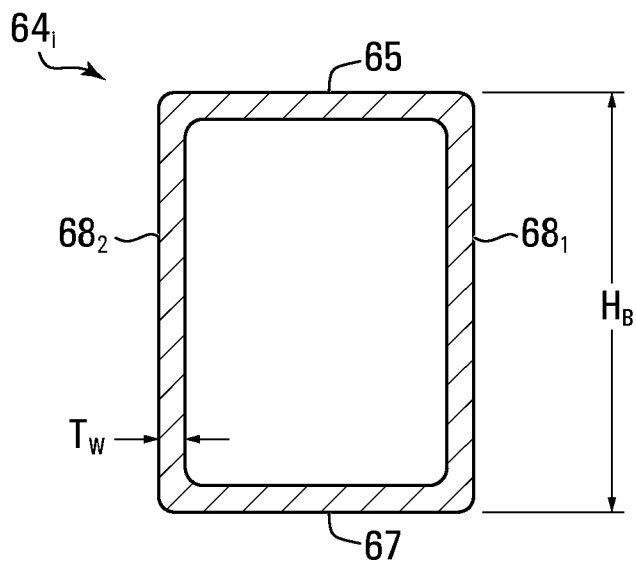


FIG. 11

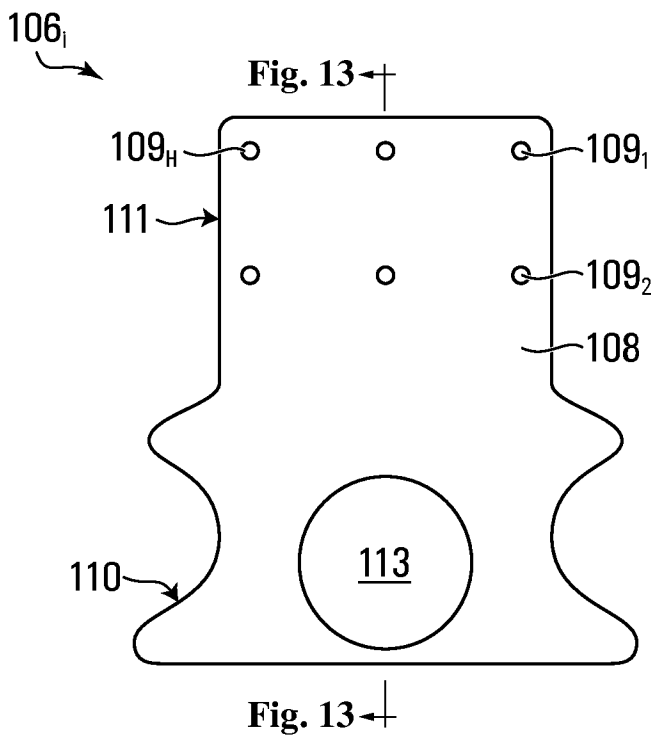


FIG. 12

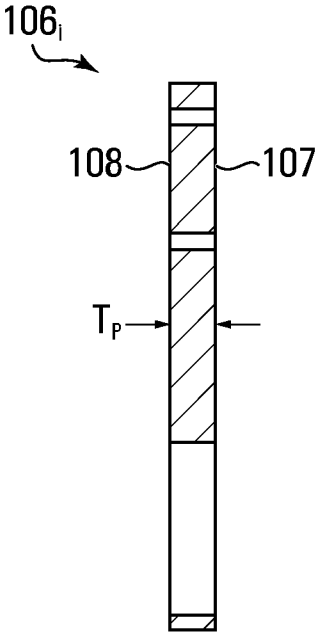


FIG. 13

11/41

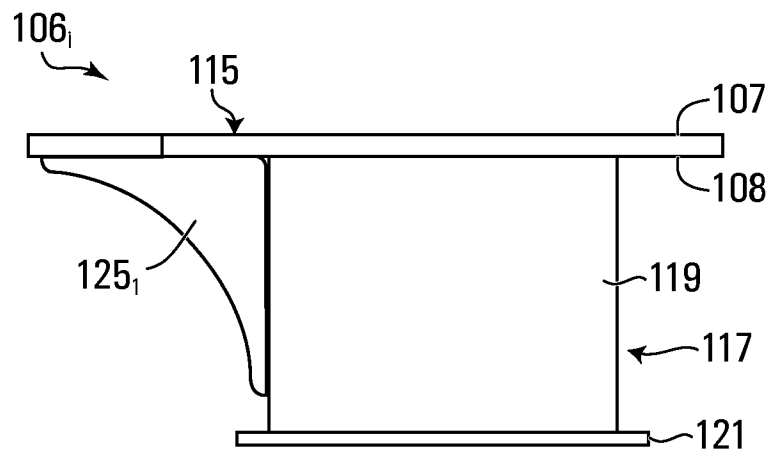


FIG. 14


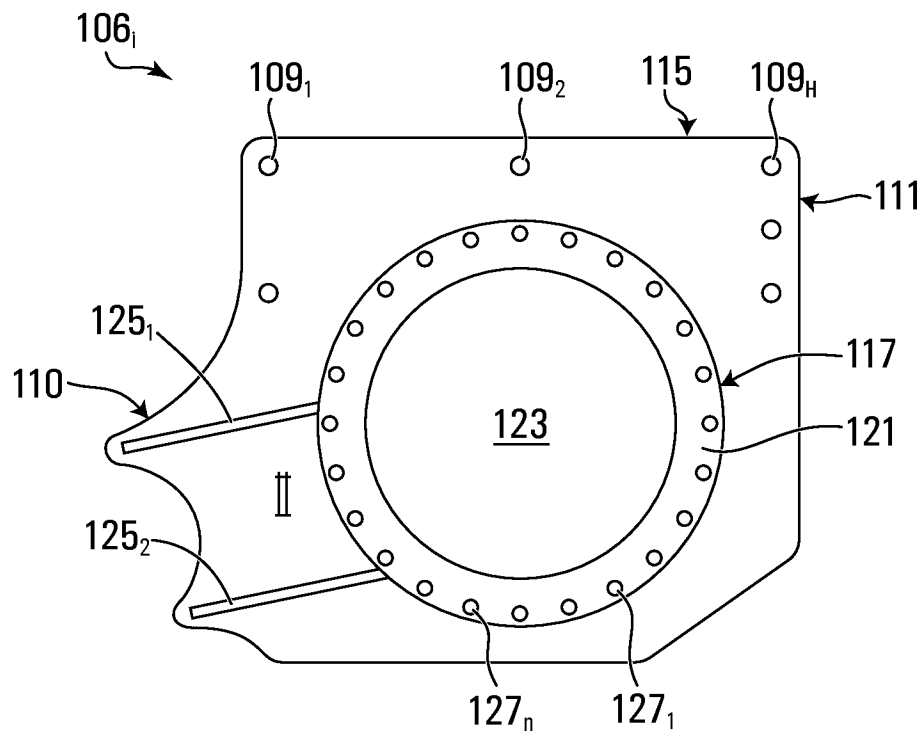


FIG. 15

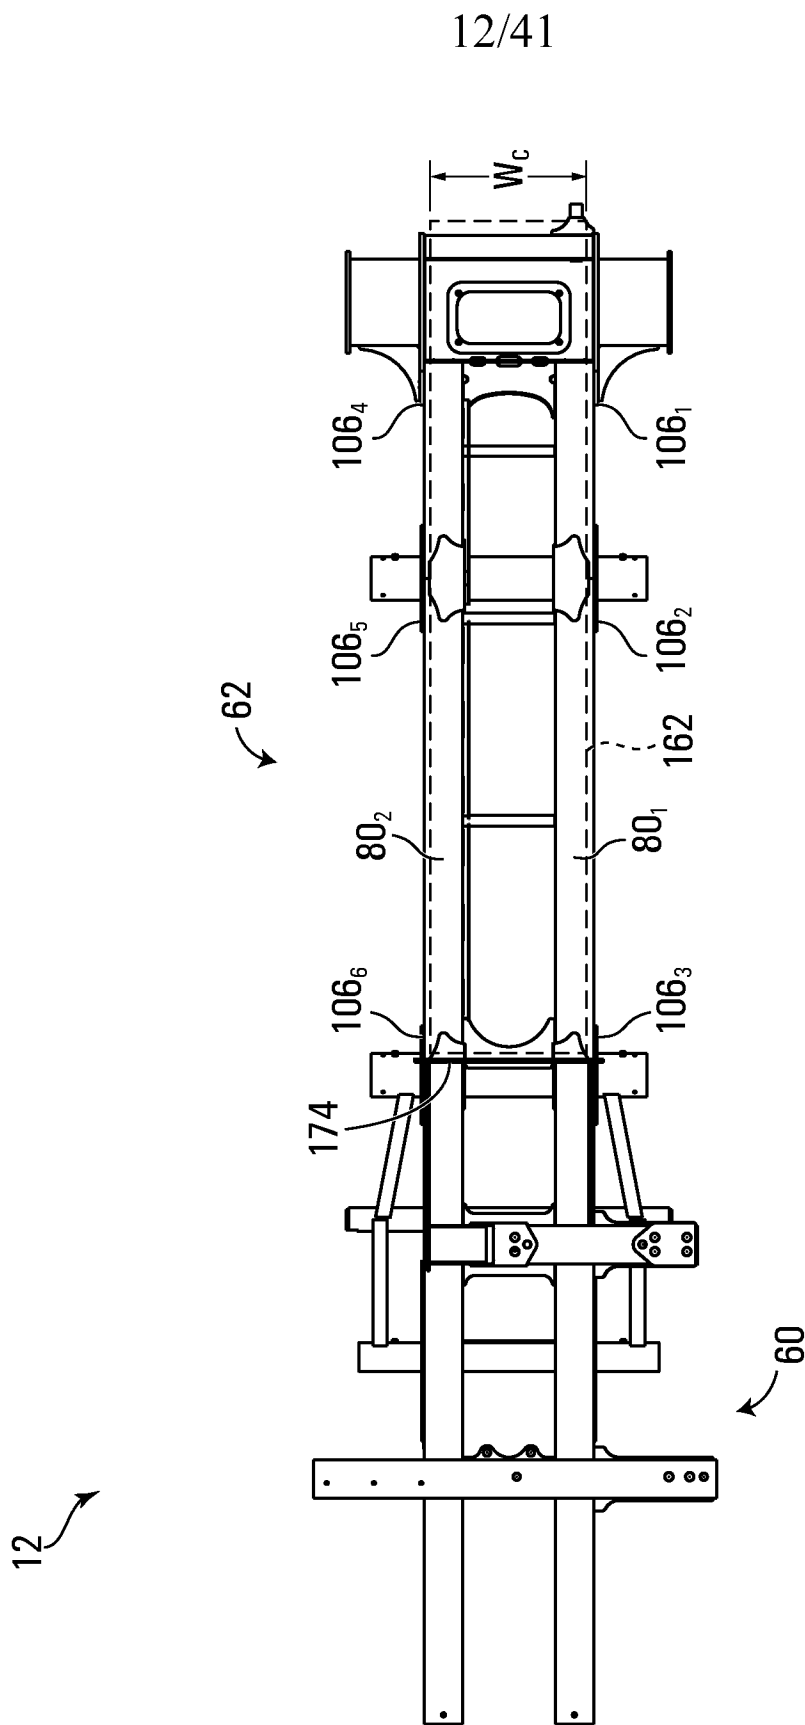

13/41

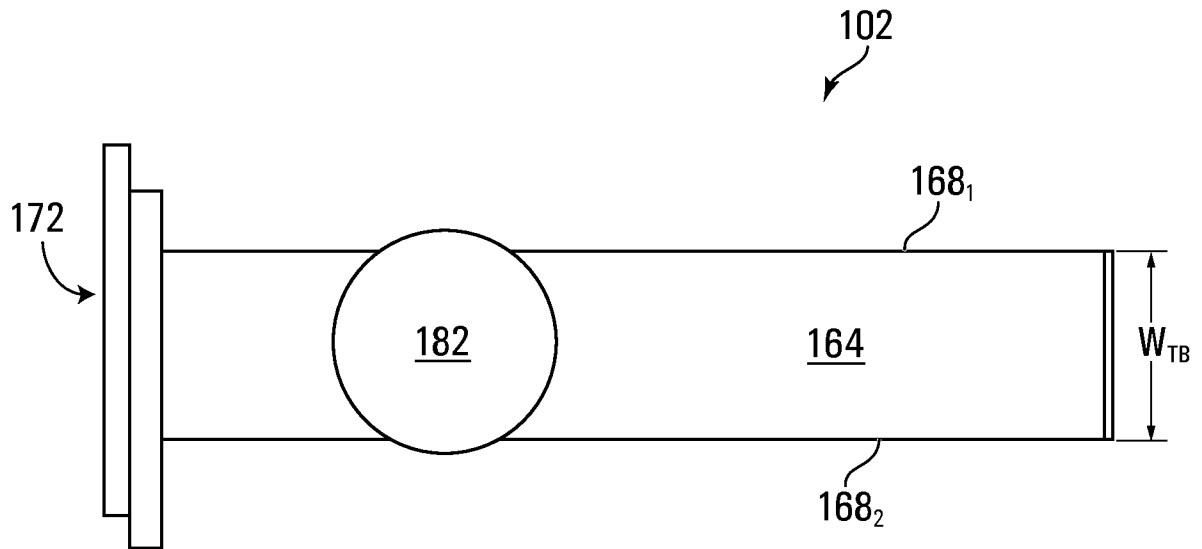


FIG. 17

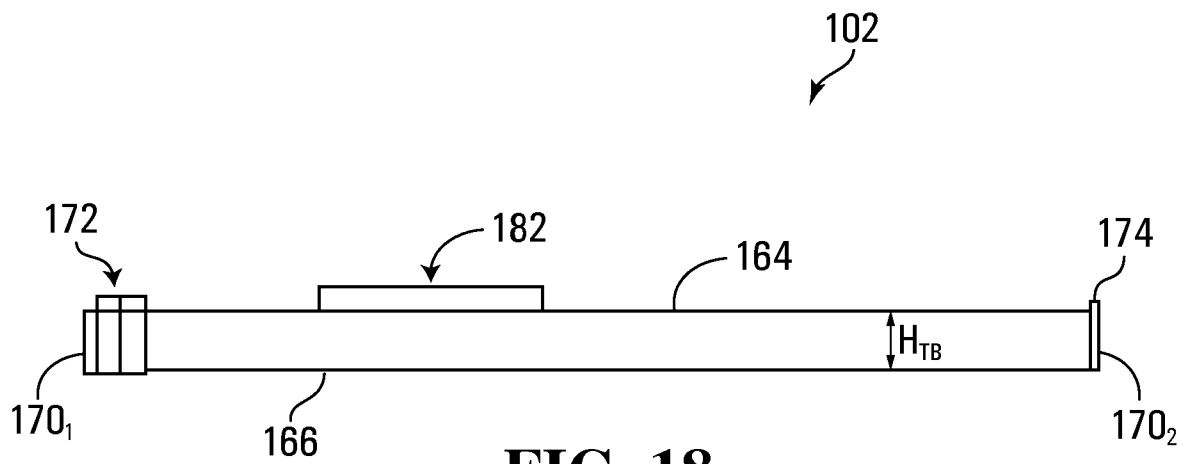


FIG. 18

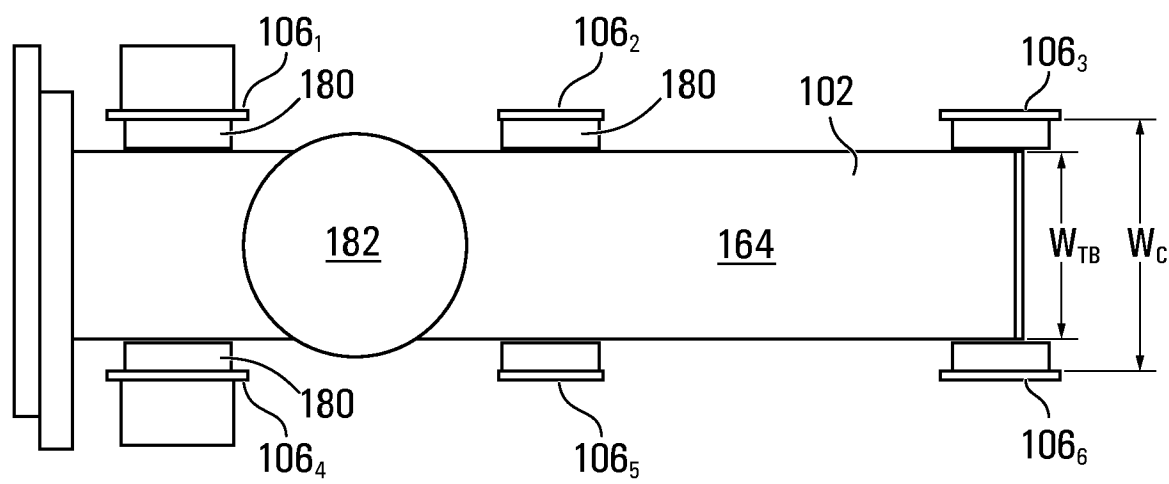


FIG. 19

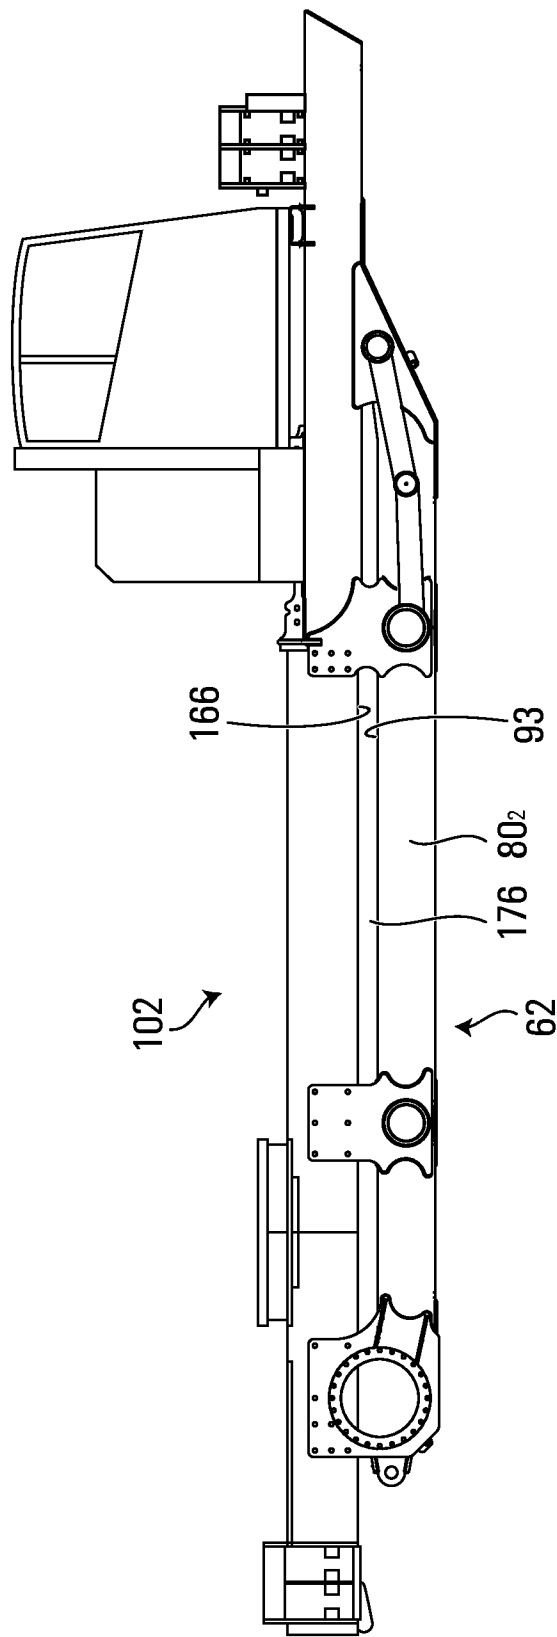


FIG. 20

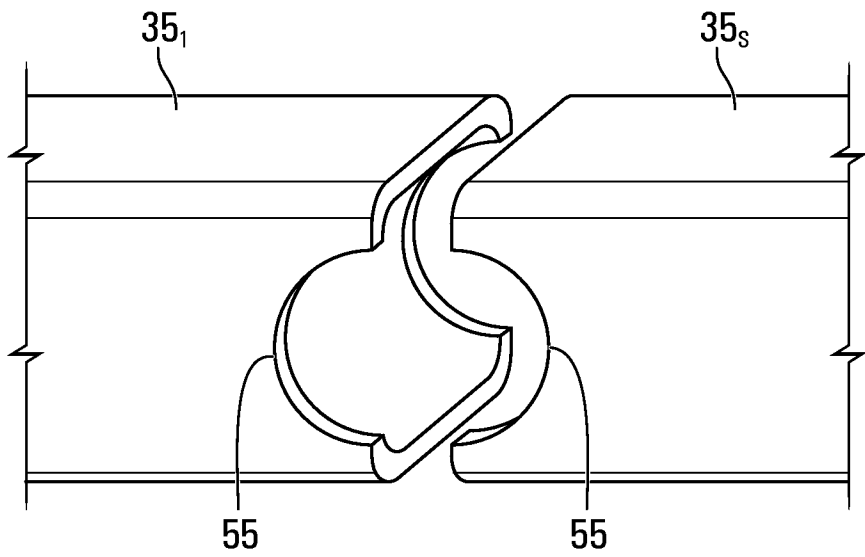


FIG. 21

17/41

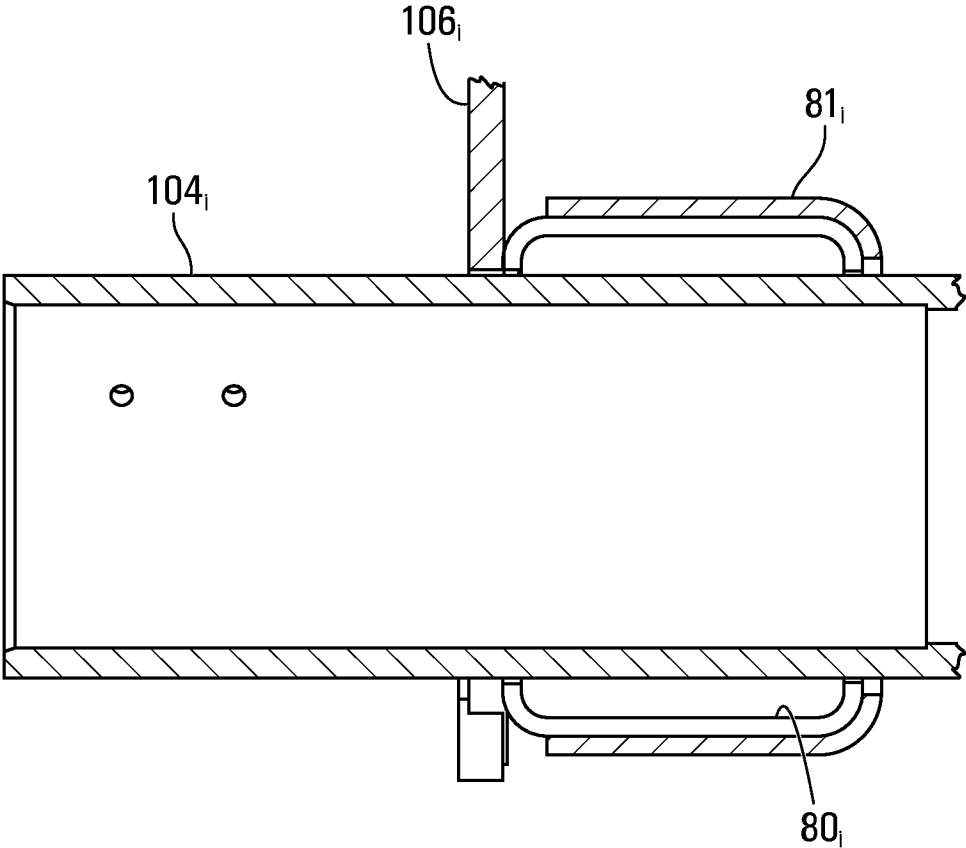


FIG. 22

18/41

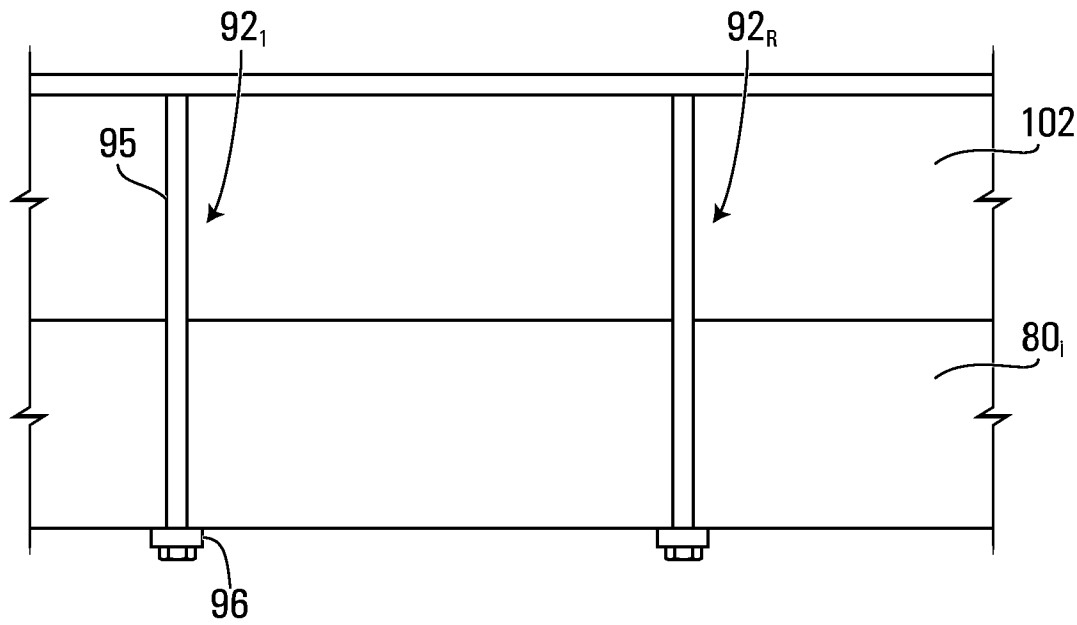


FIG. 23

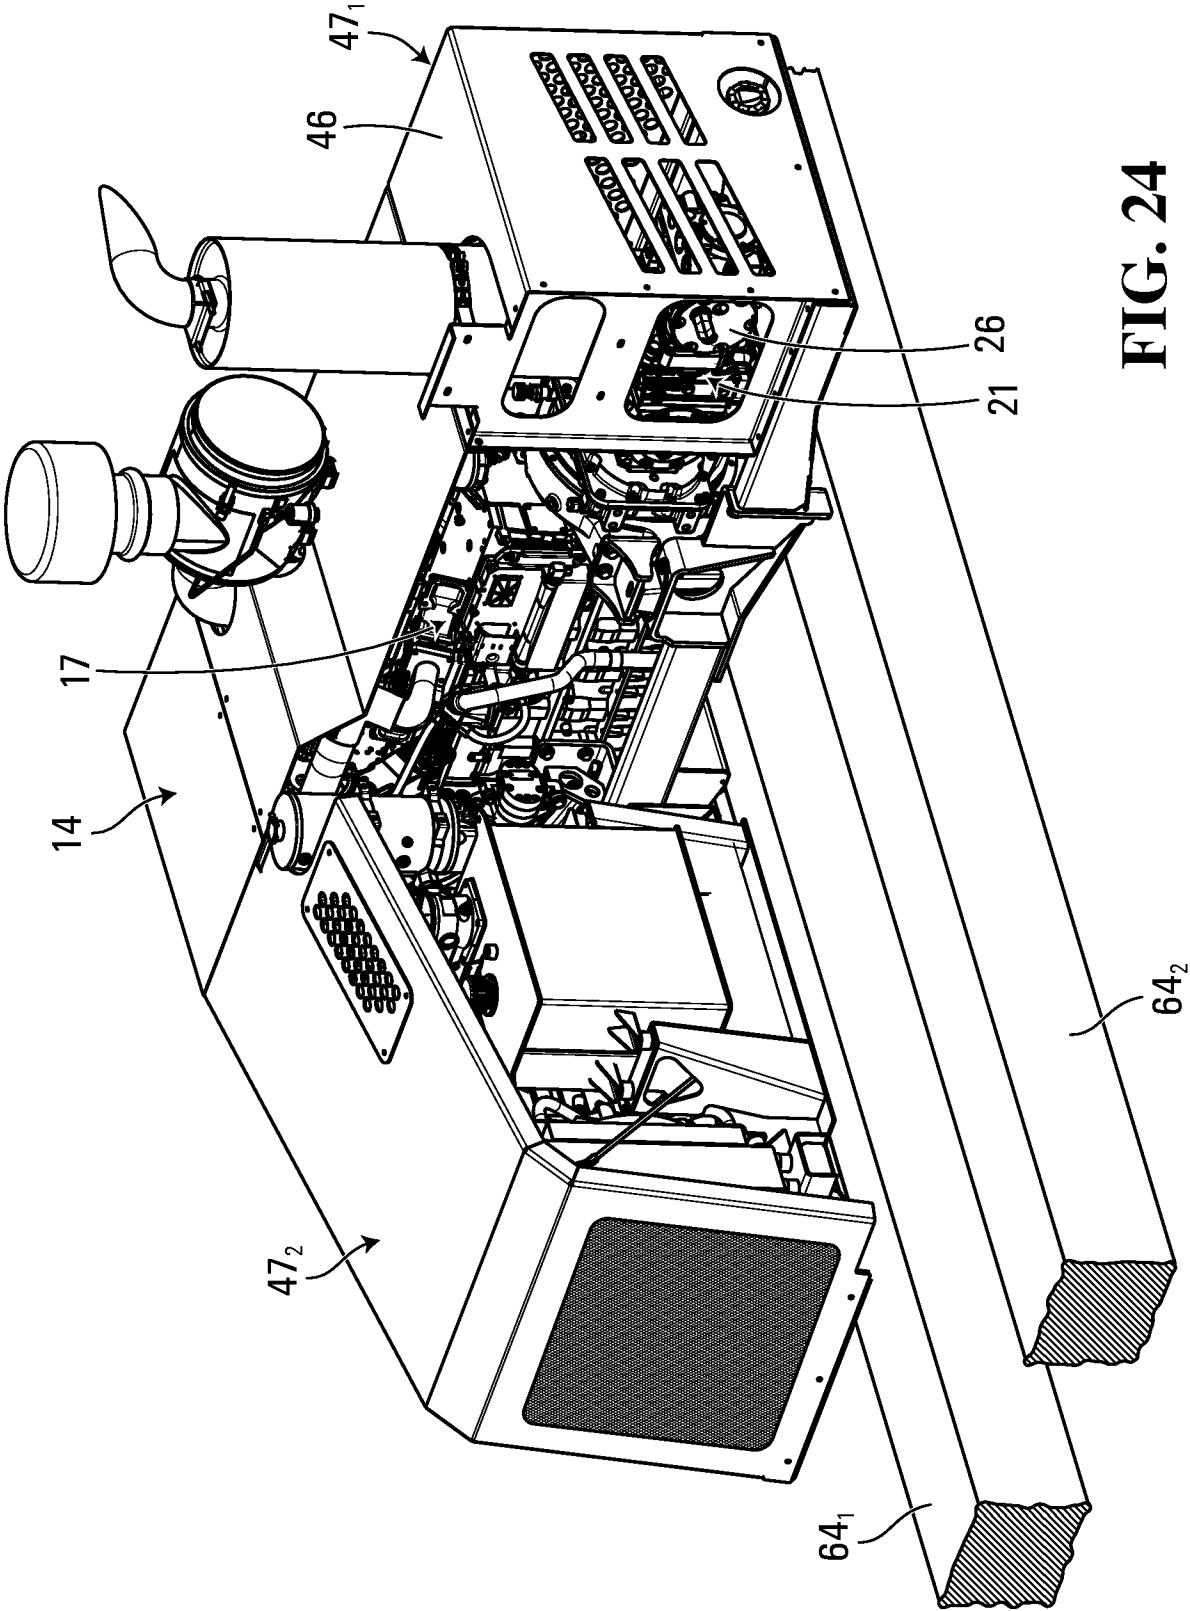


FIG. 24

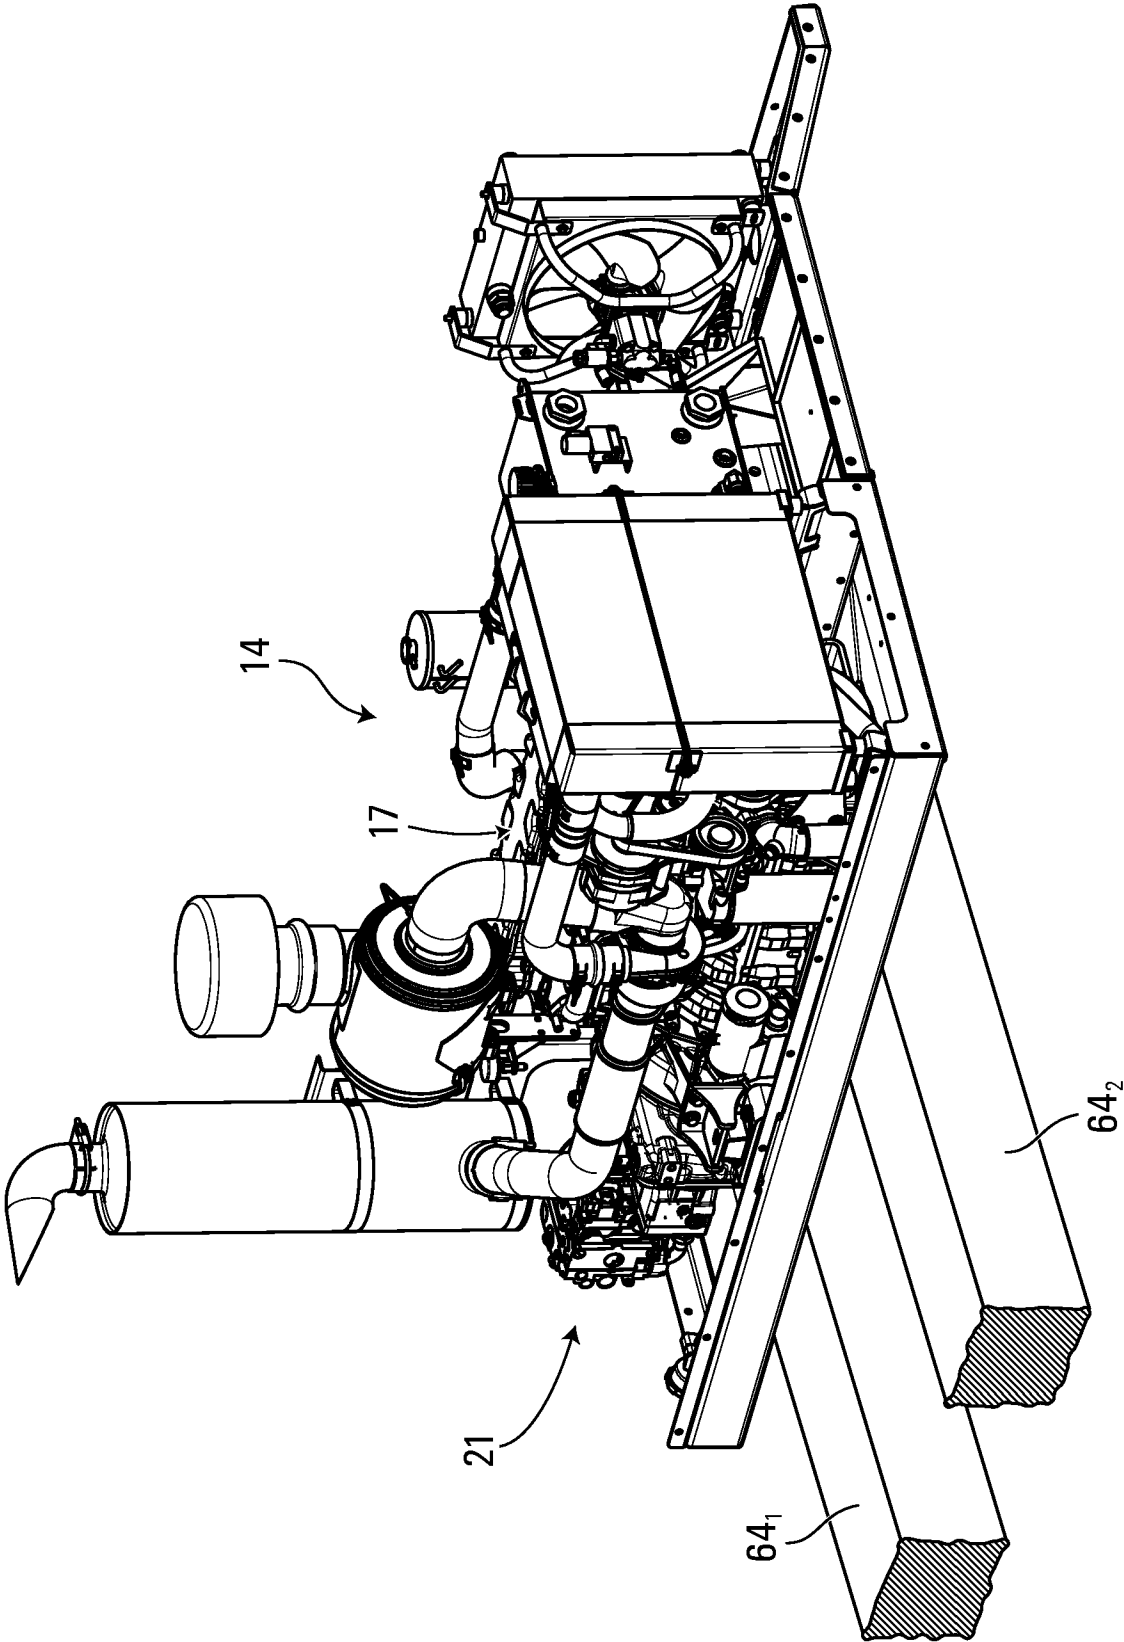


FIG. 25

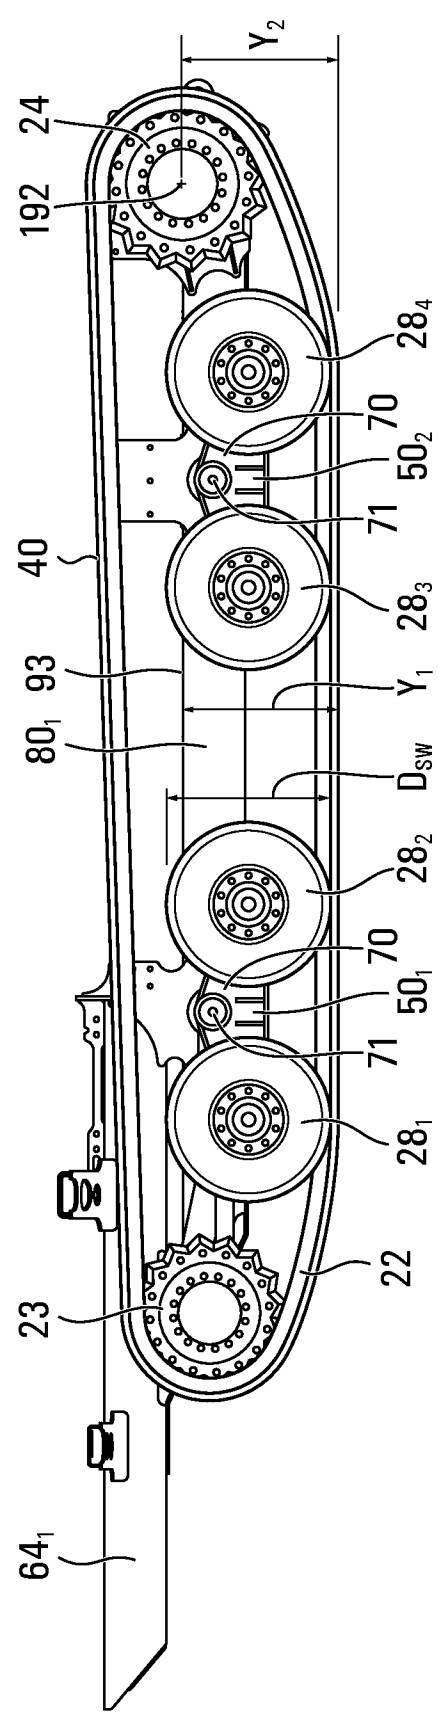


FIG. 26

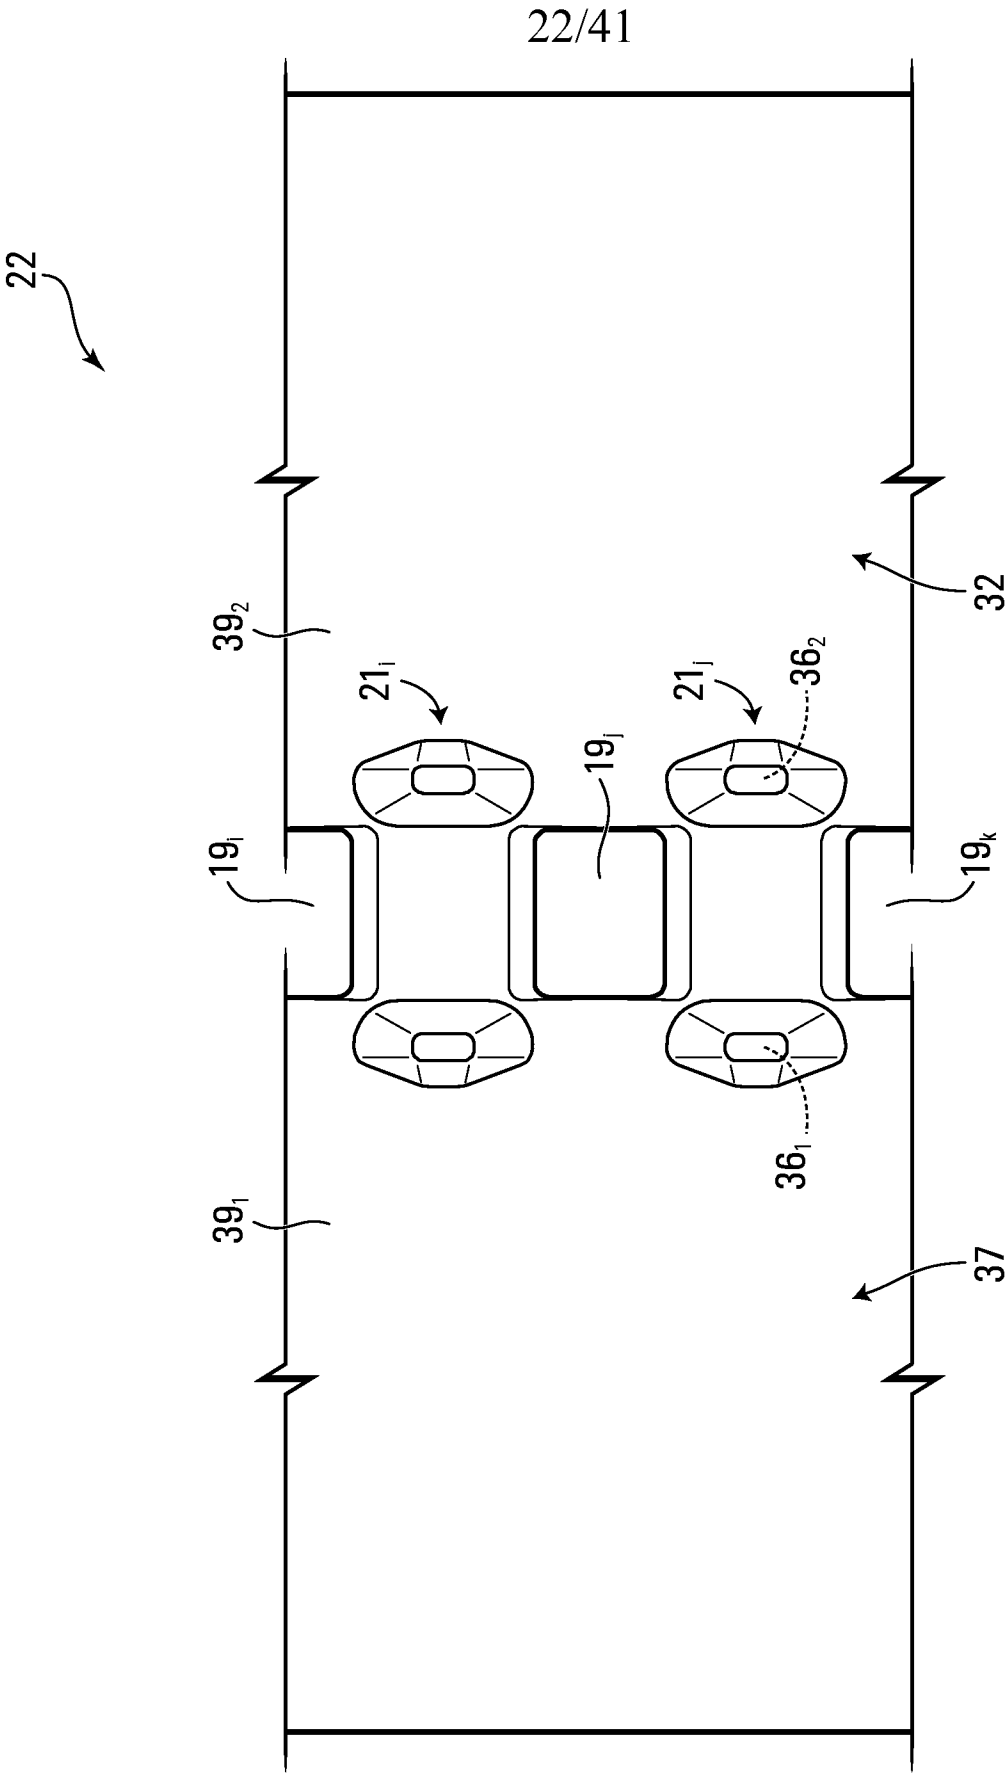


FIG. 27

23/41




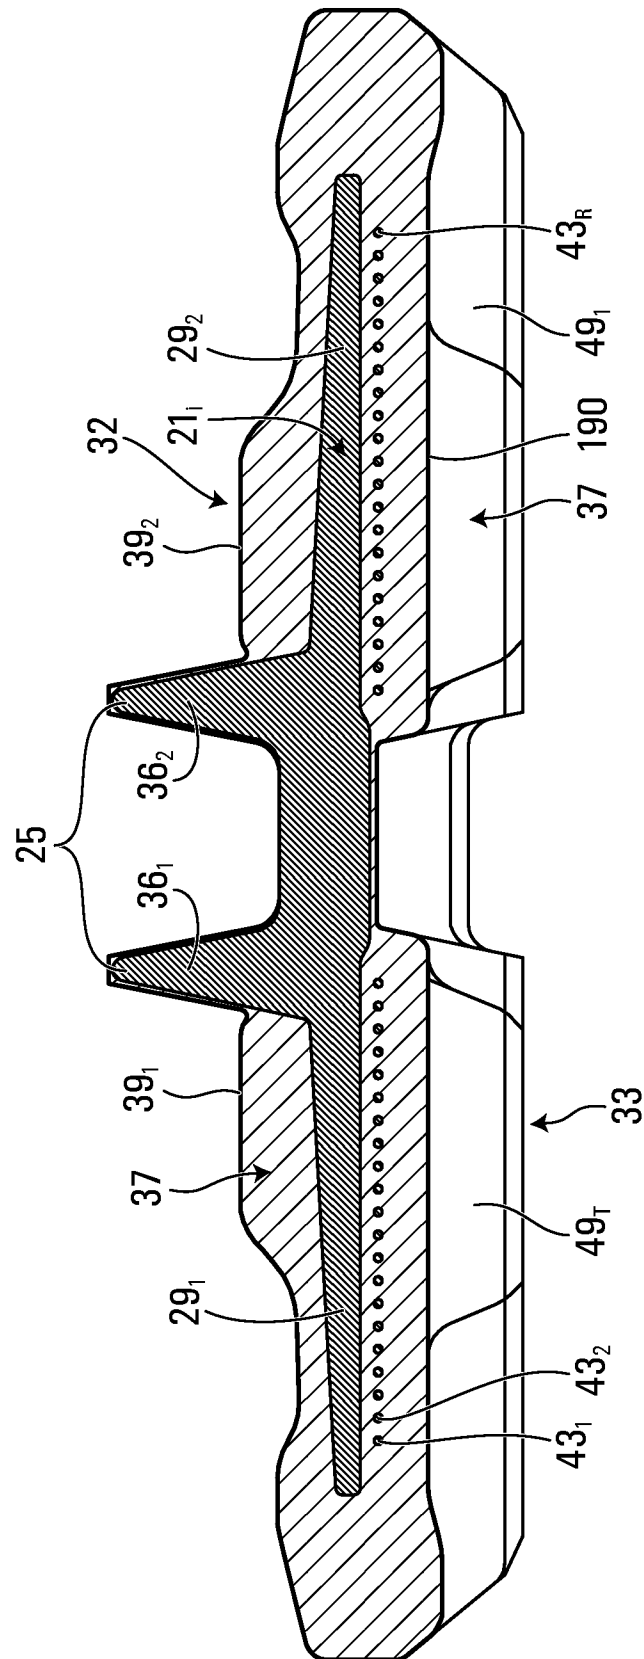


FIG. 28

24/41

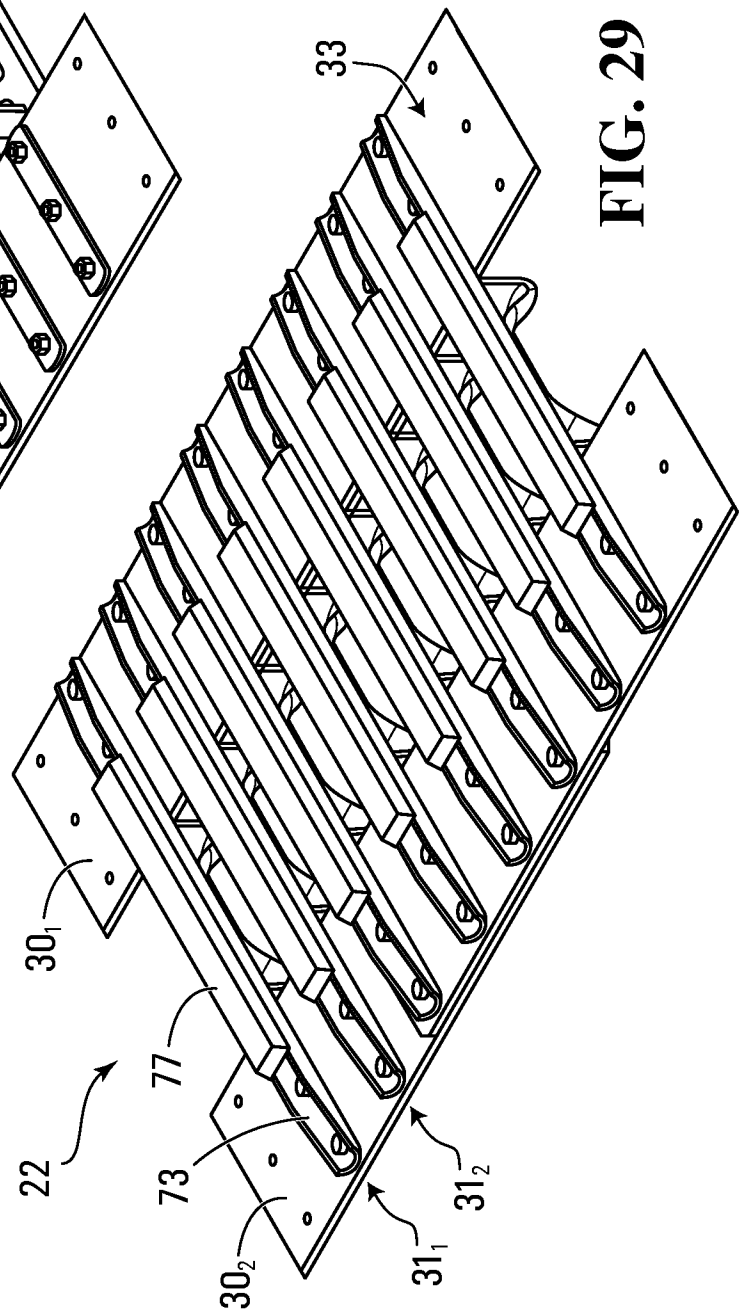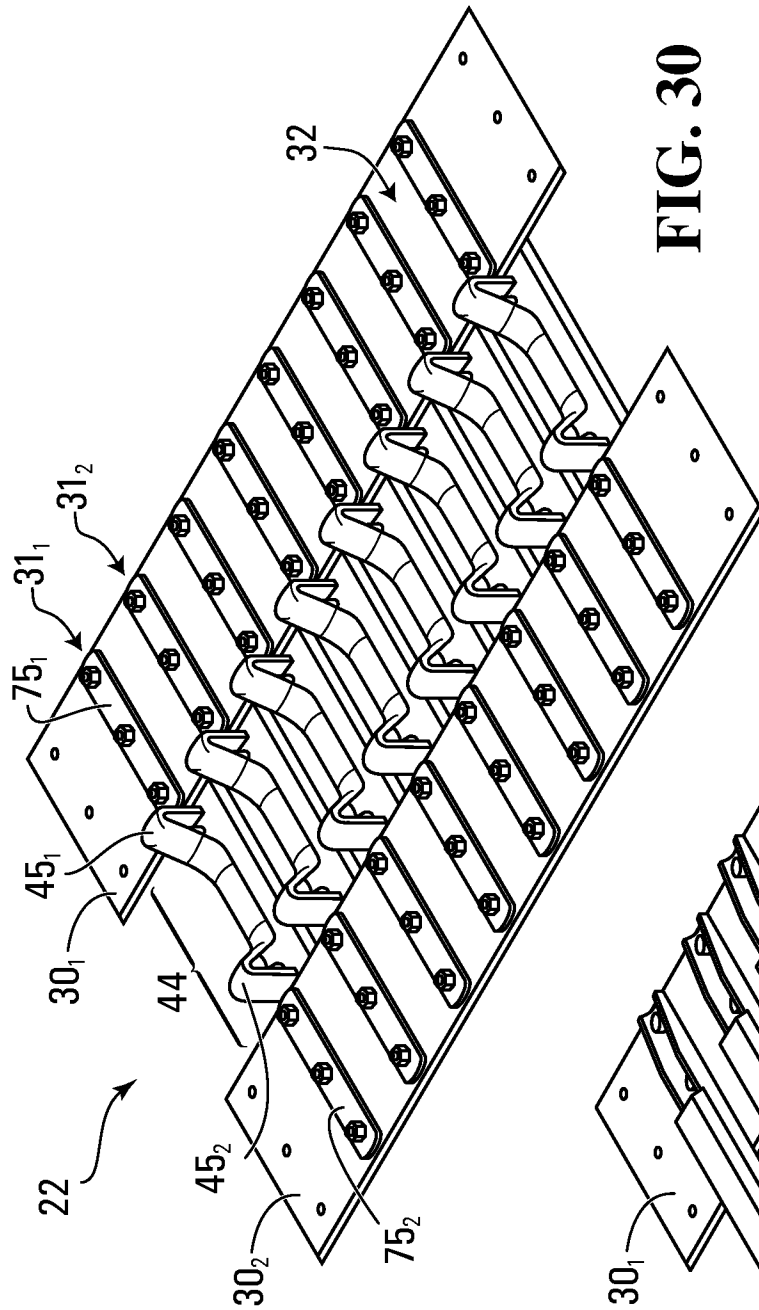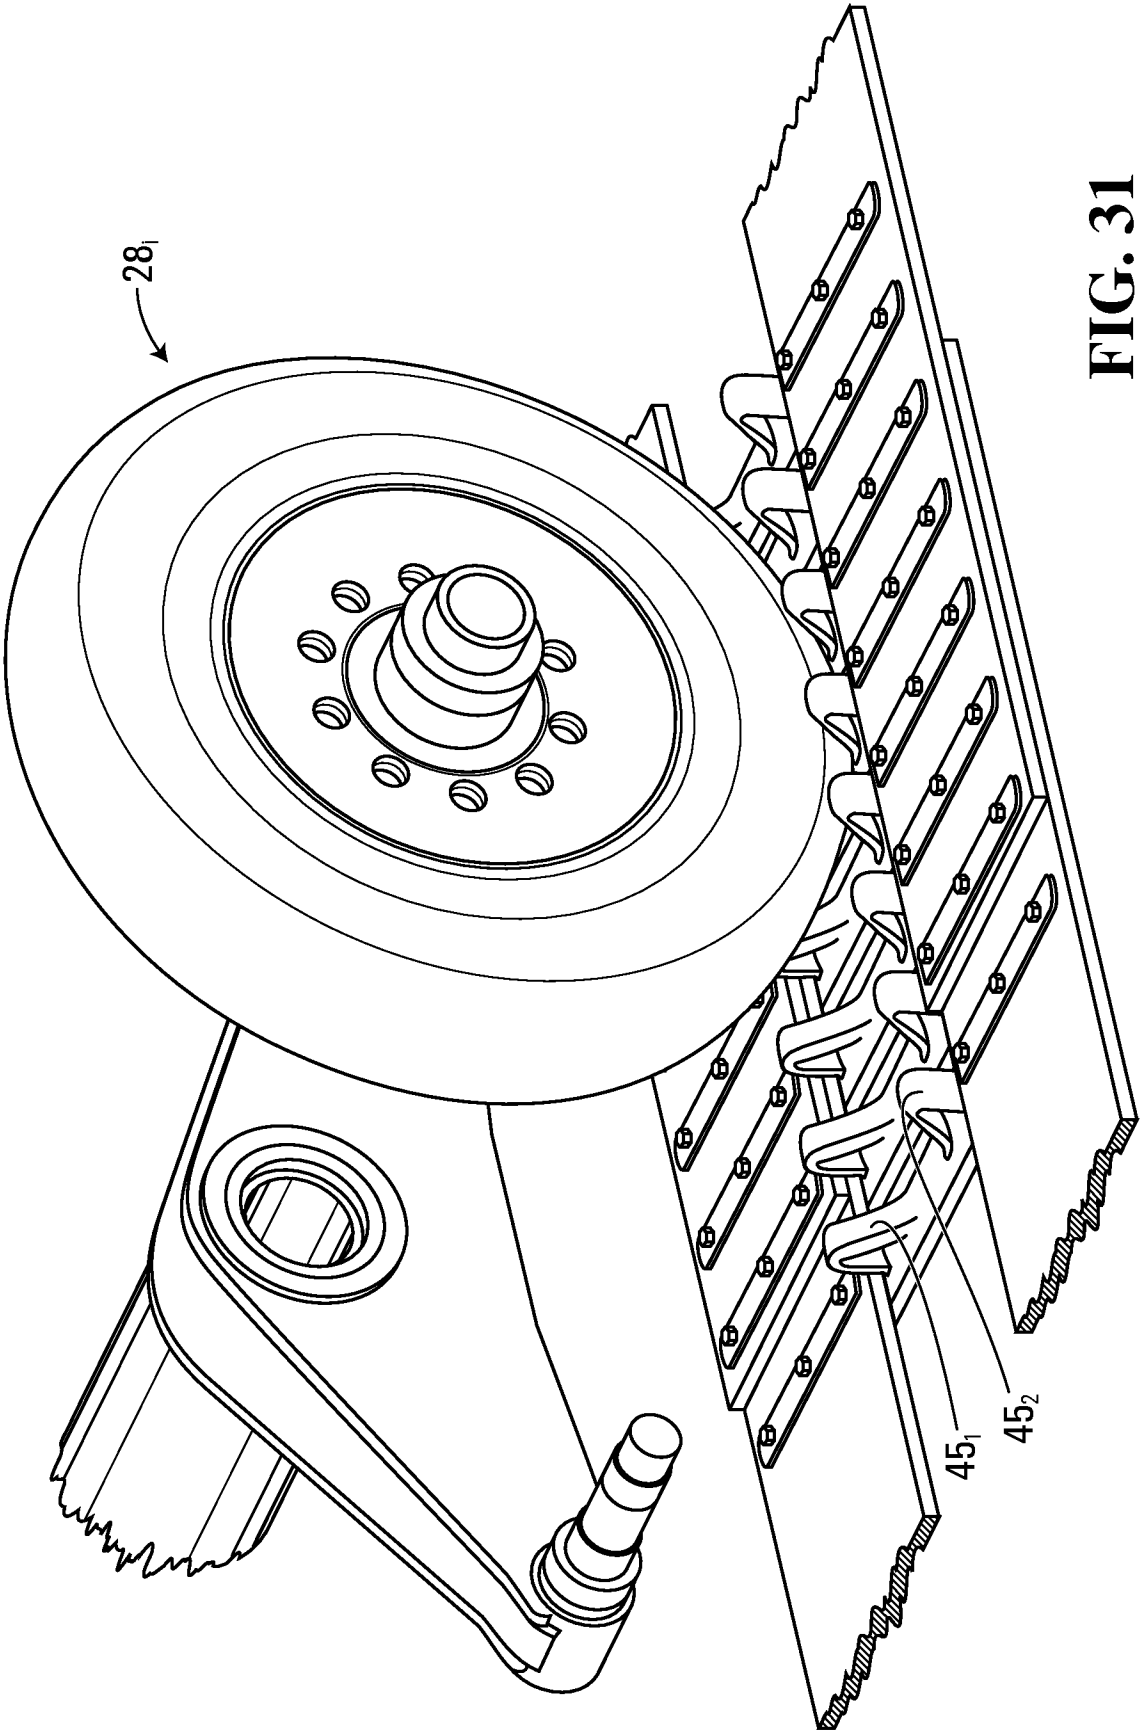

25/41



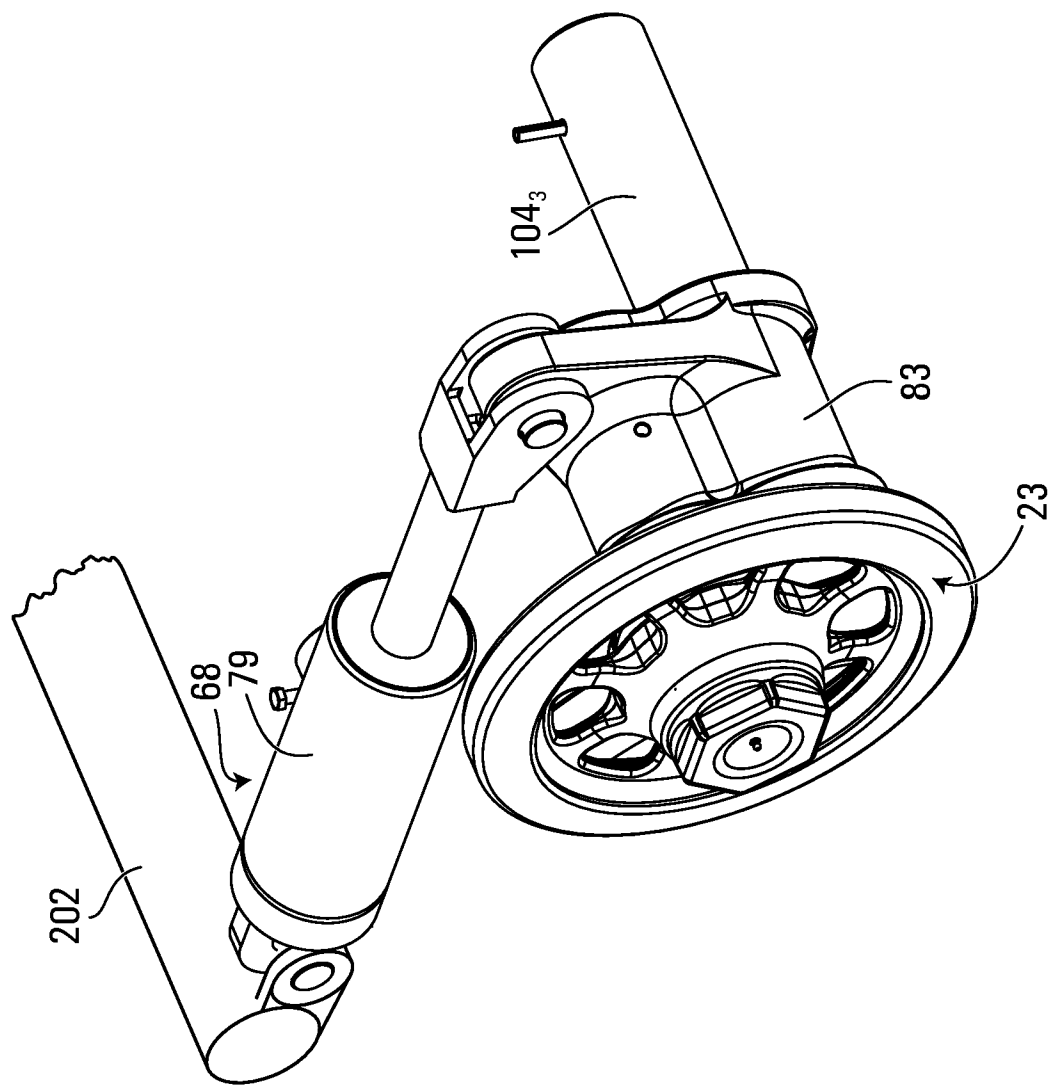


FIG. 32

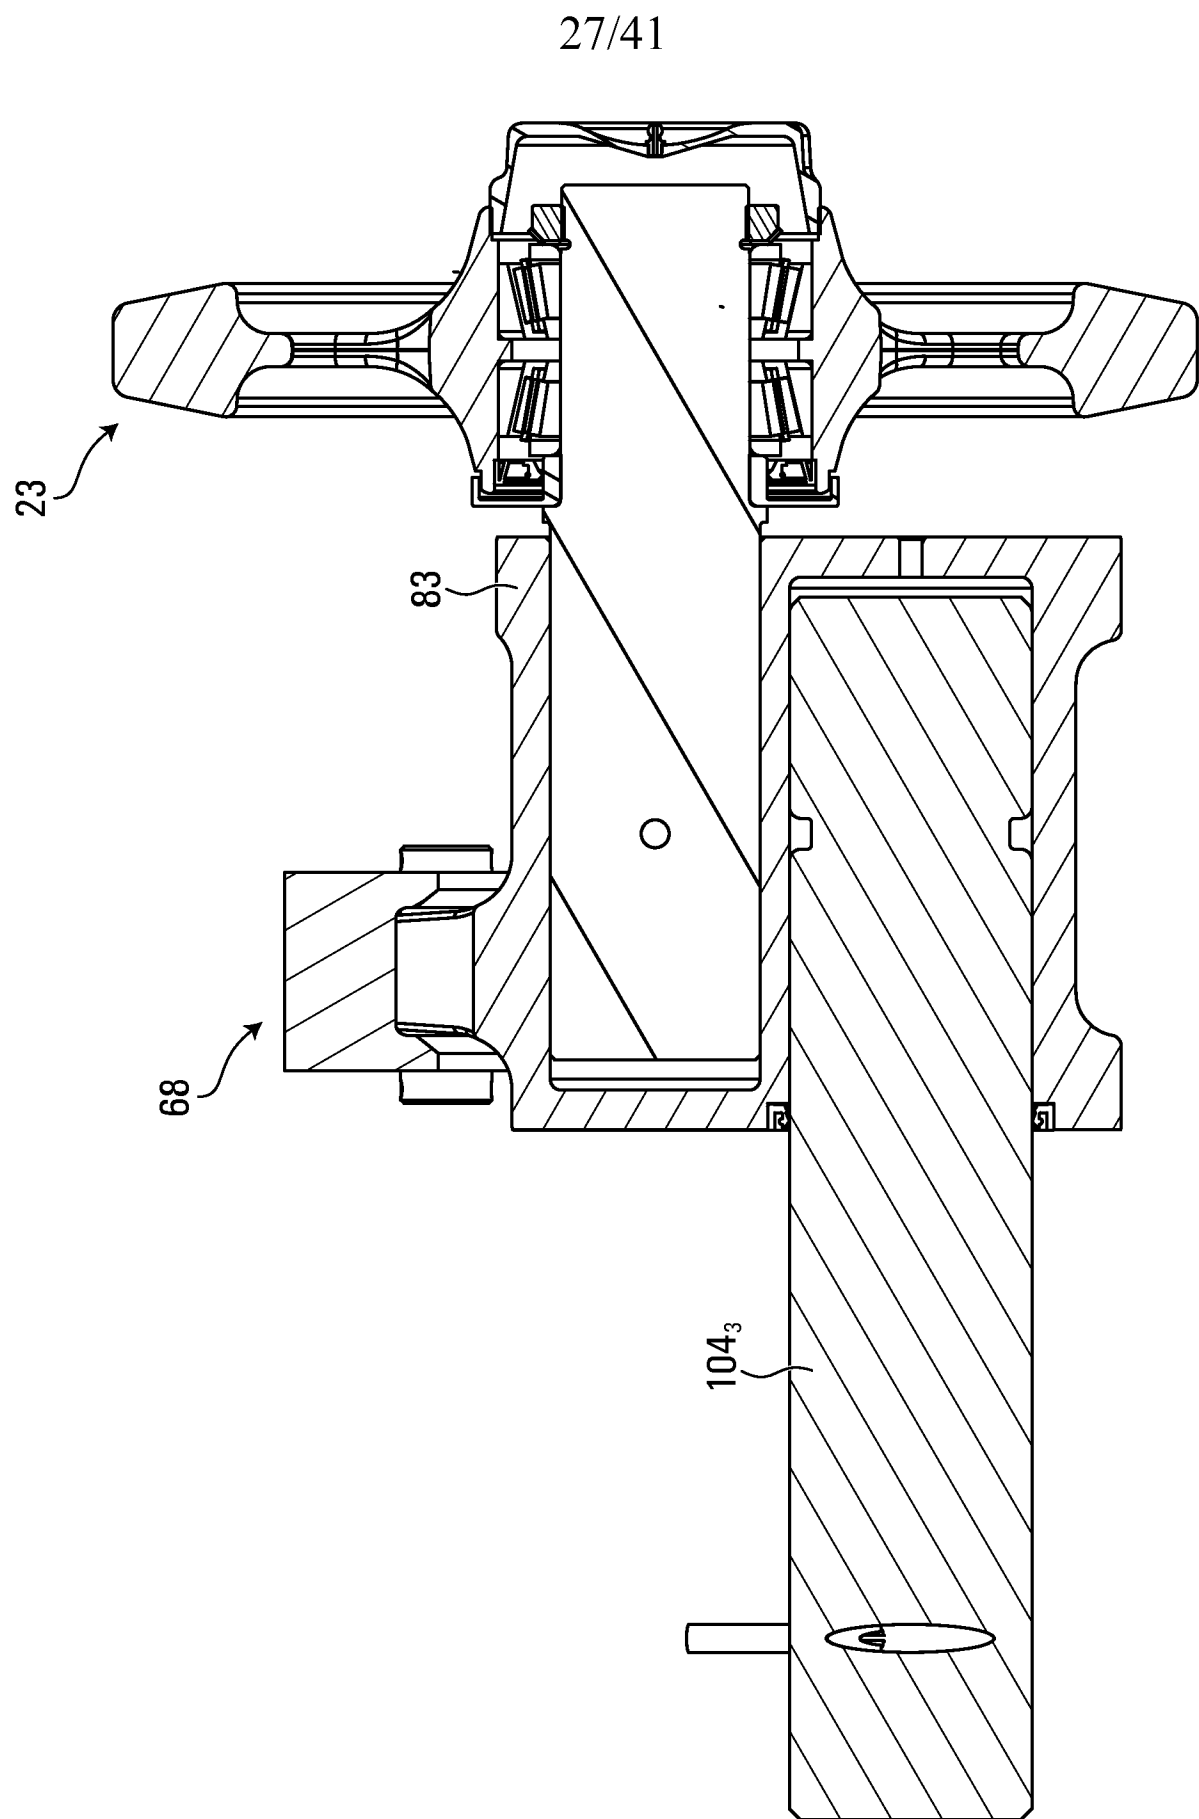


FIG. 33

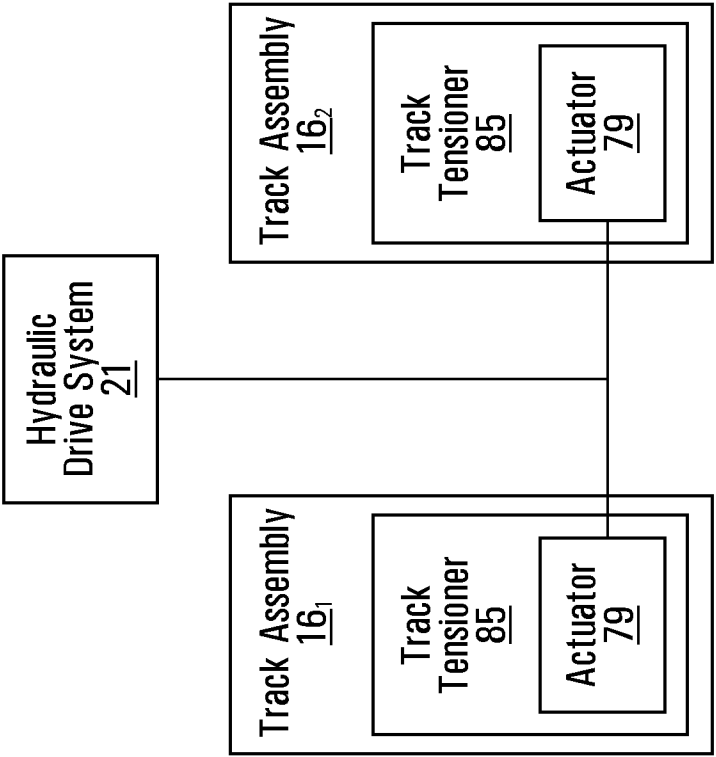


FIG. 34

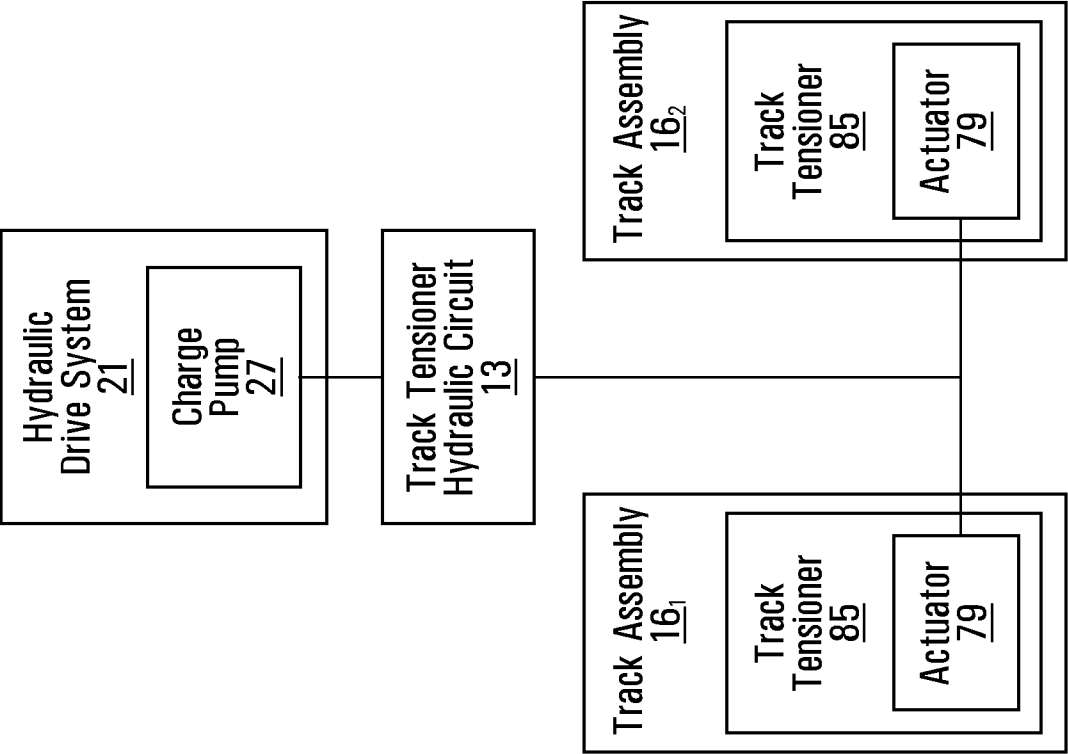


FIG. 35

30/41

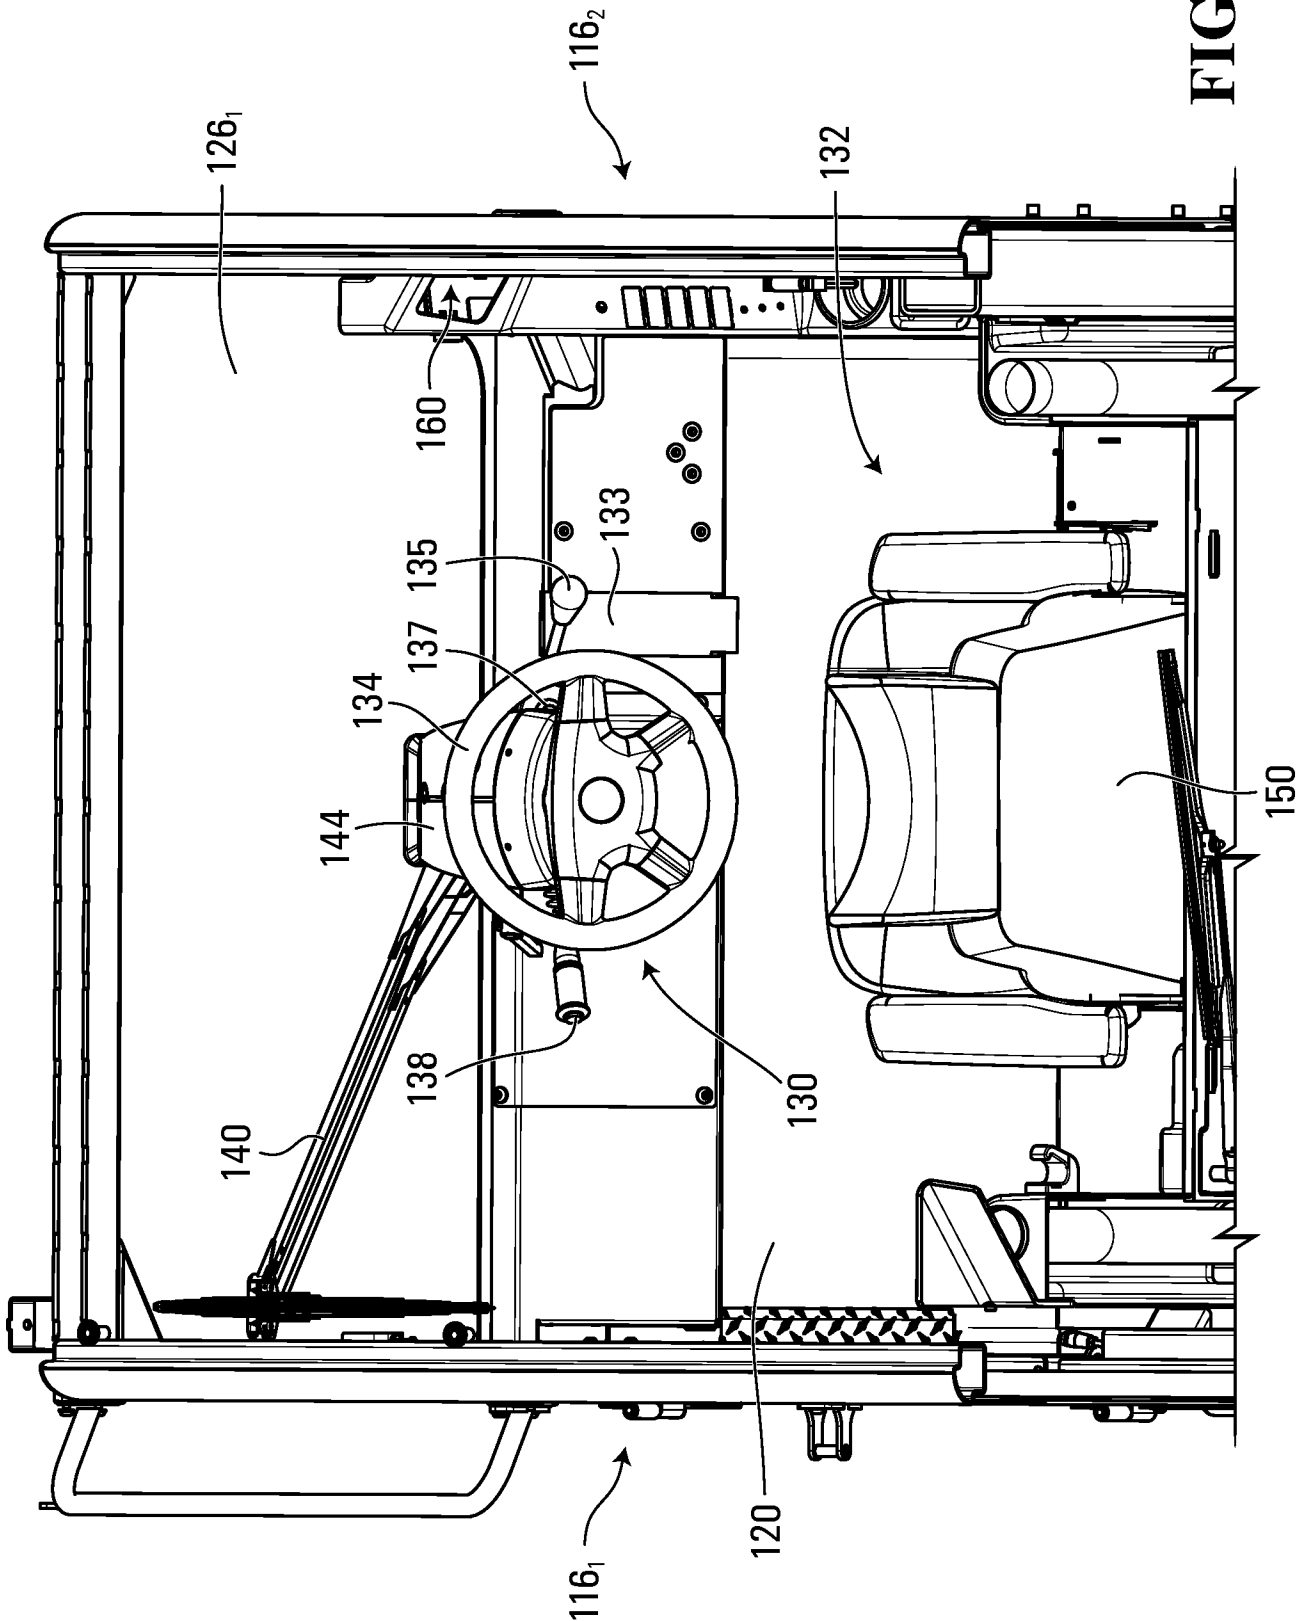


FIG. 36

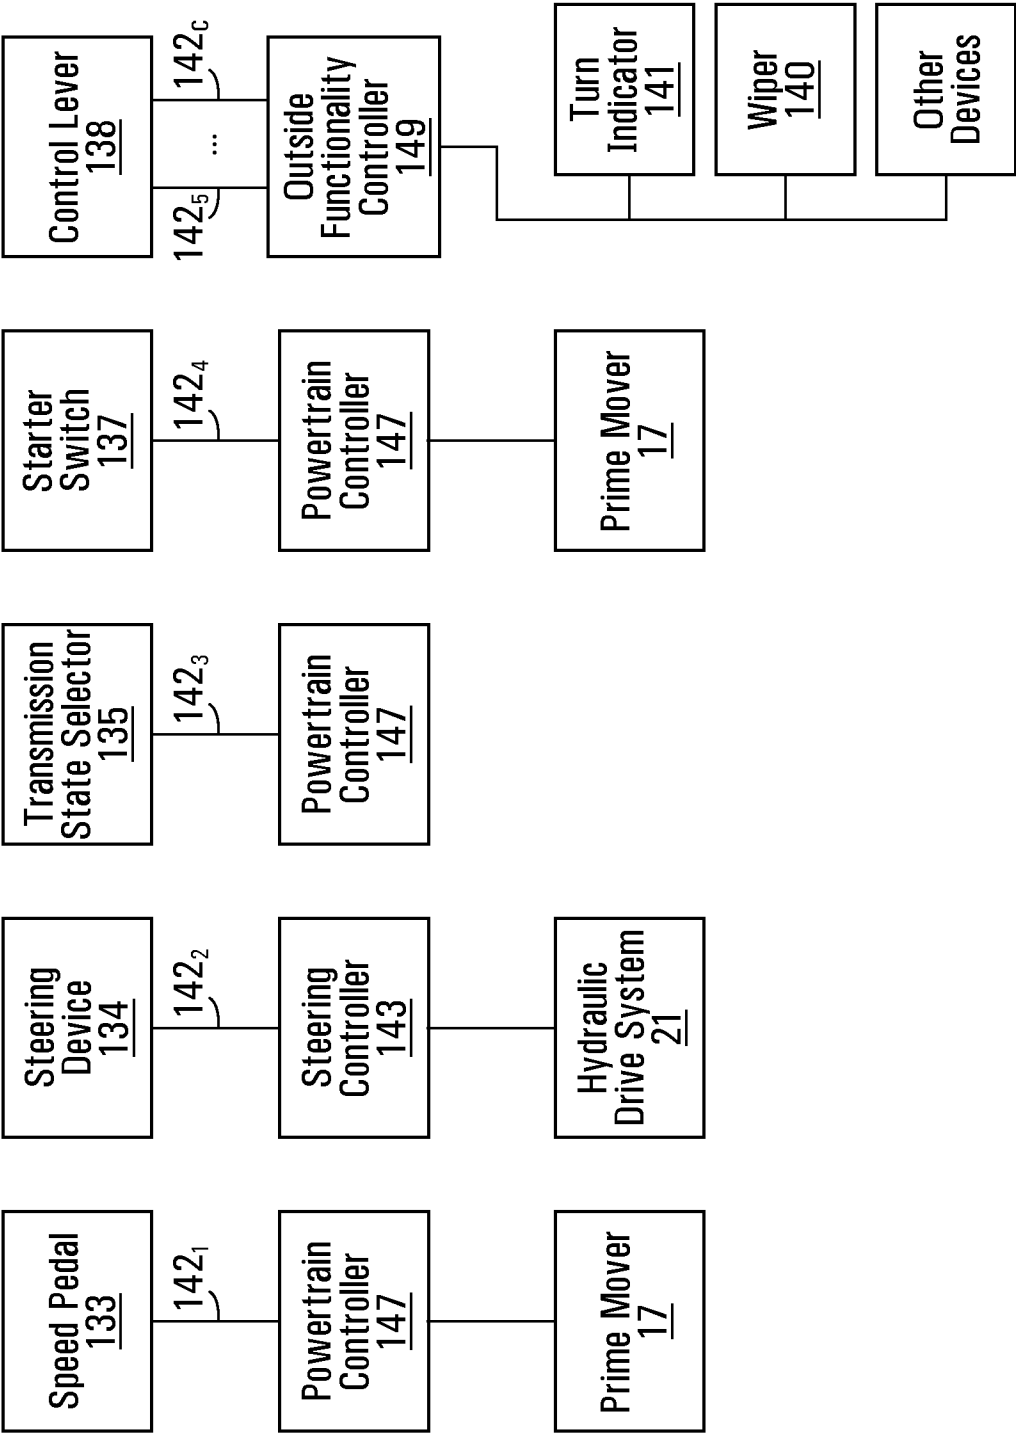


FIG. 37

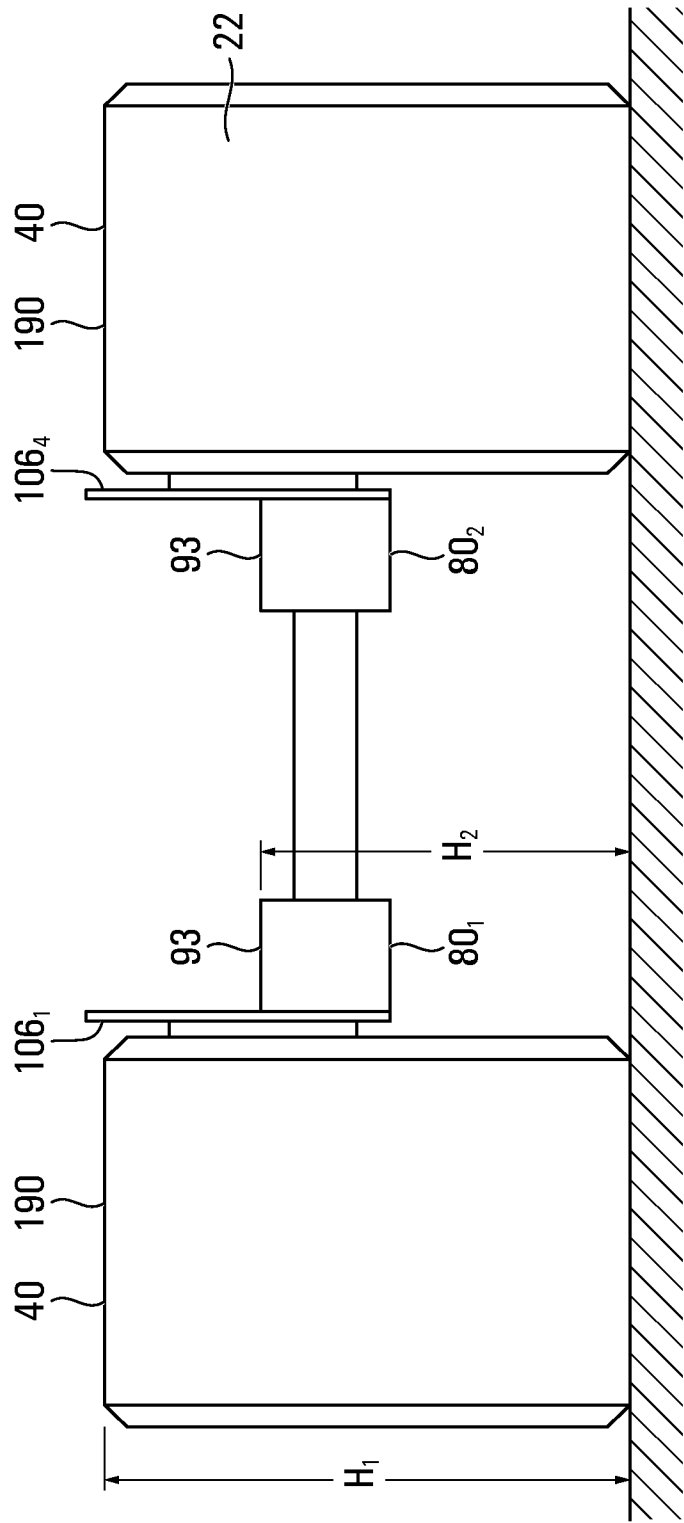


FIG. 38

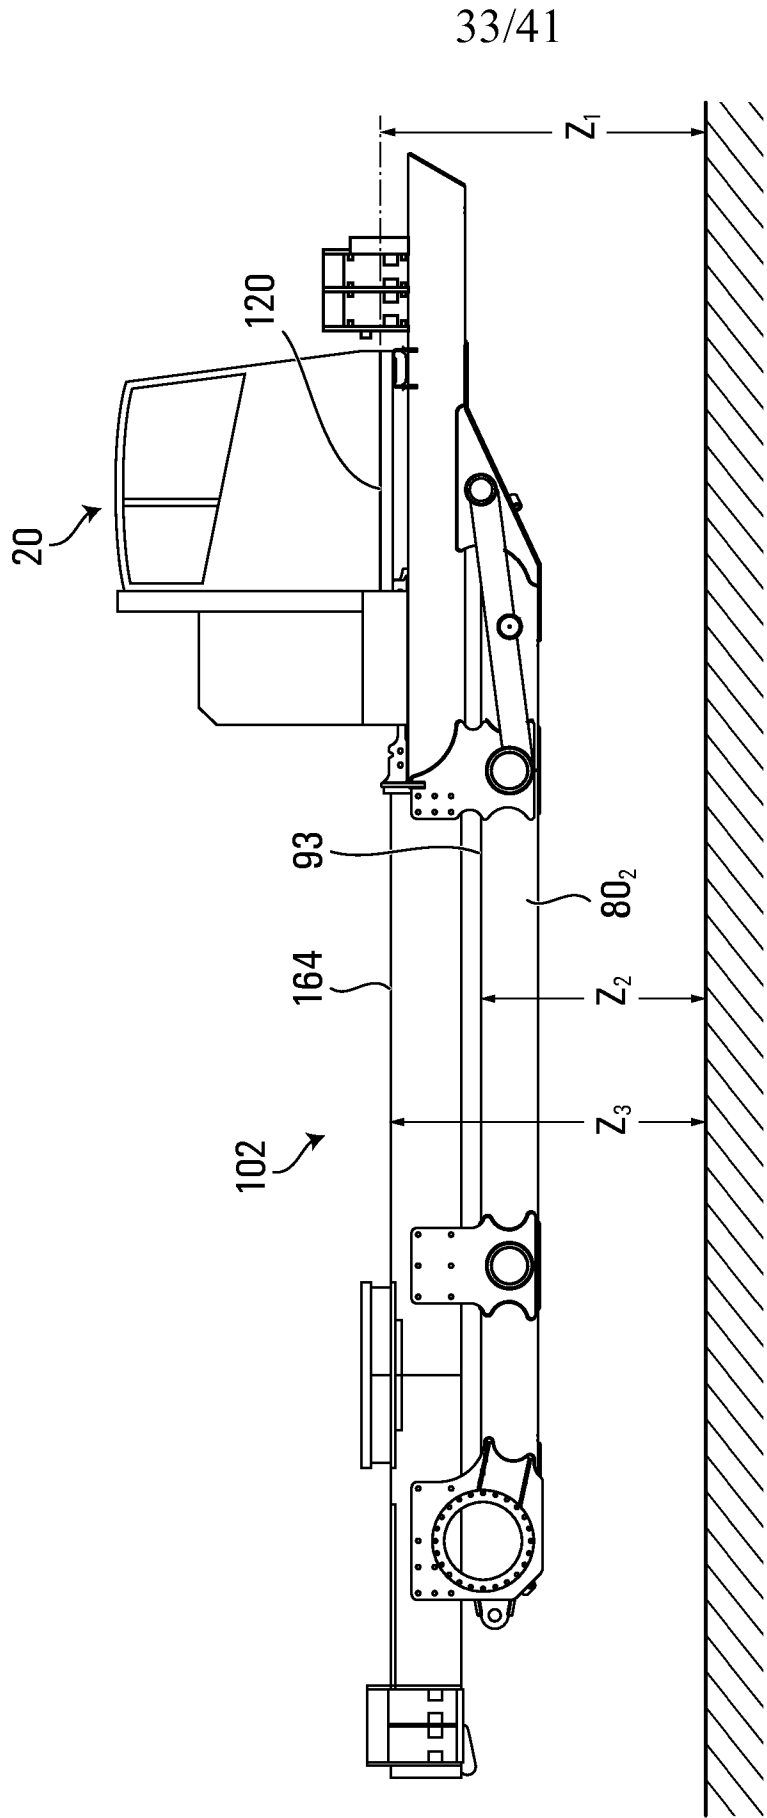


FIG. 39

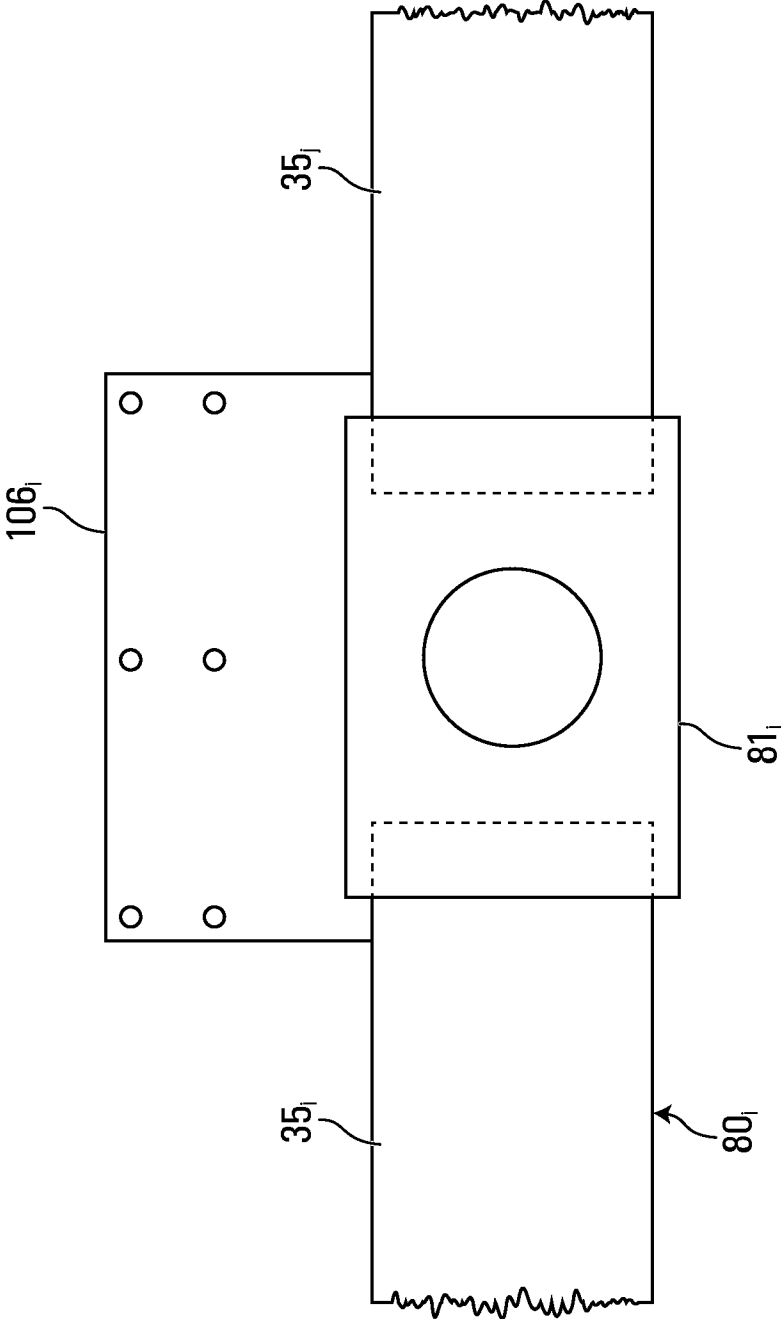


FIG. 40

35/41

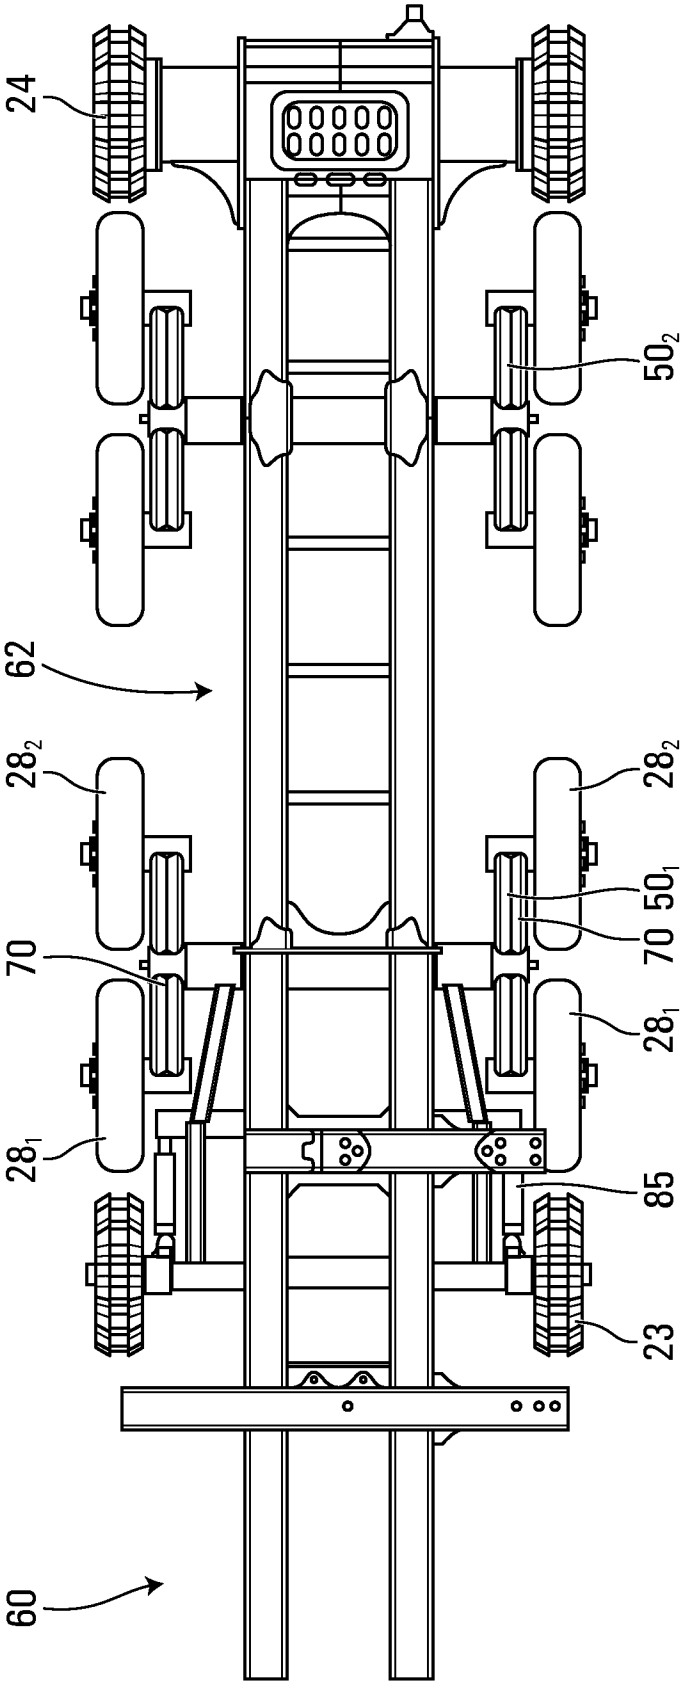


FIG. 41

36/41

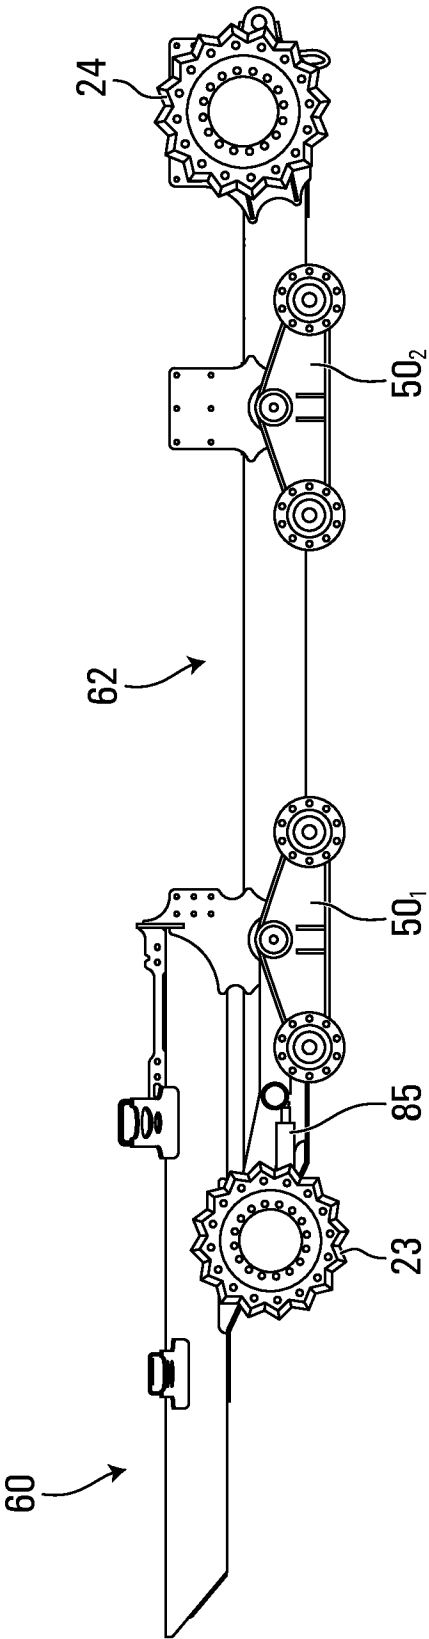


FIG. 42

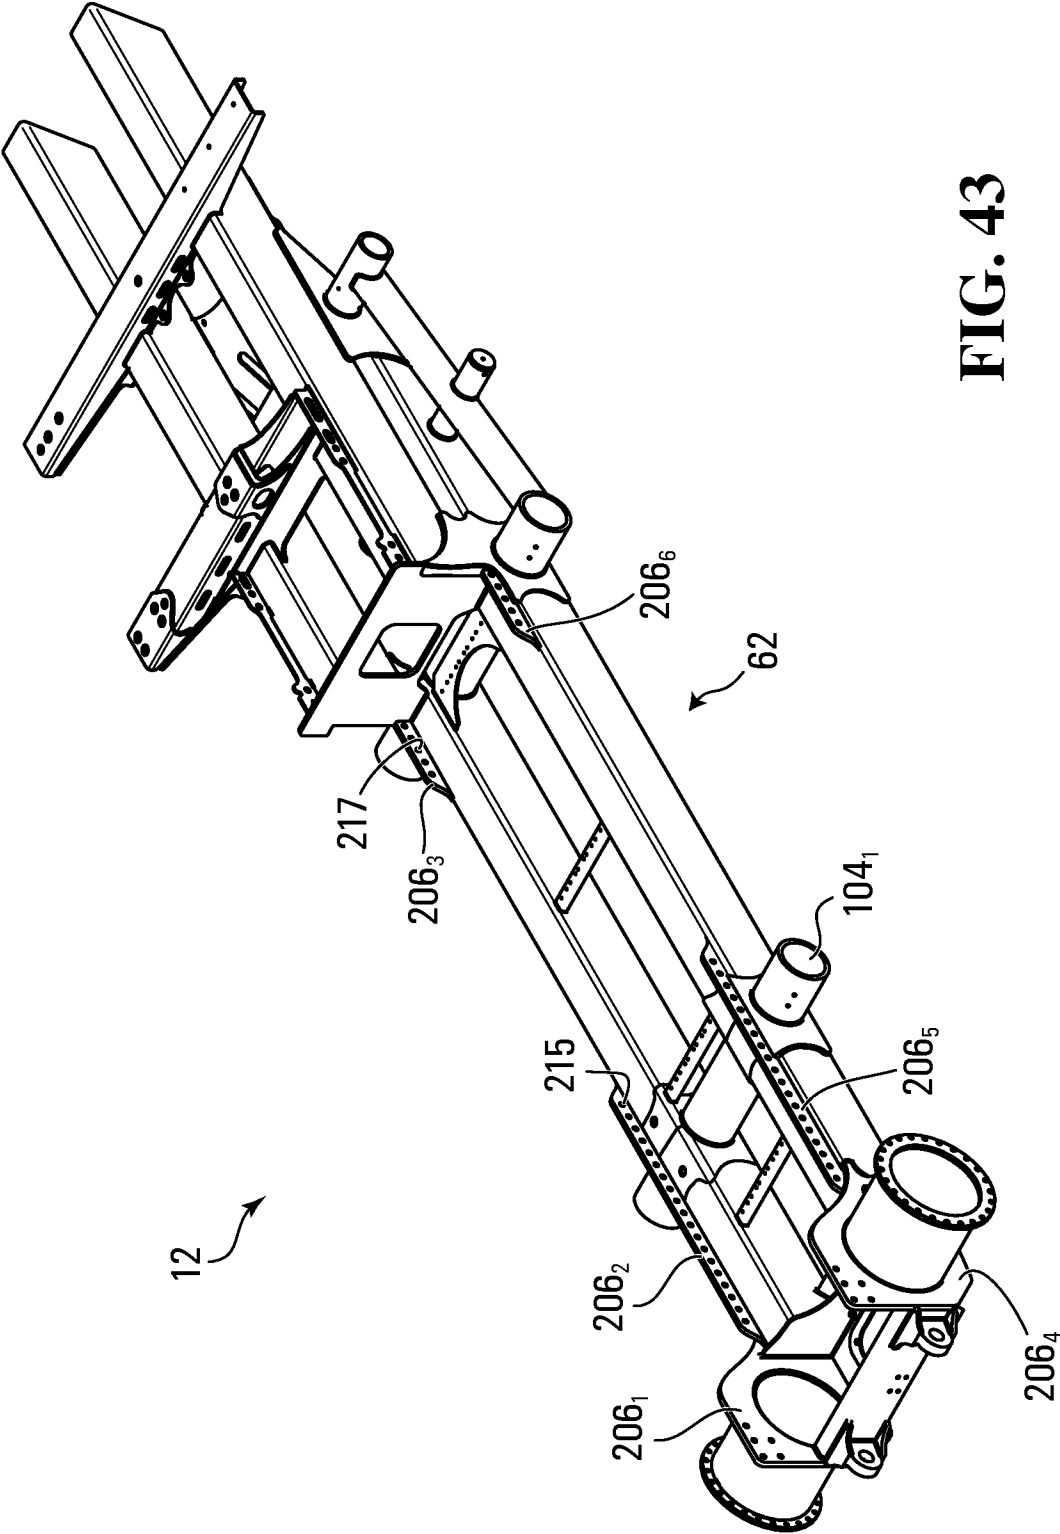


FIG. 43

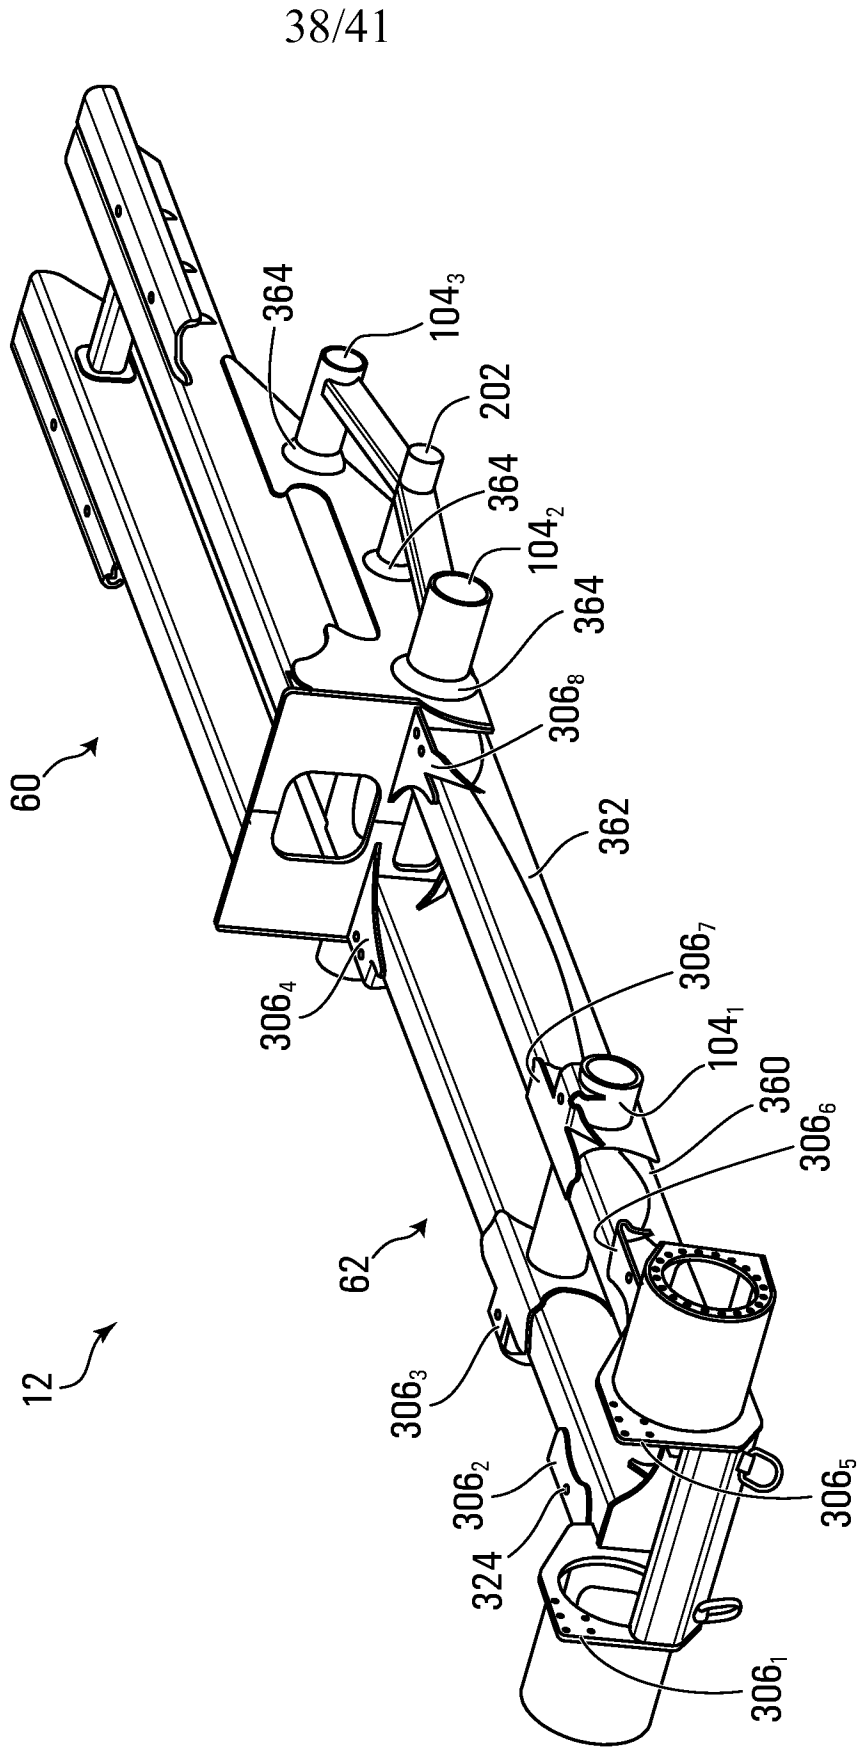


FIG. 44

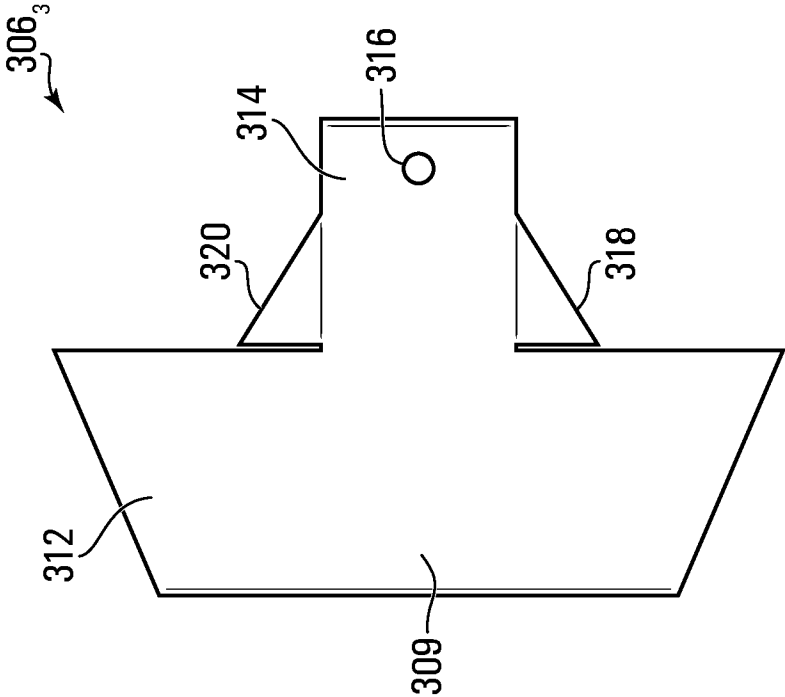


FIG. 45

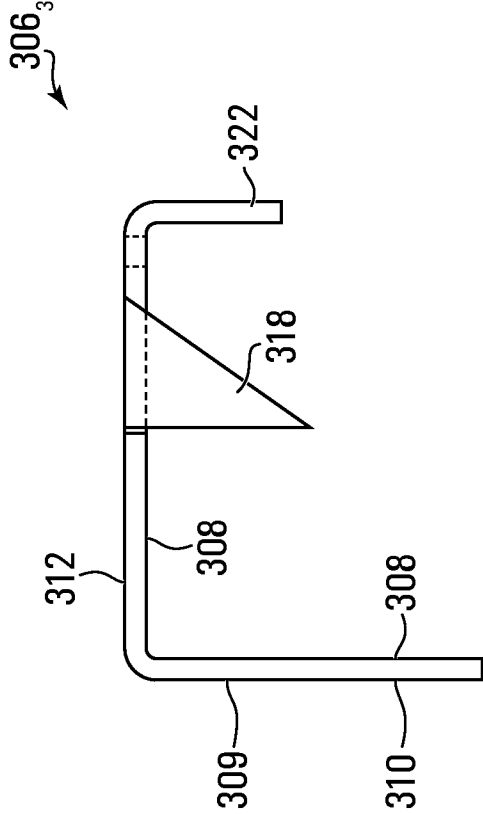
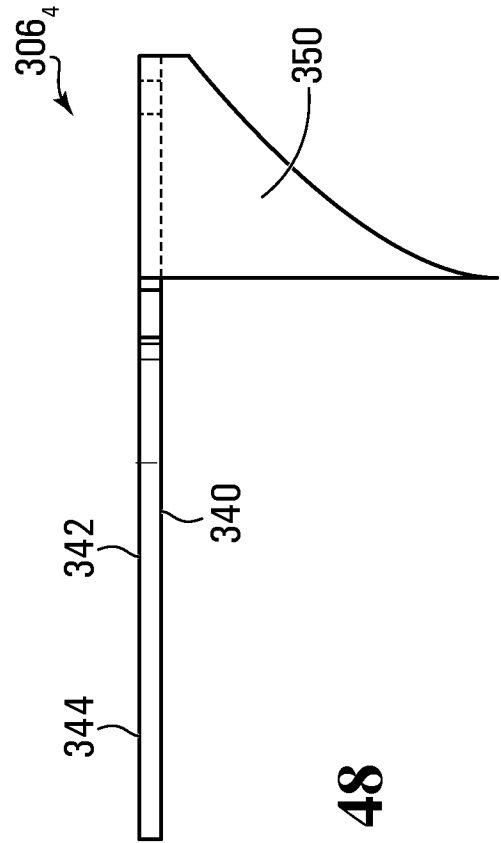
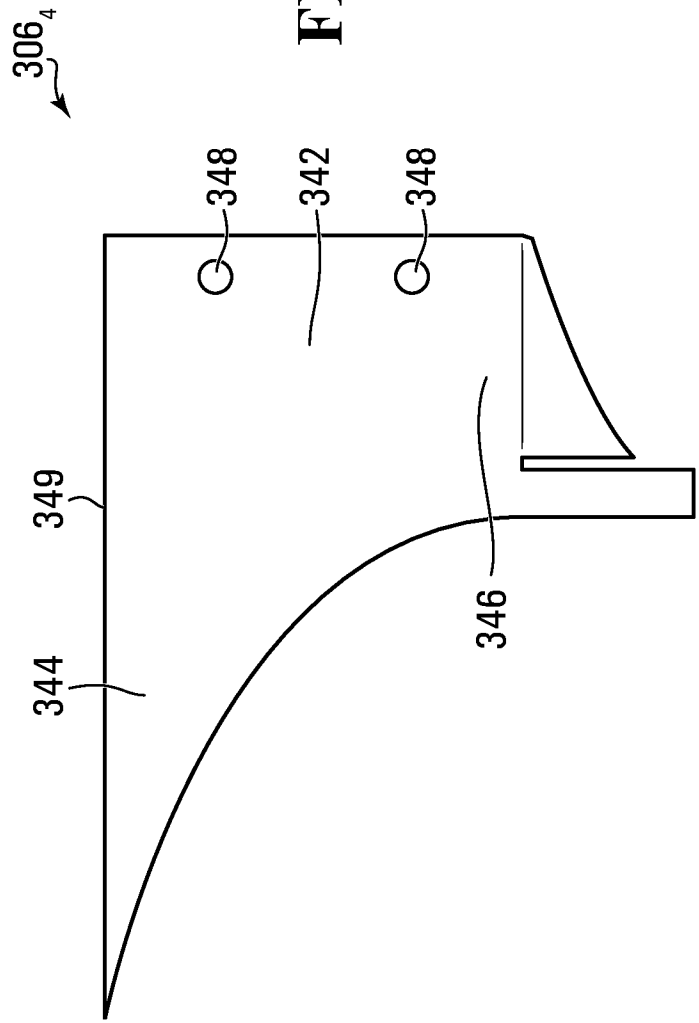


FIG. 46



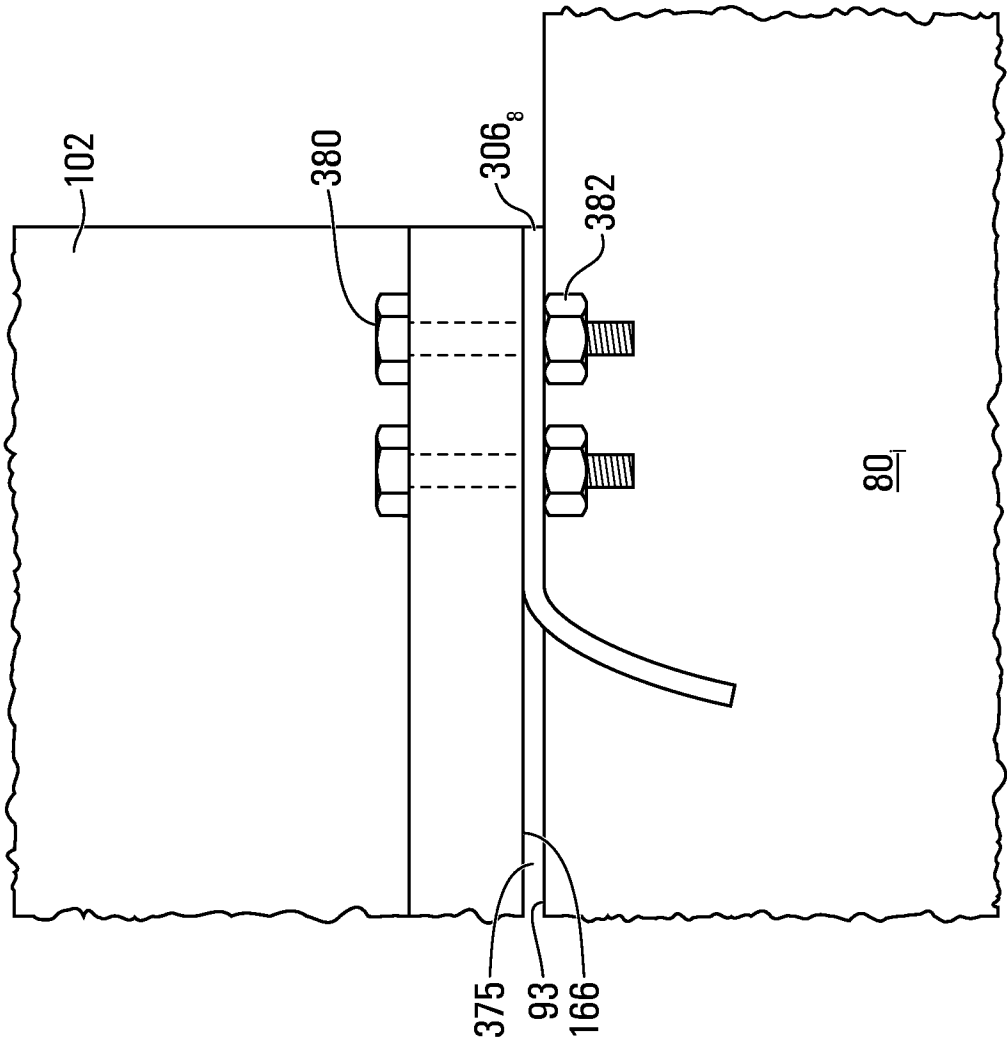


FIG. 49

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/072138

A. CLASSIFICATION OF SUBJECT MATTER

INV. B62D21/18 B62D55/06 B62D55/10 B62D55/24 B62D55/253
B62D55/30

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B62D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2013/029165 A1 (ROLIC INVEST SARL [LU]; STEBEN ERIC [CA]; MARLEAU BENOIT [CA]) 7 March 2013 (2013-03-07) page 9, line 31 - page 10, line 21 page 46, line 28 - page 47, line 11; figures 19-25 page 51, line 1 - line 5 -----	1-43, 91-138, 141,143
A	WO 2010/066045 A1 (ROLIC INVEST SARL [LU]; GODIN MARC-ANDRE [CA]; PAQUET FRANCOIS [CA]) 17 June 2010 (2010-06-17) page 8, line 32 - page 10, line 13; figures 1-3 -----	1-43, 91-138, 141,143
A	US 2014/360811 A1 (ROSS JR FREDRICK MARTIN [US] ET AL) 11 December 2014 (2014-12-11) paragraph [0020] - paragraph [0026]; figures 1-8 -----	1-43, 91-138, 141,143



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

18 February 2016

Date of mailing of the international search report

10/05/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Burley, James

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP2015/072138

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-43, 91-138, 141, 143 see additional sheet(s)

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-43, 91-138, 141, 143

a tracked vehicle having a chassis frame wherein the frame is divided into upper and lower parts which partially overlap

2. claims: 44-90, 142

a tracked vehicle having a chassis frame wherein the torsional resistance of the frame is greater in one portion relative to another

3. claims: 139, 140

methods of installing a torque box on a tracked vehicle

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/072138

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2013029165 A1	07-03-2013	CA 2846662 A1	07-03-2013
		EP 2750964 A1	09-07-2014
		EP 2799315 A2	05-11-2014
		JP 2014529544 A	13-11-2014
		US 2014174839 A1	26-06-2014
		US 2015008052 A1	08-01-2015
		WO 2013029165 A1	07-03-2013

WO 2010066045 A1	17-06-2010	CA 2746338 A1	17-06-2010
		EP 2373533 A1	12-10-2011
		US 2012037434 A1	16-02-2012
		WO 2010066045 A1	17-06-2010

US 2014360811 A1	11-12-2014	CA 2854099 A1	10-12-2014
		US 2014360811 A1	11-12-2014
