




(86) Date de dépôt PCT/PCT Filing Date: 2011/03/28 (87) Date publication PCT/PCT Publication Date: 2011/10/06 (45) Date de délivrance/Issue Date: 2018/04/10 (85) Entrée phase nationale/National Entry: 2012/09/27 (86) N° demande PCT/PCT Application No.: US 2011/030202 (87) N° publication PCT/PCT Publication No.: 2011/123392 (30) Priorité/Priority: 2010/03/31 (US12/752,079)	(51) Cl.Int./Int.Cl. <i>B64D 29/00</i> (2006.01), <i>F02C 7/24</i> (2006.01) (72) Inventeurs/Inventors: THRASH, PATRICK J., US; MILLER, DAVID MICHAEL, US (73) Propriétaire/Owner: THE BOEING COMPANY, US (74) Agent: SIM & MCBURNEY
---	--

(54) Titre : STRUCTURE DE NACELLE MOTEUR UNITARISEE
(54) Title: UNITIZED ENGINE NACELLE STRUCTURE

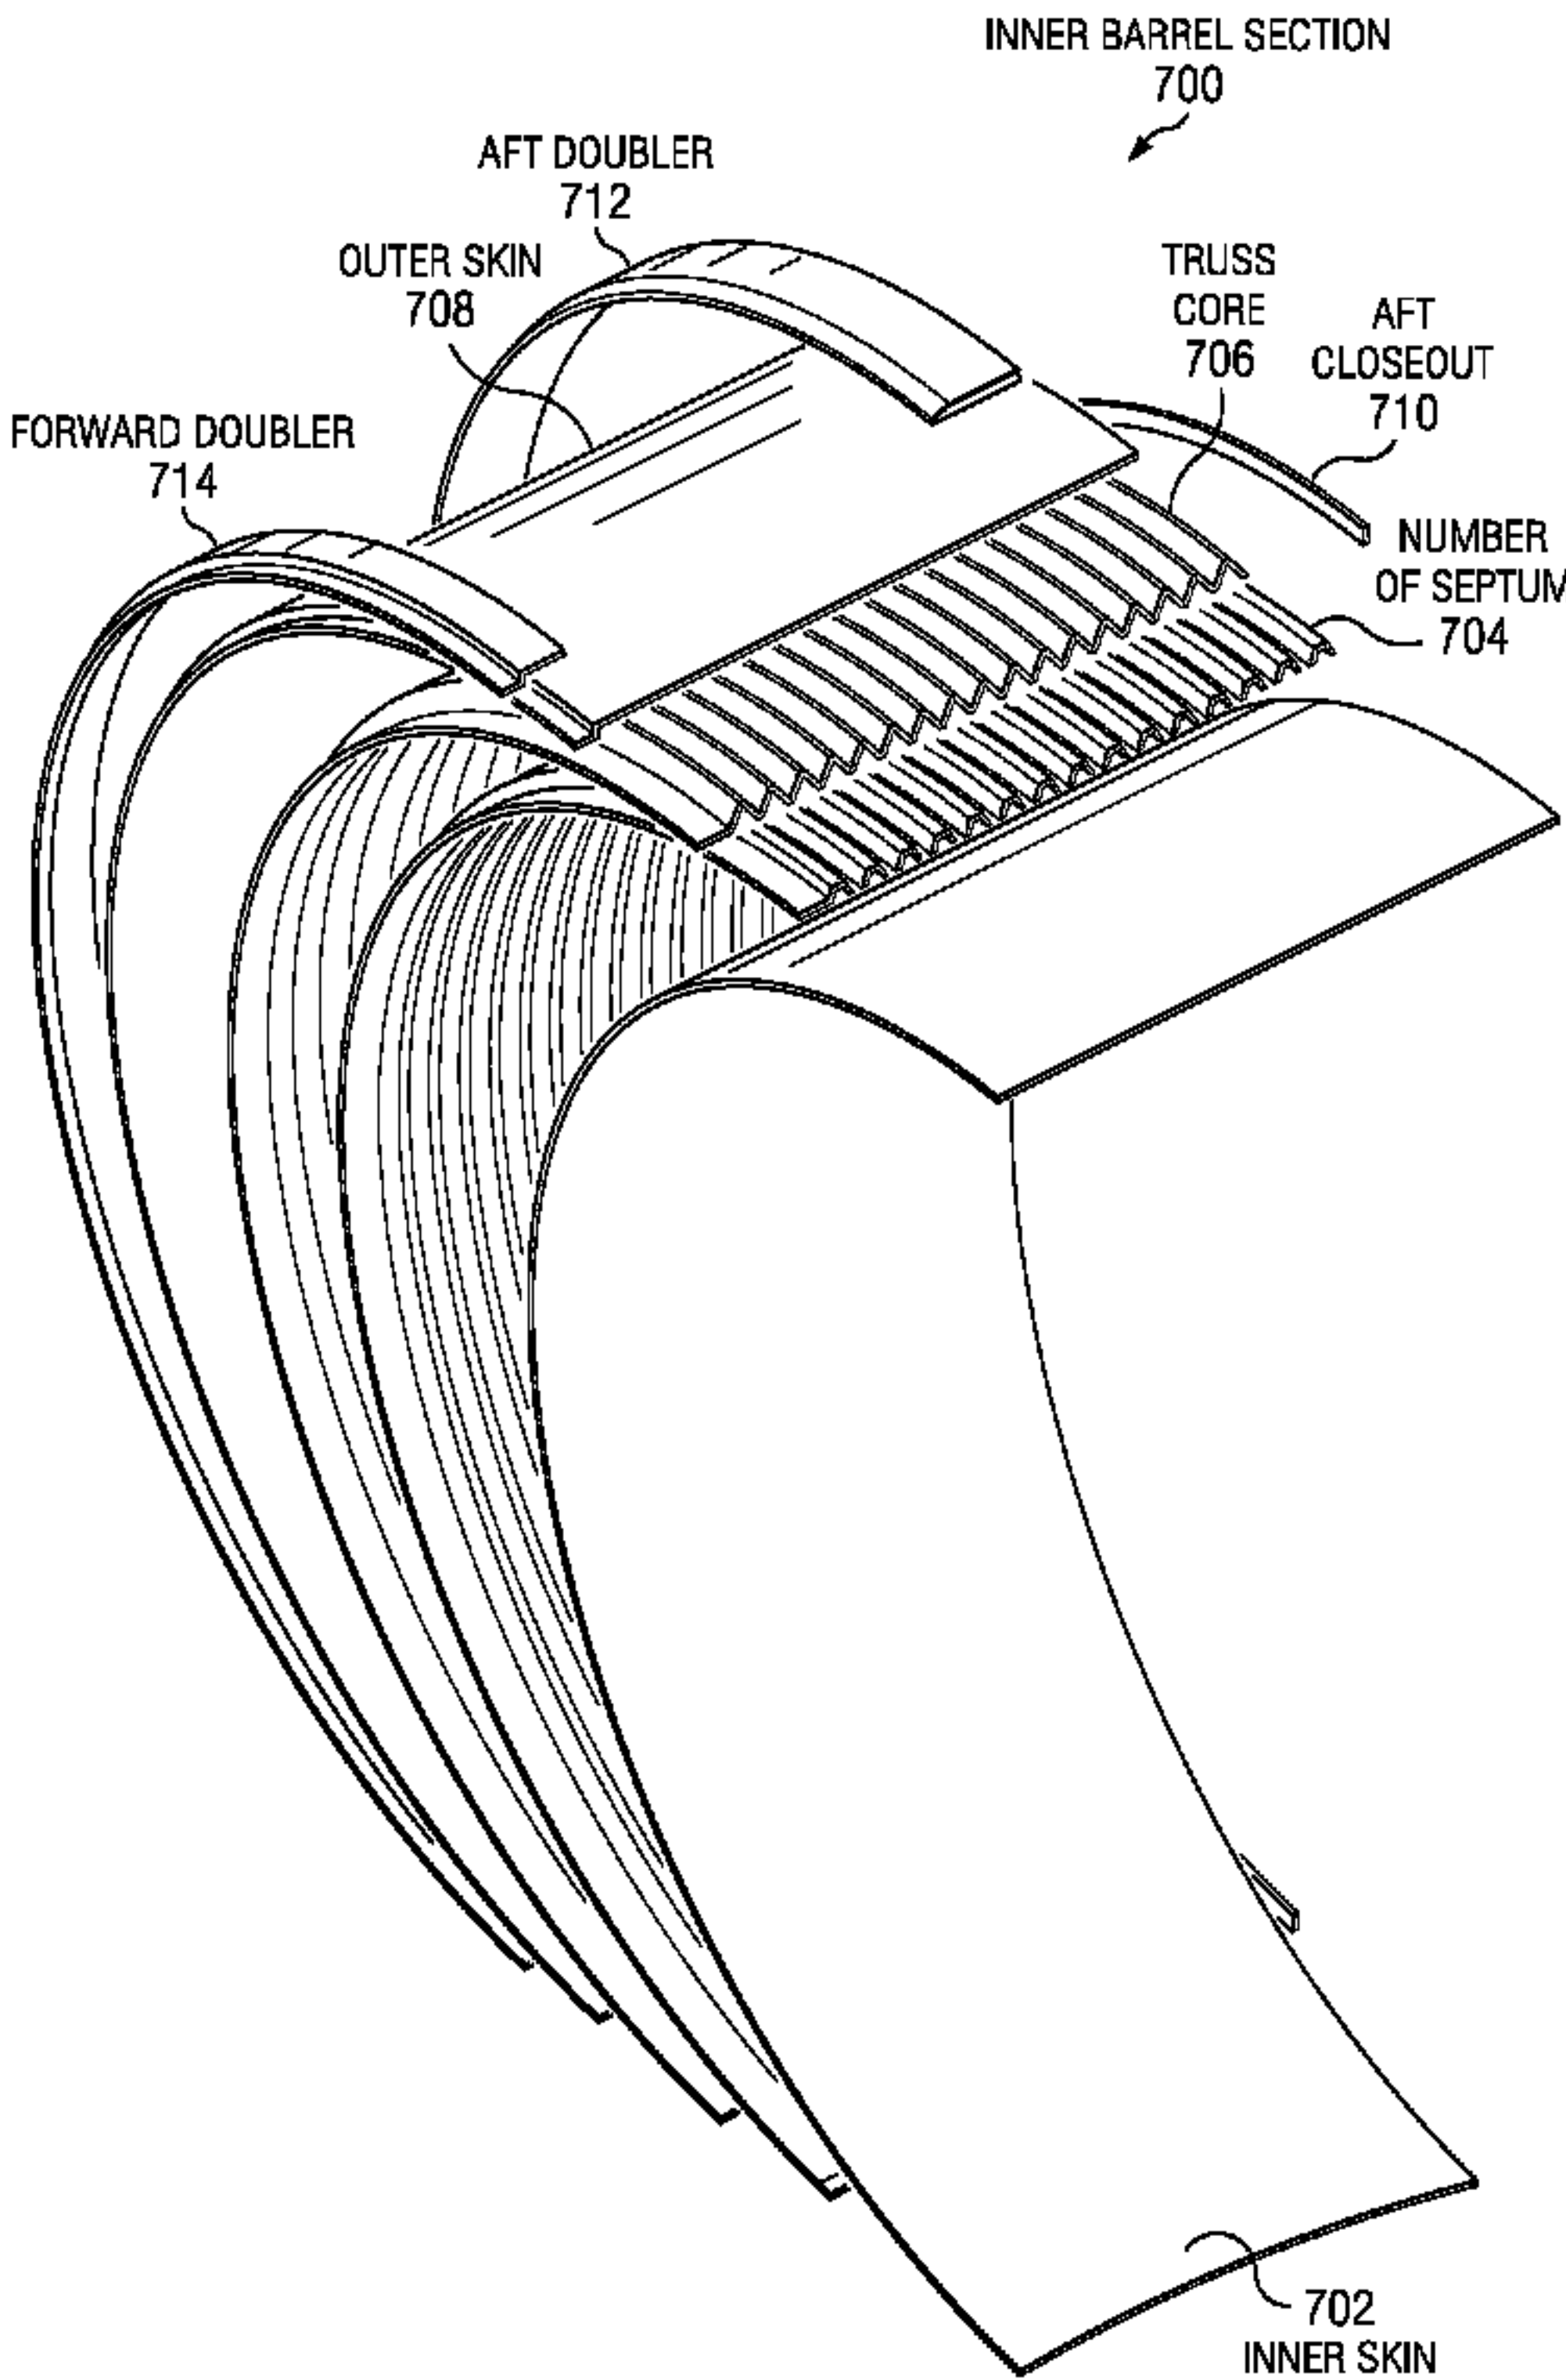

(57) Abrégé/Abstract:
An inner barrel structure (700) for an engine nacelle. The inner barrel structure (700) includes an inner skin (702), a truss core (706) disposed with respect to the inner skin (702) to define a plurality of cavities, and a plurality of septa (704) respective disposed in the cavities.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
6 October 2011 (06.10.2011)(10) International Publication Number
WO 2011/123392 A3(51) International Patent Classification:
B64C 29/00 (2006.01) *F02C 7/24* (2006.01)92880 (US). MILLER, David Michael [US/US]; 6129
Fleetwood Lane, Chino Hills, California 91709 (US).(21) International Application Number:
PCT/US2011/030202(74) Agents: SATERMO, Eric K et al.; The Boeing Compa-
ny, PO Box 2515, MC 110-SD54, Seal Beach, California
90740-1515 (US).(22) International Filing Date:
28 March 2011 (28.03.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/752,079 31 March 2010 (31.03.2010) US(71) Applicant (for all designated States except US): THE
BOEING COMPANY [US/US]; 100 North Riverside
Plaza, Chicago, Illinois 60606-2016 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): THRASH, Patrick
J. [US/US]; 6940 Winterberry Way, Corona, California(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,

[Continued on next page]

(54) Title: UNITIZED ENGINE NACELLE STRUCTURE

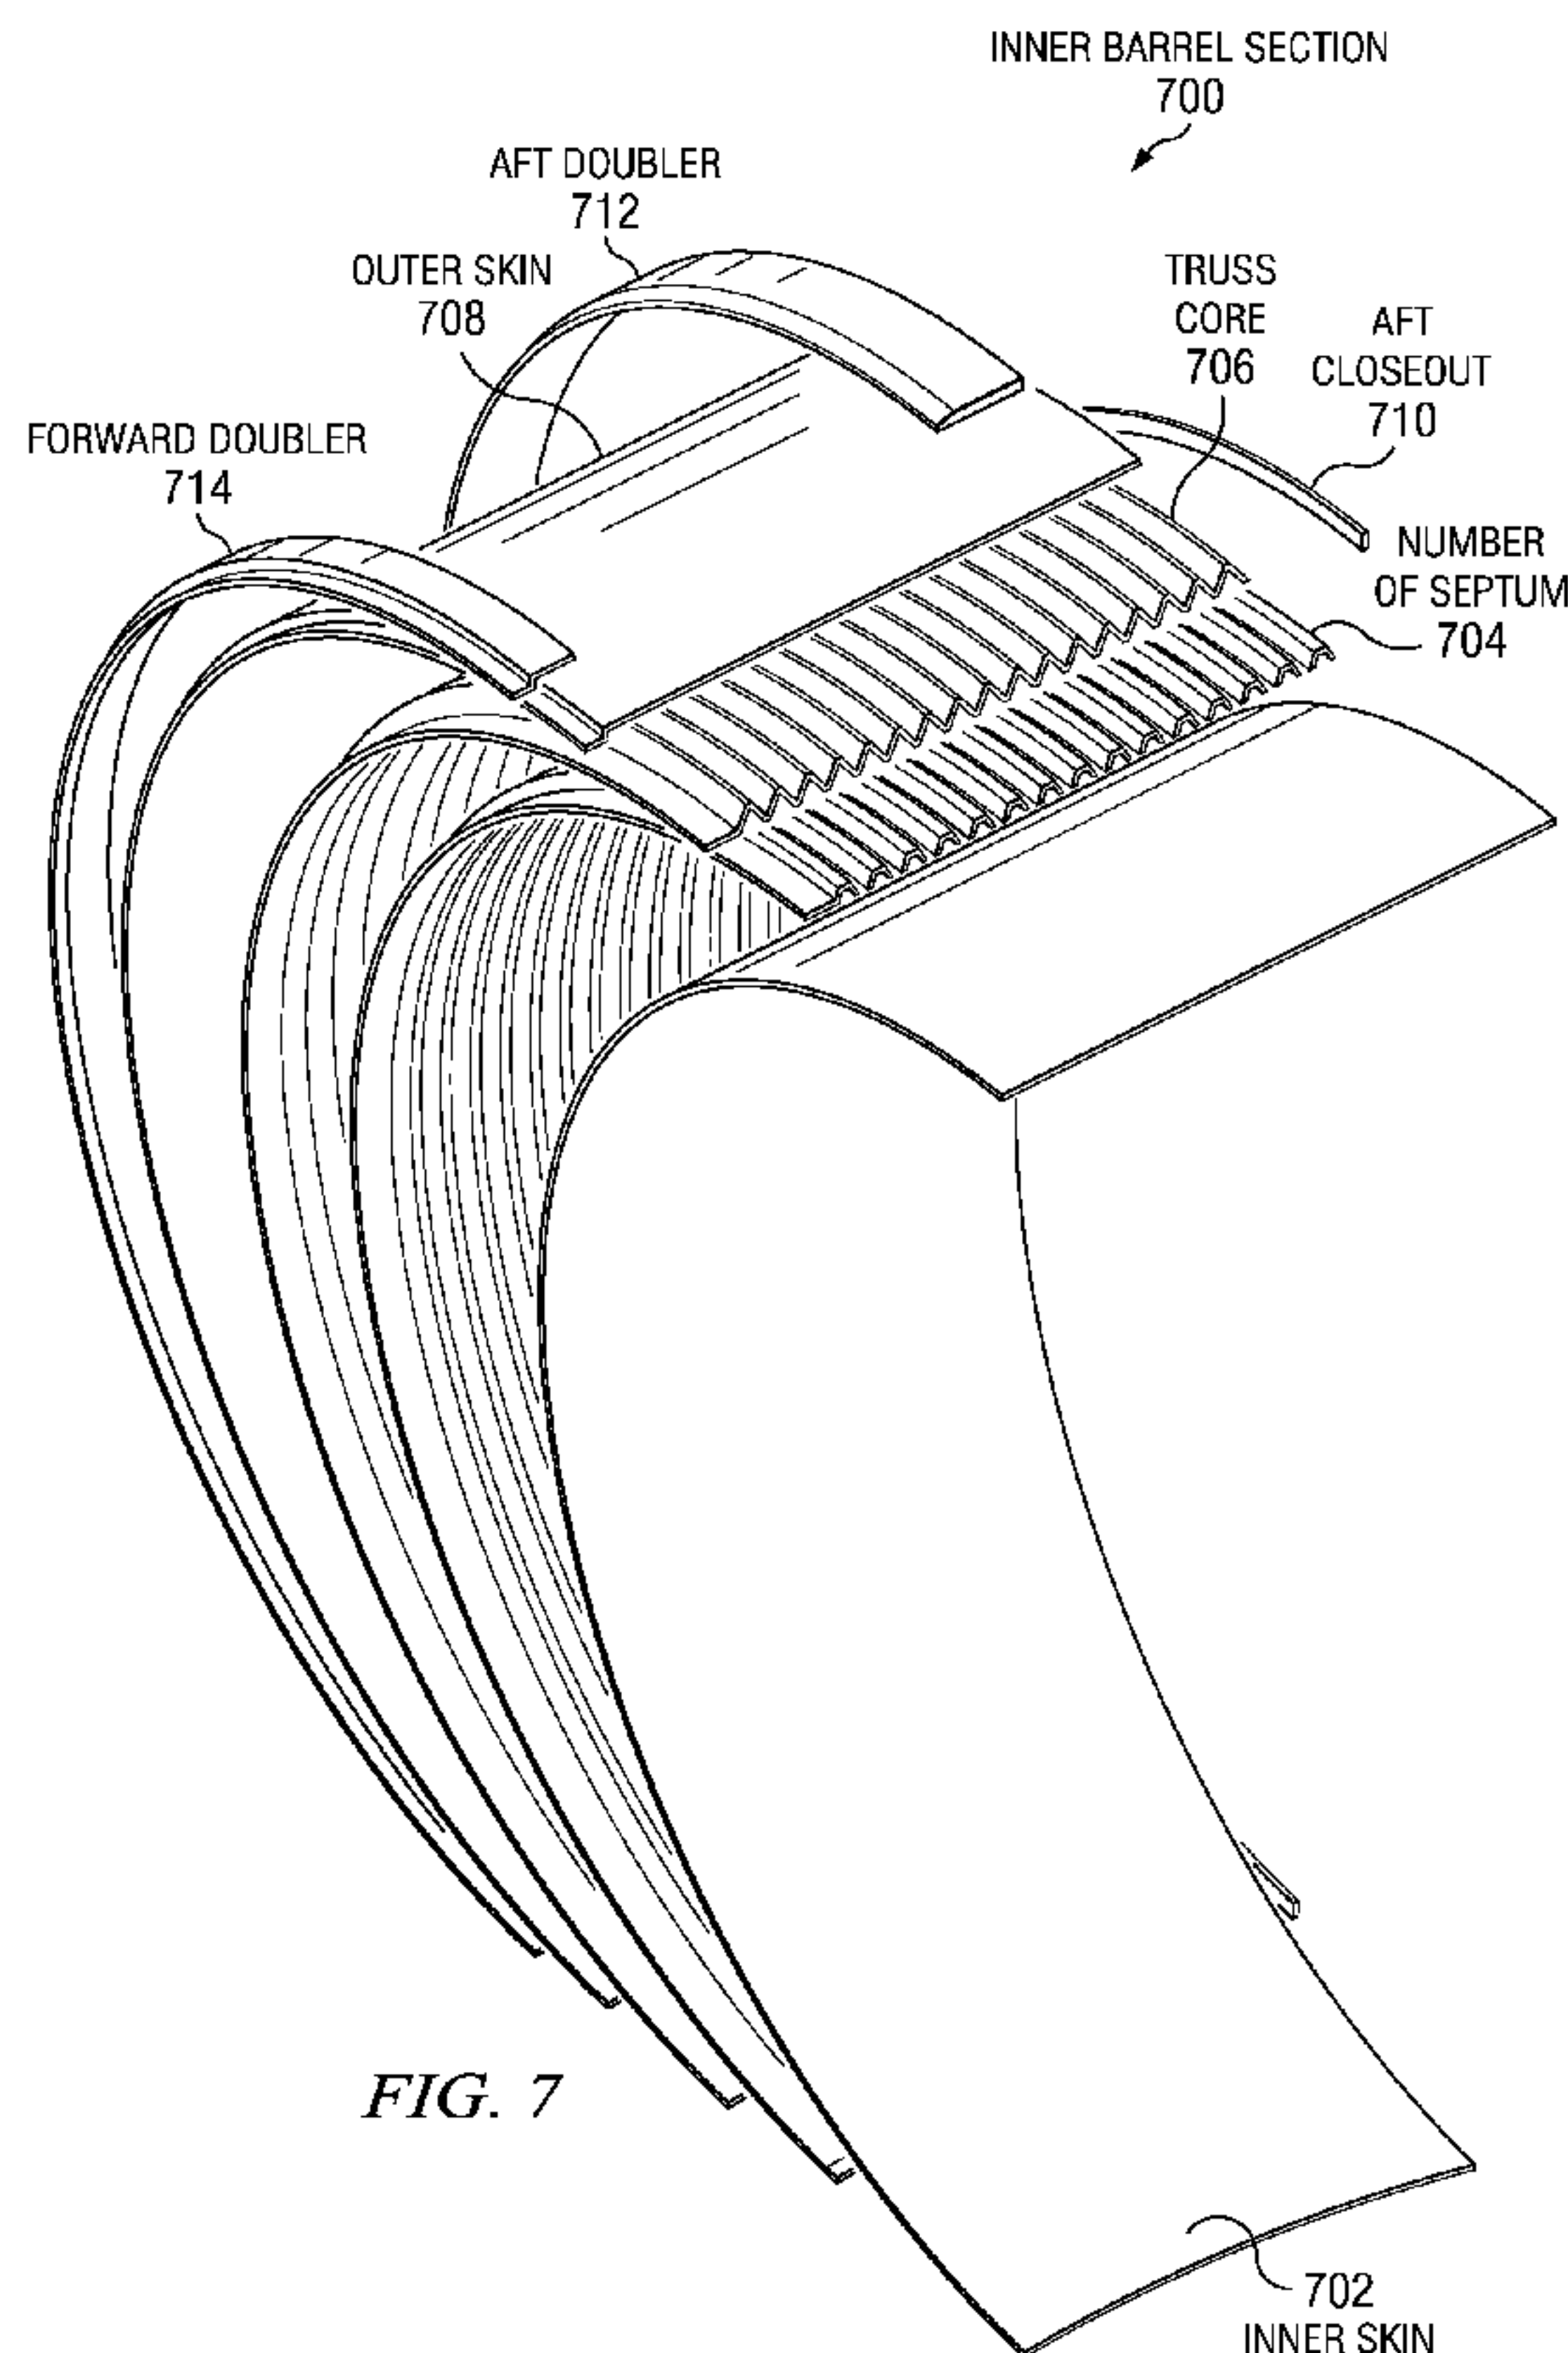
(57) Abstract: An inner barrel structure (700) for an engine na-
celle. The inner barrel structure (700) includes an inner skin
(702), a truss core (706) disposed with respect to the inner skin
(702) to define a plurality of cavities, and a plurality of septa
(704) respective disposed in the cavities.

FIG. 7

WO 2011/123392 A3

WO 2011/123392 A3

- ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

 - as to the identity of the inventor (Rule 4.17(i))
 - as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

 - with international search report (Art. 21(3))
 - before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(88) Date of publication of the international search report:
24 November 2011

UNITIZED ENGINE NACELLE STRUCTURE

BACKGROUND INFORMATION

The present disclosure relates generally to aircraft manufacturing and more specifically to manufacturing composite engine nacelle structures. Still more specifically, the present disclosure relates to an acoustically treated inner barrel structure for engine nacelles.

An engine nacelle is a housing structure for an engine, such as a jet engine or turbine engine of an aircraft. The nacelle is required to withstand duct pressures and loads imposed upon it in flight and during ground handling. The nacelle is considered a secondary structure to the aircraft structures of the wings and fuselage.

Composite technology applications may be found in aircraft structures, including the nacelle. Non-metallic composites offer weight and cost savings for nacelle structures. However, the nacelle must still withstand the high pressure and high temperature conditions experienced during flight. The constraints upon nacelle design include strength, temperature, fire containment, noise reduction, sonic fatigue, damage tolerance and erosion.

Therefore, it is advantageous to have a method and apparatus that takes into account one or more of the issues discussed above, as well as possibly other issues.

SUMMARY

The different advantageous embodiments provide an inner barrel structure comprising an outer skin, an inner skin, a number of septum, and a truss core.

The different advantageous embodiments further provide a method for assembling a barrel structure. A number of layers of an inner skin fabric is laid down around a steel mold tool to form an inner skin. A number of mandrel sections with encapsulated septum detail is installed on the inner skin. A first number of radial ply closeouts is installed between each of the number of mandrel sections with encapsulated septum detail installed. A number of layers of truss core fabric is laid down over the number of mandrel sections with encapsulated septum detail to form a truss core. A number of mandrel sections is installed on the truss core. A second number of radial ply closeouts is installed between each of the number of mandrel sections. A number of layers of an outer skin fabric is laid down against the number of mandrel sections to form an outer skin.

The different advantageous embodiments further provide a method for forming a barrel structure. A vacuum bag is installed over a dry three-dimensional preform inner barrel structure on a steel mold tool. The dry three-dimensional preform inner barrel structure is placed inside an

oven. The dry three-dimensional preform inner barrel structure is infused with resin to a form resin-infused inner barrel structure. The resin-infused inner barrel structure is cured to form an inner barrel. The inner barrel is removed from the oven. The vacuum bag is removed. A release ply is released from the inner barrel and the release ply and flow media are discarded.

- 5 The inner barrel is removed from the steel mold tool. A number of holes are drilled in the inner skin and the outer skin of the inner barrel.

Accordingly, in one aspect there is provided an inner barrel structure of an engine nacelle, the inner barrel structure comprising: an inner skin formed by laying down a number of layers of an inner skin fabric around a steel mold tool and using a number of banding threads to
 10 hold the inner skin against the steel mold tool in tension; a truss core disposed with respect to the inner skin to define a cavity; and a septum disposed in the cavity.

According to another aspect there is provided a method for assembling a barrel structure, the method comprising: laying down a number of layers of an inner skin fabric around a steel mold tool to form an inner skin; installing a number of mandrel sections with
 15 encapsulated septum detail on the inner skin; installing a first number of radial ply closeouts between each of the number of mandrel sections with encapsulated septum detail installed; laying down a number of layers of truss core fabric over the number of mandrel sections with encapsulated septum detail to form a truss core; installing a number of mandrel sections on the truss core; installing a second number of radial ply closeouts between each of the number of
 20 mandrel sections; laying down a number of layers of an outer skin fabric against the number of mandrel sections to form an outer skin; and banding the inner skin using a number of banding threads to hold the inner skin against the steel mold tool in tension.

According to another aspect there is provided a method for forming a barrel structure, the method comprising: installing a vacuum bag over a dry three-dimensional preform inner
 25 barrel structure on a steel mold tool, the preform inner barrel structure having an inner skin formed by laying down a number of layers of an inner skin fabric around the steel mold tool and using a number of banding threads to hold the inner skin against the steel mold tool in tension; placing the dry three-dimensional preform inner barrel structure inside an oven; infusing the dry three-dimensional preform inner barrel structure with resin to form a resin-infused inner barrel
 30 structure; curing the resin-infused inner barrel structure to form an inner barrel; removing the inner barrel from the oven; removing the vacuum bag; removing the release ply from the inner barrel and discarding a release ply and flow media; removing the inner barrel from the steel mold tool; and drilling a number of holes in at least one of an inner skin and an outer skin of the inner barrel.

According to another aspect there is provided a method of manufacturing an inner barrel structure of an engine nacelle, the method comprising: forming a plurality of cavities between an inner skin and an outer skin of the inner barrel structure, the inner barrel structure having an inner skin formed by laying down a number of layers of an inner skin fabric around a steel mold tool and using a number of banding threads to hold the inner skin against the steel mold tool in tension; and disposing a noise-attenuating structure within the cavities.

The features, functions, and advantages can be achieved independently in various embodiments of the present disclosure or may be combined in yet other embodiments in which further details can be seen with reference to the following description and drawings.

10 **BRIEF DESCRIPTION OF THE DRAWINGS**

FIG. 1 is an illustration of an aircraft manufacturing and service method in accordance with an advantageous embodiment;

FIG. 2 is an illustration of an aircraft in which an advantageous embodiment may be implemented;

15 FIG. 3 is an illustration of a nacelle manufacturing environment in accordance with an advantageous embodiment;

FIG. 4 is a nacelle in accordance with an advantageous embodiment;

FIG. 5 is an inner barrel in accordance with an advantageous embodiment;

FIG. 6 is a nacelle cross section in accordance with an advantageous embodiment;

20 FIG. 7 is an inner barrel section in accordance with an advantageous embodiment;

FIG. 8 is a septum in accordance with an advantageous embodiment;

FIG. 9 is a septum detail in accordance with an advantageous embodiment;

FIG. 10 is an inner barrel section in accordance with an advantageous embodiment;

FIG. 11 is an inner barrel section detail in accordance with an advantageous embodiment;

25 FIG. 12 is a mandrel with encapsulated septum in accordance with an advantageous embodiment;

FIG. 13 is an inner barrel cross-section in accordance with an advantageous embodiment;

FIGS. 14A and 14B are a steel mold tool in accordance with an advantageous embodiment;

30 FIGS. 15A and 15B are an inner skin lay-up in accordance with an advantageous embodiment;

FIGS. 16A and 16B are an inner skin banding in accordance with an advantageous embodiment;

FIG. 17 is an assembly of mandrels in accordance with an advantageous embodiment;

FIG. 18 is a mandrel installation in accordance with an advantageous embodiment;

FIG. 19 is a truss core lay-up in accordance with an advantageous embodiment;

FIG. 20 is an inner barrel section detail in accordance with an advantageous embodiment;

5 FIG. 21 is a flowchart illustrating a process for assembling a barrel structure in accordance with an advantageous embodiment; and

FIG. 22 is a flowchart illustrating a process for forming a barrel structure in accordance with an advantageous embodiment.

DETAILED DESCRIPTION

10 Referring more particularly to the drawings, embodiments of the disclosure may be described in the context of the aircraft manufacturing and service method **100** as shown in FIG. 1 and aircraft **200** as shown in FIG. 2. Turning first to FIG. 1, an illustration of an aircraft manufacturing and service method is depicted in accordance with an advantageous embodiment. During pre-production, aircraft manufacturing and service method **100** may include specification
15 and design **102** of aircraft **200** in FIG. 2 and material procurement **104**.

During production, component and subassembly manufacturing **106** and system integration **108** of aircraft **200** in FIG. 2 may take place. Thereafter, aircraft **200** in FIG. 2 may go through certification and delivery **110** in order to be placed in service **112**. While in service by a customer, aircraft **200** in FIG. 2 may be scheduled for routine maintenance and service **114**,
20 which may include modification, reconfiguration, refurbishment, and other maintenance or service.

Each of the processes of aircraft manufacturing and service method **100** may be performed or carried out by a system integrator, a third party, and/or an operator. In these examples, the operator may be a customer. For the purposes of this description, a system integrator may
25 include, without limitation, any number of aircraft manufacturers and major-system subcontractors; a third party may include, without limitation, any number of vendors, subcontractors, and suppliers; and an operator may be an airline, leasing company, military entity, service organization, and so on.

With reference now to FIG. 2, an illustration of an aircraft is depicted in which an
30 advantageous embodiment may be implemented. In this example, aircraft **200** may be produced by aircraft manufacturing and service method **100** in FIG. 1 and may include airframe **202** with a plurality of systems **204** and interior **206**. Examples of systems **204** may include one or more of

propulsion system **208**, electrical system **210**, hydraulic system **212**, and environmental system **214**. Any number of other systems may be included. Although an aerospace example is shown, different advantageous embodiments may be applied to other industries, such as the automotive industry.

5 Apparatus and methods embodied herein may be employed during any one or more of the stages of aircraft manufacturing and service method **100** in FIG. **1**. For example, components or subassemblies, such as an engine nacelle, designed during specification and design **102** of aircraft **200** may be produced in component and subassembly manufacturing **106** in FIG. **1**.

10 As used herein, the phrase “at least one of”, when used with a list of items, means that different combinations of one or more of the items may be used and only one of each item in the list may be needed. For example, “at least one of item A, item B, and item C” may include, for example, without limitation, item A or item A and item B. This example also may include item A, item B, and item C or item B and item C.

15 The different advantageous embodiments take into account and recognize a number of different considerations. For example, the different advantageous embodiments take into account and recognize that current methods of design and production for engine nacelles involve a multi-step process utilizing pre-impregnated materials and multiple autoclave cures to produce a composite inner barrel structure. This current approach requires the use of core material in honeycomb or other form, often in two layers separated by a septum or mid-skin element to meet
20 the structural and acoustic performance requirements. This approach also requires the use of an autoclave, which is expensive to operate and maintain with a limited supplier base.

The different advantageous embodiments further take into account and recognize that current core and septum materials are often sole sourced and expensive. The current methods require co-bonding of skins, such as inner and outer skins, mid-skin, and septum elements, in
25 multiple steps using autoclave cure processes. The pre-impregnated materials, film adhesives, and other materials require subzero storage and have a limited “out-time” of approximately thirty days in which the materials must be laid up, vacuum bagged, and autoclave process cured. These requirements place time and cost constraints on the manufacturing of engine nacelle inner barrel structures.

30 Thus, the different advantageous embodiments provide an inner barrel structure comprising an inner skin, an outer skin, a number of septum, and a truss core.

The different advantageous embodiments further provide a method for assembling a barrel structure. A number of layers of fabric is laid down around a steel mold tool to form an inner

skin. A number of mandrels with encapsulated septum detail are installed on the inner skin. A first number of radial ply closeouts are installed between each of the number of mandrels with encapsulated septum detail installed. A number of layers of fabric is laid down over the number of mandrels with encapsulated septum detail to form a truss core. A number of mandrels is
5 installed on the truss core. A second number of radial ply closeouts is installed between each of the number of mandrels. A number of layers of fabric is laid down against the number of mandrels to form an outer skin.

The different advantageous embodiments further provide a method for forming a barrel structure. A vacuum bag is installed over the dry three-dimensional preform inner barrel
10 structure on a steel mold tool. The dry three-dimensional preform inner barrel structure is placed inside an oven. The dry three-dimensional preform inner barrel structure is infused with resin to form resin-infused inner barrel structure. The resin-infused inner barrel structure is cured to form an inner barrel. The inner barrel is removed from the oven. The vacuum bag is removed. The release ply is removed from the inner barrel and the release ply and flow media are
15 discarded. A number of holes are drilled in the inner skin and the outer skin of the inner barrel.

With reference now to FIG. 3, an illustration of a nacelle manufacturing environment is depicted in accordance with an advantageous embodiment. Nacelle manufacturing environment **300** may be implemented during one or more phases of aircraft manufacturing and service method **100** in FIG. 1, such as specification and design **102** of aircraft **200** in FIG. 2 and/or
20 component and subassembly manufacturing **106** in FIG. 1, for example.

Nacelle manufacturing environment **300** includes nacelle **302**. Nacelle **302** may be an illustrative example of a nacelle structure manufactured in nacelle manufacturing environment **300**. Nacelle **302** may include, without limitation, inner barrel **304**, fan cowl **306**, engine interface **308**, leading edge inlet **310**, and/or any other suitable component.

Inner barrel **304** is one of the components that define the forward section of nacelle **302**. Inner barrel **304** connects a lower bolted interface of leading edge inlet **310** to the aft metal engine ring frame section to which it is also bolted, as described in more detail in FIG. 6 below. Fan cowl **306** connects leading edge inlet **310** to the aft metal ring frame completing the boxed section. Inner barrel **304** includes structural components such as, without limitation, inner skin
25 **312**, outer skin **314**, number of septum **316**, number of radial ply closeouts **318**, truss core **320**, aft doubler **322**, forward doubler **324**, and aft closeout **326**.

Nacelle manufacturing environment **300** includes number of mandrels **328** used during the lay-up process of the structural components of inner barrel **304**. Number of mandrels **328** may

be, for example, without limitation, wax mandrels. In an illustrative example, number of mandrels **328** are used to install number of septum **316** on inner barrel **304**. Nacelle manufacturing environment **300** also includes number of mold tools **330** used to manufacture inner barrel **304**. Number of mold tools **330** may include, for example, steel mold tool **332**.

5 Number of fixtures **334** may be used to handle one or more structural components of inner barrel **304** during manufacturing. For example, number of fixtures **334** may position number of mandrels **318** during a lay-up process.

Number of banding thread **336** may be used to hold one or more structural components of inner barrel **304** in tension against each other and/or steel mold tool **332** during manufacturing of
10 inner barrel **304**. Number of fabrics **338** may be used to form one or more structural components of inner barrel **304**. For example, number of fabrics **338** may form at least one of inner skin **312**, outer skin **314**, truss core **320**, aft doubler **322**, forward doubler **324**, and/or any other suitable component. Number of fabrics **338** may be dry fabrics such as, for example, without limitation, a woven fabric, a uni-directional tape, warp/knit fabric, braided fabric, stitched fabric, and/or any
15 other suitable fabric.

Lay-up tool **340** manipulates and positions number of fabrics **338** during manufacturing of inner barrel **304** to form one or more structural components of inner barrel **304**. In an illustrative example, number of fabrics **338** may be implemented as rolls of fabric. Lay-up tool **340** may rotate a roll of fabric and/or number of mold tools **330** to wrap a number of layers of fabric
20 around the mold tool to form a component of inner barrel **304**, in this illustrative example.

Fabric pleating device **342** is a tool configured to place number of fabrics **338** over a corrugated shape without wrinkling the fabric. Fabric pleating device **342** may work simultaneously with lay-up tool **340** to manufacture one or more structural elements of inner barrel **304**. Number of drills **344** is implemented to drill a number of holes in inner barrel **304**.
25 The number of holes may be drilled for acoustic performance, wax-melt out of wax mandrels, such as number of mandrels **328**, and/or any other suitable purpose. Number of drills **344** may be a mechanical drill, laser drill, and/or any other suitable type of drilling tool. Oven **346** is used to cure the structural components of inner barrel **304** to produce the inner barrel structure.

The illustration of nacelle manufacturing environment **300** in FIG. 3 is not meant to imply
30 physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may

be combined and/or divided into different blocks when implemented in different advantageous embodiments.

For example, in one advantageous embodiment, fabric pleating device **342** may be implemented as part of lay-up tool **342**. In another advantageous embodiment, number of
5 banding thread **336** may be incorporated into the manufactured product of nacelle **302**, for example. In yet another illustrative example, number of mandrels **328** may include, without limitation, mandrels with encapsulated septum detail, pre-formed trapezoidal mandrels, wax mandrels, and/or any other suitable type of mandrel for inner barrel **304**.

With reference now to FIG. 4, a nacelle is depicted in accordance with an advantageous
10 embodiment. Nacelle **400** is an illustrative example of one implementation of nacelle **302** in FIG. 3.

Nacelle **400** includes fan cowl **402**, inner barrel **404**, engine interface **406**, and inner barrel attachment to leading edge **408**. Fan cowl **402** is an illustrative example of one implementation of fan cowl **306** in FIG. 3. Fan cowl **402** is a covering for an engine of a vehicle, such as aircraft
15 **200** in FIG. 2. Fan cowl **402** may provide, for example, without limitation, drag reduction, engine cooling, air intake, and/or any other function for an engine of an aircraft, such as aircraft **200** in FIG. 2, for example.

Inner barrel **404** is a structural feature of nacelle **400**. Inner barrel **404** is an illustrative example of one implementation of inner barrel **304** in FIG. 3. Engine interface **406** is an
20 illustrative example of one implementation of engine interface **308** in FIG. 3.

Inner barrel attachment to leading edge **408** is an illustrative example of one implementation of leading edge inlet **310** in FIG. 3. Inner barrel attachment to leading edge **408** is a circumferentially bolted interface which completes the inner aerodynamic surface feature for nacelle **400**.

25 The illustration of nacelle **400** in FIG. 4 is not meant to imply physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition to and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be
30 combined and/or divided into different blocks when implemented in different advantageous embodiments.

Although nacelle **400** has been described with respect to aircraft, nacelle may be applied to other types of platforms. For example, without limitation, other advantageous embodiments may

be applied to a mobile platform, a stationary platform, a land-based structure, an aquatic-based structure, a space-based structure and/or some other suitable object. More specifically, the different advantageous embodiments may be applied to, for example, without limitation, a spacecraft, a space station, a satellite, and a wind tunnel.

5 With reference now to FIG. 5, an inner barrel is depicted in accordance with an advantageous embodiment. Inner barrel **500** is an illustrative example of one implementation of inner barrel **304** in FIG. 3.

10 Inner barrel **500** includes inner skin **502**, outer skin **504**, forward doubler **506**, aft doubler **508**, aft closeout **510**, and truss core **512**. Inner skin **502** and outer skin **504** provide the outer surfaces of inner barrel **500**. Inner skin **502** and outer skin **504** may be composed of, for example, a dry fabric that forms the skin elements for inner barrel **500**. Examples of the dry fabric may include, without limitation, a woven fabric, a uni-directional tape, warp/knit fabric, braided fabric, stitched fabric, and/or any other suitable fabric. Fabric for inner skin **502** and outer skin **504** may be stored as a roll of fabric, in an advantageous embodiment.

15 Forward doubler **506** and aft doubler **508** are areas of inner barrel **500** implemented with additional fabric used to form inner skin **502** and outer skin **504**. Forward doubler **506** and aft doubler **508** provide a reinforcing area to redistribute the bolt loads into the inner barrel at the fore and aft locations.

20 As inner skin **502**, outer skin **504**, and truss core **512** terminate at the aft interface, aft closeout **510** forms a closeout ply of material to connect inner skin **502** and outer skin **504**, completing the inner barrel assembly.

25 Truss core **512** is the part of the composite inner barrel structure that carries the loading between inner skin **502** and outer skin **504**, providing stiffness for inner barrel **500**. Radial ply closeout **514** may be implemented along the channels of truss core **512** as a division between continuous channels running the length of the interior of inner barrel **500**. Radial ply closeout **514** provides acoustic abatement for inner barrel **500**.

30 The illustration of inner barrel **500** in FIG. 5 is not meant to imply physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition to and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined and/or divided into different blocks when implemented in different advantageous embodiments.

With reference now to FIG. 6, a nacelle cross section is depicted in accordance with an advantageous embodiment. Nacelle cross section **600** may be an illustrative example of a cross-sectional view of nacelle **400** in FIG. 4.

5 Nacelle cross section **600** depicts a cross-sectional view of fan cowl panel **602**, inner barrel **604**, leading edge inlet **606**, engine ring frame **608**, and engine interface **610**. Inner barrel **604** connects with leading edge inlet **606** and engine ring frame **608** using bolted joints **612**. Fan cowl **602** connects leading edge inlet **606** to engine ring frame **608**, completing the boxed section.

10 The illustration of nacelle cross section **600** in FIG. 6 is not meant to imply physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition to and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined and/or divided into different blocks when implemented in different advantageous
15 embodiments.

With reference now to FIG. 7, an inner barrel section is depicted in accordance with an advantageous embodiment. Inner barrel section **700** is an illustrative example of one implementation of a section of inner barrel **500** in FIG. 5. Inner barrel section **700** provides a layered view depicting the elements of inner barrel **500** in FIG. 5.

20 Inner barrel section **700** includes inner skin **702**, number of septum **704**, truss core **706**, outer skin **708**, aft closeout **710**, aft doubler **712**, and forward doubler **714**. Inner skin **702** is an illustrative example of one implementation of inner skin **502** in FIG. 5. Outer skin **708** is an illustrative example of one implementation of outer skin **504** in FIG. 5.

Each truss core cavity against inner skin **702** contains multiple septum details,
25 implemented as number of septum **704**. In an illustrative example, a mandrel with an encapsulated septum detail may be utilized in each quadrant for a total of four septum details per truss core cavity. In this illustrative example, an inner barrel structure may be divided into four quadrants, with each quadrant together forming the complete 360 degree barrel. The mandrels may be implemented along the inner skin in sections, with four sections providing complete
30 mandrel coverage around the inner barrel structure, in this example. A fixture, such as number of fixtures **334** in FIG. 3, may be used to install each mandrel section along the inner skin, with four separate installations, one for each quadrant of the inner barrel structure. Number of truss

core cavities is dependent upon nacelle application. Number of septum **704** may be, for example, without limitation, an extruded thermoplastic material.

Truss core **706** is a dry fabric that forms the truss element of inner barrel section **700**. Truss core **706** may be, for example, without limitation, a woven fabric, a uni-directional tape, warp/knit fabric, braided fabric, stitched fabric, and/or any other suitable fabric. In one illustrative example, truss core **706** may be comprised of warp/knit fabric.

Aft closeout **710** is an illustrative example of one implementation of aft closeout **510** in FIG. 5. Aft doubler **712** is an illustrative example of one implementation of aft doubler **508** in FIG. 5. Forward doubler **714** is an illustrative example of one implementation of forward doubler **506** in FIG. 5.

Each of inner skin **702**, number of septum **704**, truss core **706**, outer skin **708**, aft closeout **710**, aft doubler **712**, and forward doubler **714** may be assembled in a three-dimensional shape, such as the shape depicted by inner barrel **400** in FIG. 4, in a dry pre-form process. Resin infusion and thermal cure may follow a dry pre-form process to mold the elements of inner barrel section **500** into a unitized structure.

The illustration of inner barrel section **700** in FIG. 7 is not meant to imply physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition to and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined and/or divided into different blocks when implemented in different advantageous embodiments.

With reference now to FIG. 8, a septum detail is depicted in accordance with an advantageous embodiment. Septum **800** is an illustrative example of a portion of a septum, such as number of septum **704** in FIG. 7.

Septum **800** is positioned between the inner and outer skins of an inner barrel structure, such as inner barrel **500** in FIG. 5. Septum **800** is located inside the truss core cavities against the inner skin, such as inner skin **702** in FIG. 7, for example. Septum **800** is a prefabricated detail that contains perforations, or holes, at discrete locations for specific acoustic properties. Septum **800** may be made from, for example, without limitation, thermoplastic material using an extrusion process, or any other suitable material and/or process. The number of holes may be drilled using, for example, without limitation, a mechanical drill, a laser, and/or any other

suitable tool for creating holes. The shape of septum **800** is optimized for surface area, strength, and stiffness to provide specific acoustic properties for the inner barrel structure.

Septum **800** may be configured to provide single or multiple chambers, in an illustrative example as shown in FIG. **8**. The example depicted for septum **800** illustrates a two chamber design. More specifically, in a number of embodiments the septa **800** may include a stiffening portion **802**. As shown in the example, the stiffening portion **802** may be configured substantially channel-like or U shaped, and may further be configured to include acoustically configured perforations. In some embodiments, the stiffening portion **802** may contacts the inner skin (see, e.g., FIG. **11** below).

The illustration of septum **800** in FIG. **8** is not meant to imply physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition to and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined and/or divided into different blocks when implemented in different advantageous embodiments.

With reference now to FIG. **9**, a septum detail is depicted in accordance with an advantageous embodiment. Septum detail **900** depicts a portion of septum **800** in FIG. **8**. Septum **902** is an illustrative example of a detailed view of septum **800** in FIG. **8**.

Number of holes **904** is disposed along horizontal and vertical surfaces of septum **902** and pass through the thickness of the septum material, thereby configuring the septa **902** for attenuating noise. Number of holes **904** is an illustrative example of holes drilled after fabrication of septum **902**. The hole pattern and hole size for number of holes **904** is pre-determined in order to meet the acoustic performance requirement for the nacelle inner barrel application. Number of holes **904** in septum **902** may also enable draining of the molten wax material from the wax mandrels during the “post cure” melt out process at an elevated temperature. Number of holes **904** may be placed at any number of locations along septum surfaces and at any spacing and/or frequency.

The illustration of septum detail **900** in FIG. **9** is not meant to imply physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition to and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may

be combined and/or divided into different blocks when implemented in different advantageous embodiments.

With reference now to FIG. 10, an inner barrel section is depicted in accordance with an advantageous embodiment. Inner barrel section **1000** is an illustrative example of one
5 implementation of a section of inner barrel **500** in FIG. 5. Inner barrel section **1000** may be considered an alternate view from inner barrel section **700** in FIG. 7 of a section of inner barrel **500** in FIG. 5, for example.

Inner barrel section **1000** depicts outer skin **1002**, inner skin **1004**, truss core **1006**, number
of septum **1008**, forward doubler **1010**, aft doubler **1012**, and aft closeout **1014** in a unitized, or
10 post-cure, form. The unitized structure depicted in inner barrel section **1000** provides a single joint interface for each of inner skin **1004**, outer skin **1002**, and truss core **1006**, without multiple splice joints.

The implementation of truss core **1006** creates number of cavities **1016**, in this illustrative example. Number of cavities **1016** may contain wax mandrels during the dry assembly and
15 initial cure processes. These wax mandrels may be melted out in a post-cure process, resulting in number of cavities **1016**. Number of cavities **1016** are segmented, or divided, perpendicularly by radial ply closeouts, discussed in more detail in the figures that follow. These radial ply closeouts prevent a continuous cavity around the inner barrel structure, which would result in acoustic abatement if not for the division of the cavity structure within the inner barrel. To
20 achieve optimum acoustic abatement, dissipation of acoustic energy as heat in the pores of the material is directly related to its resistance to air flow. In a honeycomb structure this is achieved inherently by the individual honeycomb cell. The truss core design is inherently two-dimensional since the cavities are circumferential. Thus, a radial ply completes the three-dimensional closeout and increases flow resistance.

Wax film removal techniques may be applied to inner barrel section **1000** after the wax
25 mandrels have been melted out to remove any residual wax film on the inner surfaces of the part. The wax film removal techniques may include, for example, without limitation, a solvent bath, ultrasonic cleaning, and/or any other suitable technique. In one advantageous embodiment, acoustic treatment of inner barrel section **1000** may include inserting materials into number of
30 cavities **1016** after the melt-out and wax film removal processes are completed. In an illustrative example, a bulk absorber material may be blown into number of cavities **1016** of inner barrel section **1000** to provide additional acoustic performance for the complete inner barrel, such as inner barrel **500** in FIG. 5. The acoustic impedance in the axial and circumferential direction is

enhanced by the bulk absorber over wider engine operating conditions. In one illustrative example, a bulk absorber may result in a two perceived noise decibel (PNdB) reduction in noise level. The bulk absorber material may be, for example, without limitation, treated Kevlar fiber matt, aluminized fiberglass matt, nickel plated graphite matt, and/or any other suitable absorber material used for acoustic performance.

Detail **1018** is a portion of inner barrel section **1000** presented with more detail in FIG. **11** below.

The illustration of inner barrel section **1000** in FIG. **10** is not meant to imply physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition to and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined and/or divided into different blocks when implemented in different advantageous embodiments.

With reference now to FIG. **11**, an inner barrel section detail is depicted in accordance with an advantageous embodiment. Inner barrel section detail **1100** provides a detailed view of detail **1018** for inner barrel section **1000** in FIG. **10**. Inner barrel section detail **1100** is an illustrative example of one implementation of the elements depicted in inner barrel section **700** in FIG. **7** and inner barrel section **1000** in FIG. **10**.

Inner barrel section detail **1100** depicts outer skin **1102** and inner skin **1104** disposed as the outer surfaces of an inner barrel section. Number of septum **1106** is an illustrative example of one implementation of number of septum **704** in FIG. **7** and/or number of septum **1008** in FIG. **10**. During assembly of dry fabric elements to form the inner barrel section, wax mandrels may be used to support the truss structure formed by truss core **1108** within outer skin **1102** and inner skin **1104**. Wax mandrels with encapsulated septum may be positioned over inner skin **1104** for the lay-up of truss core **1108**, and later melted out during a post-cure process. Bulk absorber material **1110** may be blown into the cavities that remain when the wax mandrels are melted out, providing additional acoustic performance features.

Truss core **1108** is an illustrative example of one implementation of truss core **706** in FIG. **7** and/or truss core **1006** in FIG. **10**. Truss core **1108** may be applied over the corrugated shape provided by wax mandrels positioned over inner skin **1104** during lay-up.

The illustration of inner barrel section detail **1100** in FIG. **11** is not meant to imply physical or architectural limitations to the manner in which different advantageous embodiments

may be implemented. Other components in addition to and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined and/or divided into different blocks when implemented in different
5 advantageous embodiments.

With reference now to FIG. 12, a mandrel with encapsulated septum is depicted in accordance with an advantageous embodiment. Mandrel with encapsulated septum **1200** is an illustrative example of one implementation of wax mandrels with encapsulated septum that are placed on inner skin **1104** in FIG. 11. In this depiction, wax **1202** is encapsulated with septum
10 **1204**, as shown. Septum **1204** may be an illustrative example of one implementation of number of septum **704** in FIG. 7 and/or septum **800** in FIG. 8.

The illustration of mandrel with encapsulated septum **1200** in FIG. 12 is not meant to imply physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition to and/or in place of the ones
15 illustrated may be used. Some components may be unnecessary in some advantageous embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined and/or divided into different blocks when implemented in different advantageous embodiments.

With reference now to FIG. 13, an inner barrel cross-section is depicted in accordance with
20 an advantageous embodiment. Inner barrel cross-section **1300** is an illustrative example of one implementation of the elements depicted in inner barrel section **700** in FIG. 7 and inner barrel section **1000** in FIG. 10.

Inner barrel cross-section **1300** depicts inner skin **1302** and outer skin **1304**. Inner skin **1302** is an illustrative example of one implementation of inner skin **702** in FIG. 7 and/or inner
25 skin **1004** in FIG. 10. Septum **1310** is disposed along inner skin **1302**. Outer skin **1304** is an illustrative example of one implementation of outer skin **708** in FIG. 7 and/or outer skin **1002** in FIG. 10.

Truss core **1306** is a cross section view of truss core **1006** in FIG. 10. Truss core **1306** is corrugated about a number of wax mandrels during a lay-up process. The wax mandrels are
30 implemented in sections divided by radial ply closeout **1308**. Radial ply closeout **1308** is an illustrative example of an element installed at the same time as the wax mandrels. Radial ply closeout **1308** may be, for example, without limitation, a dry carbon fiber that is resin infused

during a resin infusion process, a thermoplastic material similar to number of septum **704** in FIG. 7, and/or any other suitable material.

Radial ply closeout **1308** creates a wall perpendicular to inner skin **1302** and outer skin **1304** that provides a division in the cavities formed when the wax mandrels are melted out in a post-cure process.

Number of holes **1312** is disposed along inner skin **1302** pass through the thickness of inner skin **1302**. Number of holes **1312** is an illustrative example of holes drilled after an initial resin infusion cure cycle. The hole pattern and hole size for number of holes **1312** is determined in order to meet the acoustic performance requirement for the nacelle inner barrel application.

Number of holes **1312** in inner skin **1302** may also enable draining of the molten wax material from the wax mandrels during the “post cure” melt out process at elevated temperature. Number of holes **1312** may be placed at any number of locations along inner skin **1302** and at any spacing and/or frequency.

Wax drain hole **1314** implemented in outer skin **1304** and truss core wax drain hole **1316** are illustrative examples of a number of holes used to assist in the wax melt-out during a post-cure process. Wax drain hole **1314**, truss core wax drain hole **1316**, and number of holes **1312** may be drilled using, for example, without limitation, a mechanical drill, a laser, and/or any other suitable tool for creating holes. Number of holes **1312** may also be formed in-situ with the resin infusion process using pin mats positioned between the steel mold tool and inner skin **1302**, in another advantageous embodiment. The pin mat is subsequently removed after resin infusion.

Number of holes **1312**, wax drain hole **1314**, and truss core wax drain hole **1316** are provided for illustrative purposes only and do not limit the number, location, frequency, size, and/or any other configuration of holes that may be drilled for wax melt-out and/or acoustic treatment.

The illustration of inner barrel section cross-section **1300** in FIG. 13 is not meant to imply physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition to and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined and/or divided into different blocks when implemented in different advantageous embodiments.

With reference now to FIGS. 14A and 14B, a steel mold tool is depicted in accordance with an advantageous embodiment. Steel mold tool **1400** may be implemented during

component and subassembly manufacturing **106** in FIG. **1** of inner barrel **500** in FIG. **5**, for example.

Steel mold tool **1400** is depicted in load position **1402** in FIG. **14A** and lay-up position **1404** in FIG. **14B**. Steel mold tool **1400** may be implemented in lay-up position **1404** for dry
5 assembly of inner barrel elements, such as inner skin **702**, number of septum **704**, truss core **706**, outer skin **708**, aft closeout **710**, aft doubler **712**, and forward doubler **714** in FIG. **7**. Steel mold tool **1400** may be implemented in load position **1402** for unitizing process, such as vacuum bagging, oven cure, thermal cure, post-cure wax melt-out, and/or any other suitable process.

The illustration of steel mold tool **1400** in FIGS. **14A** and **14B** is not meant to imply
10 physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition to and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined and/or divided into different blocks when implemented in different
15 advantageous embodiments.

With reference now to FIGS. **15A** and **15B**, an inner skin lay-up is depicted in accordance with an advantageous embodiment. Inner skin lay-up **1500** depicts one implementation of the application of inner skin **702** in FIG. **7**, for example.

Steel mold tool **1502** may be implemented in lay-up position, such as lay-up position **1404**
20 in FIG. **14B**. Inner skin **1504** is applied to steel mold tool **1502** and secured using clamp strap **1506**. Inner skin **1504** may be stored as a roll of dry fabric, for example, and may be wrapped around steel mold tool **1502** a number of times to achieve a desired fabric thickness or number of layers. As used herein, “number of” refers to one or more times and/or one or more layers. In an illustrative example, steel mold tool **1502** may be rotated 360 degrees as inner skin **1504** is
25 applied to wrap inner skin **1504** all the way around steel mold tool **1502**.

The illustration of inner skin lay-up **1500** in FIGS. **15A** and **15B** is not meant to imply physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition to and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments.
30 Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined and/or divided into different blocks when implemented in different advantageous embodiments.

With reference now to FIGS. **16A** and **16B**, an inner skin banding is depicted in accordance with an advantageous embodiment. Inner skin banding **1600** depicts one implementation of the banding of inner skin **702** in FIG. 7, for example.

Steel mold tool **1602** may be implemented in lay-up position, such as lay-up position **1404** in FIG. 14. Inner skin **1604** in FIG. **16B** is banded using number of banding thread **1606** in FIG. **16A**. Number of banding thread **1606** is thread that holds fabric, such as inner skin **1604** in hoop tension. Number of banding thread **1606** may be, for example, without limitation, vectran fiber, carbon, cotton, and/or any other suitable thread material.

Banding of inner skin **1604** is the process of wrapping number of banding thread **1606** around inner skin **1604** disposed around steel mold tool **1602** to hold inner skin **1604** against steel mold tool **1602** under tension. Number of clamp bar slots **1608** provides access for number of banding thread **1606** to wrap completely around inner skin **1604**. Banded inner skin **1610** in FIG. **16B** is then ready for application of a number of septum encapsulated in wax mandrels, such as number of septum **704** in FIG. 7

The illustration of inner skin banding **1600** in FIGS. **16A** and **16B** is not meant to imply physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition to and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined and/or divided into different blocks when implemented in different advantageous embodiments.

With reference now to FIG. 17, an assembly of mandrels is depicted in accordance with an advantageous embodiment. Assembly of mandrels **1700** depicts one implementation of a number of wax mandrels, such as wax mandrel **1202** in FIG. 12, for example.

Number of wax mandrels **1702** form assembly of mandrels **1700**. Number of wax mandrels **1702** may include encapsulated septum detail, such as number of septum **704** in FIG. 7, in one advantageous embodiment. Wax mandrels with encapsulated septum detail are laid up on the banded inner skin of an inner barrel structure, such as banded inner skin **1610** in FIG. **16B**, for example.

In another advantageous embodiment, number of wax mandrels **1702** may be pre-configured in a trapezoidal shape, when viewed as a cross-section, to align with the corrugated truss structure of truss core material laid up over wax mandrel sections encapsulated with septum detail, for example. In an illustrative example, wax mandrels without encapsulated septum detail

are laid up over the banded truss core fabric that is applied over the wax mandrels with encapsulated septum detail, for example.

Assembly of mandrels **1700** may be handled by fixture **1704**. Fixture **1704** may be an illustrative example of one implementation of number of fixtures **334** in FIG. **3**. Fixture **1704** may manipulate and position assembly of mandrels **1700** onto materials laid up on a steel mold tool, such as steel mold tool **1602** in FIG. **16B**, for example. In one illustrative example, assembly of mandrels **1700** may include encapsulated septum detail and be applied to a banded inner skin, such as banded inner skin **1610** in FIG. **16B**. In another illustrative example, assembly of mandrels **1700** may be applied to a banded truss core fabric, as depicted in FIGS. **19** and **20** that follow.

The illustration of assembly of mandrels **1700** in FIG. **17** is not meant to imply physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition to and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined and/or divided into different blocks when implemented in different advantageous embodiments.

With reference now to FIG. **18**, a mandrel installation is depicted in accordance with an advantageous embodiment. Mandrel installation **1800** depicts one implementation of the installation of assembly of mandrels **1700** in FIG. **17**, for example.

Steel mold tool **1802** may be implemented in lay-up position, such as lay-up position **1404** in FIG. **14B**. Banded inner skin **1804** is ready for application of wax mandrels, such as assembly of mandrels **1700** in FIG. **17**. mandrel section **1806** is an illustrative example of one implementation of assembly of mandrels **1700** in FIG. **17**. Fixture **1808** is an illustrative example of one implementation of fixture **1704** in FIG. **17**. Fixture **1808** applies mandrel section **1806** to banded inner skin **1804**.

Assembly of mandrels will be applied simultaneously with a number of radial ply closeouts, such as radial ply closeout **1308** in FIG. **13**. Radial ply closeouts will be applied between each section of the number of mandrel installed. The radial ply closeouts are pre-manufactured in a discrete shape to create a wall between mandrel sections installed. Mandrel installation **1800** applies mandrel sections all the way around banded inner skin **1804** supported by steel mold tool **1802**. Following the completion of mandrel installation, the wax mandrels may be banded, similar to the banding of inner skin **1604** in FIG. **16B**, to apply tension and hold

mandrel sections against the inner skin fabric. Truss core fabric will then be applied over the banded wax mandrel sections.

The illustration of mandrel installation **1800** in FIG. **18** is not meant to imply physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition to and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined and/or divided into different blocks when implemented in different advantageous embodiments.

With reference now to FIG. **19**, a truss core lay-up is depicted in accordance with an advantageous embodiment. Truss core lay-up **1900** depicts one implementation of the application of truss core **706** in FIG. **7**, for example.

Steel mold tool **1902** may be implemented in lay-up position, such as lay-up position **1404** in FIG. **14B**. Number of banded wax mandrel sections **1904** may be ready for application of truss core fabric **1906**. Truss core fabric **1906** is an illustrative example of one implementation of truss core **706** in FIG. **7**. Truss core fabric **1906** may be stored as a roll of fabric.

Lay-up tool **1908** may include fabric pleating device **1910** for laying down truss core fabric **1906** over the corrugated shape of number of banded wax mandrel sections **1904** without wrinkling truss core fabric **1906**. Steel mold tool **1902** may rotate 360 degrees to wrap a number of layers of truss core fabric **1906** all the way around steel mold tool **1902**. The number of layers of truss core fabric **1906** is laid up against number of banded wax mandrel sections **1904**. As used herein, “number of” refers to one or more layers.

In an illustrative example, banding thread may be used to band truss core fabric **1906** after truss core fabric **1906** is laid up over number of banded wax mandrel sections **1904**. Additional wax mandrel sections are then applied over truss core fabric **1906** and may also be banded to form an additional layer of banded wax mandrel sections. An outer skin is then applied over the additional banded wax mandrel sections to complete the dry assembly of the inner barrel structure. The outer skin may be laid up in a similar fashion to inner skin **1504** in FIGS. **15A** and **15B**. A number of layers of outer skin may be laid up against the additional wax mandrel sections applied over truss core fabric **1906**. In an illustrative example, steel mold tool **1902** may be rotated 360 degrees as the outer skin is applied to wrap the outer skin all the way around steel mold tool **1902**. The outer skin is then banded to hold the outer skin against the other elements laid up on steel mold tool **1902** in tension.

The illustration of truss core lay-up **1900** in FIG. **19** is not meant to imply physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition to and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments. Also, the
5 blocks are presented to illustrate some functional components. One or more of these blocks may be combined and/or divided into different blocks when implemented in different advantageous embodiments.

With reference now to FIG. **20**, an inner barrel section detail is depicted in accordance with an advantageous embodiment. Inner barrel section detail **2000** may be an illustrative example of
10 one implementation of the elements depicted in inner barrel section **700** in FIG. **7** and inner barrel section **1000** in FIG. **10** in a three-dimensional dry assembly before resin infusion or curing, for example.

Inner barrel section detail **2000** depicts a number of elements laid up on steel mold tool **2002**. Inner skin **2004** is adjacent to, or disposed along, steel mold tool **2002**. Number of
15 septum **2006** is laid up on inner skin **2004** through the installation of number of wax mandrels with encapsulated septum **2008**. Truss core **2010** is laid up over number of wax mandrels with encapsulated septum **2008**. Number of wax mandrels **2012** is depicted as applied over truss core **2010**. Outer skin **2014** is laid up over number of wax mandrels **2012**. Forward doubler **2016** is then laid up at the forward end of the inner barrel section with the same fabric used to form outer
20 skin **2014**. Additional materials are then applied to outer skin **2014**, including release ply and flow media.

Release ply is a release material placed between the dry fabric of outer skin **2014** and a flow media. A flow media is a porous material with low non-linearity factor, which is used to introduce and evenly spread a substance, such as resin for example, across a surface. The release
25 ply provides a medium that disposes flow media evenly across the inner barrel outer surface while preventing flow media from sticking to the dry assembly part. Following a flow media application process, such as resin infusion, the release ply may be used to remove the flow media from the inner barrel part. Release ply and flow media may be discarded following a resin infusion process, for example.

30 The illustration of inner barrel section detail **2000** in FIG. **20** is not meant to imply physical or architectural limitations to the manner in which different advantageous embodiments may be implemented. Other components in addition to and/or in place of the ones illustrated may be used. Some components may be unnecessary in some advantageous embodiments.

Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined and/or divided into different blocks when implemented in different advantageous embodiments.

With reference now to FIG. 21, a flowchart illustrating a process for assembling a barrel structure is depicted in accordance with an advantageous embodiment. The process in FIG. 21 may be implemented using one or more of the elements depicted in FIG. 7 for inner barrel section 700, FIG. 10 for inner barrel section 1000, and/or FIG. 11 for inner barrel section detail 1100.

The process begins by laying down a number of layers of an inner skin fabric around a steel mold tool to form an inner skin(operation 2102). The steel mold tool may be, for example, steel mold tool 1400 in FIGS. 14A and 14B. The inner skin is a dry fabric that forms one or more of the skin elements for inner barrel 500 in FIG. 5, for example. The inner skin may be, for example, without limitation, a woven fabric, a uni-directional tape, warp/knit fabric, braided fabric, stitched fabric, and/or any other suitable fabric.

The process bands the inner skin with a number of banding thread (operation 2104). The number of banding thread is thread that holds fabric, such as the inner skin laid down in operation 2102, in hoop tension. The number of banding thread may be, for example, without limitation, vectran fiber, carbon, cotton, and/or any other suitable thread material. The inner skin is banded using the number of banding thread to form a banded inner face sheet, such as banded inner skin 1610 in FIG. 16B, for example.

The process next installs a number of mandrel sections with encapsulated septum detail on the banded inner skin(operation 2106). The number of mandrel sections may be, for example, assembly of mandrels 1700 in FIG. 17. The process installs a number of radial ply closeouts between each of the number of mandrel sections with encapsulated septum detail (operation 2108). The number of radial ply closeouts is installed perpendicular to the length of the number of mandrel sections to form a wall or divide between each of the number of mandrel sections as they are installed around the banded inner skin on the steel mold tool. The number of radial ply closeouts has a discrete shape that correspond to the shape of the wax mandrel sections and provide walls between the cavities that remain when the wax mandrels are melted out during a post-cure melt out process.

The process then bands the number of mandrel sections with encapsulated septum detail (operation 2110). The banding of the mandrel sections may be similar to the banding of the

inner skin, using a number of banding threads to secure the number of mandrel sections to the banded inner skin around the steel mold tool with tension.

Next, the process lays down a number of layers of truss core fabric over the number of banded mandrel sections with encapsulated septum detail to form a truss core (operation **2112**).

5 The truss core fabric is a dry fabric that forms the truss element of an inner barrel structure, such as inner barrel **500** in FIG. **5**, for example. The truss core fabric may be, for example, without limitation, a woven fabric, a uni-directional tape, warp/knit fabric, plain weave fabric, braided fabric, stitched fabric, and/or any other suitable fabric. The truss core fabric may be stored on a roll and laid up over the number of mandrel sections with encapsulated septum detail using a lay-up tool, such as lay-up tool **1908** in FIG. **19**. The lay-up tool may include a pleating device, such as fabric pleating device **1910** in FIG. **19**, for laying down the truss core fabric over the corrugated surface of the number of mandrel sections without wrinkling the truss core fabric.

The process then bands the truss core (operation **2114**) using banding threads to secure the truss core against the wax mandrel sections with tension. The process installs a number of
15 mandrel sections on the banded truss core (operation **2116**). The number of mandrel sections may be, for example, wax mandrels, such as number of wax mandrels **2012** and number of wax mandrels with encapsulated septum **2008** in FIG. **20**. The process installs a number of radial ply closeouts between each of the number of mandrel sections (operation **2118**), and then bands the number of mandrel sections (operation **2120**).

20 Next, the process lays down a number of layers of an outer skin fabric to form an outer skin (operation **2122**) against the banded number of mandrel sections. Additional layers of fabric are then laid up and positioned at the forward and aft ends of the inner skin, mandrels, truss core, and outer skin preform assembly to form local buildup or doublers at the aft and forward ends of the inner barrel assembly. The process then lays down an aft doubler and
25 forward doubler (operation **2124**). Rigid tooling details, such as steel mandrels, for example, are placed forward and aft of the outer skin wall and on top of the outer skin flange to establish and maintain critical interfacing surfaces with the leading edge and engine fan case components. The process then bands the outer skin (operation **2126**), with the process terminating thereafter.

The dry three-dimensional preform inner barrel structure that results from the process in
30 FIG. **21** may then be unitized, as described in more detail in FIG. **22**.

With reference now to FIG. **22**, a flowchart illustrating a process for forming a barrel structure is depicted in accordance with an advantageous embodiment.

The process begins by installing a vacuum bag over a dry three-dimensional preform inner barrel structure on a steel mold tool (operation **2202**), such as the structure described in FIG. **21**. The vacuum bagging compacts the dry materials together using pressure prior to the resin-infusion and cure processes that complete the unitization of the inner barrel. A vacuum is applied to the mold tool to remove the air molecules under the vacuum bag. The process places the dry three-dimensional preform inner barrel structure inside an oven (operation **2204**).

The process infuses the dry three-dimensional preform inner barrel structure with resin to form resin-infused inner barrel structure (operation **2206**). The resin-infusion occurs at a temperature that is lower than the melting point of the wax mandrels in the inner barrel structure. In one illustrative example, the resin infusion process within the oven may occur at approximately 140 degrees Fahrenheit.

The process cures the resin-infused inner barrel structure to form an inner barrel (operation **2208**). The process may cure the resin-infused inner barrel structure in the oven at a temperature higher than the temperature used for resin infusion, but lower than a temperature that would melt the wax mandrels, for example. One illustrative example of a curing temperature for the resin-infused inner barrel structure may be approximately 200 degrees Fahrenheit. The resin curing unitizes the inner barrel structure, bonding the skin, septum, and truss core elements together. The process then removes the inner barrel from the oven (operation **2210**) and removes the vacuum bag (operation **2212**). The process releases the release ply from the inner barrel and discards the release ply and flow media (operation **2214**). Next, the process removes the inner barrel from the steel mold tool (operation **2216**).

The process drills a number of holes in at least one of the inner skin and the outer skin (operation **2218**). The number of holes may be used for wax melt out of the wax mandrels in operation **2222** and/or acoustic treatment of the inner barrel. The number of holes may be drilled with a tool such as, for example, without limitation, a laser, a mechanical drill, and/or any other suitable tool. The inner barrel may cool down once removed from the oven in operation **2210** and prior the drilling step in operation **2218**. Holes may also be formed in-situ with the resin infusion process using pin mats positioned between the steel mold tool and inner skin. The pin mat is subsequently removed after resin

The process places the inner barrel with the number of holes in the oven (operation **2220**). The process then melts out the wax mandrels using the number of holes (operation **2222**). In an illustrative example, the post-cure wax melt out may occur at a temperature higher than that of the temperatures used for resin-infusion and the initial cure of the resin-infused inner barrel. The

temperature used in the oven for the wax melt-out may be a temperature at which the wax mandrels are engineered to melt, for example. In one illustrative example, the wax mandrels may be engineered to remain rigid at temperatures upwards of 200 degrees Fahrenheit or more and melt at approximately 350 degrees Fahrenheit. In this example, the wax mandrels are
5 configured to withstand the resin-infusion temperature of 140 degrees Fahrenheit and the initial cure temperature of 200 degrees Fahrenheit, retaining a rigid state until a higher temperature, such as 350 degrees Fahrenheit, is reached during a post-cure melt out phase. The number of holes drilled in operation **2218** allows the melted wax mandrels to flow out of the inner barrel structure during the melt out step in operation **2222**. The wax mandrels may also be engineered
10 to withstand one atmospheric pressure, 14.7 psi, without deforming.

The process then removes the inner barrel from the oven (operation **2224**). The process removes residual wax film from the inner barrel (operation **2226**). Residual wax film may remain within the interior of the barrel structure along the cavities where the wax mandrels were implemented prior to melting out, for example. The wax film removal may be accomplished
15 using a number of techniques, such as, for example, without limitation, a solvent bath, ultrasonic cleaning, and/or any other suitable technique.

The process may optionally apply additional acoustic treatment (operation **2228**). The additional acoustic treatment may be, for example, without limitation blowing in bulk absorber material into the number of cavities resulting from the space left by the wax mandrels after wax
20 melt out in operation **2222**.

The process then trims the ends of the inner barrel (operation **2230**), with the process terminating thereafter.

The flowcharts and block diagrams in the different depicted embodiments illustrate the architecture, functionality, and operation of some possible implementations of apparatus,
25 methods and computer program products. In this regard, each block in the flowchart or block diagrams may represent a module, segment, or portion of computer usable or readable program code, which comprises one or more executable instructions for implementing the specified function or functions. In some alternative implementations, the function or functions noted in the block may occur out of the order noted in the figures. For example, in some cases, two
30 blocks shown in succession may be executed substantially concurrently, or the blocks may sometimes be executed in the reverse order, depending upon the functionality involved.

The different advantageous embodiments take into account and recognize a number of different considerations. For example, the different advantageous embodiments take into

account and recognize that current methods of design and production for engine nacelles involve a multi-step process utilizing pre-impregnated materials and multiple autoclave cures to produce a composite inner barrel structure. This current approach requires the use of core material in honeycomb or other form, often in two layers separated by a septum or mid-skin element to meet
5 the structural and acoustic performance requirements. This approach also requires the use of an autoclave, which is expensive to operate and maintain with a limited supplier base.

The different advantageous embodiments further take into account and recognize that current core and septum materials are often sole sourced and expensive. The current methods require co-bonding of skins, such as face sheets, mid-skin, and septum elements, in multiple
10 steps using autoclave cure processes. The pre-impregnated materials, film adhesives, and other materials require subzero storage and have a limited “out-time” of approximately thirty days in which the materials must be laid up, vacuum bagged, and autoclave process cured. These requirements place time and cost constraints on the manufacturing of engine nacelle inner barrel structures.

15 Thus, the different advantageous embodiments provide a one-step cure process for forming a unitized inner barrel structure without the use of an autoclave. This process results in shorter cycle time and turn around on the mold tool, and a cost benefit by use of the lower cost oven over the autoclave. Vacuum bag installation is only required once during this advantageous process, and only two heat cycles within a oven are needed to complete the part.

20 The different advantageous embodiments further provide a unitized one-piece design build inner barrel having a truss design with an integral septum detail. The inner barrel is formed in a one-step cure process with melt-out wax mandrels in a oven. The materials do not require sub-zero storage or autoclave cure processes. The dry fabrics used to produce the inner barrel have an unlimited out time as opposed to the thirty day out time for current state of the art designs.
25 The unitized structure provides a single joint interface for each of the three sub-components that is superior to the multiple splice joints needed for the current state of the art structures.

The description of the different advantageous embodiments has been presented for purposes of illustration and description, and is not intended to be exhaustive or limited to the embodiments in the form disclosed. Many modifications and variations will be apparent to those
30 of ordinary skill in the art. Further, different advantageous embodiments may provide different advantages as compared to other advantageous embodiments. The embodiment or embodiments selected are chosen and described in order to best explain the principles of the embodiments, the practical application, and to enable others of ordinary skill in the art to understand the disclosure

for various embodiments with various modifications as are suited to the particular use contemplated.

What is claimed is:

1. An inner barrel structure of an engine nacelle, the inner barrel structure comprising:
an inner skin formed by laying down a number of layers of an inner skin fabric around a steel mold tool and using a number of banding threads to hold the inner skin against the steel mold tool in tension;
a truss core disposed with respect to the inner skin to define a cavity; and
a septum disposed in the cavity.
2. The inner barrel structure of claim 1, wherein the truss core is disposed at an inner surface of the inner skin such that a plurality of cavities are defined therebetween, and further comprising a plurality of septa respectively disposed in the plurality of cavities.
3. The inner barrel structure of claim 2, wherein the plurality of septa are configured for attenuating noise.
4. The inner barrel structure of claim 1, further comprising:
an outer skin disposed in a spaced relationship with the inner skin; and
a radial ply closeout disposed between the inner and outer skins.
5. The inner barrel structure of claim 1, further comprising absorber material disposed in the cavity.
6. The inner barrel structure of claim 5, wherein the absorber material is disposed between the truss core and the septum.
7. The inner barrel structure of any one of claims 1 to 6, wherein the septum includes a stiffening portion.
8. The inner barrel structure of claim 7, wherein the stiffening portion is configured substantially channel-like.
9. The inner barrel structure of claim 7 or 8, wherein the stiffening portion includes acoustically configured perforations.

10. The inner barrel structure of any one of claims 7 to 9, wherein the stiffening portion contacts the inner skin.
11. An engine nacelle comprising the inner barrel structure of any one of claims 1 to 10.
12. A method for assembling a barrel structure, the method comprising:
 - laying down a number of layers of an inner skin fabric around a steel mold tool to form an inner skin;
 - installing a number of mandrel sections with encapsulated septum detail on the inner skin;
 - installing a first number of radial ply closeouts between each of the number of mandrel sections with encapsulated septum detail installed;
 - laying down a number of layers of truss core fabric over the number of mandrel sections with encapsulated septum detail to form a truss core;
 - installing a number of mandrel sections on the truss core;
 - installing a second number of radial ply closeouts between each of the number of mandrel sections;
 - laying down a number of layers of an outer skin fabric against the number of mandrel sections to form an outer skin; and
 - banding the inner skin using a number of banding threads to hold the inner skin against the steel mold tool in tension.
13. The method of claim 12, further comprising laying down an aft doubler and a forward doubler against the outer skin.
14. The method of claim 13, further comprising infusing with resin a portion of the barrel structure.
15. The method of claim 14, further comprising utilizing sacrificial mandrel sections that are removable by melting.
16. The method of claim 14 or 15, further comprising holding the inner skin against a mold tool.

17. The method of any one of claims 14 to 16, further comprising holding the truss core against the mandrel sections with encapsulated septum detail in tension.
18. The method of any one of claims 14 to 17, wherein the infusing step occurs at a temperature that is lower than the melting point of a number of wax mandrels in an inner barrel.
19. The method of claim 18, further comprising curing at a temperature higher than the temperature used for the infusing step, but lower than a temperature at which the number of wax mandrels is engineered to melt.
20. The method of any one of claims 12 to 19, wherein the banding threads are selected from at least one of vectran fiber, carbon, and cotton.
21. The method of any one of claims 12 to 20, further comprising:
banding the number of mandrel sections with encapsulated septum detail using the number of banding threads to hold the number of mandrel sections with encapsulated septum detail against the inner skin in tension.
22. The method of any one of claims 12 to 21, further comprising:
banding the truss core using the number of banding threads to hold the truss core against the number of mandrel sections with encapsulated septum detail in tension.
23. The method of any one of claims 12 to 22, further comprising:
banding the outer skin using the number of banding threads to hold the outer skin against the number of mandrel sections in tension.
24. The method of any one of claims 12 to 23, wherein the inner skin fabric is at least one of a woven fabric, a uni-directional tape, warp/knit fabric, braided fabric, stitched fabric, and/or any other suitable fabric.
25. The method of any one of claims 12 to 24, wherein the outer skin fabric is at least one of a woven fabric, a uni-directional tape, warp/knit fabric, braided fabric, stitched fabric,

and/or any other suitable fabric.

26. The method of claim 25, wherein said forming further comprises disposing the truss core at the inner skin of the barrel structure such that a plurality of cavities are defined therebetween.

27. The method of claim 25 or 26, wherein said disposing further comprises disposing a plurality of perforated septa respectively in the cavities.

28. The method of any one of claims 25 to 27, further comprising disposing absorbing material in the cavities.

29. The method of any one of claims 12 to 28, wherein the truss core fabric is at least one of a woven fabric, a uni-directional tape, warp/knit fabric, braided fabric, stitched fabric, and/or any other suitable fabric.

30. The method of any one of claims 12 to 29, wherein the first number of radial ply closeouts is installed perpendicular to the length of the number of mandrel sections with encapsulated septum detail to form a wall or divide between each of the number of mandrel sections with encapsulated septum detail as they are installed around the inner skin on the steel mold tool.

31. The method of claim 30, wherein said disposing further comprises disposing a plurality of septa each including a stiffening portion.

32. The method of any one of claims 12 to 31, wherein the second number of radial ply closeouts is installed perpendicular to the length of the number of mandrel sections to form a wall or divide between each of the number of mandrel sections as they are installed around the truss core on the steel mold tool.

33. Use of a plurality of engine nacelles installed onto an aircraft, at least one of the nacelles comprising a barrel structure assembled according to the method of any one of claims 12 to 32.



34. A method for forming a barrel structure, the method comprising:
- installing a vacuum bag over a dry three-dimensional preform inner barrel structure on a steel mold tool, the preform inner barrel structure having an inner skin formed by laying down a number of layers of an inner skin fabric around the steel mold tool and using a number of banding threads to hold the inner skin against the steel mold tool in tension;
 - placing the dry three-dimensional preform inner barrel structure inside an oven;
 - infusing the dry three-dimensional preform inner barrel structure with resin to form a resin-infused inner barrel structure;
 - curing the resin-infused inner barrel structure to form an inner barrel;
 - removing the inner barrel from the oven;
 - removing the vacuum bag;
 - removing the release ply from the inner barrel and discarding a release ply and flow media;
 - removing the inner barrel from the steel mold tool; and
 - drilling a number of holes in at least one of an inner skin and an outer skin of the inner barrel.
35. The method of claim 34, further comprising:
- placing the inner barrel with the number of holes in the oven;
 - melting out a number of wax mandrels from the inner barrel through the number of holes drilled;
 - removing the inner barrel from the oven; and
 - removing residual wax film from the inner barrel.
36. The method of claim 35, further comprising:
- applying additional acoustic treatment to the inner barrel.
37. The method of claim 35 or 36, wherein the number of wax mandrels is engineered to maintain rigidity at one atmosphere of applied pressure by the vacuum bag and a temperature used for the infusing step and a temperature used for the curing step, and wherein the number of wax mandrels is engineered to melt at a temperature higher than the temperature used for the infusing step and the temperature used for the curing step.

38. The method of any one of claims 35 to 37, wherein the removing residual wax film from the inner barrel step uses a technique selected from at least one of a solvent bath and ultrasonic cleaning.

39. A method of manufacturing an inner barrel structure of an engine nacelle, the method comprising:

forming a plurality of cavities between an inner skin and an outer skin of the inner barrel structure, the inner barrel structure having an inner skin formed by laying down a number of layers of an inner skin fabric around a steel mold tool and using a number of banding threads to hold the inner skin against the steel mold tool in tension; and disposing a noise-attenuating structure within the cavities.

1/19

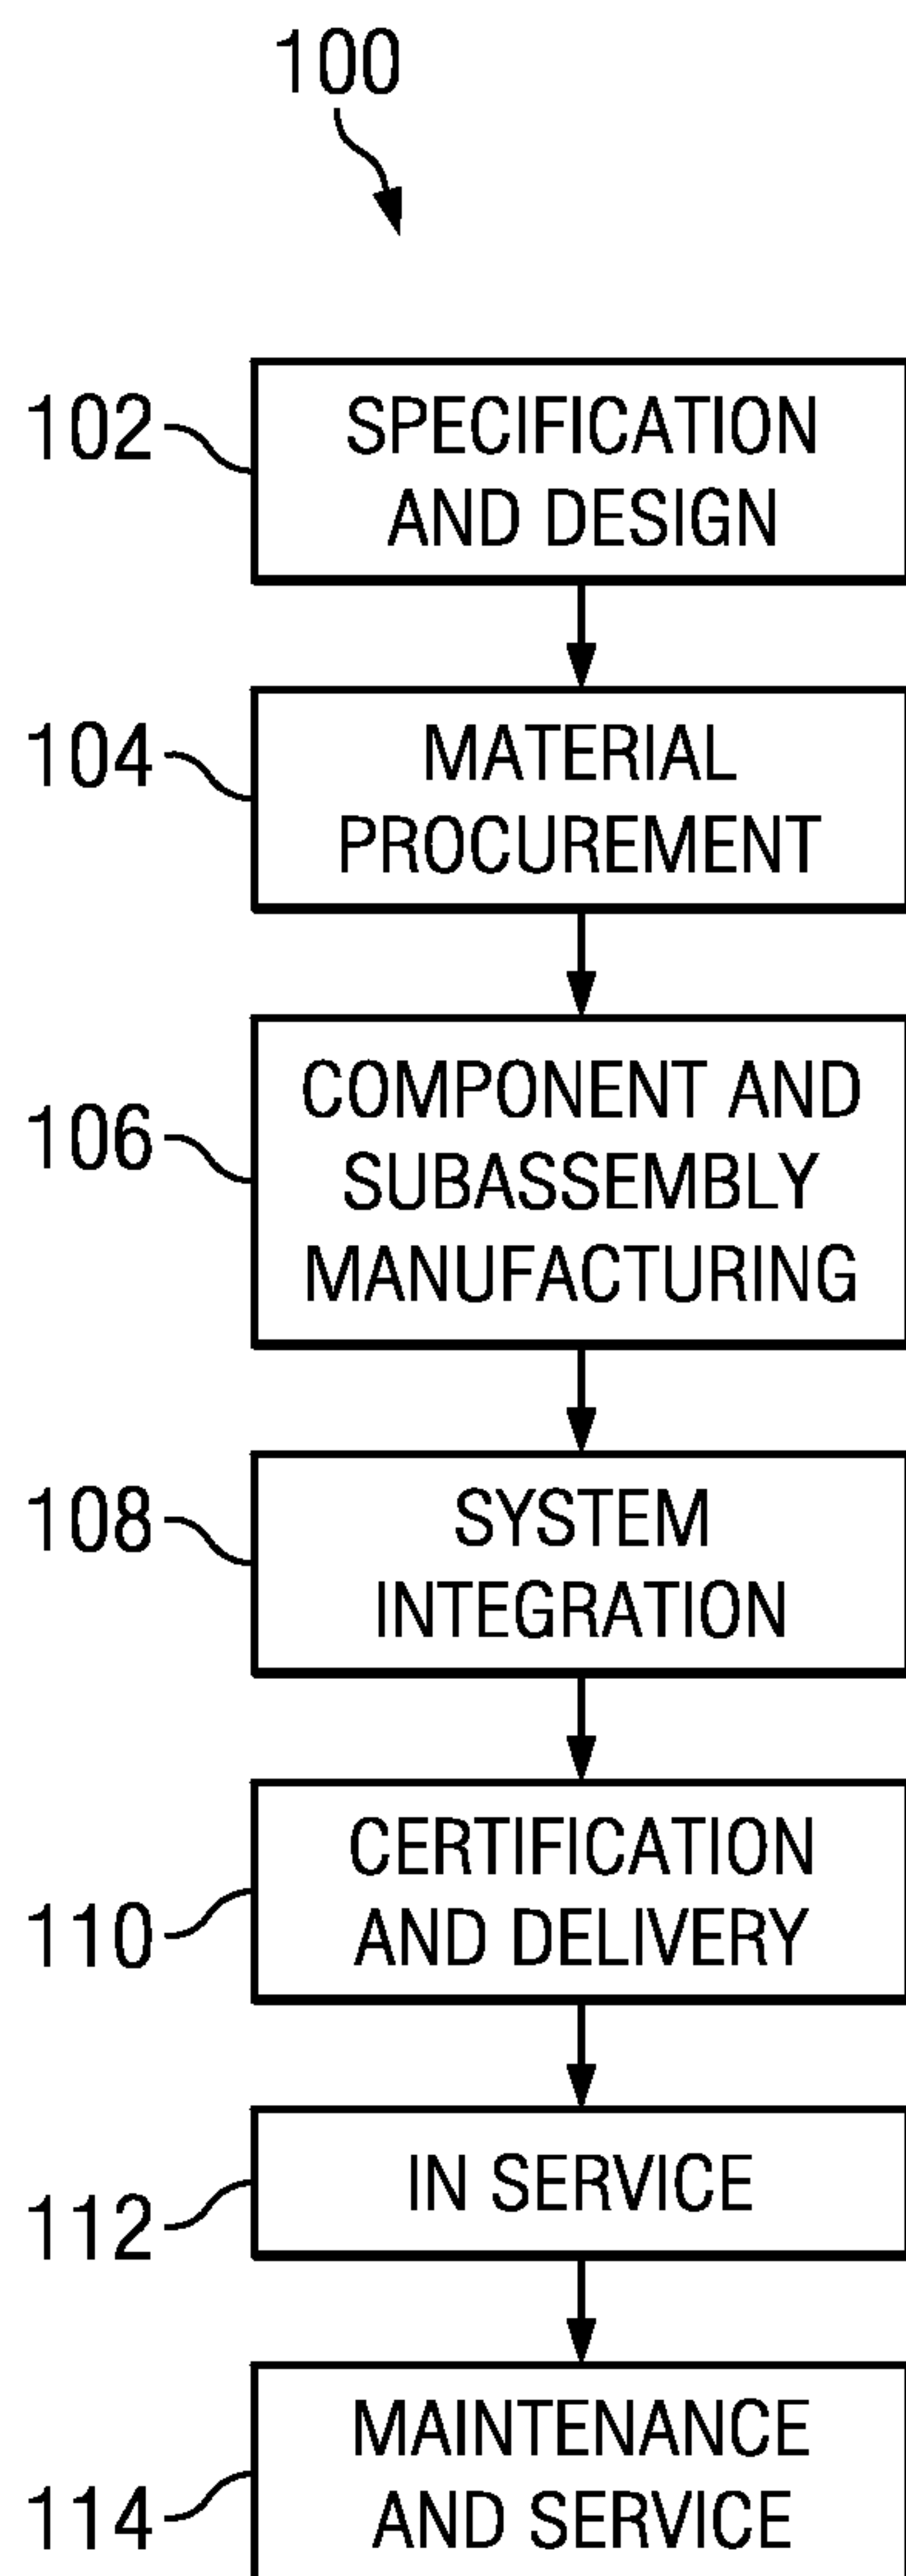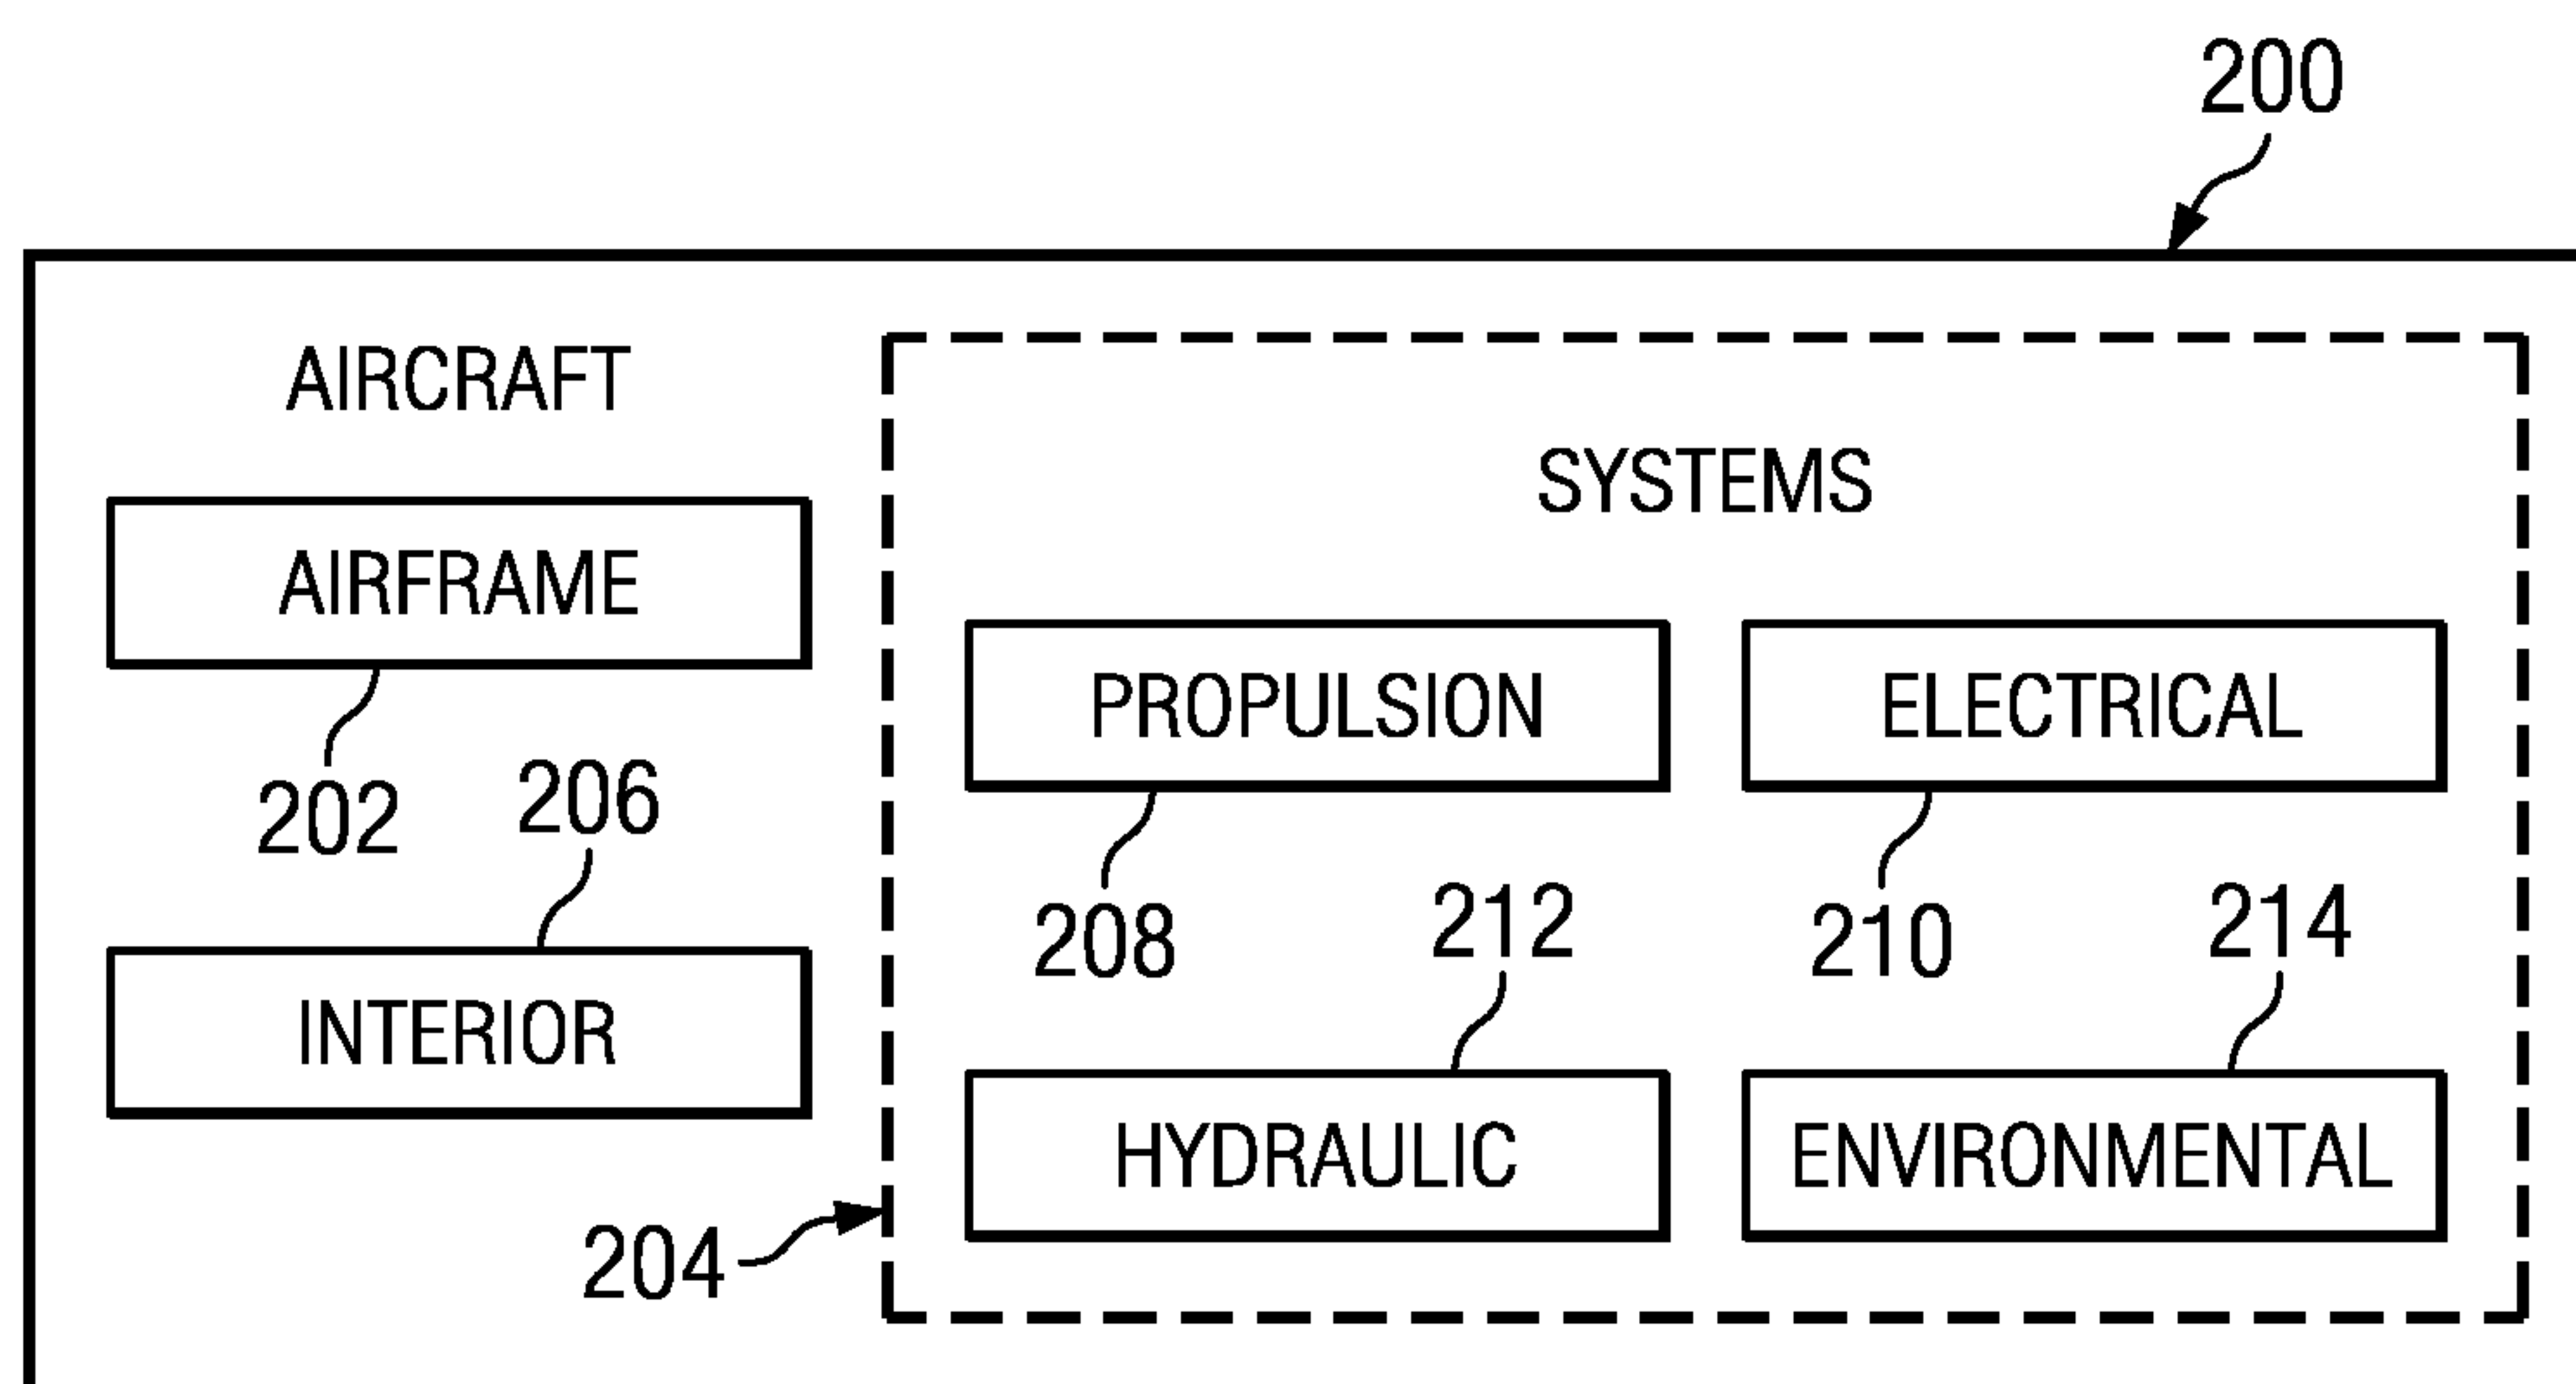*FIG. 1**FIG. 2*

2/19

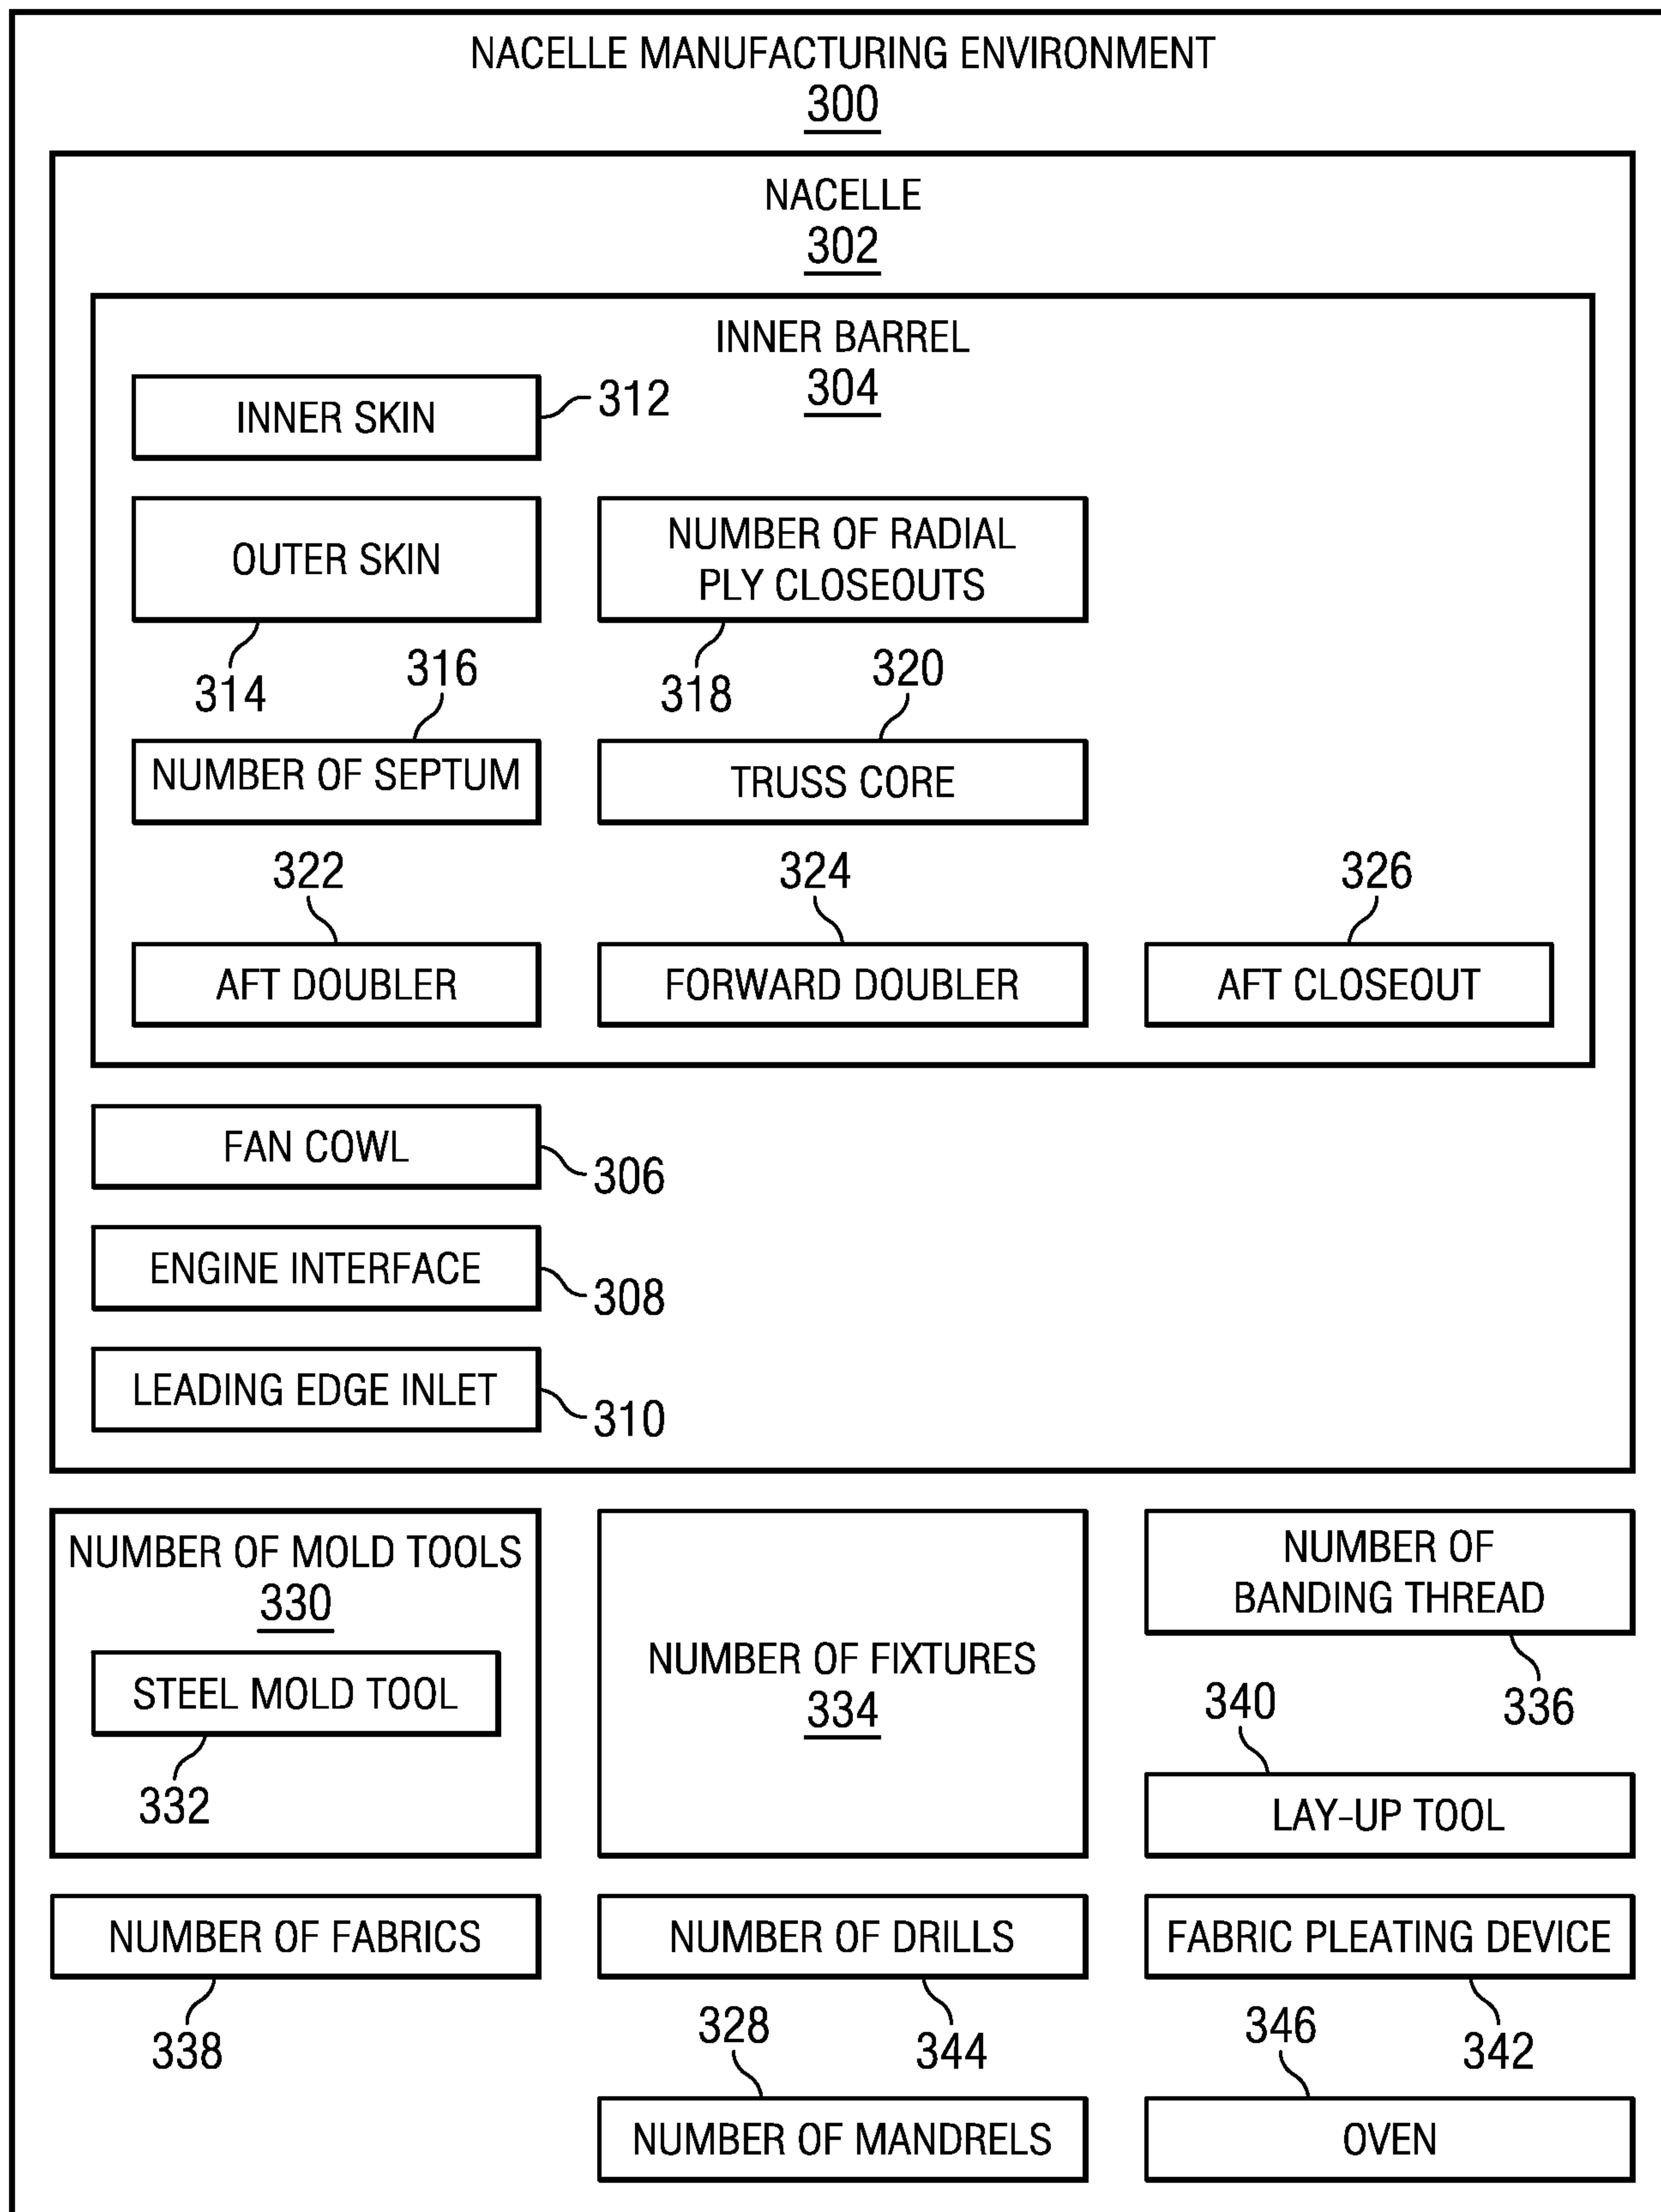
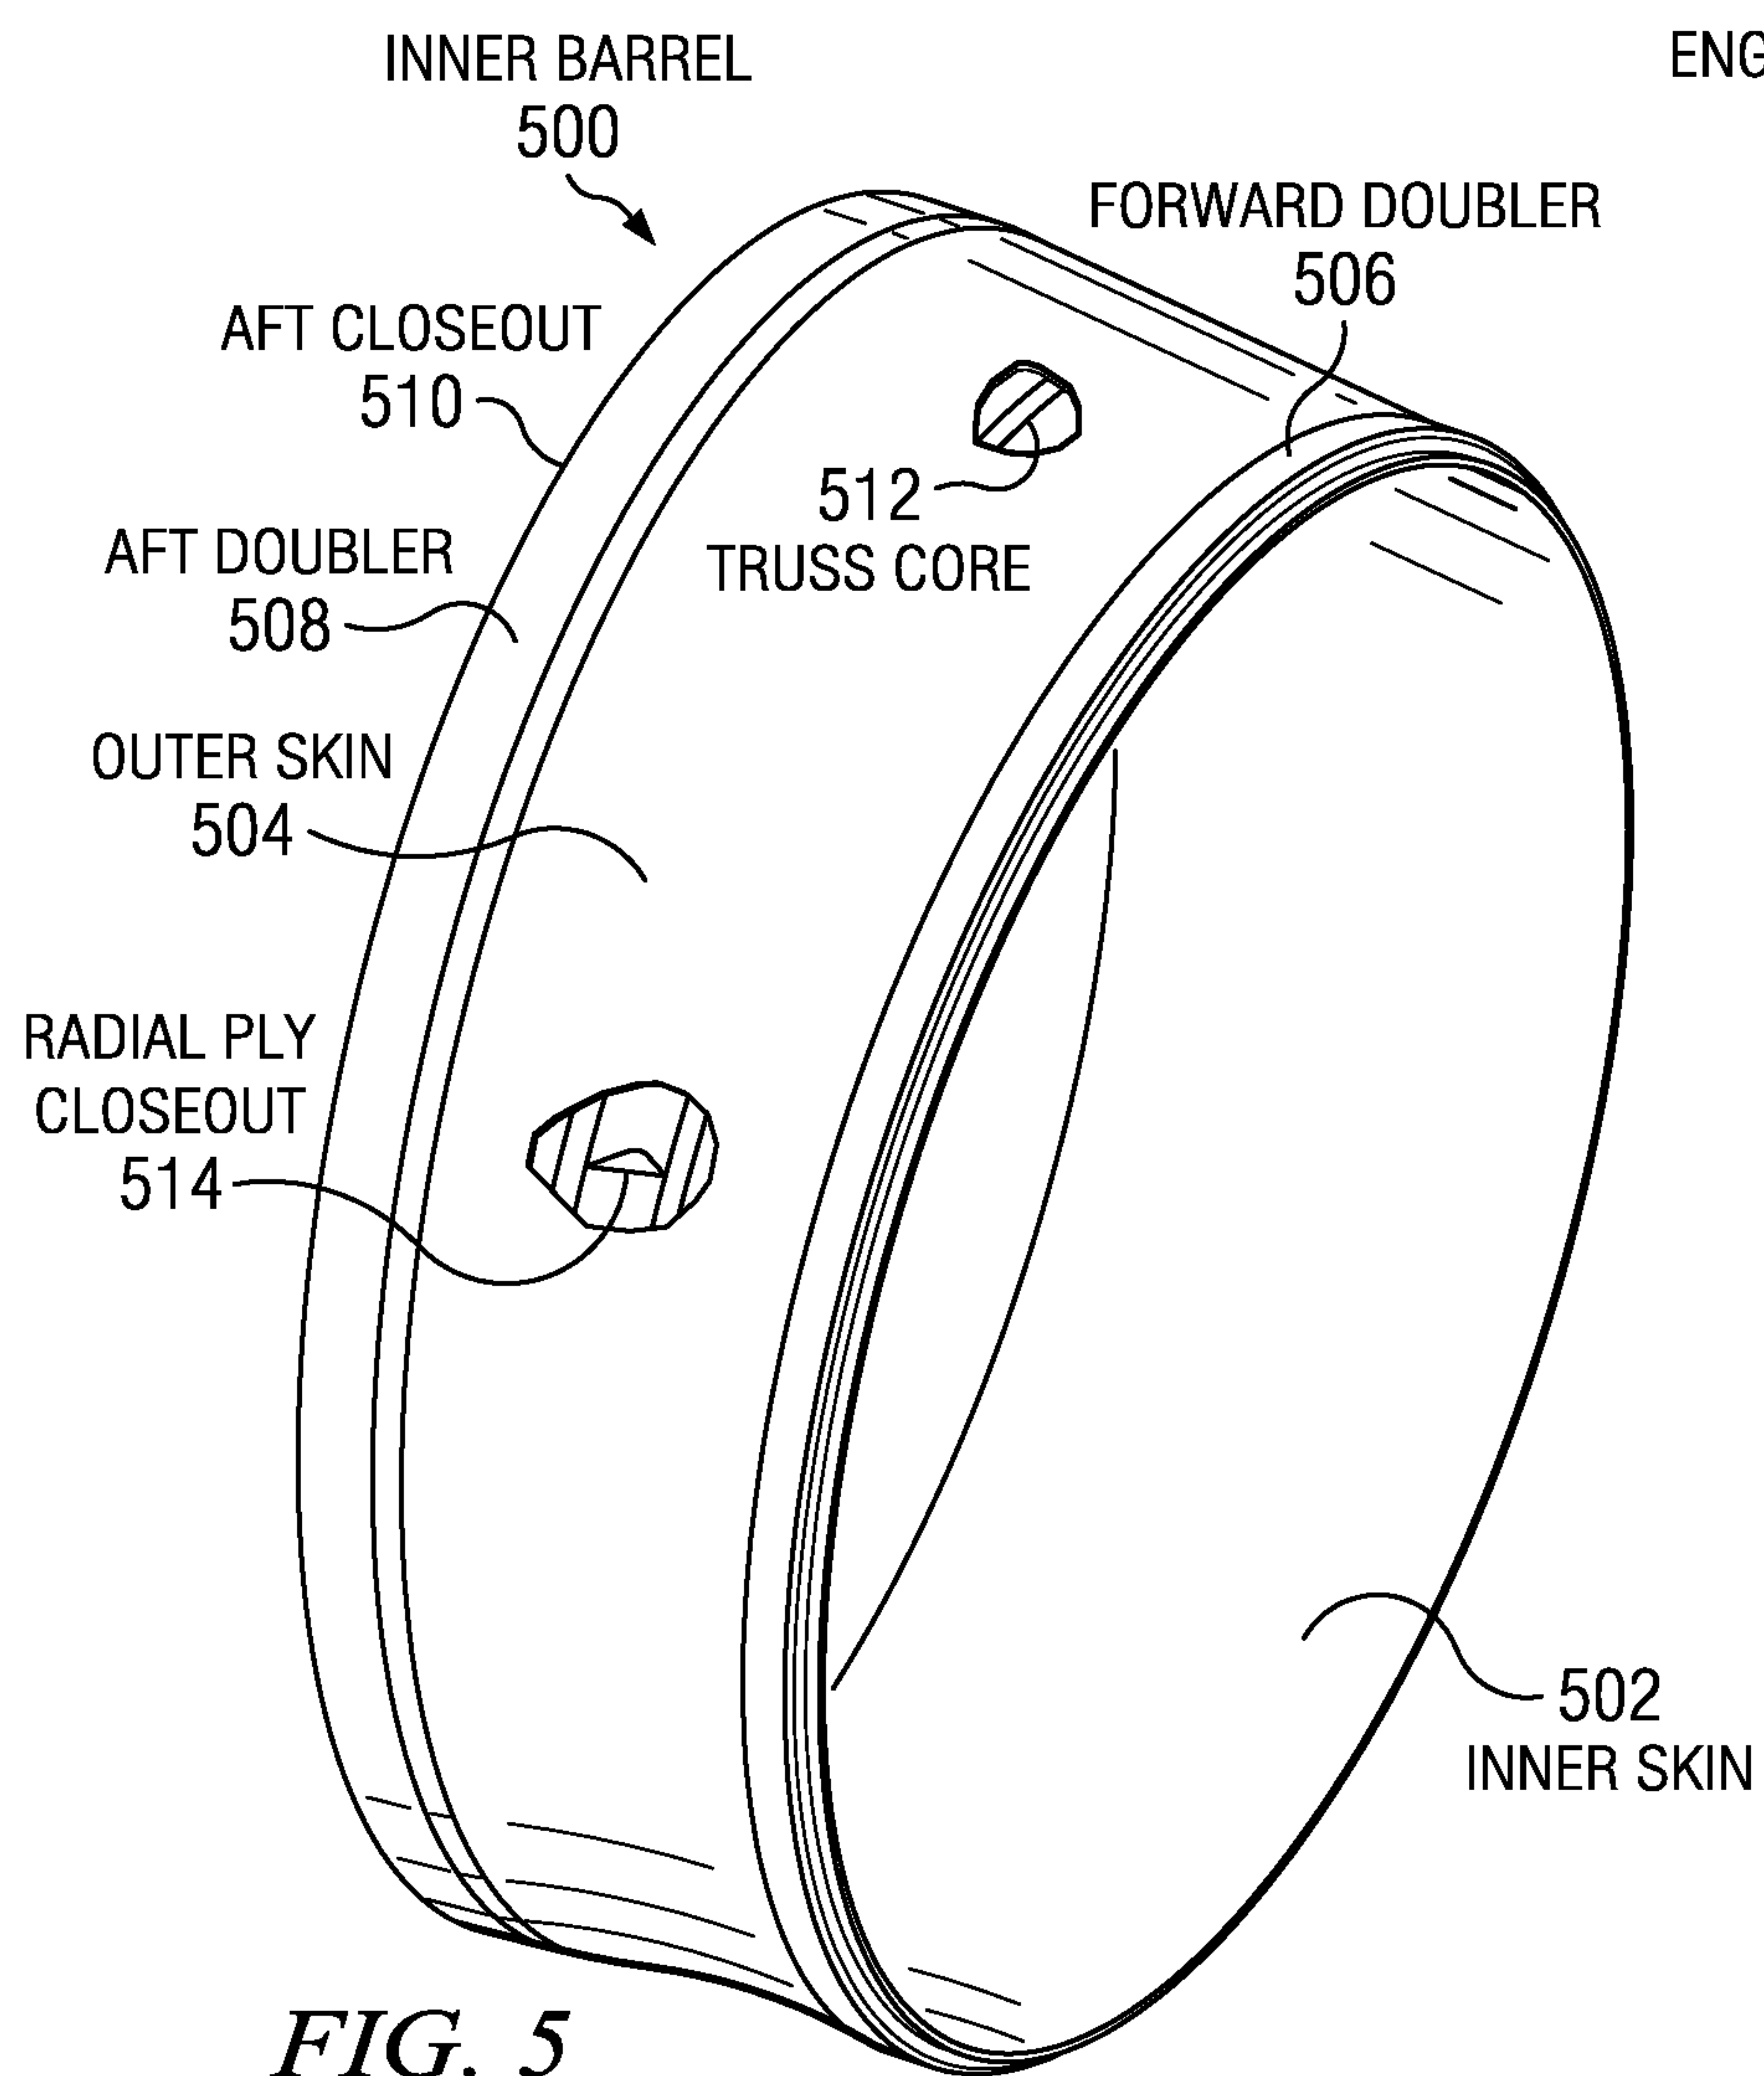
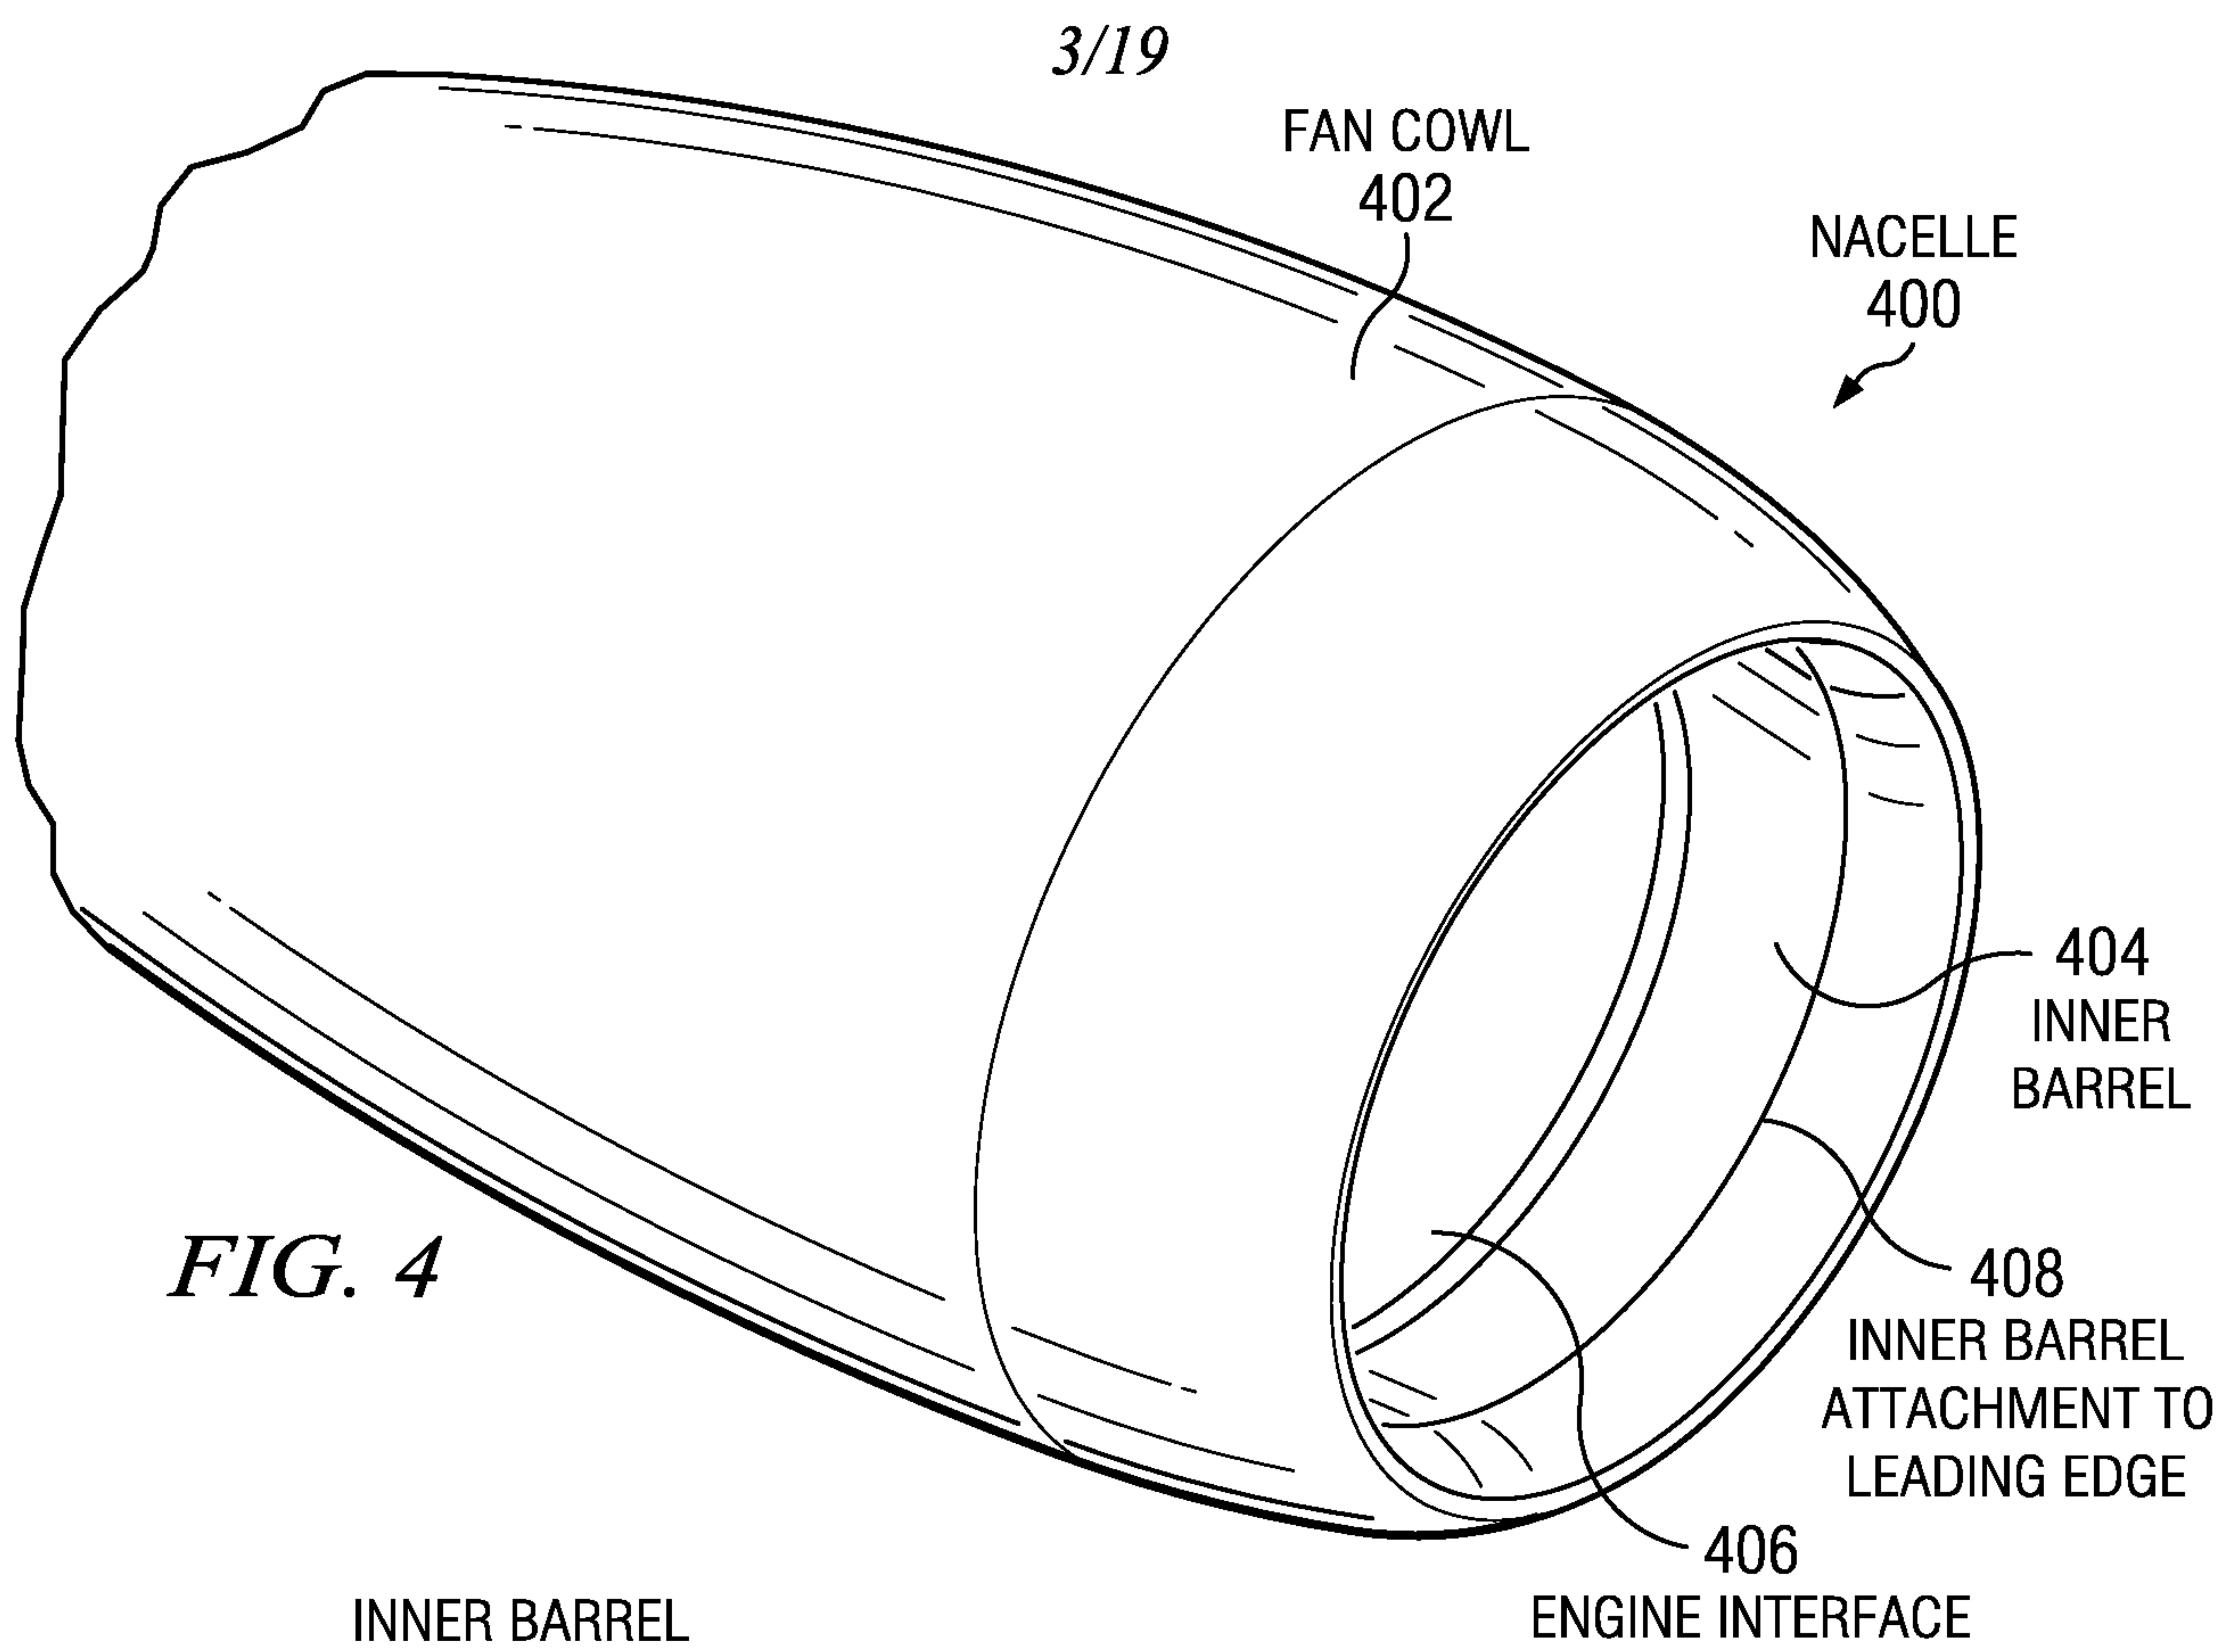


FIG. 3





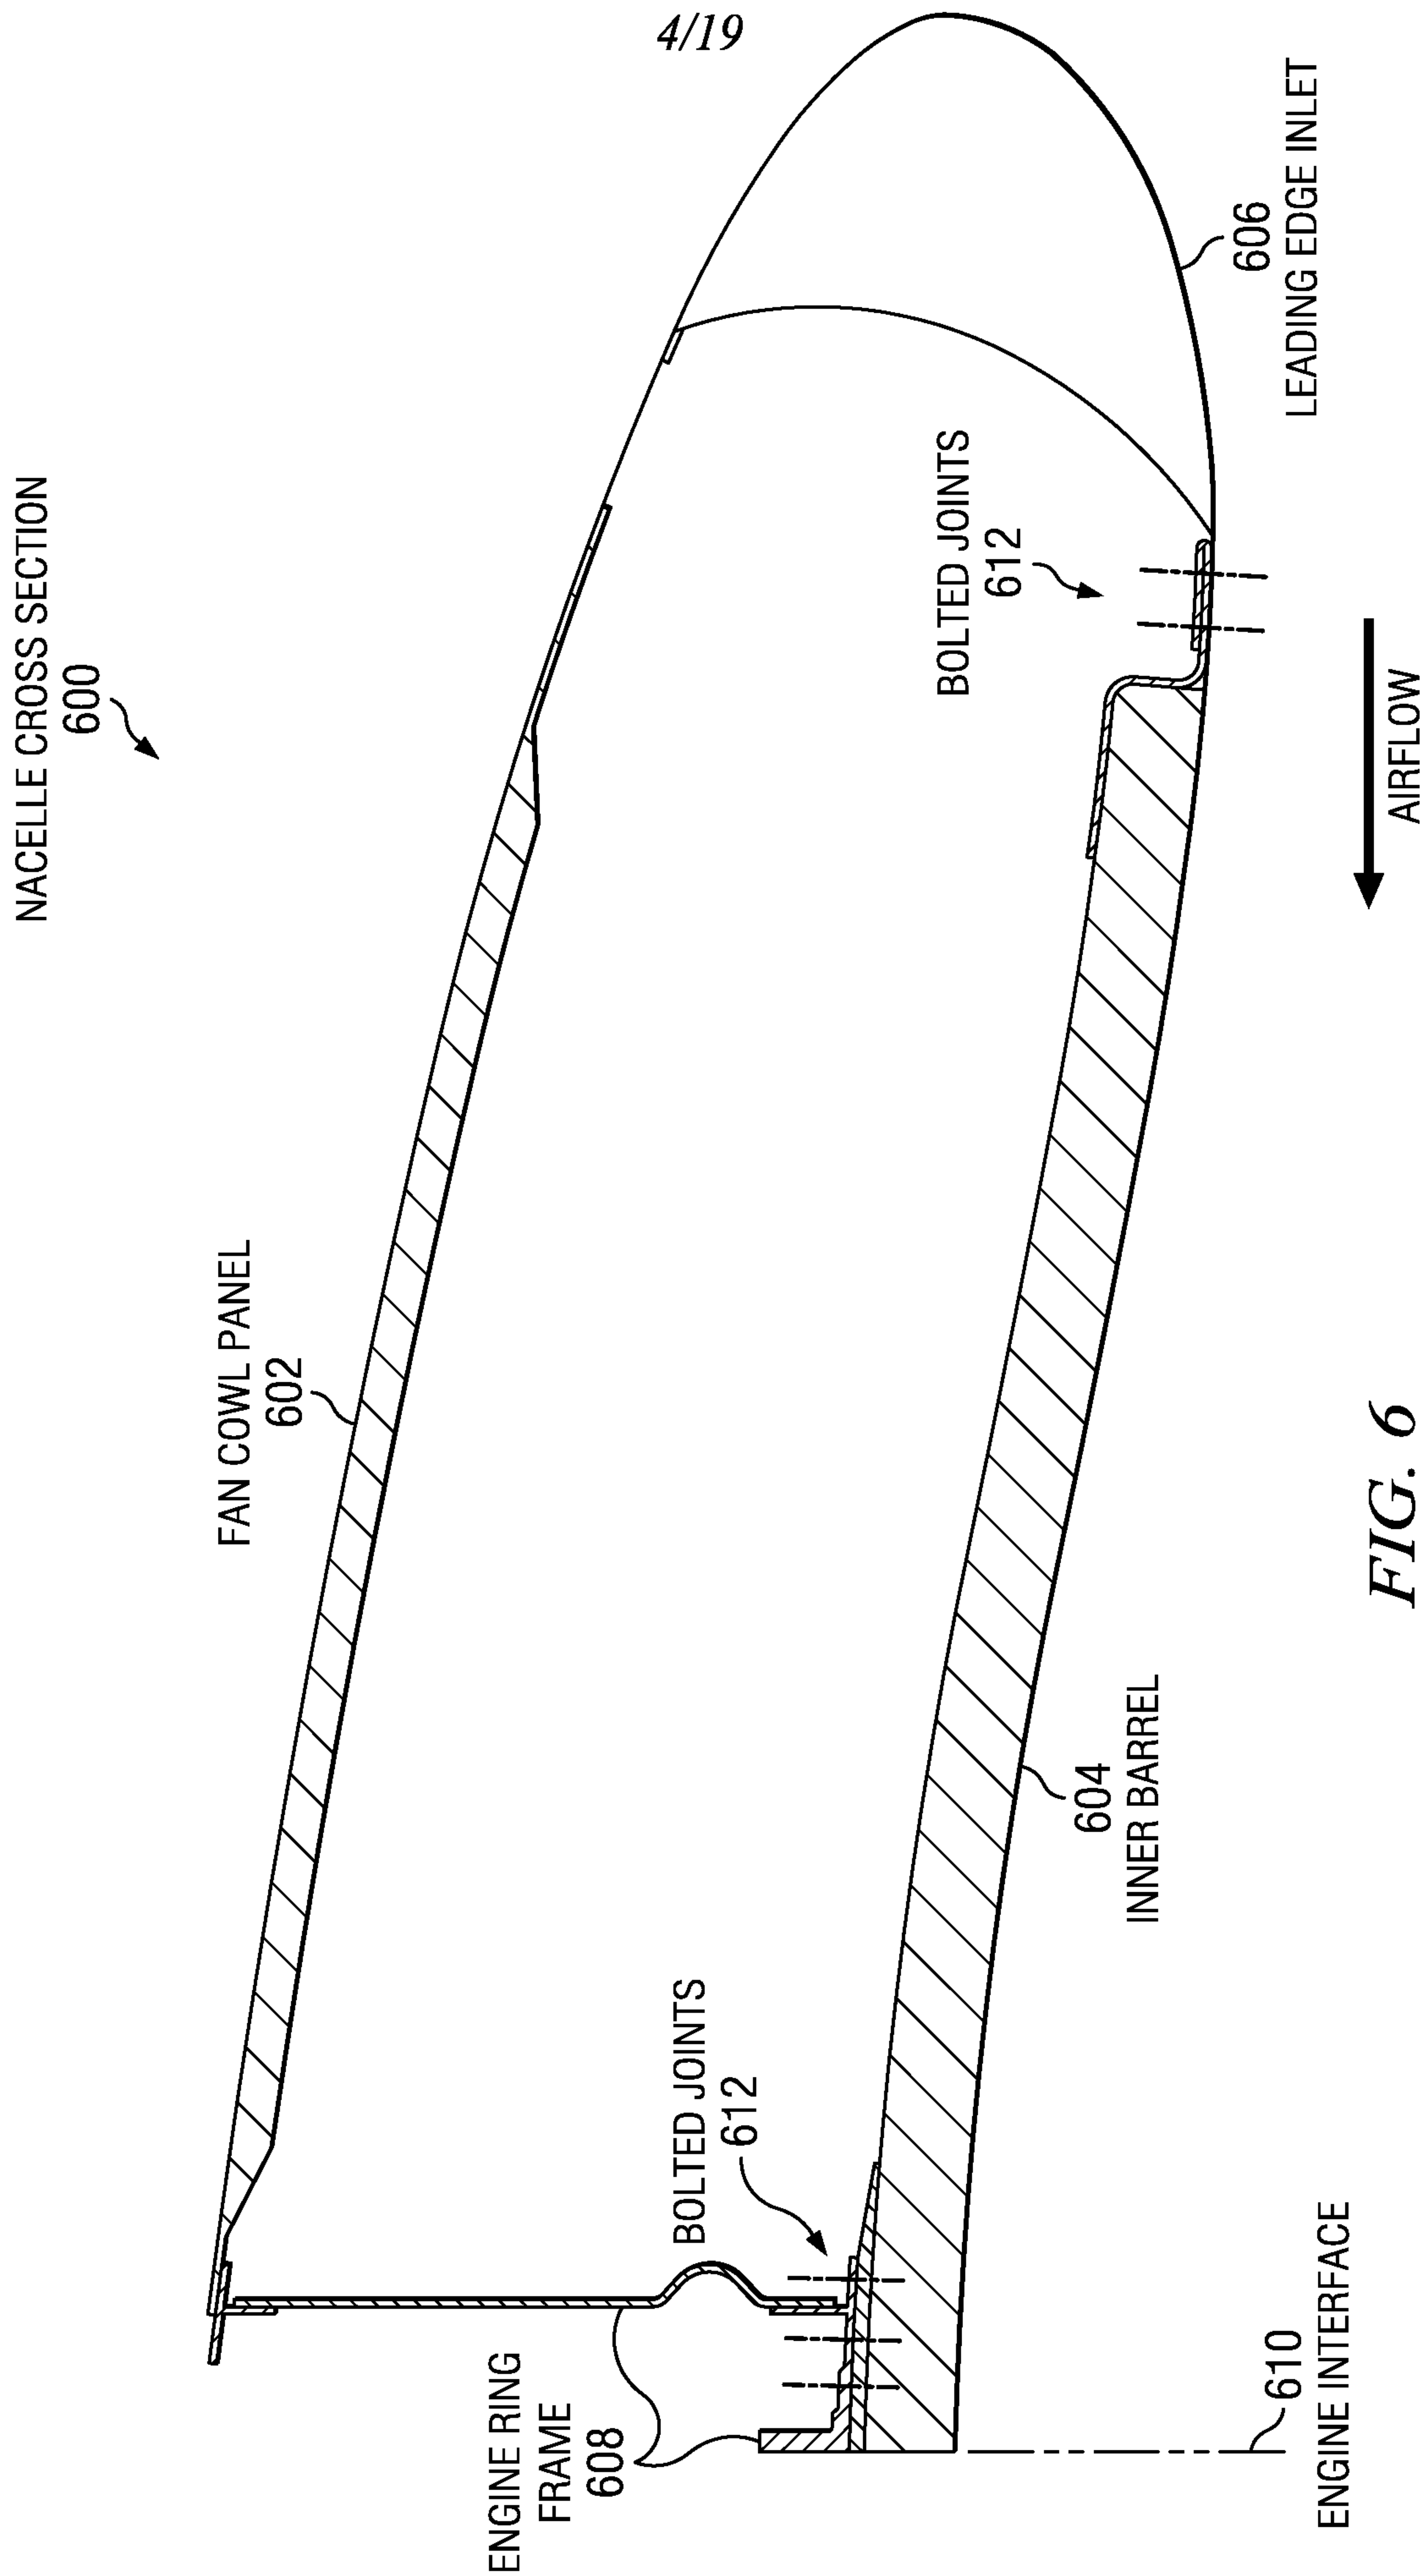


FIG. 6

5/19

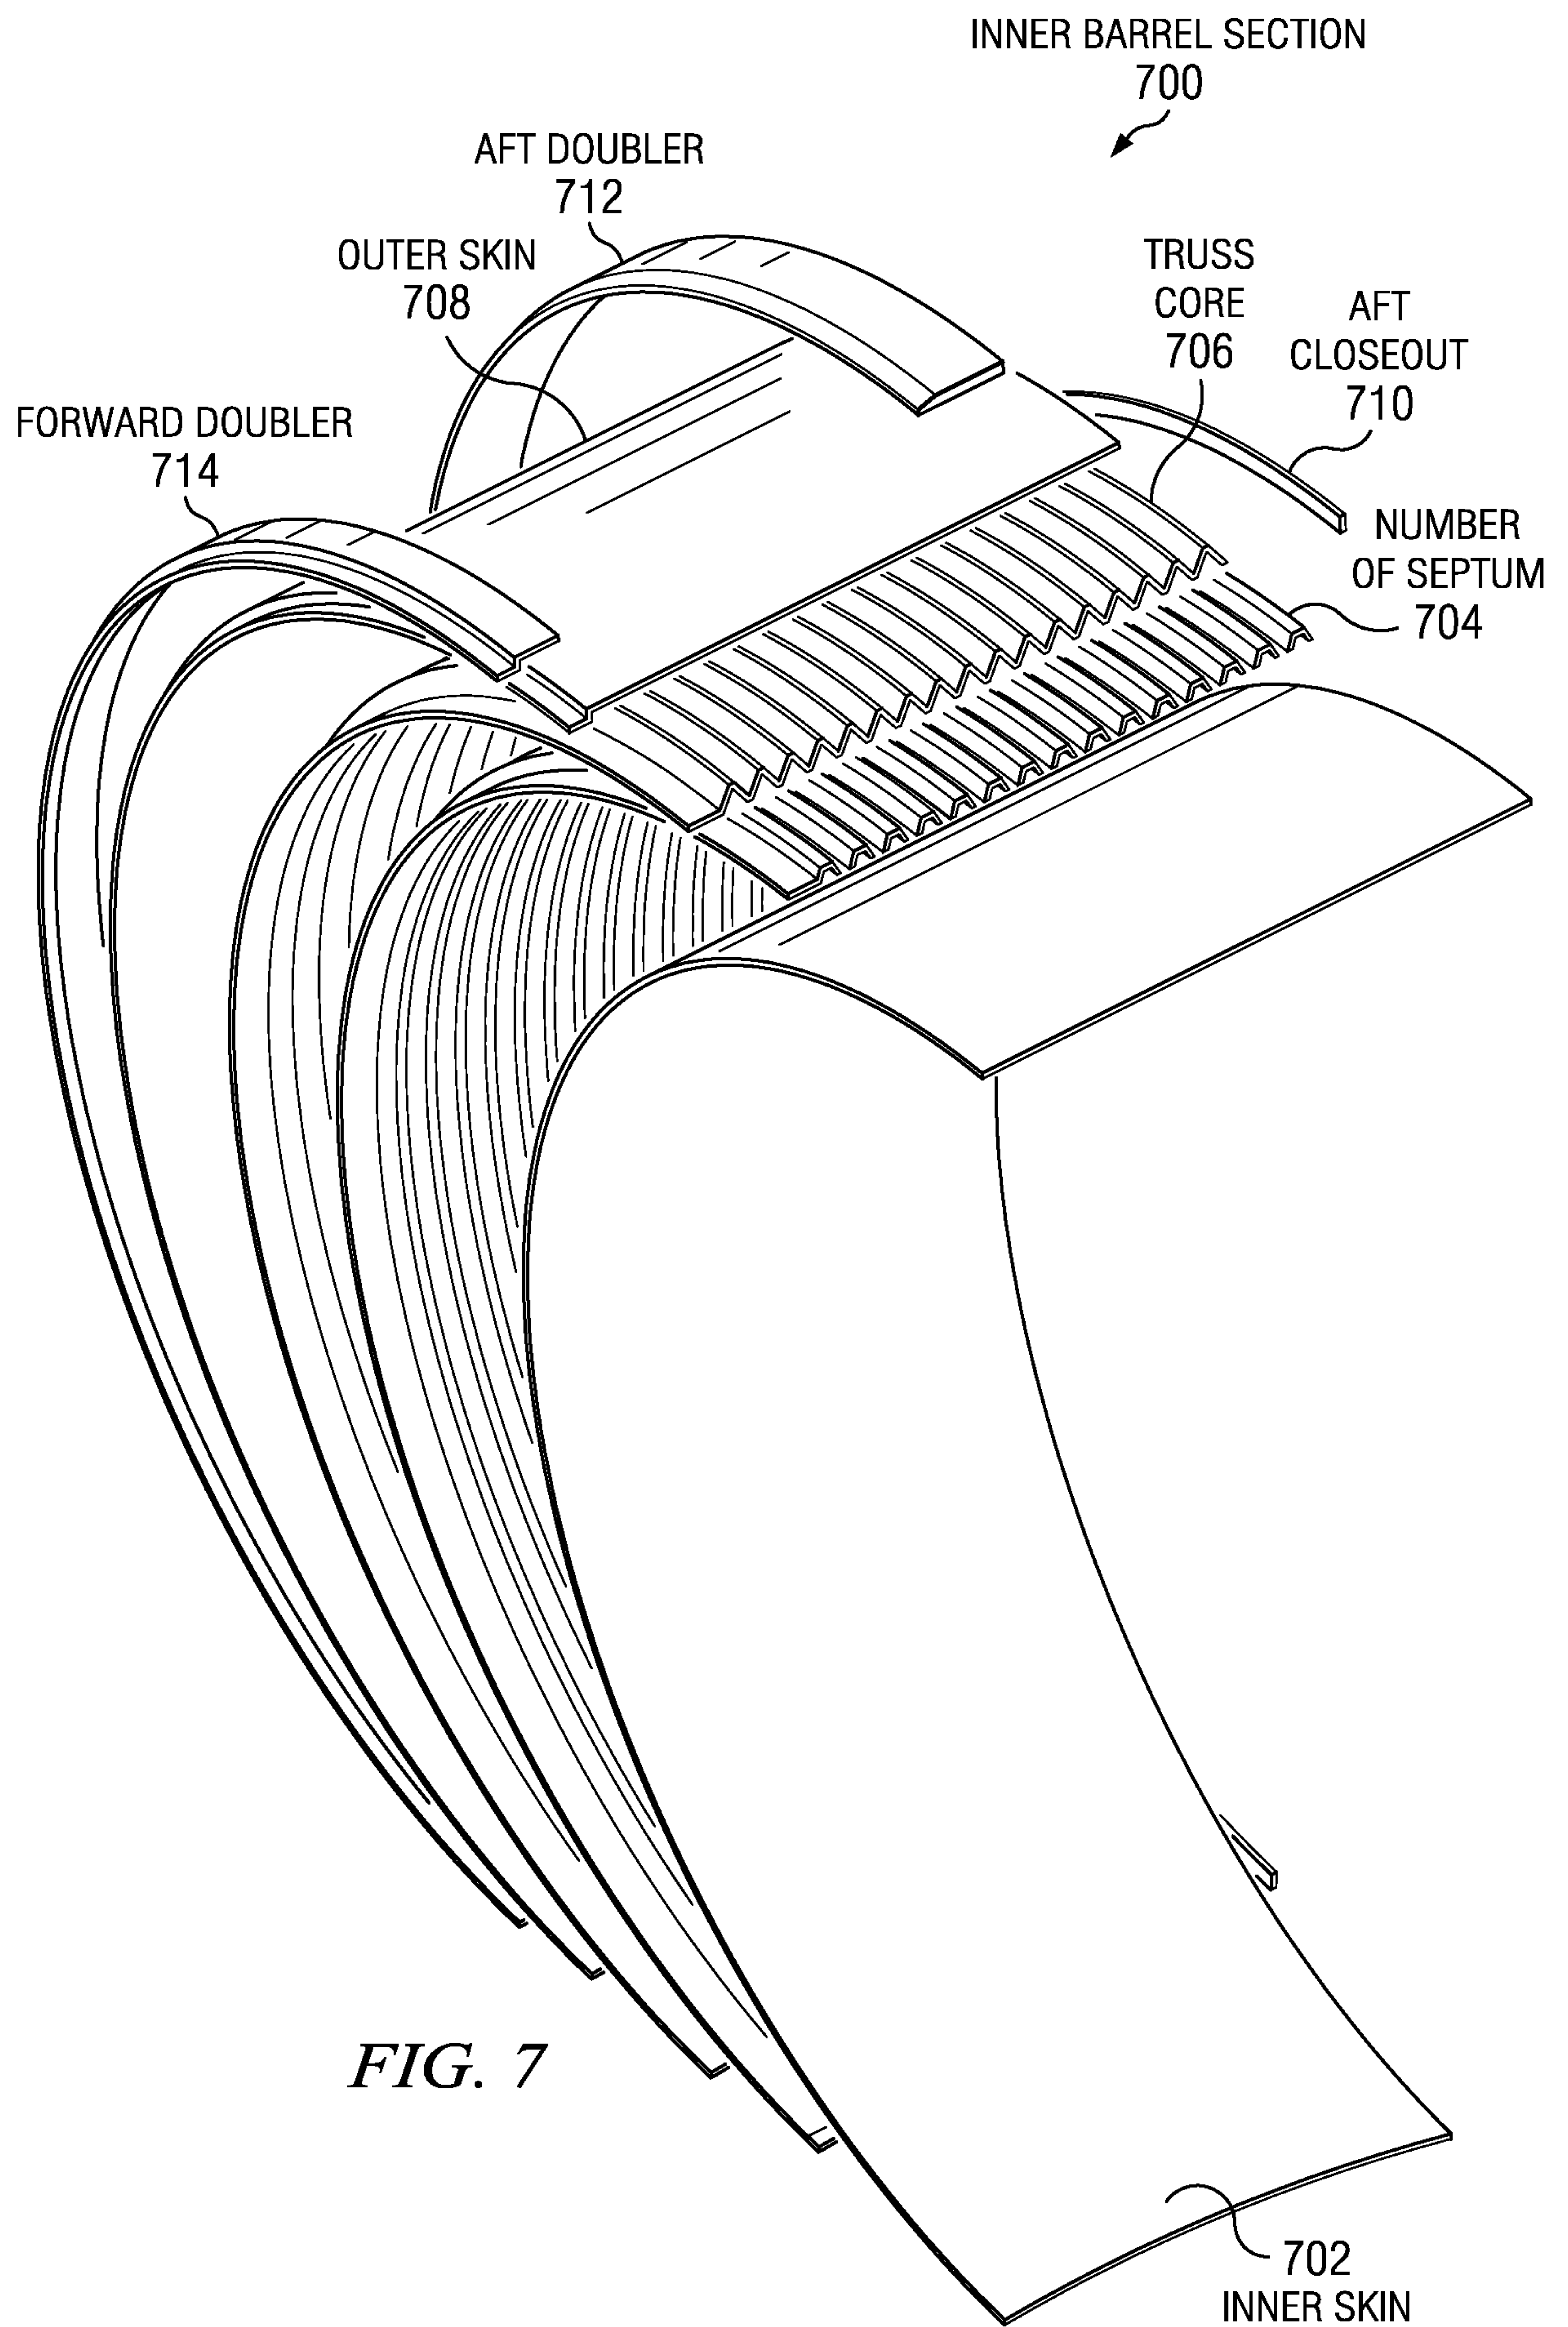

6/19

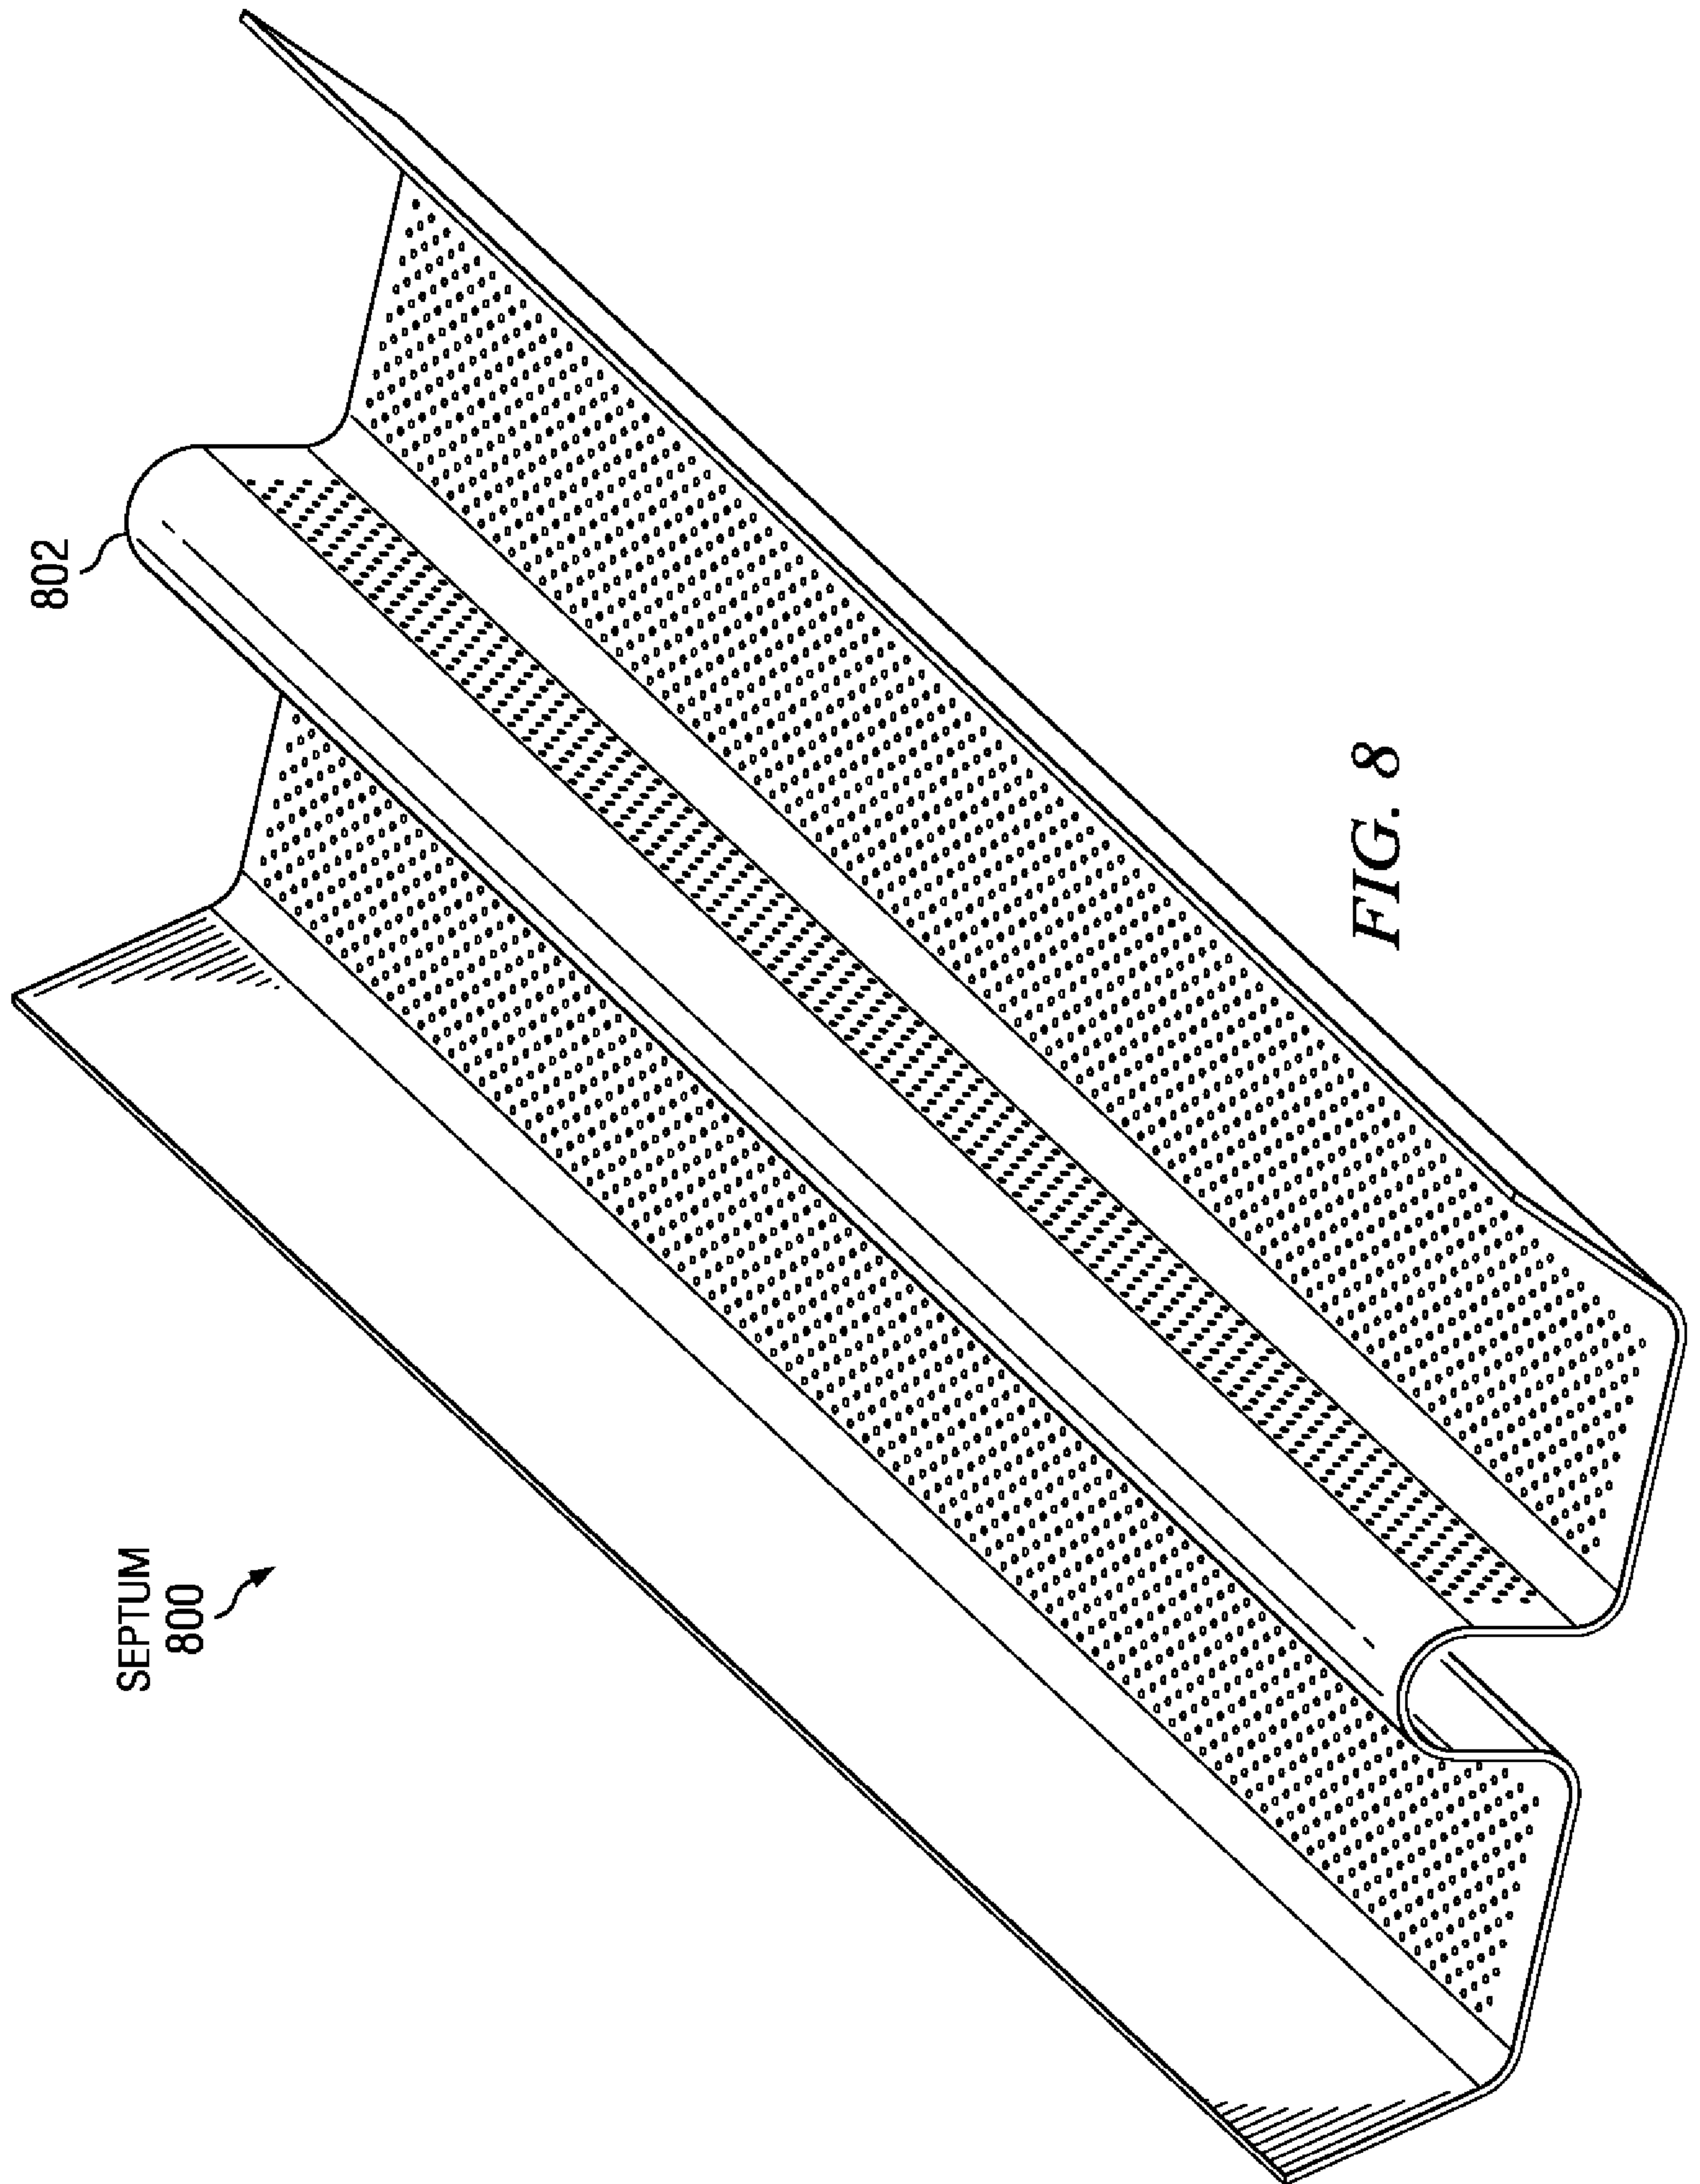

7/19

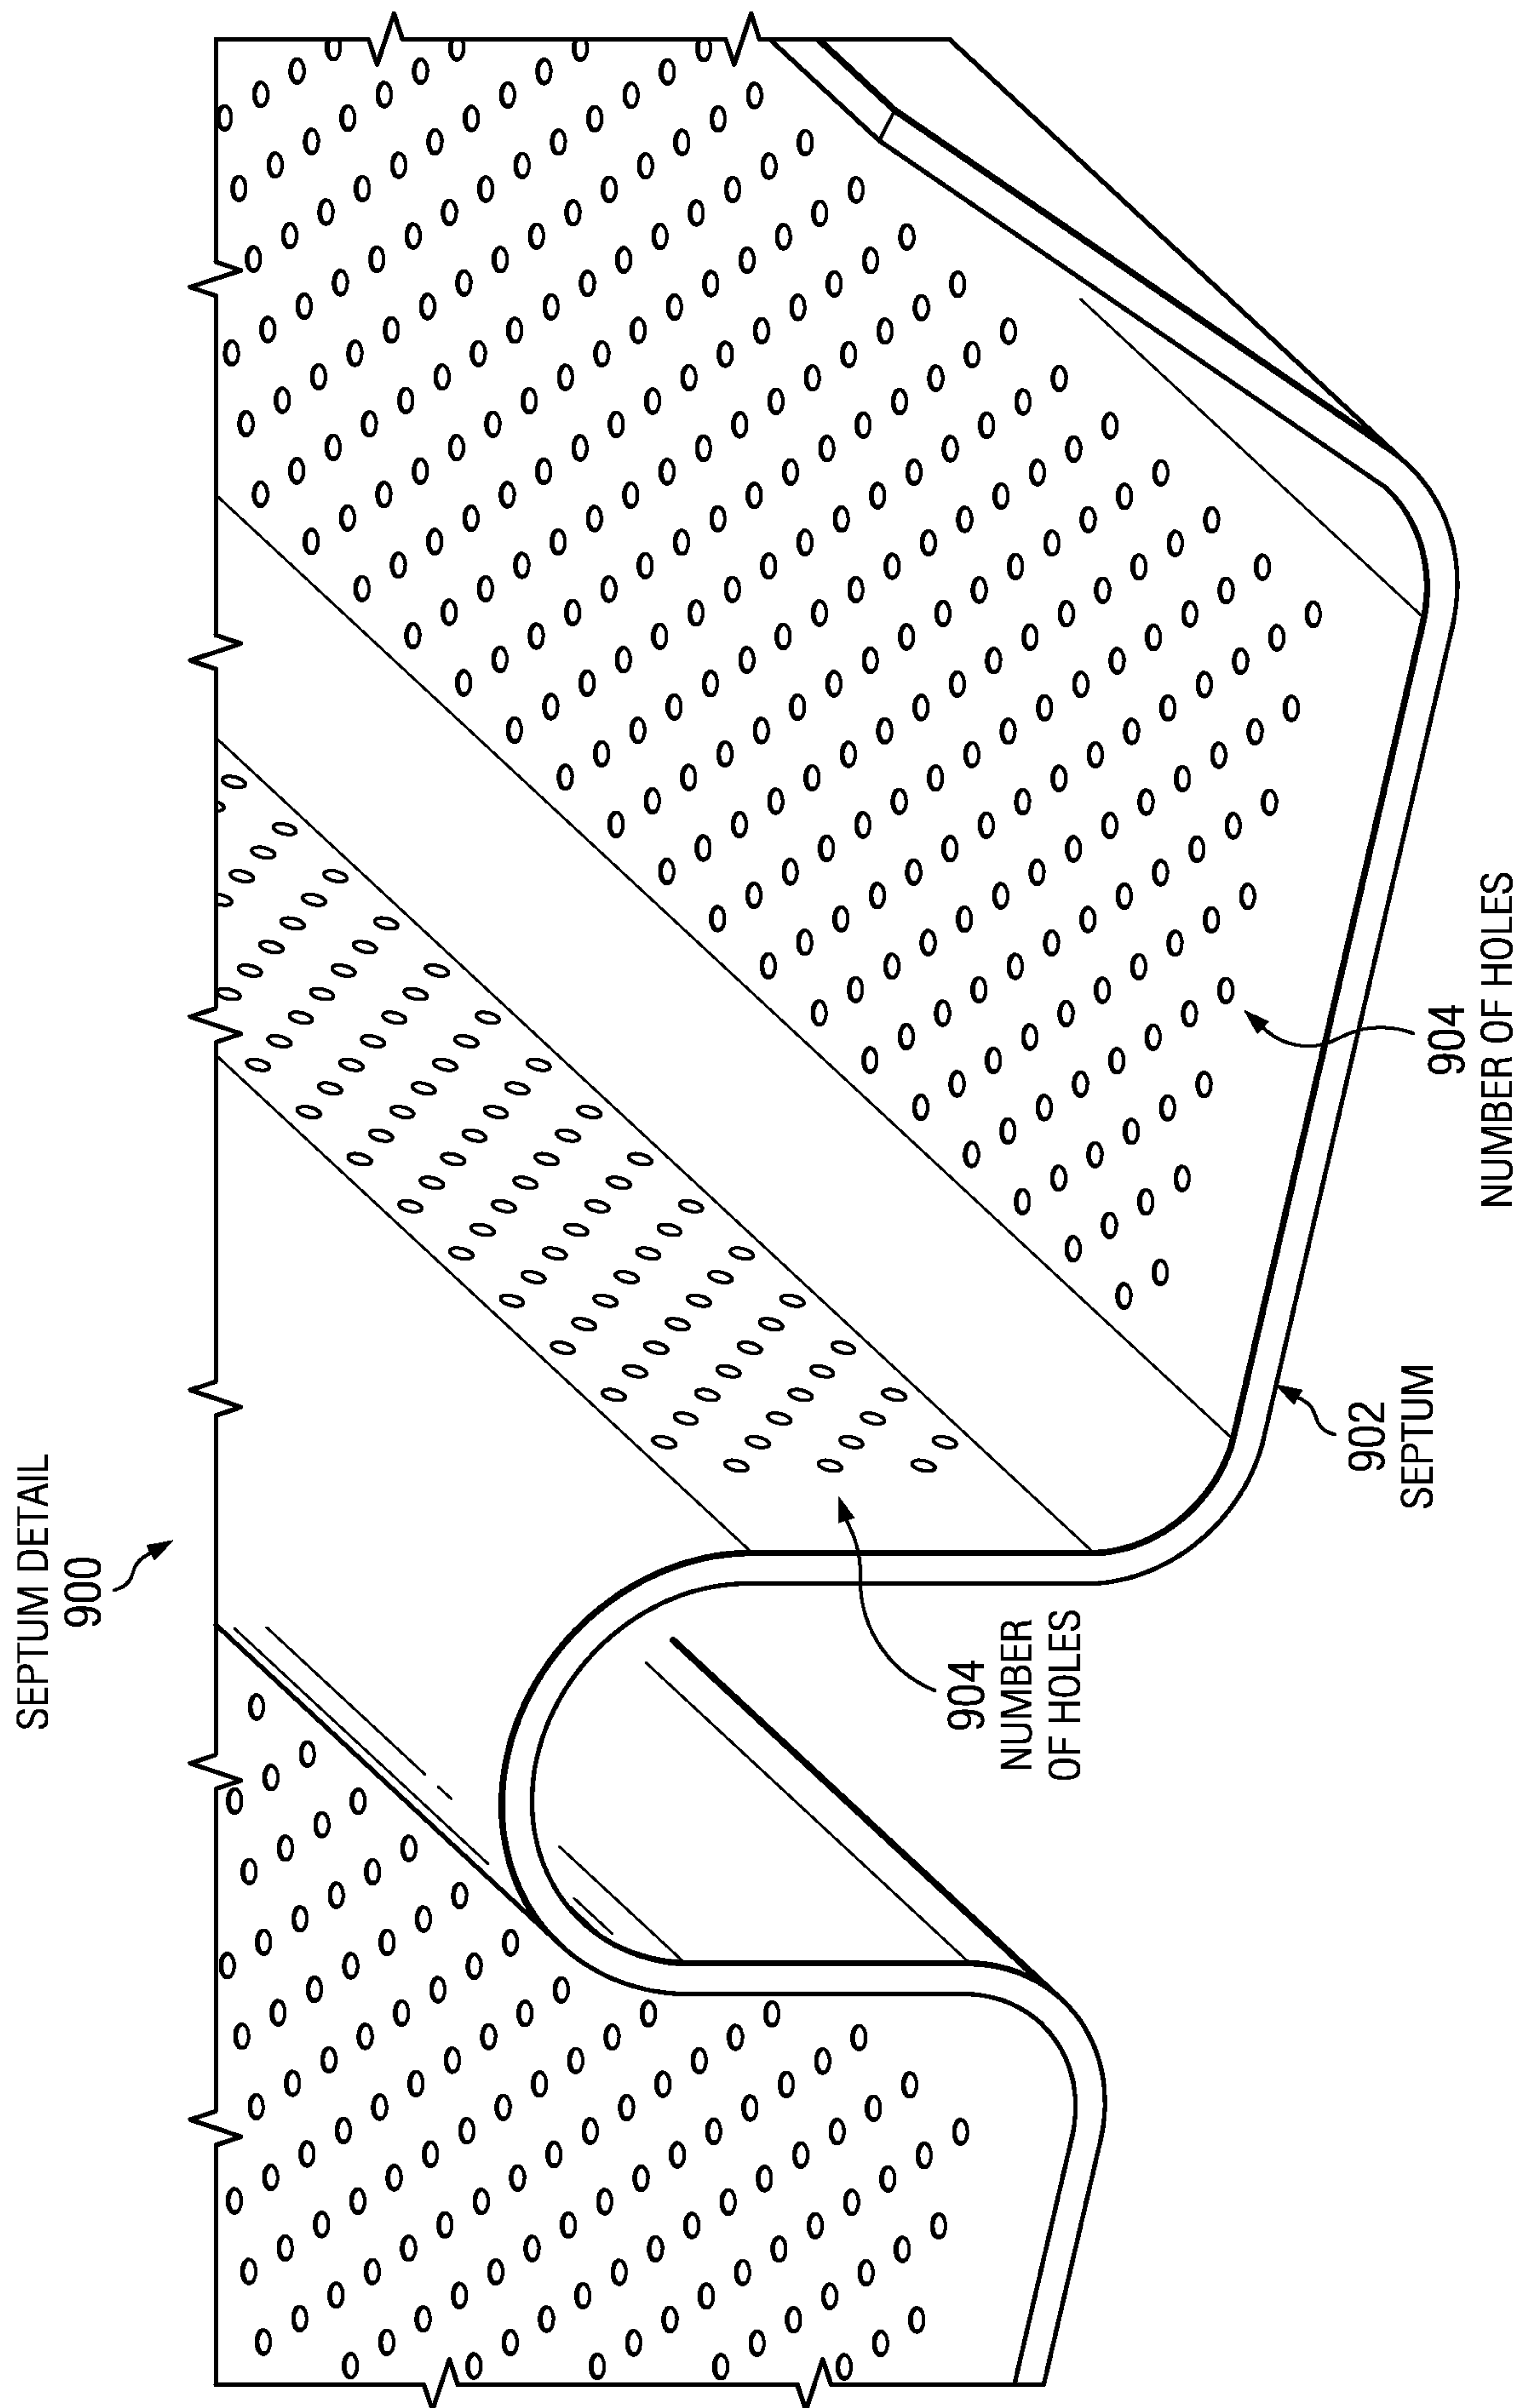


FIG. 9

8/19



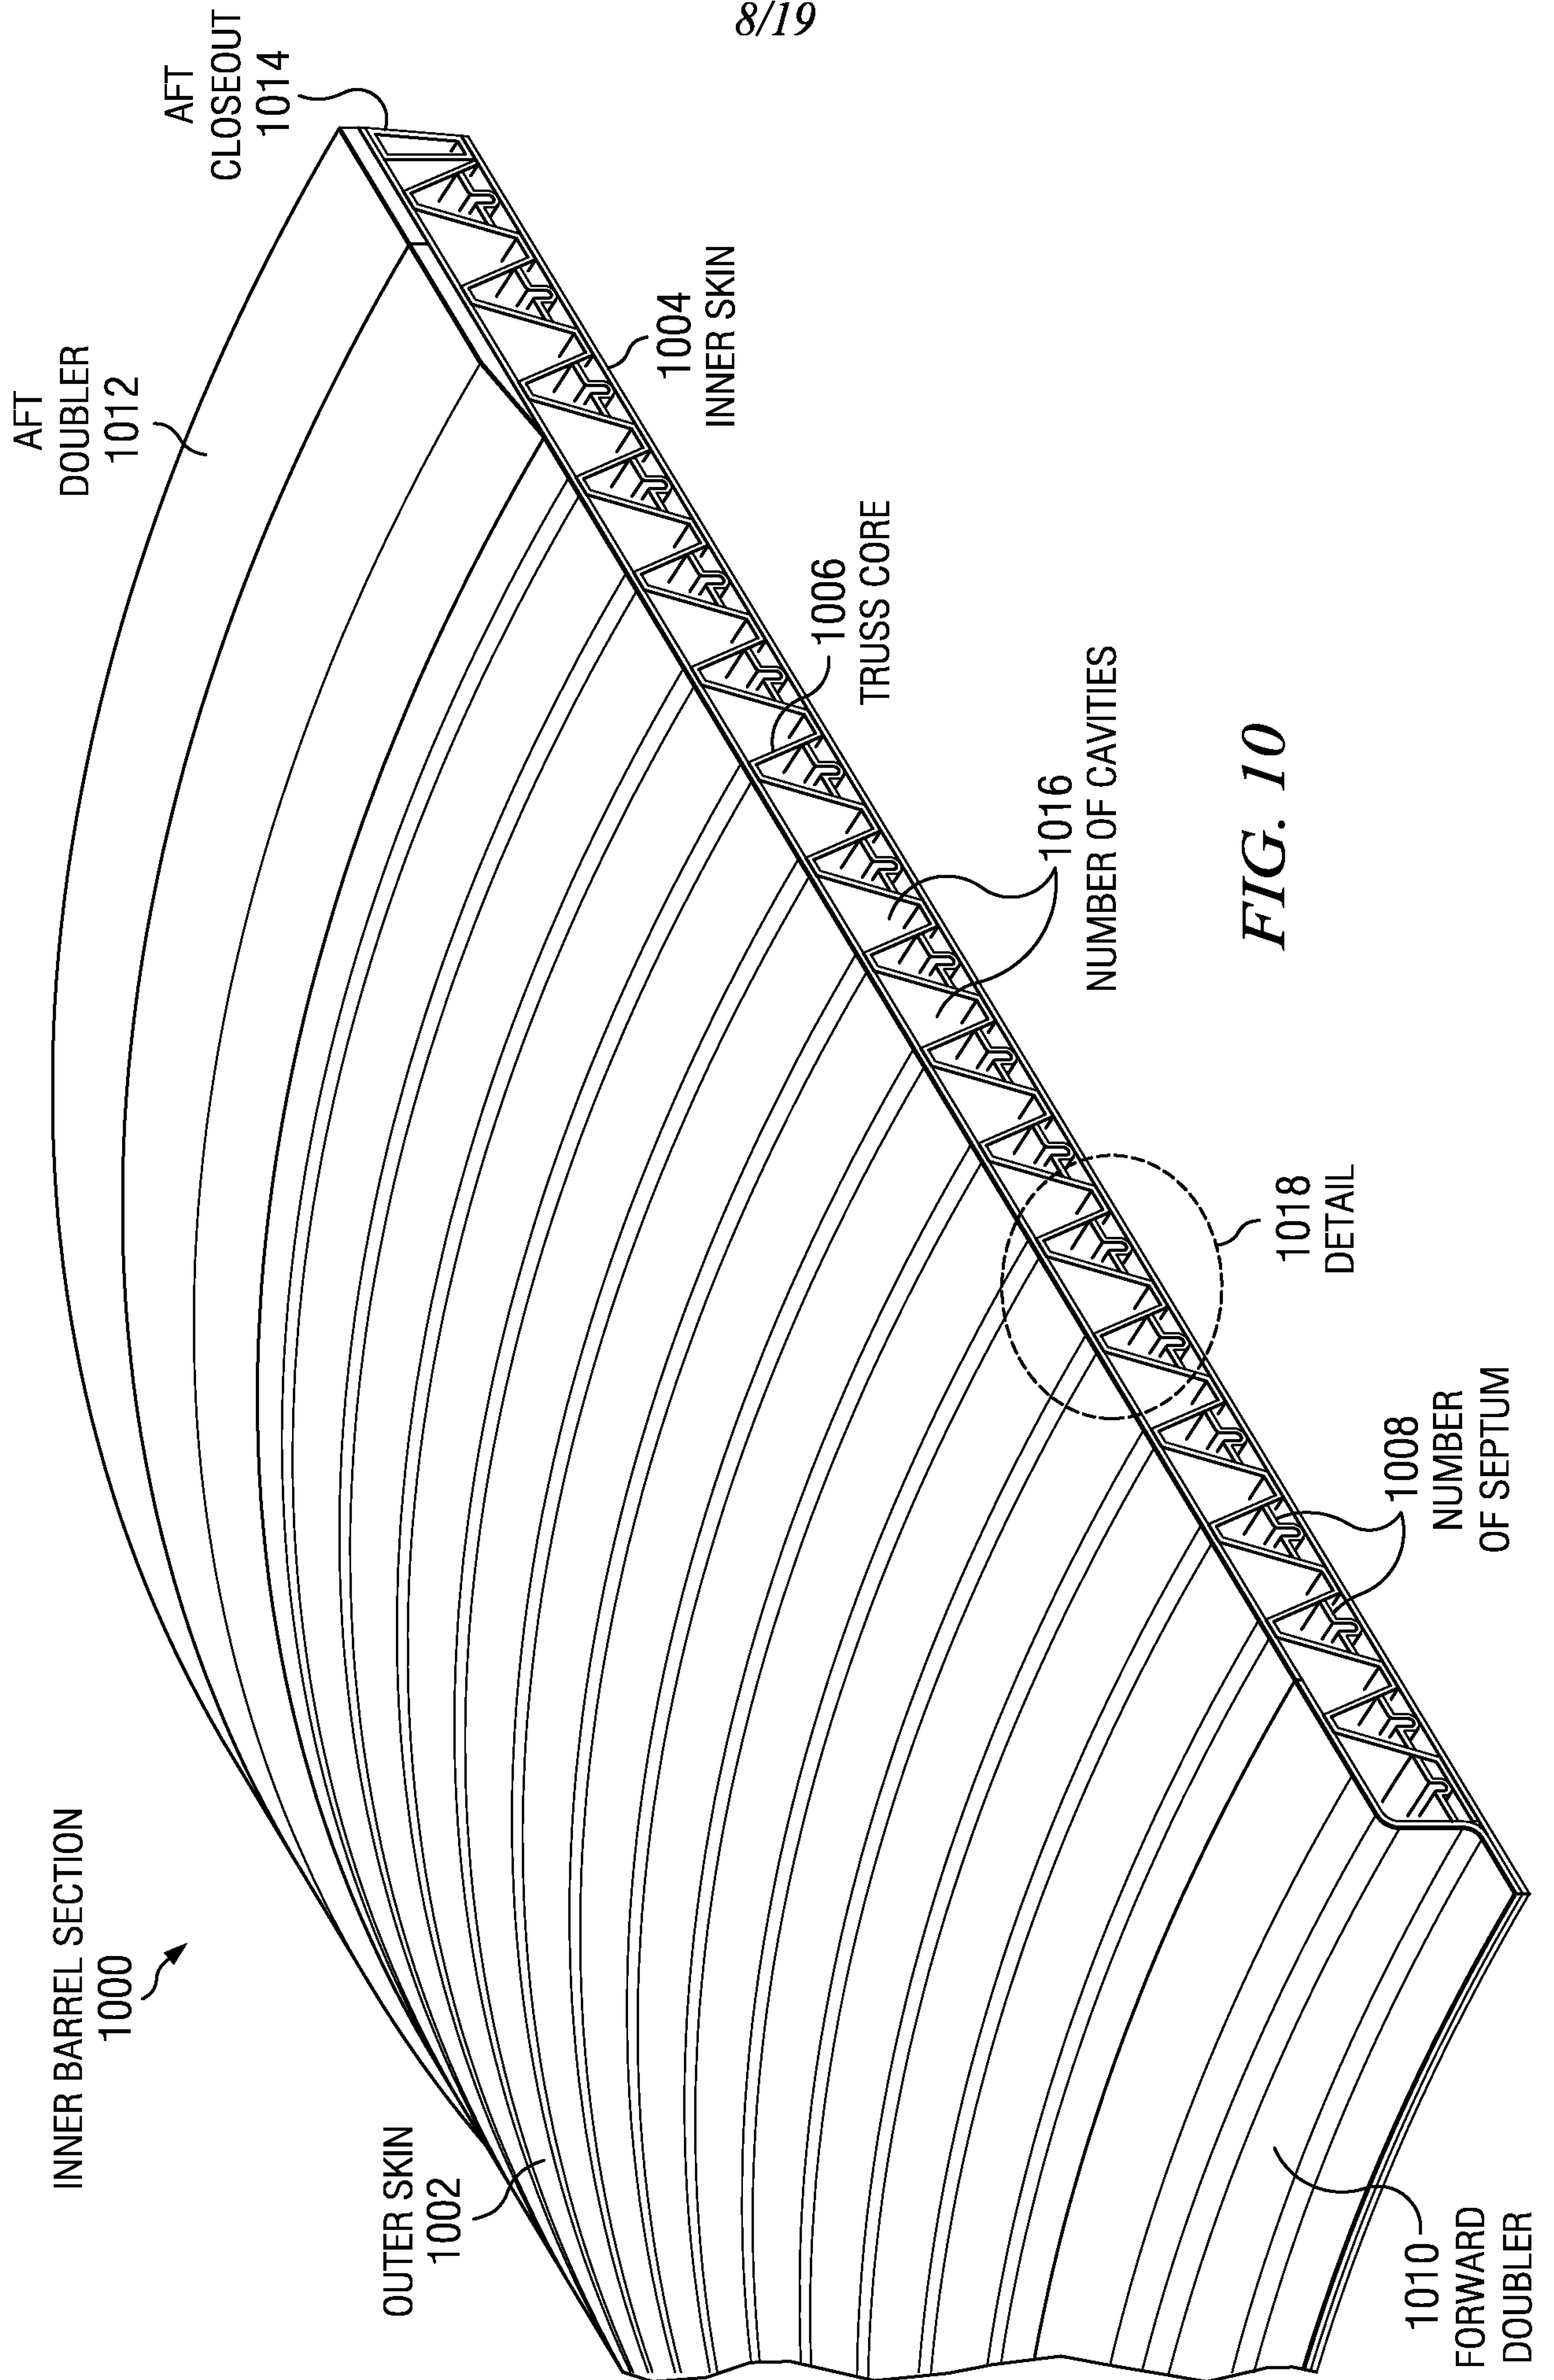


FIG. 10

9/19

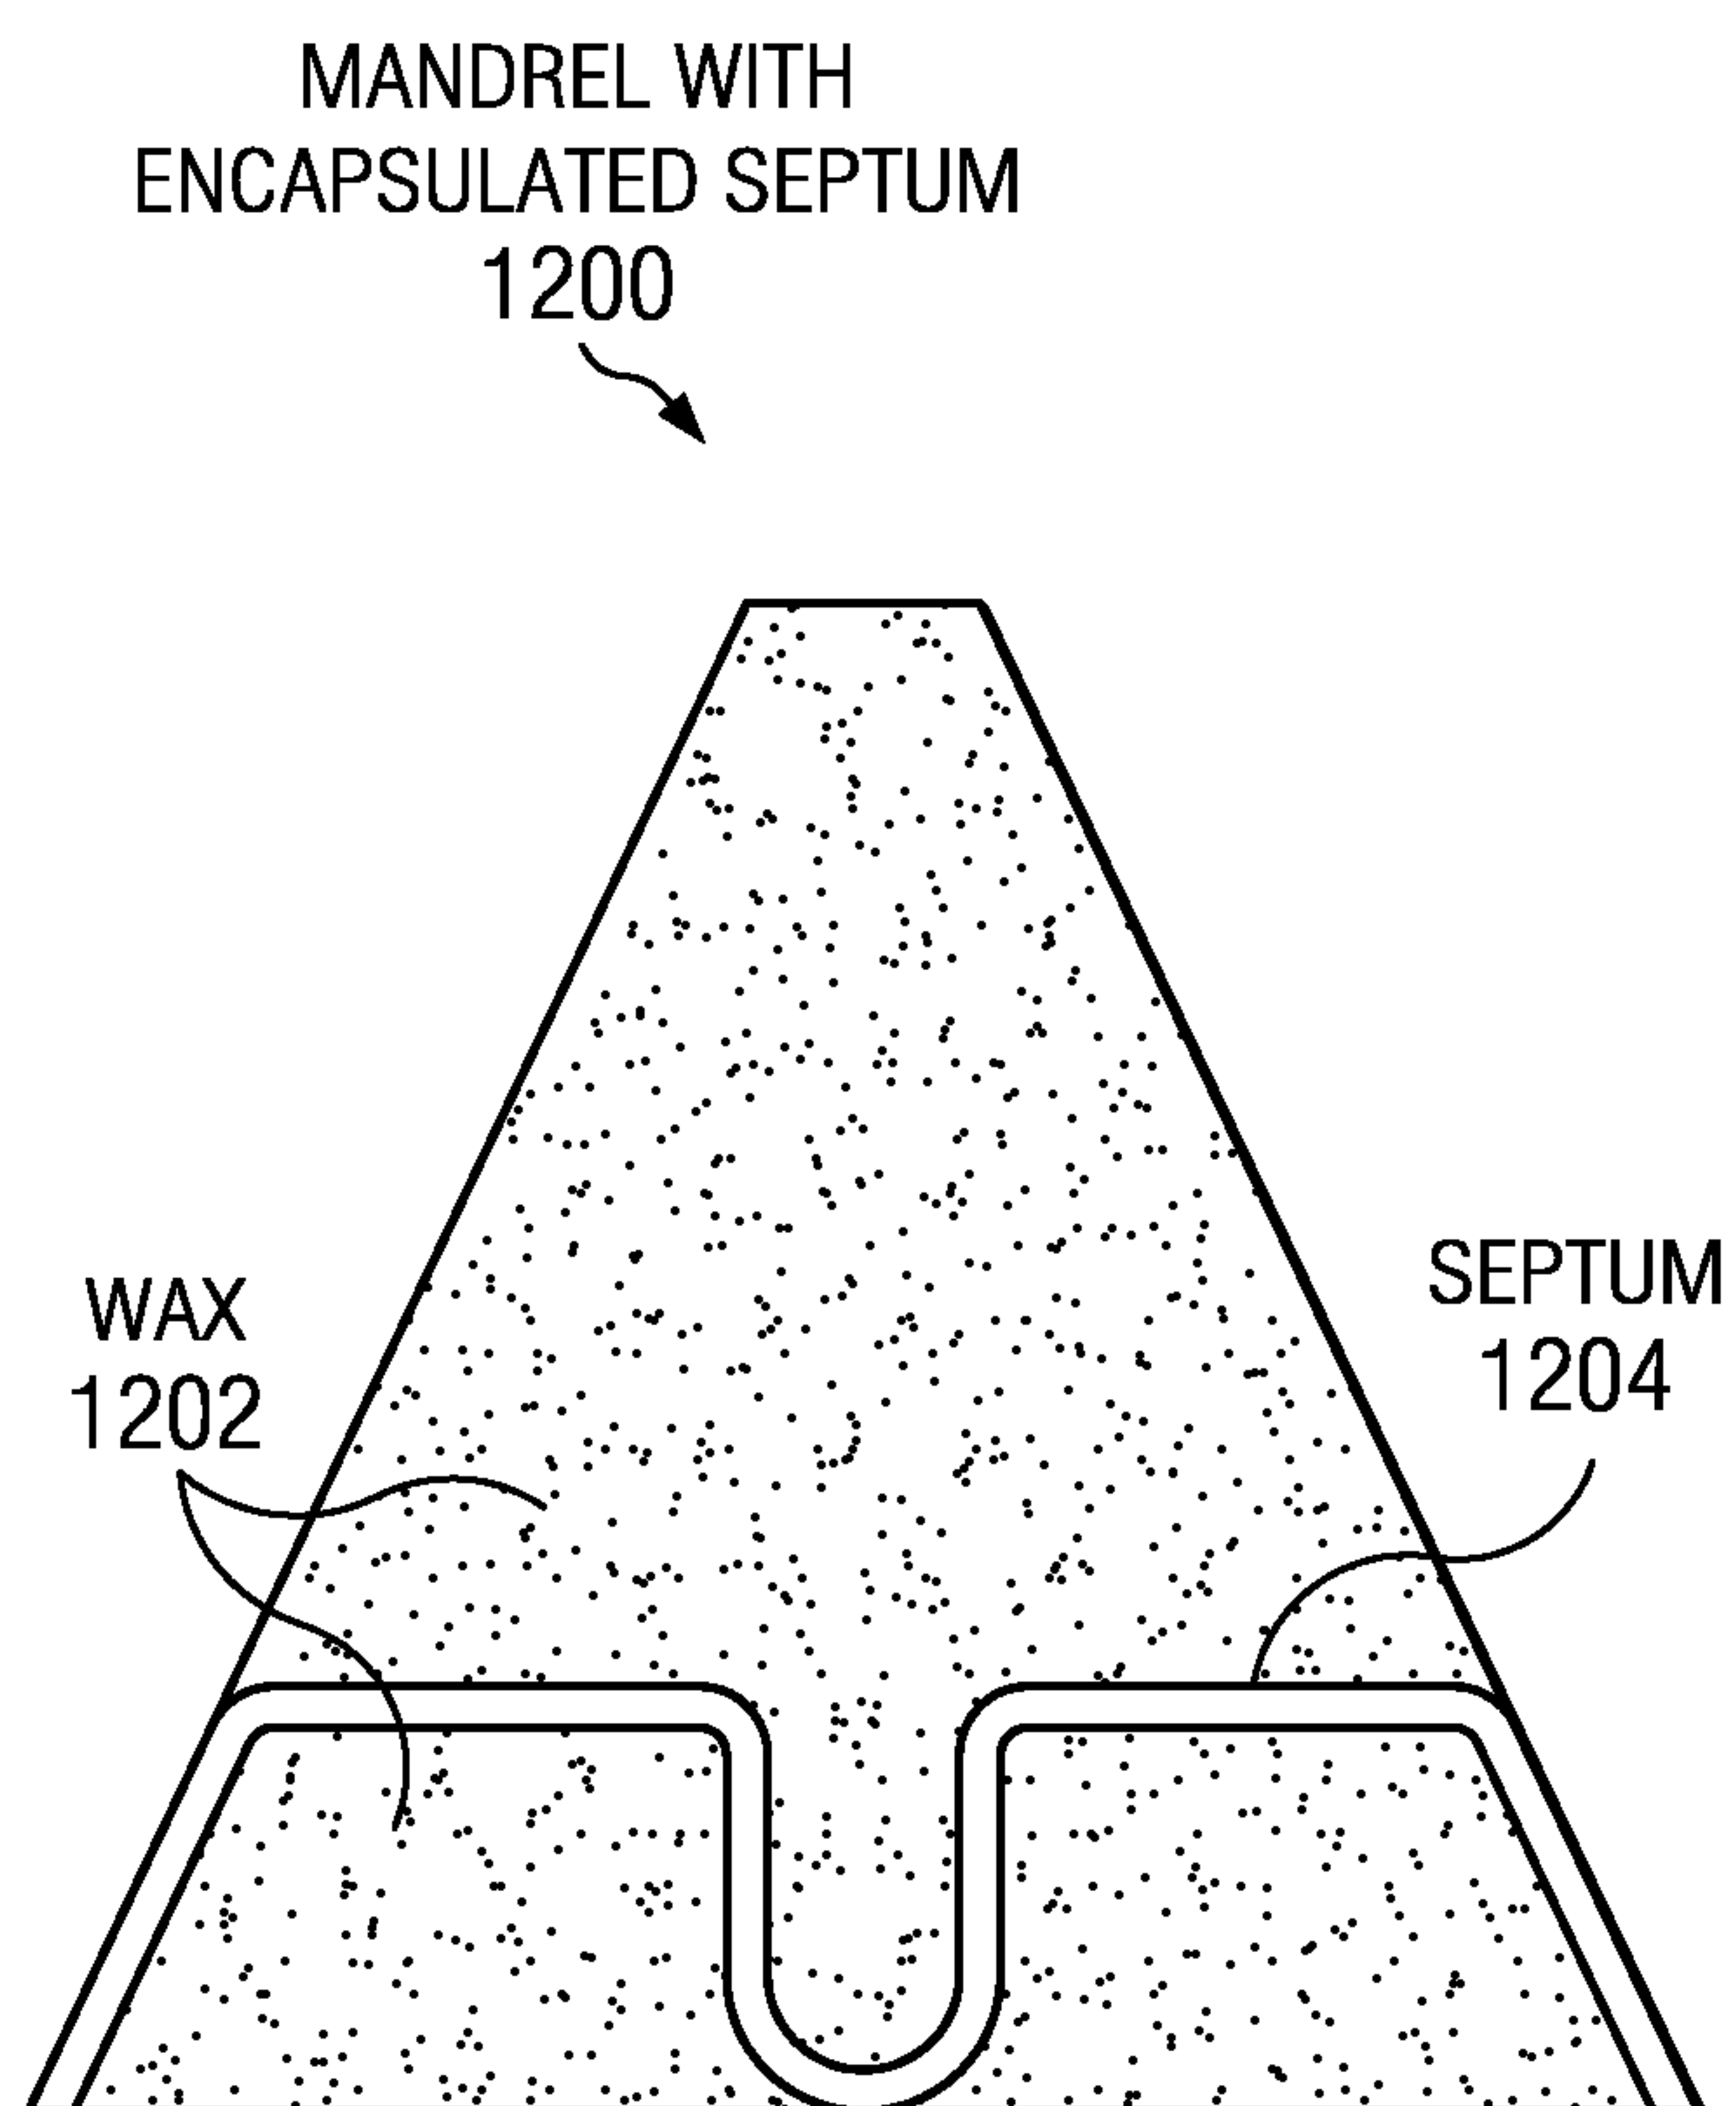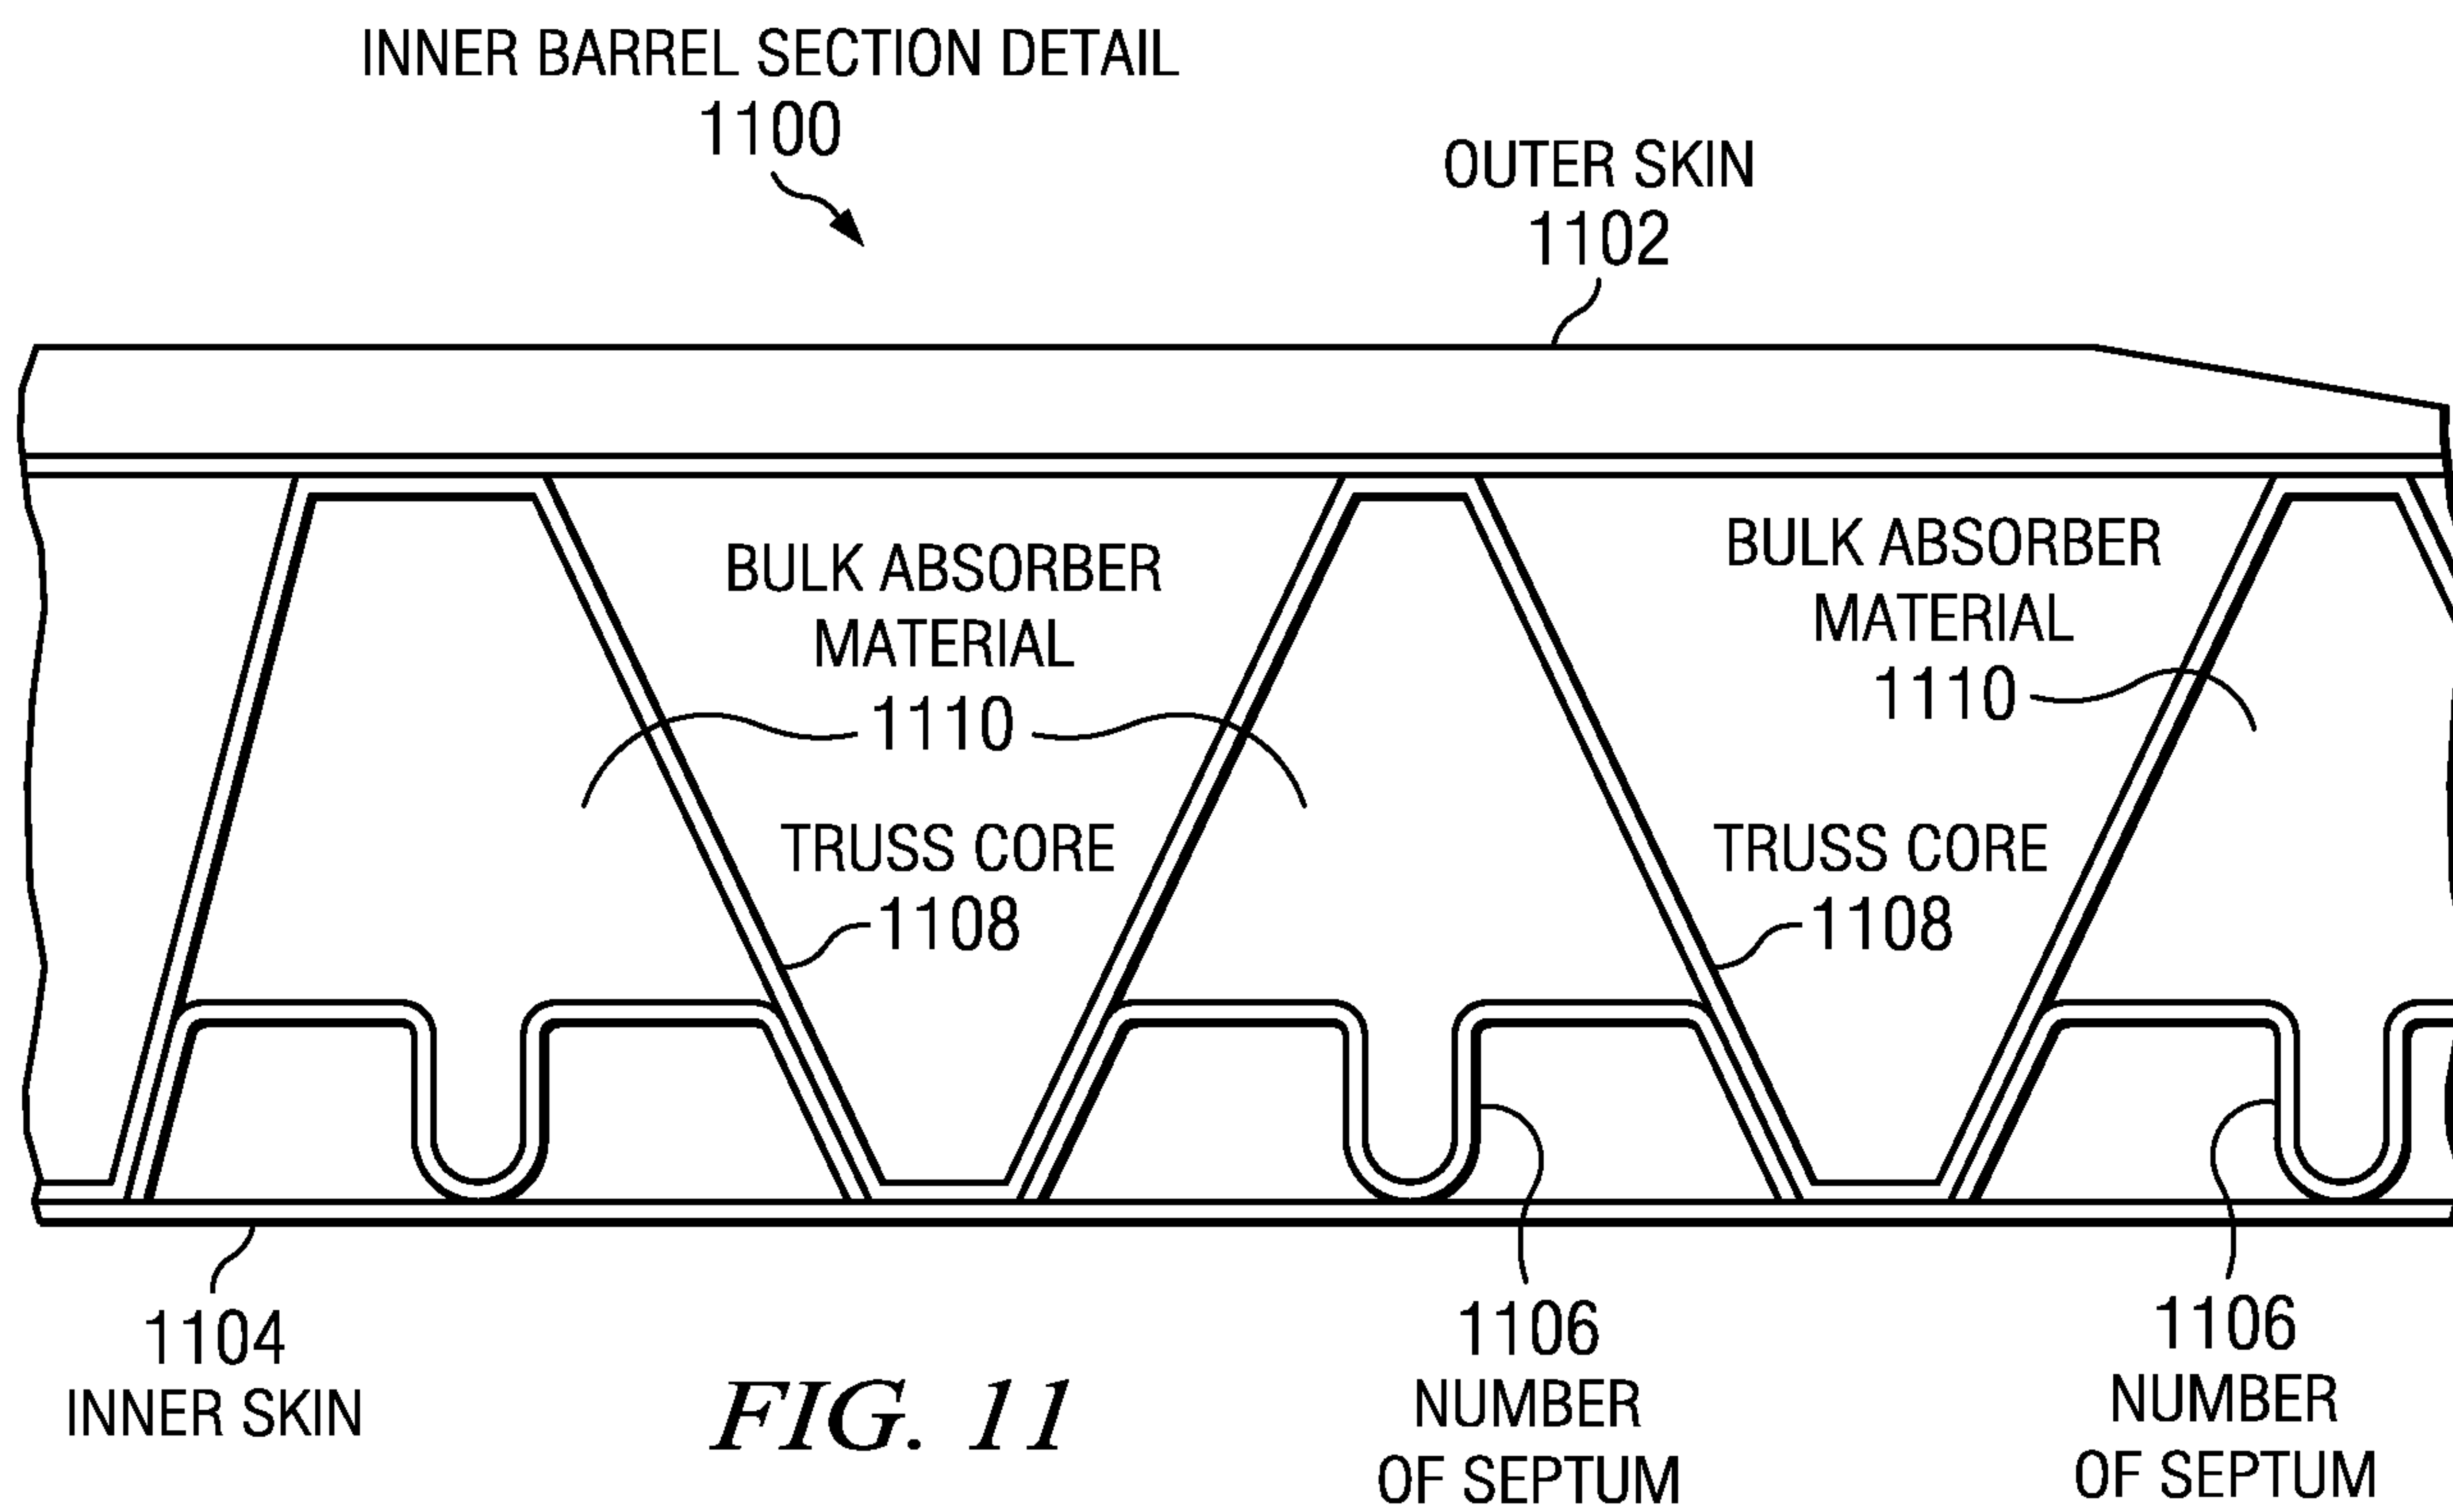

10/19

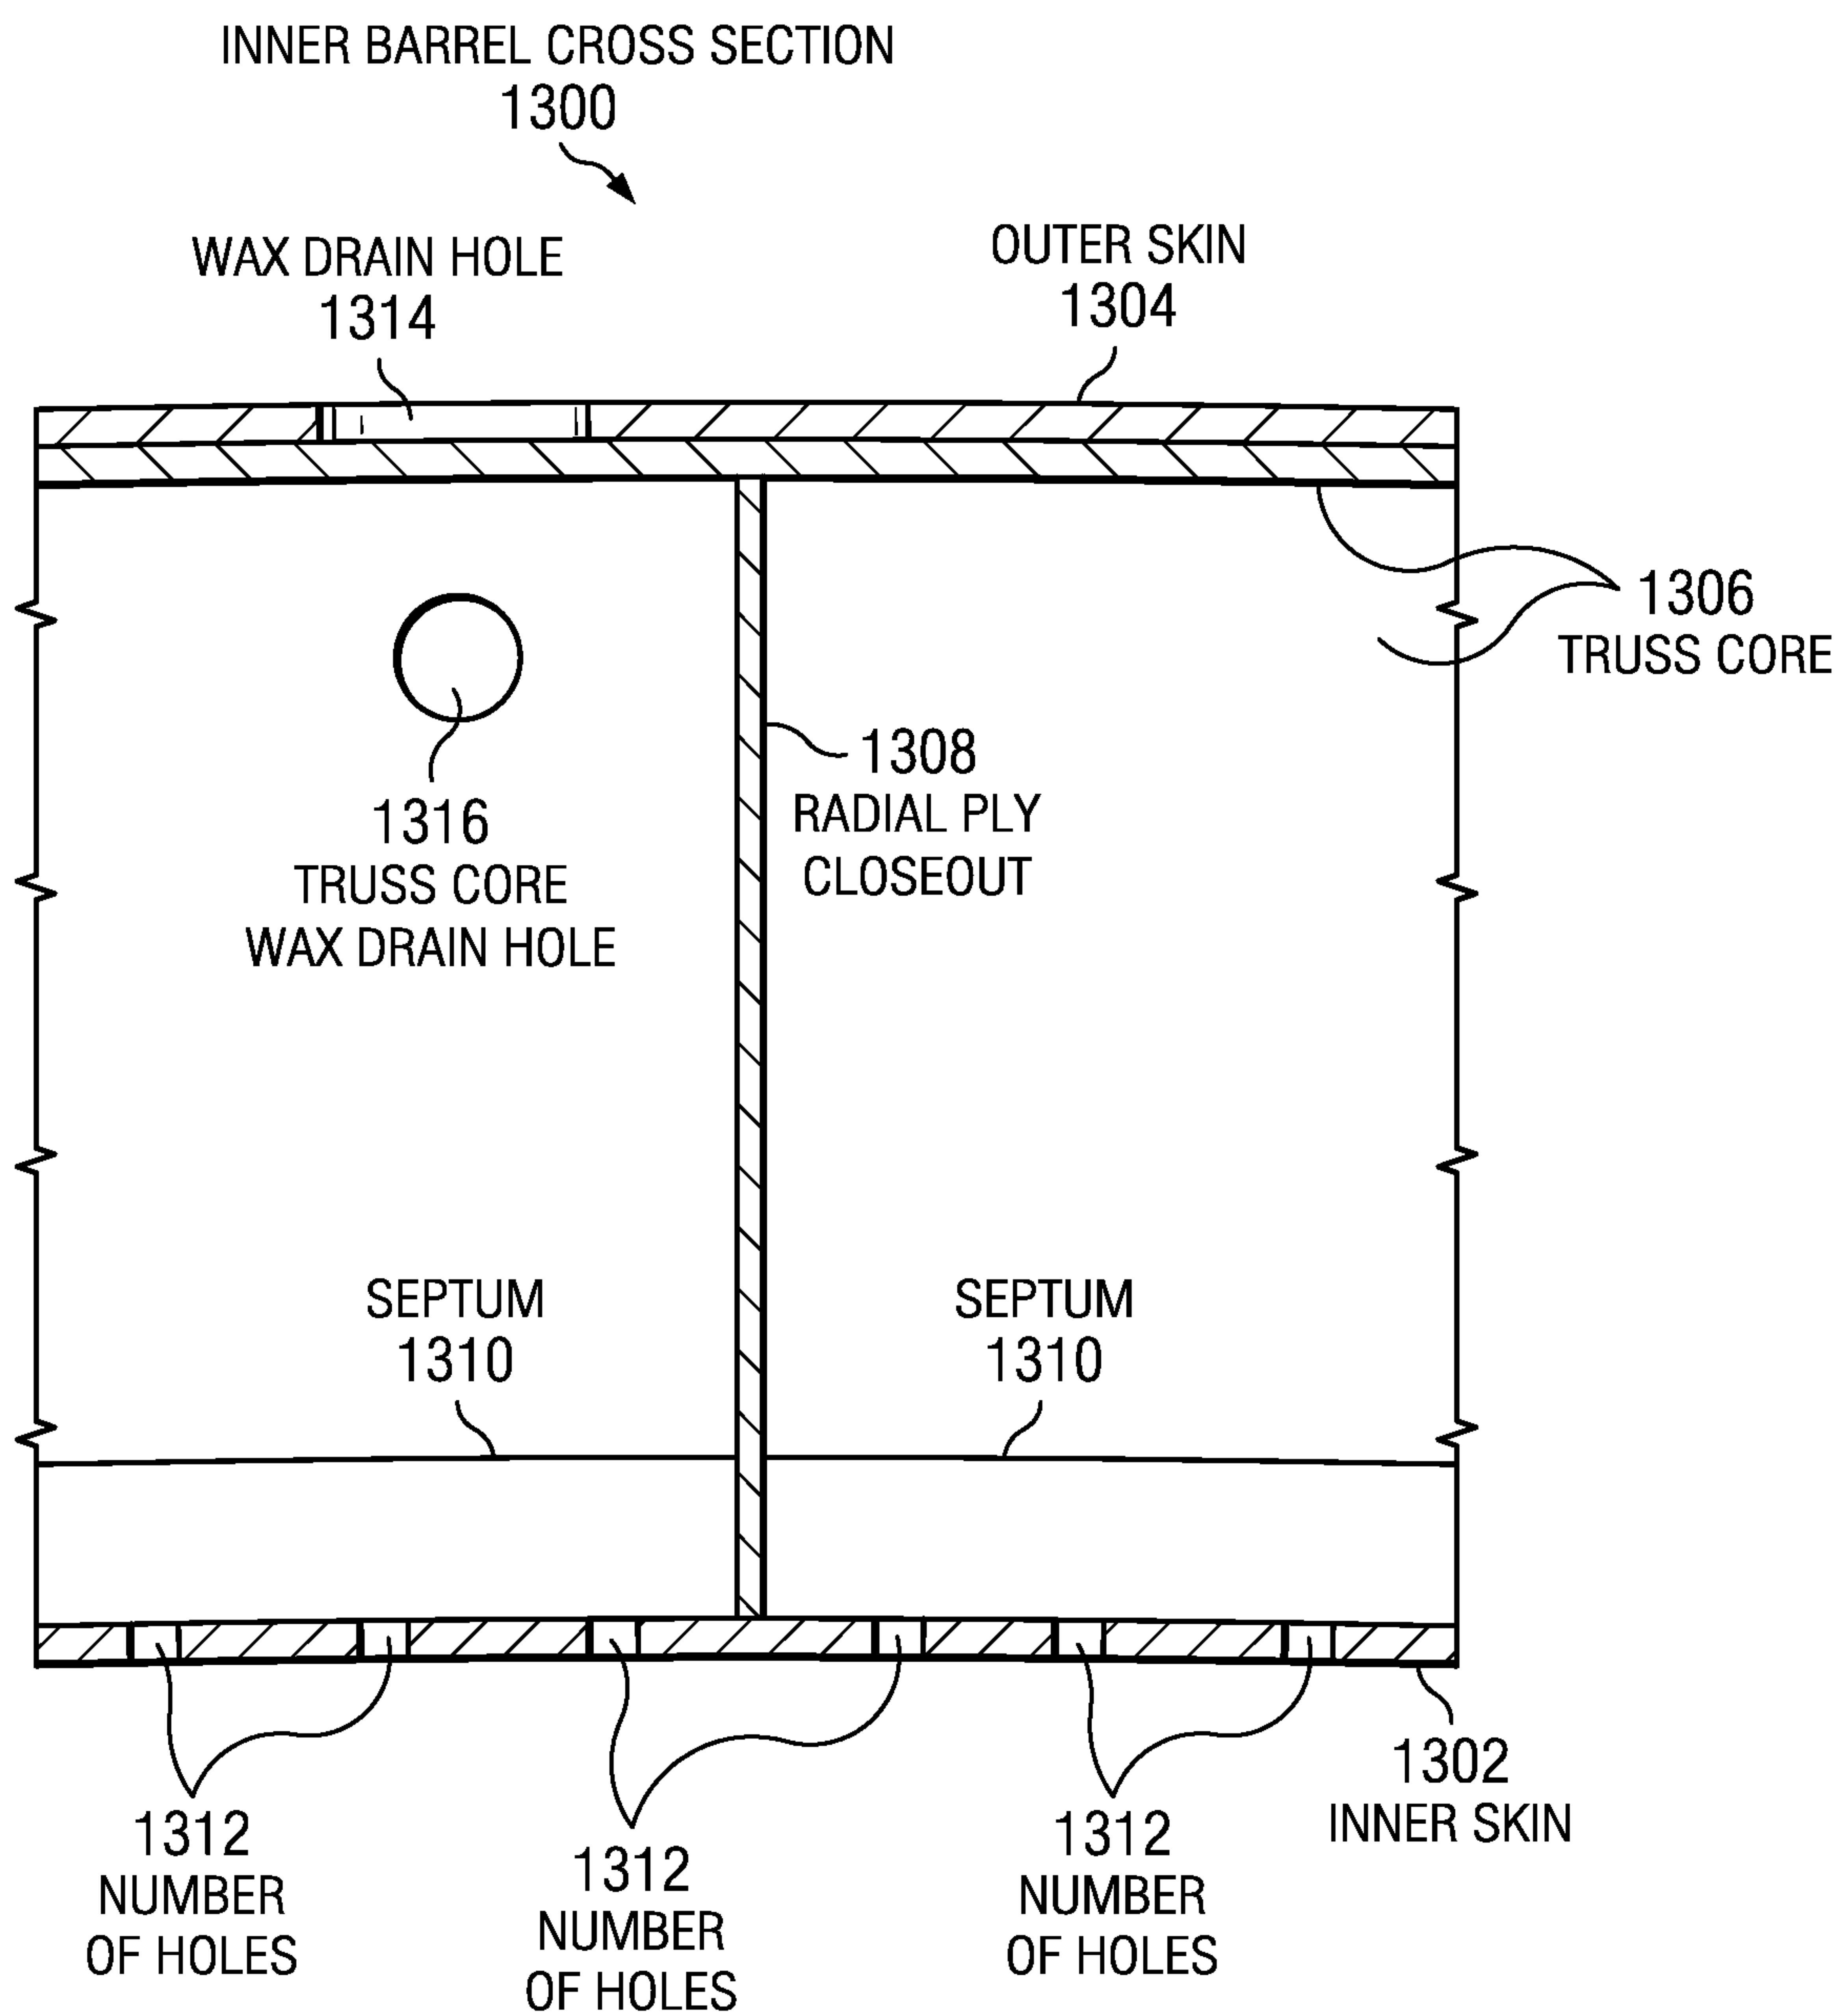


FIG. 13

11/19

FIG. 14A







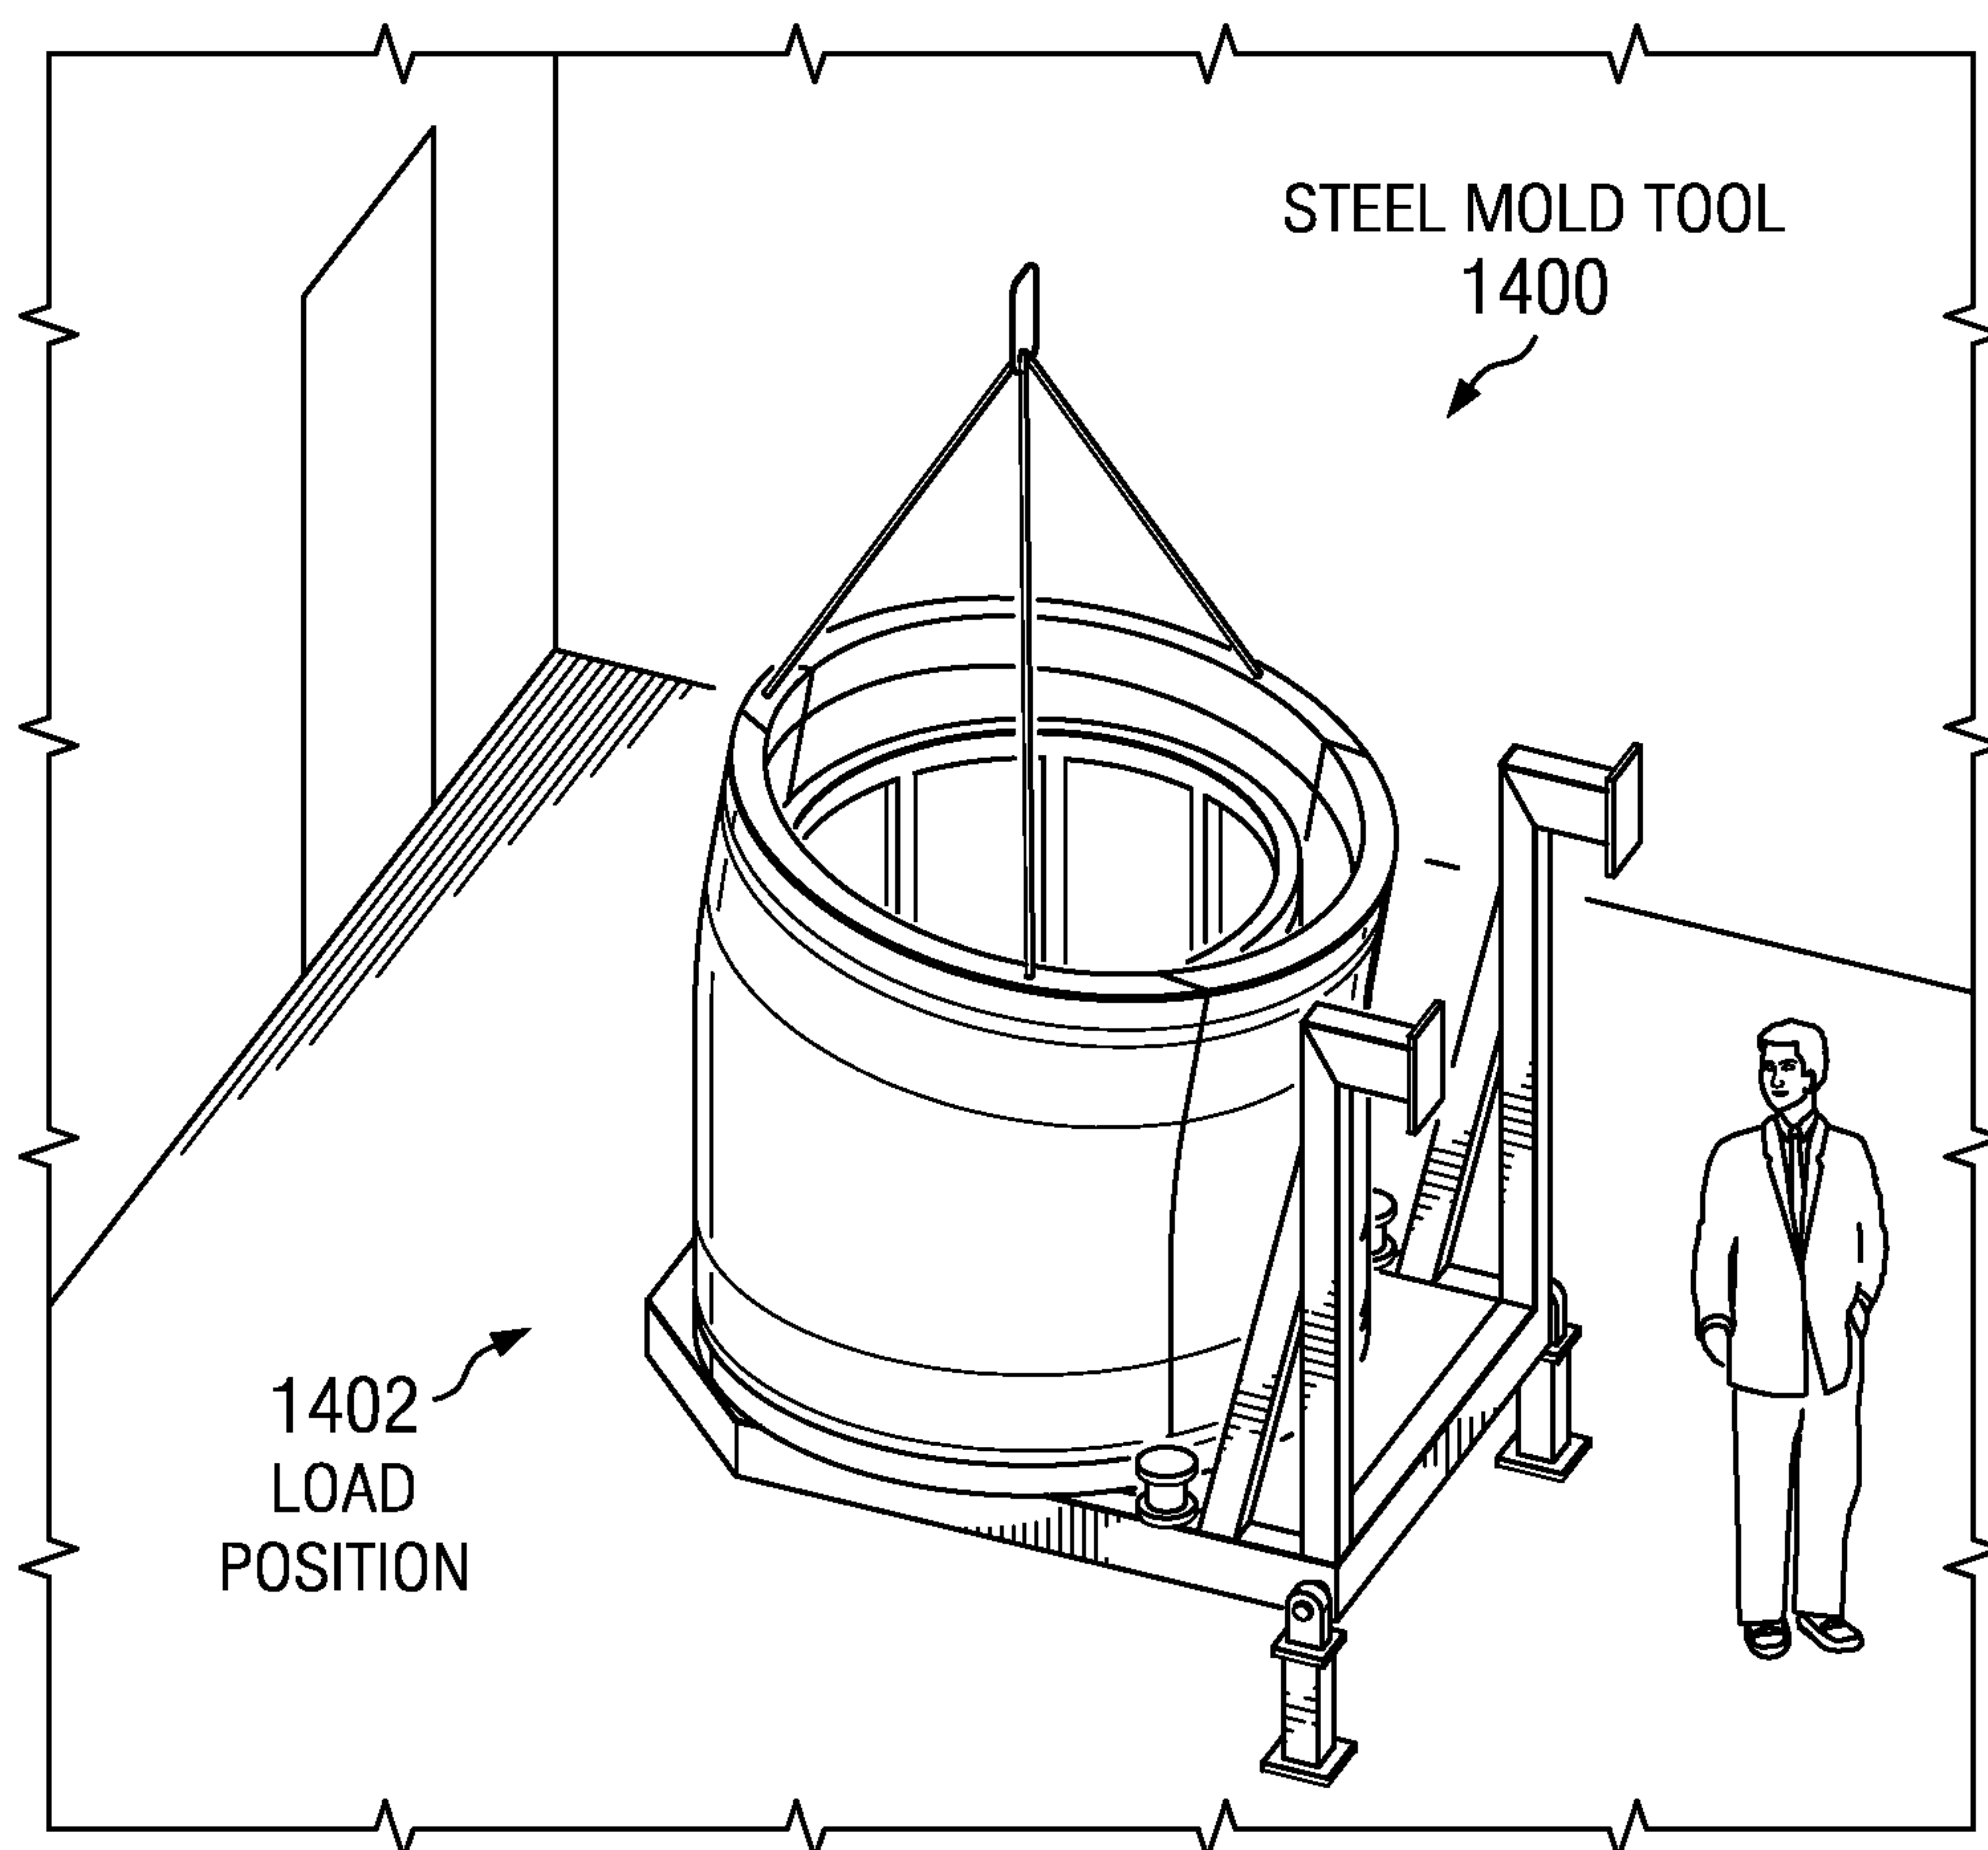


FIG. 14B





*FIG. 16A**FIG. 16B*

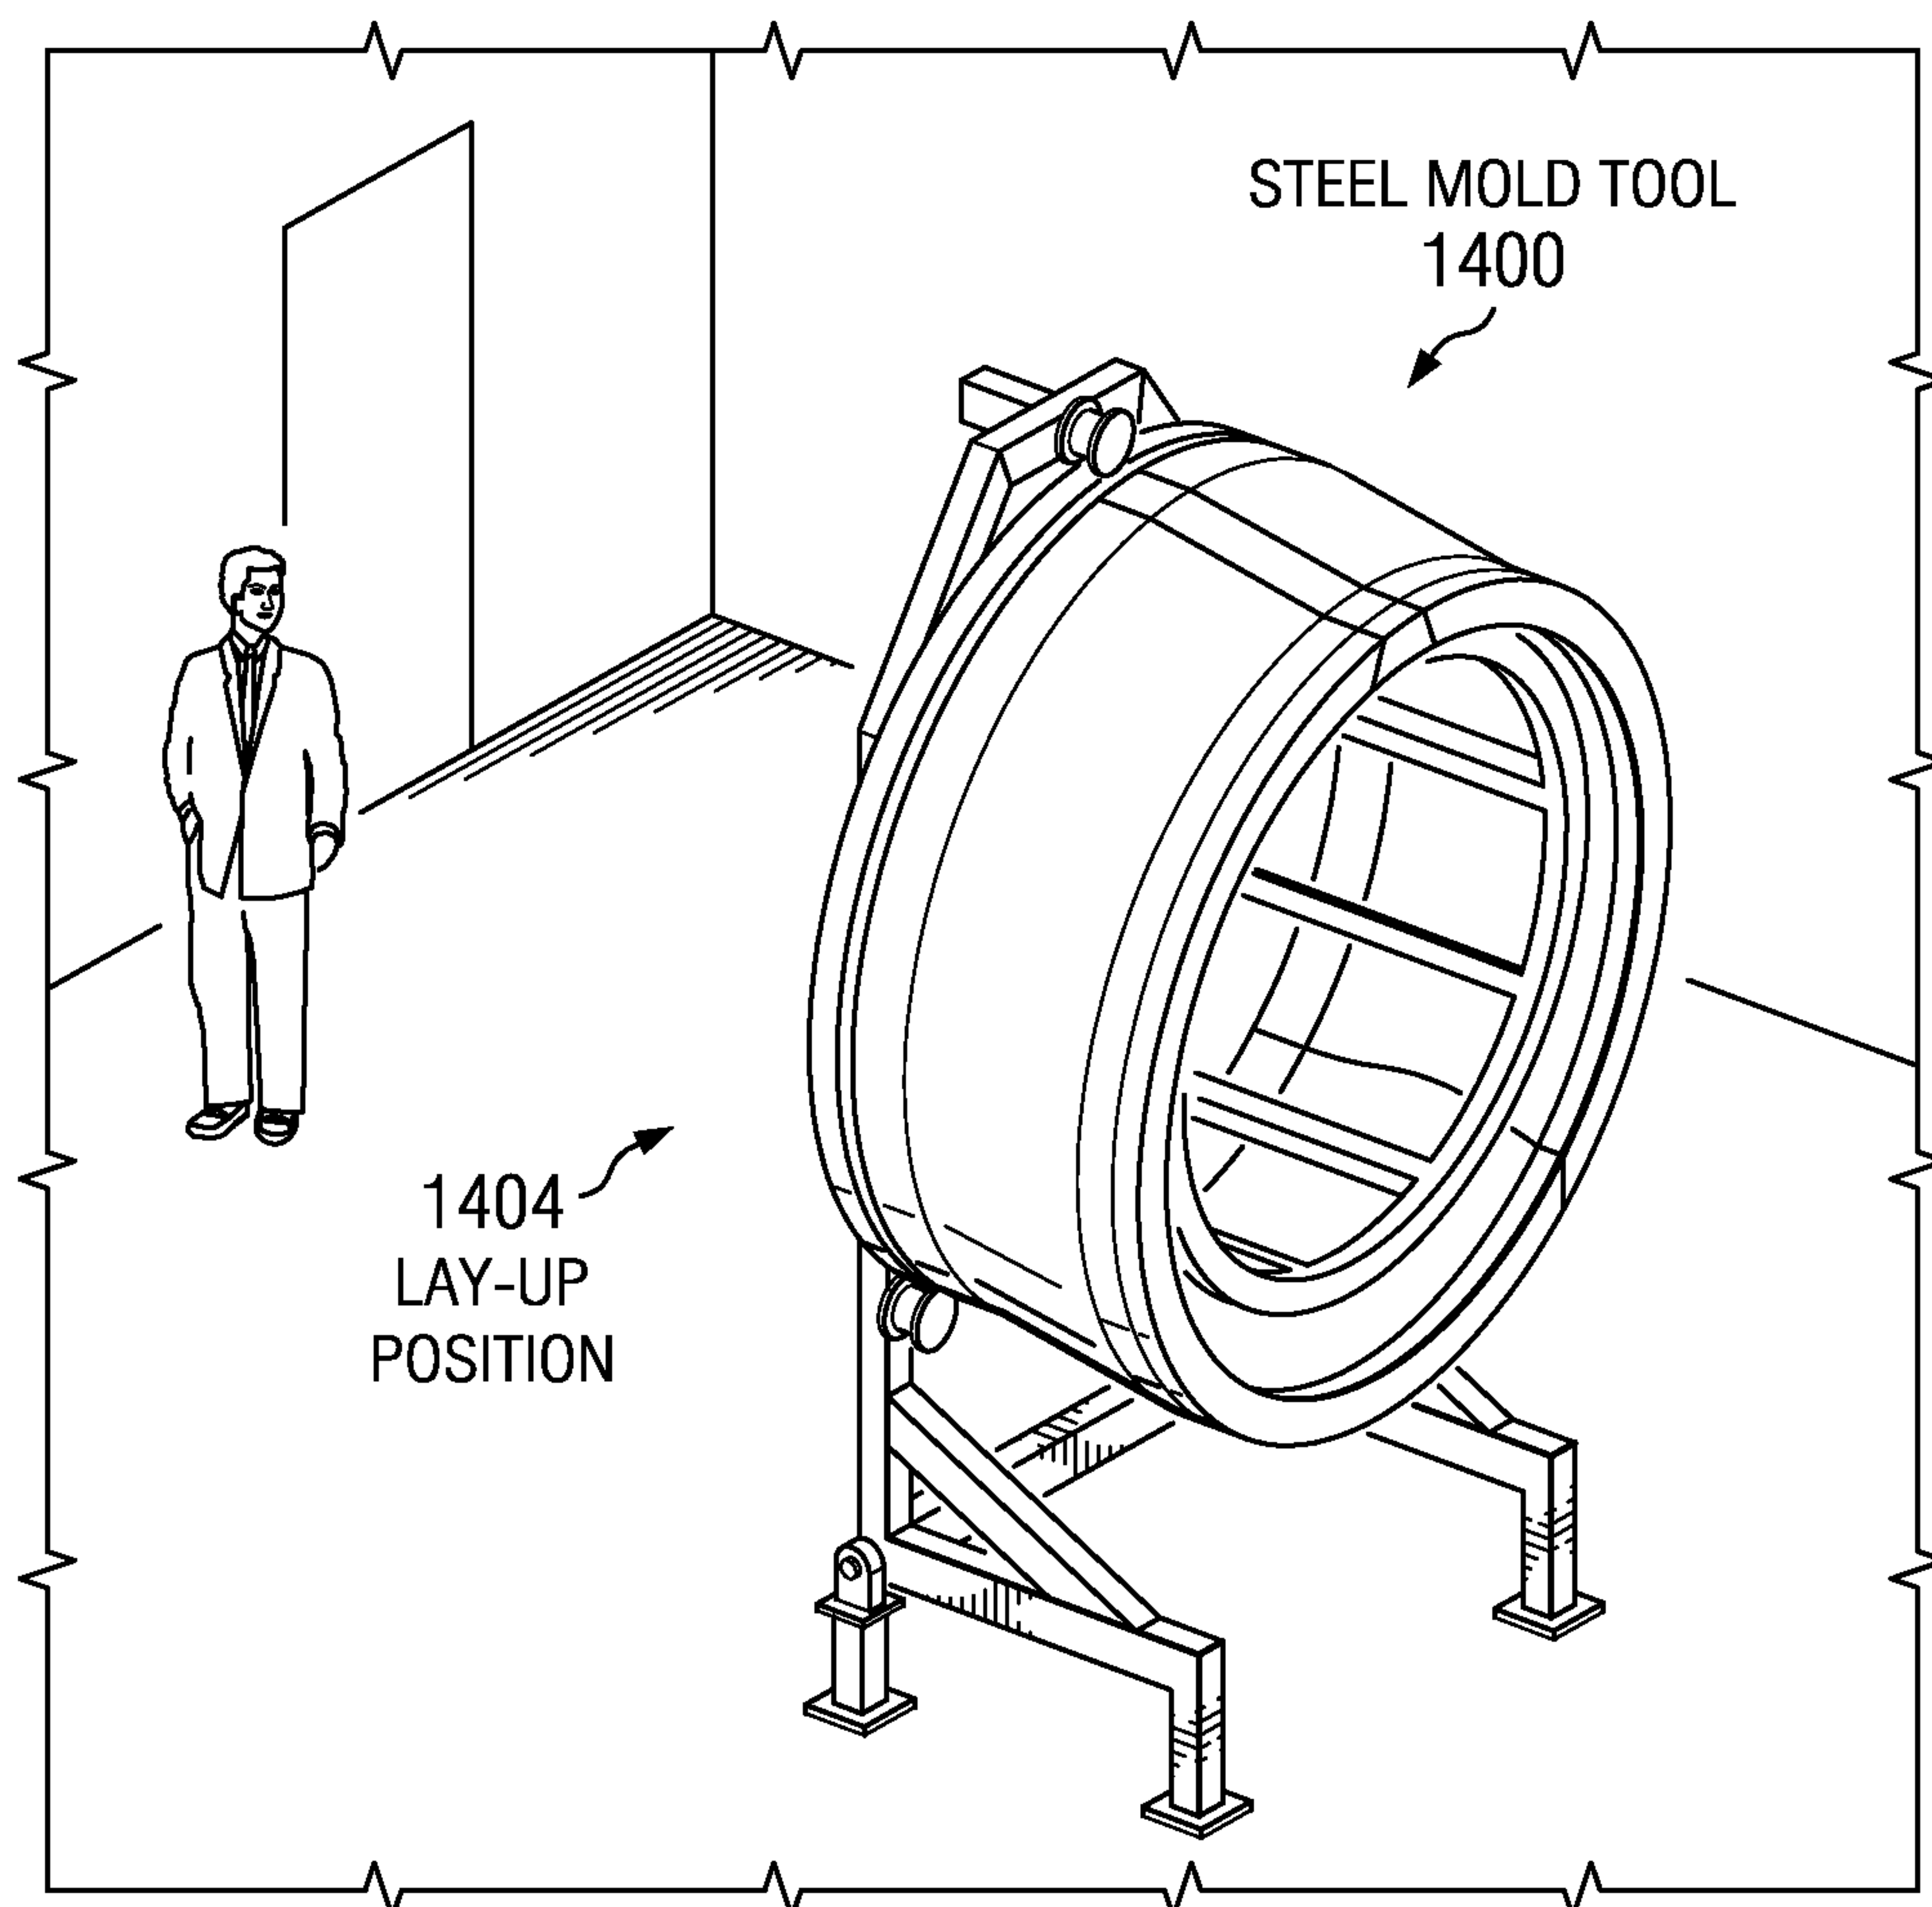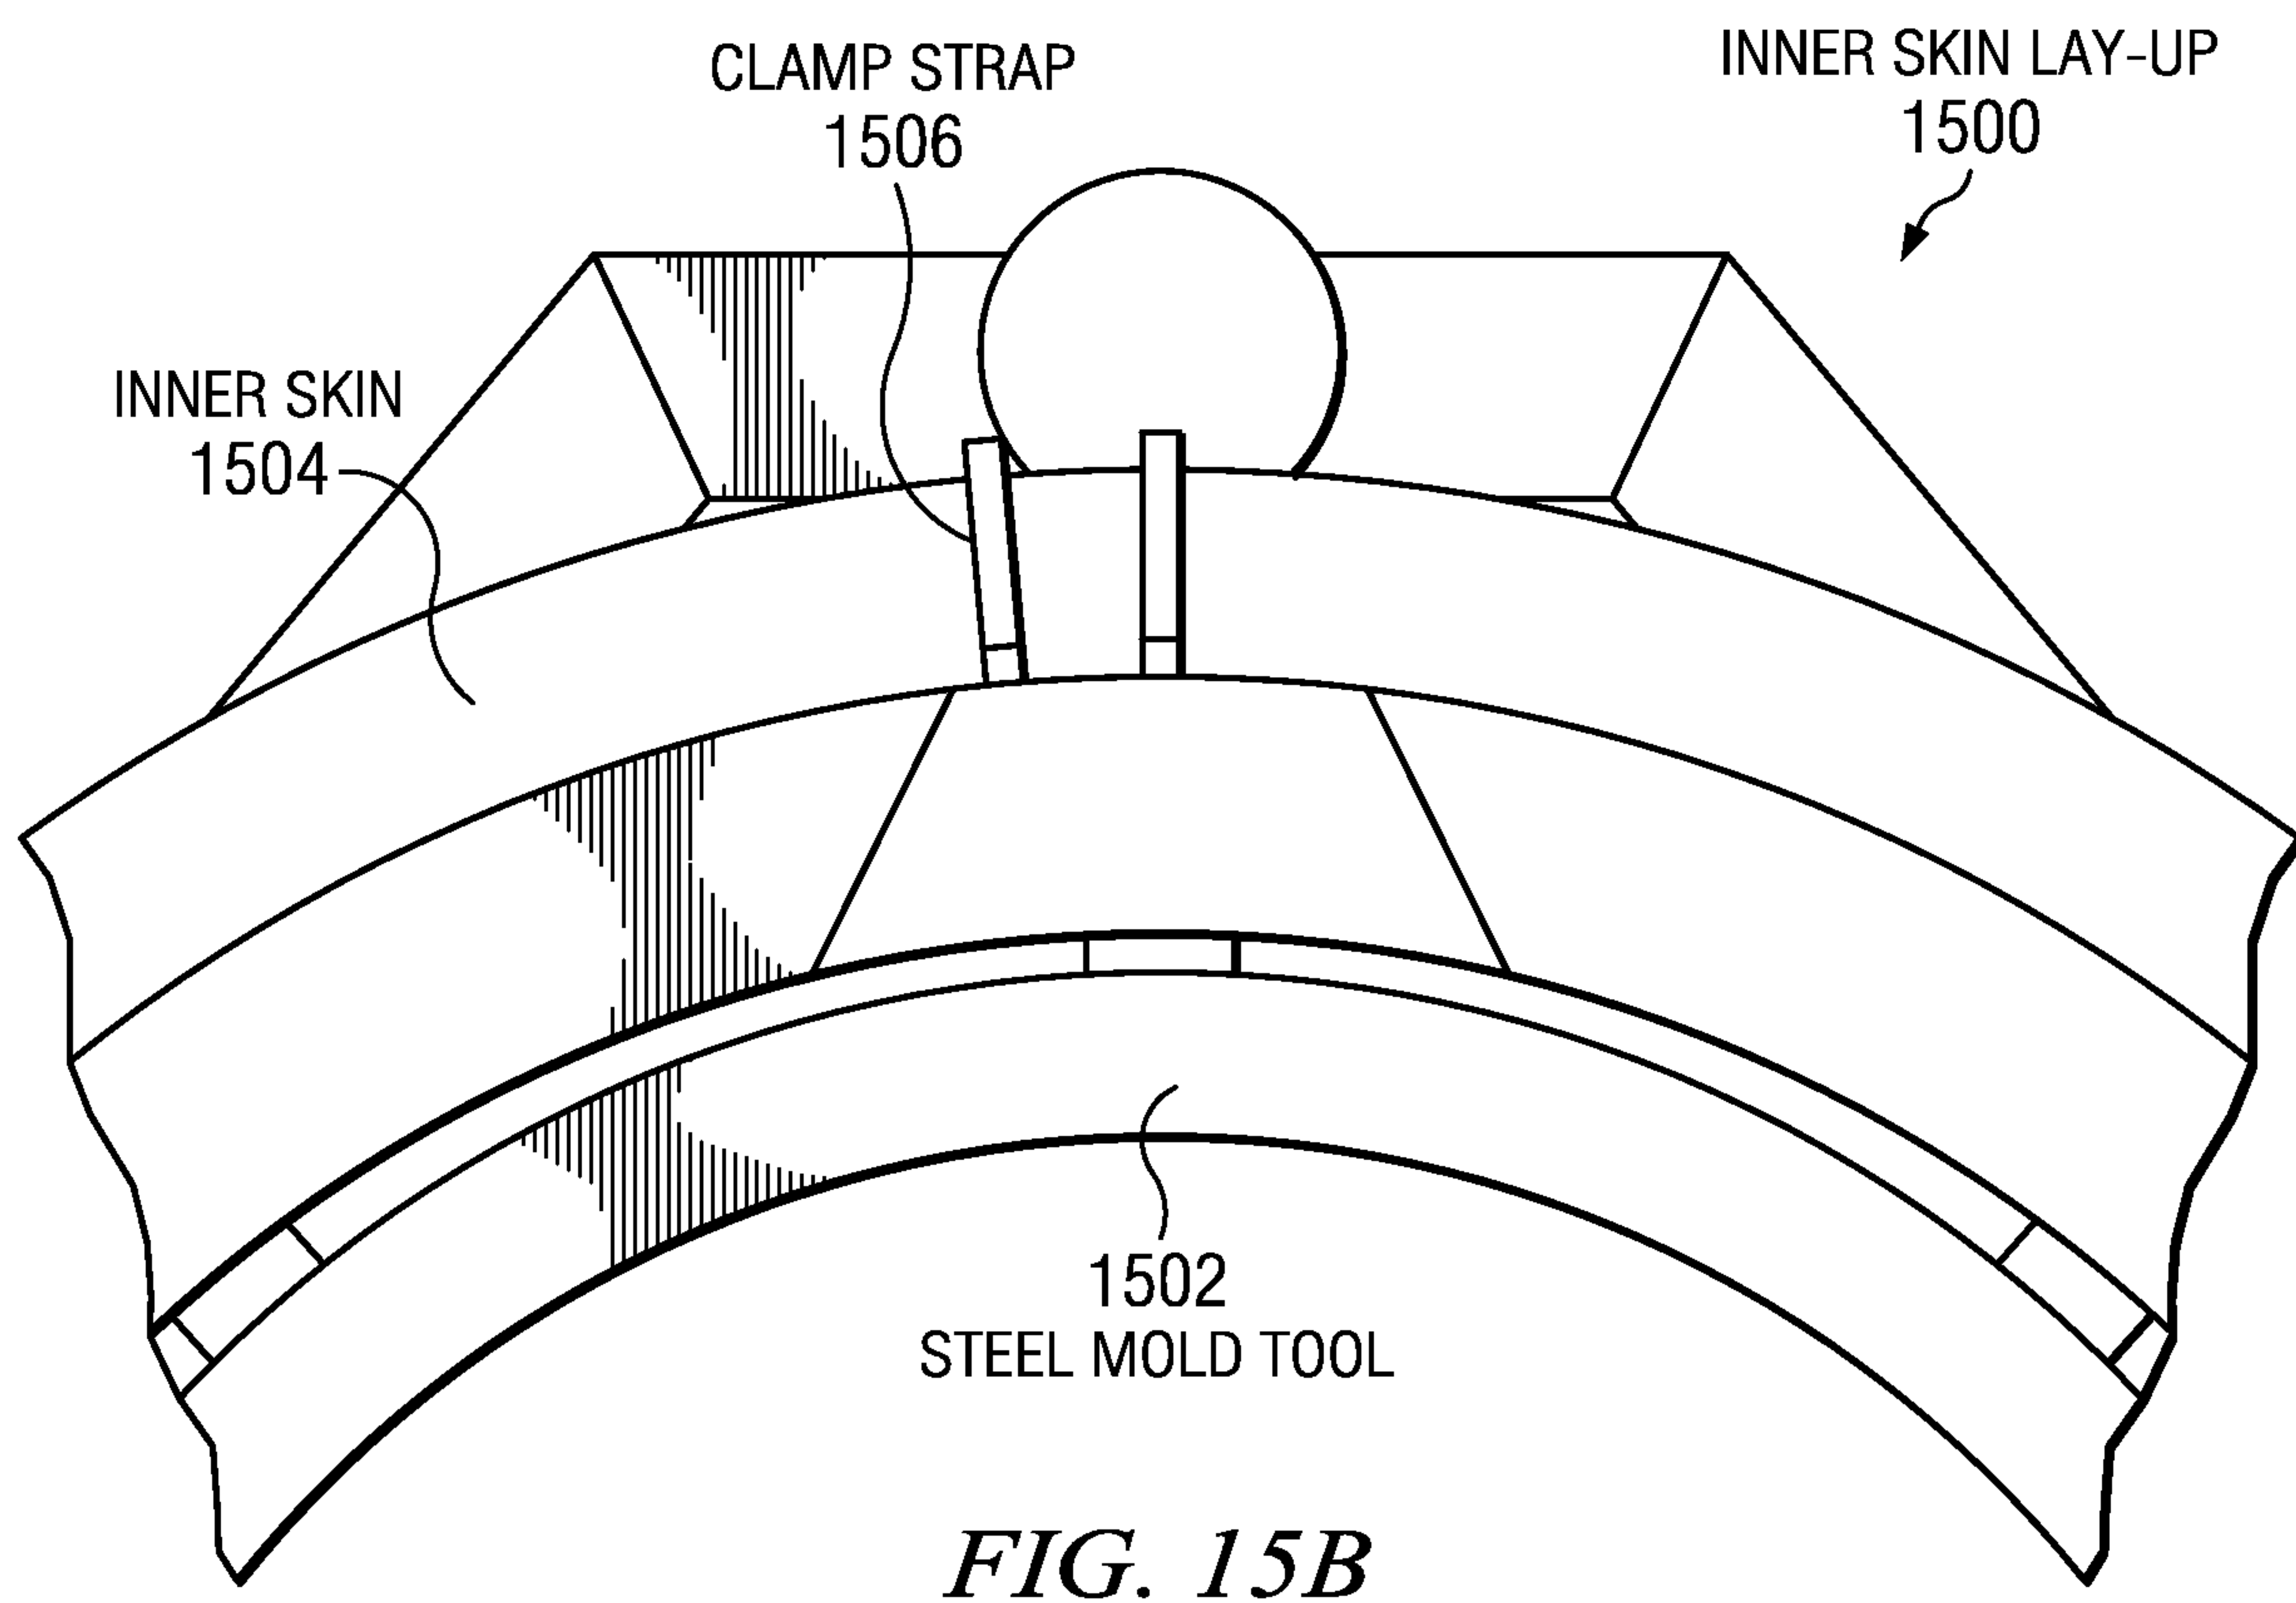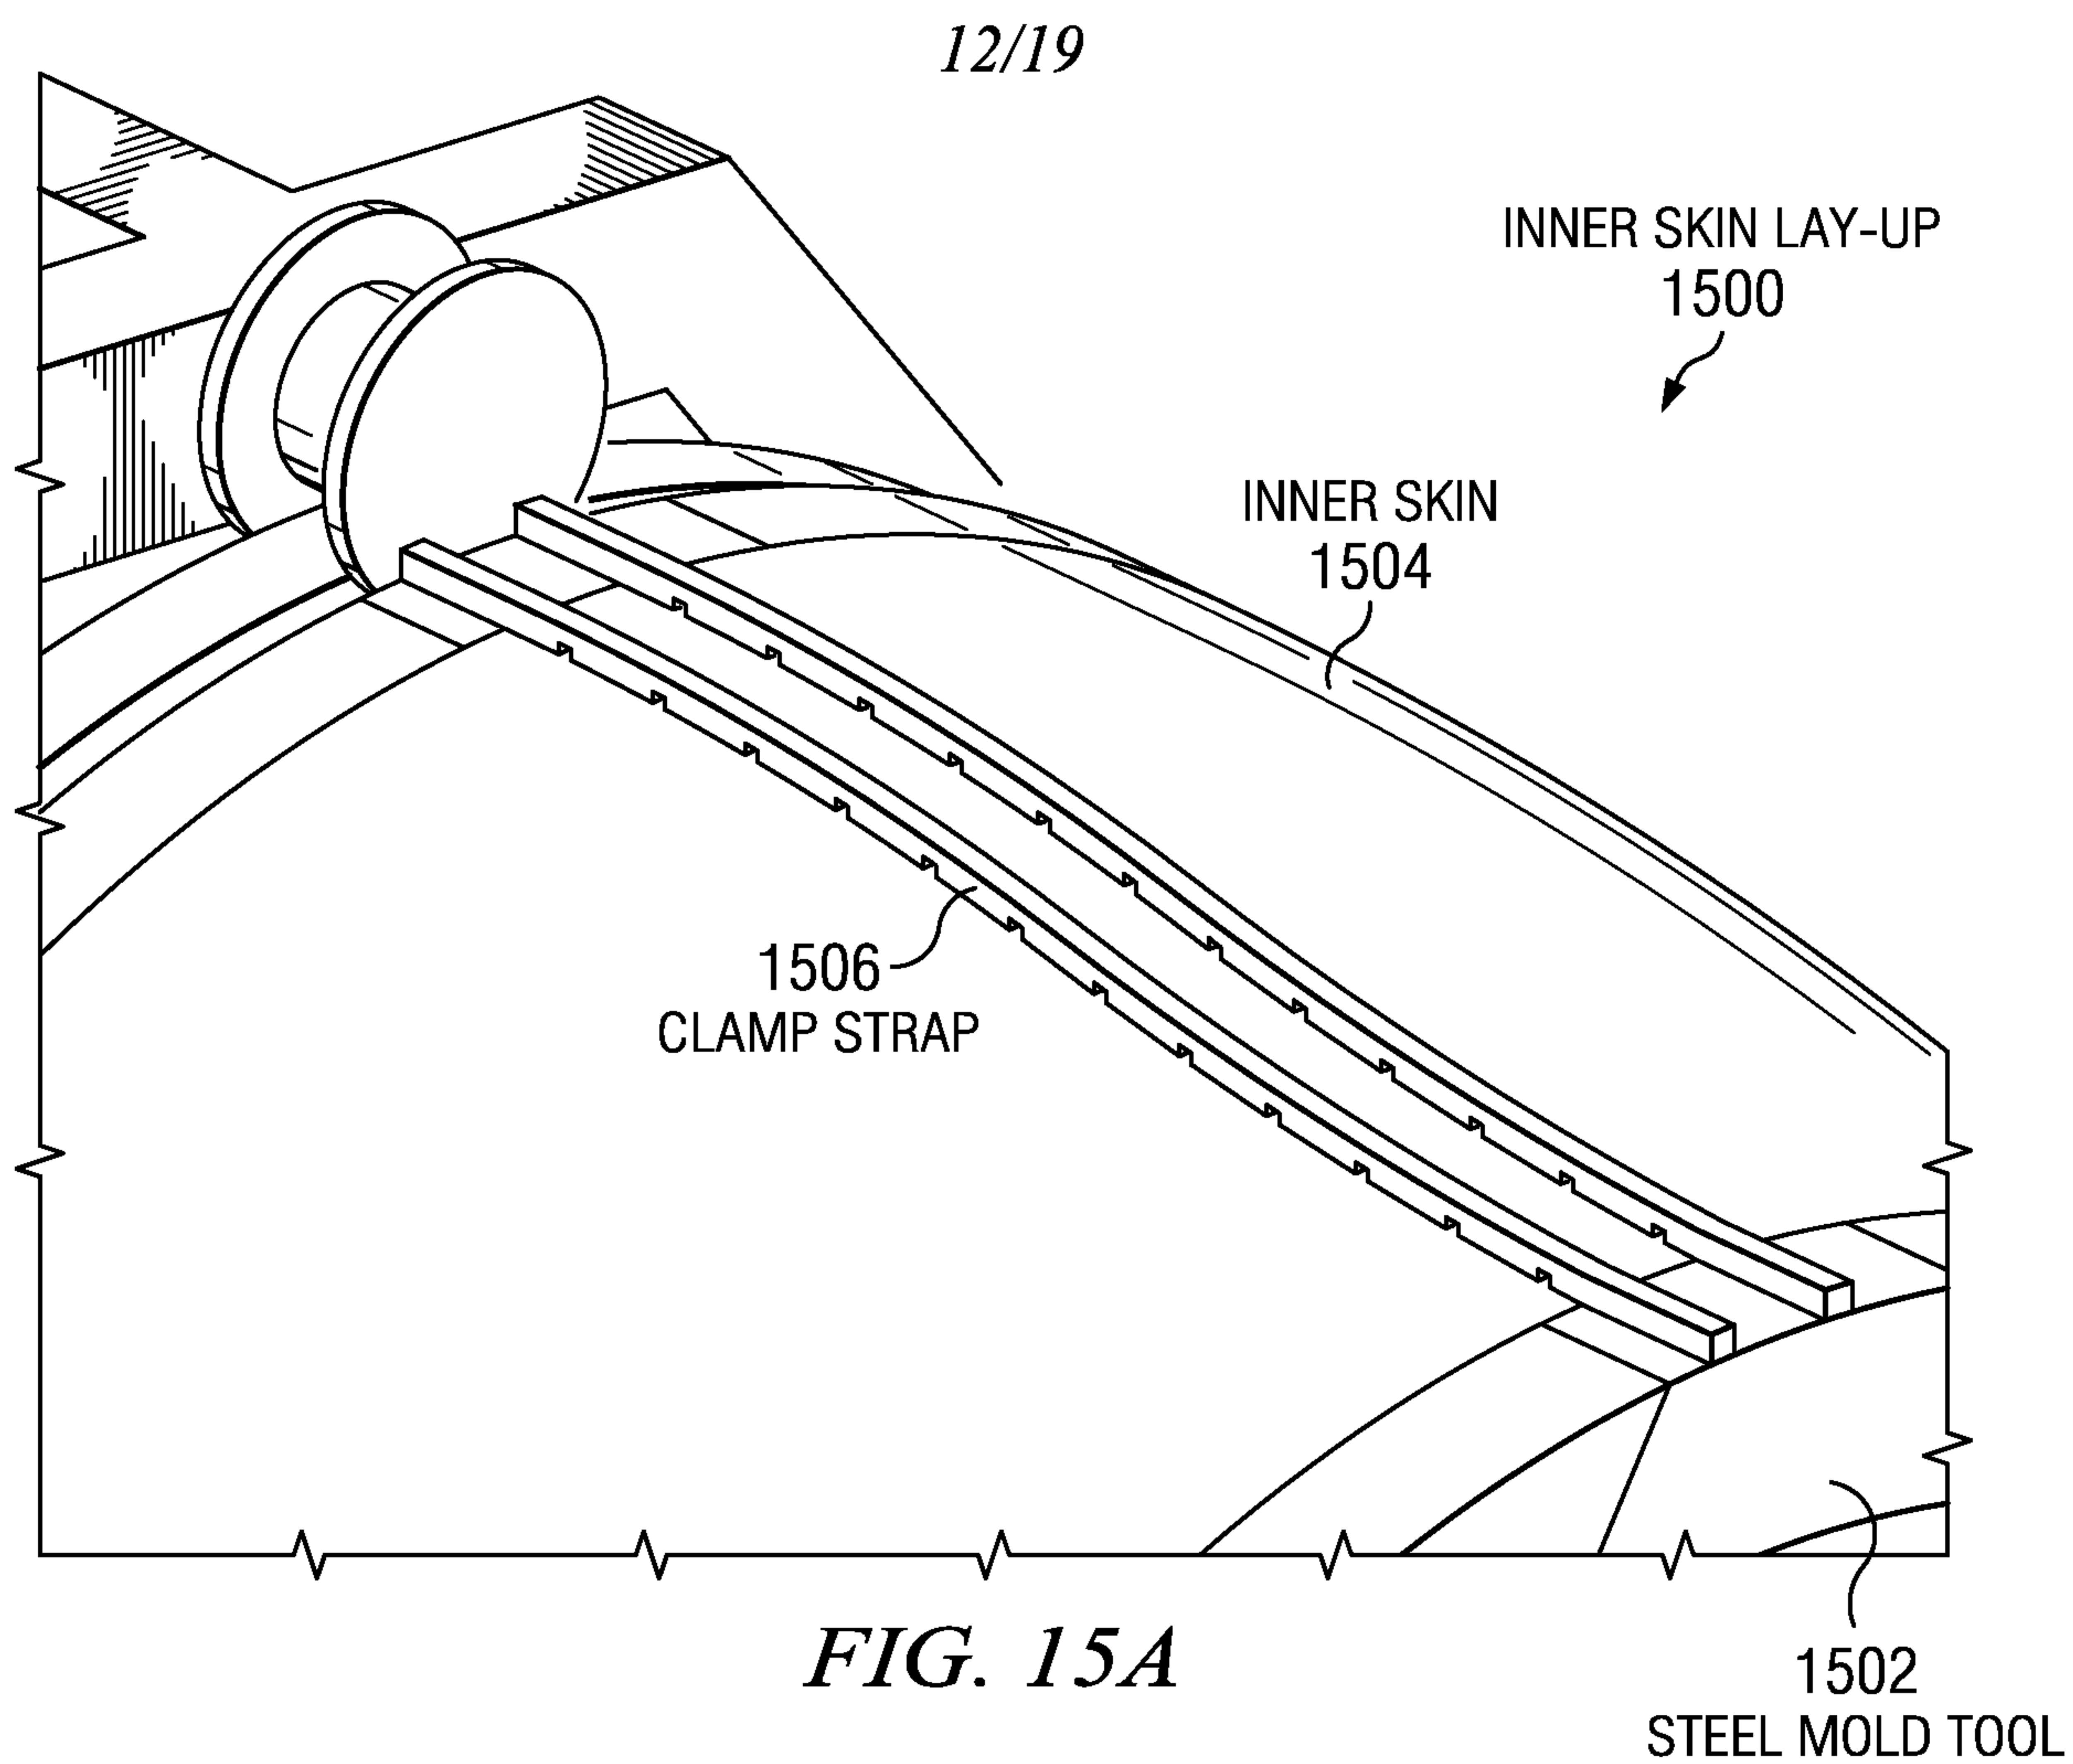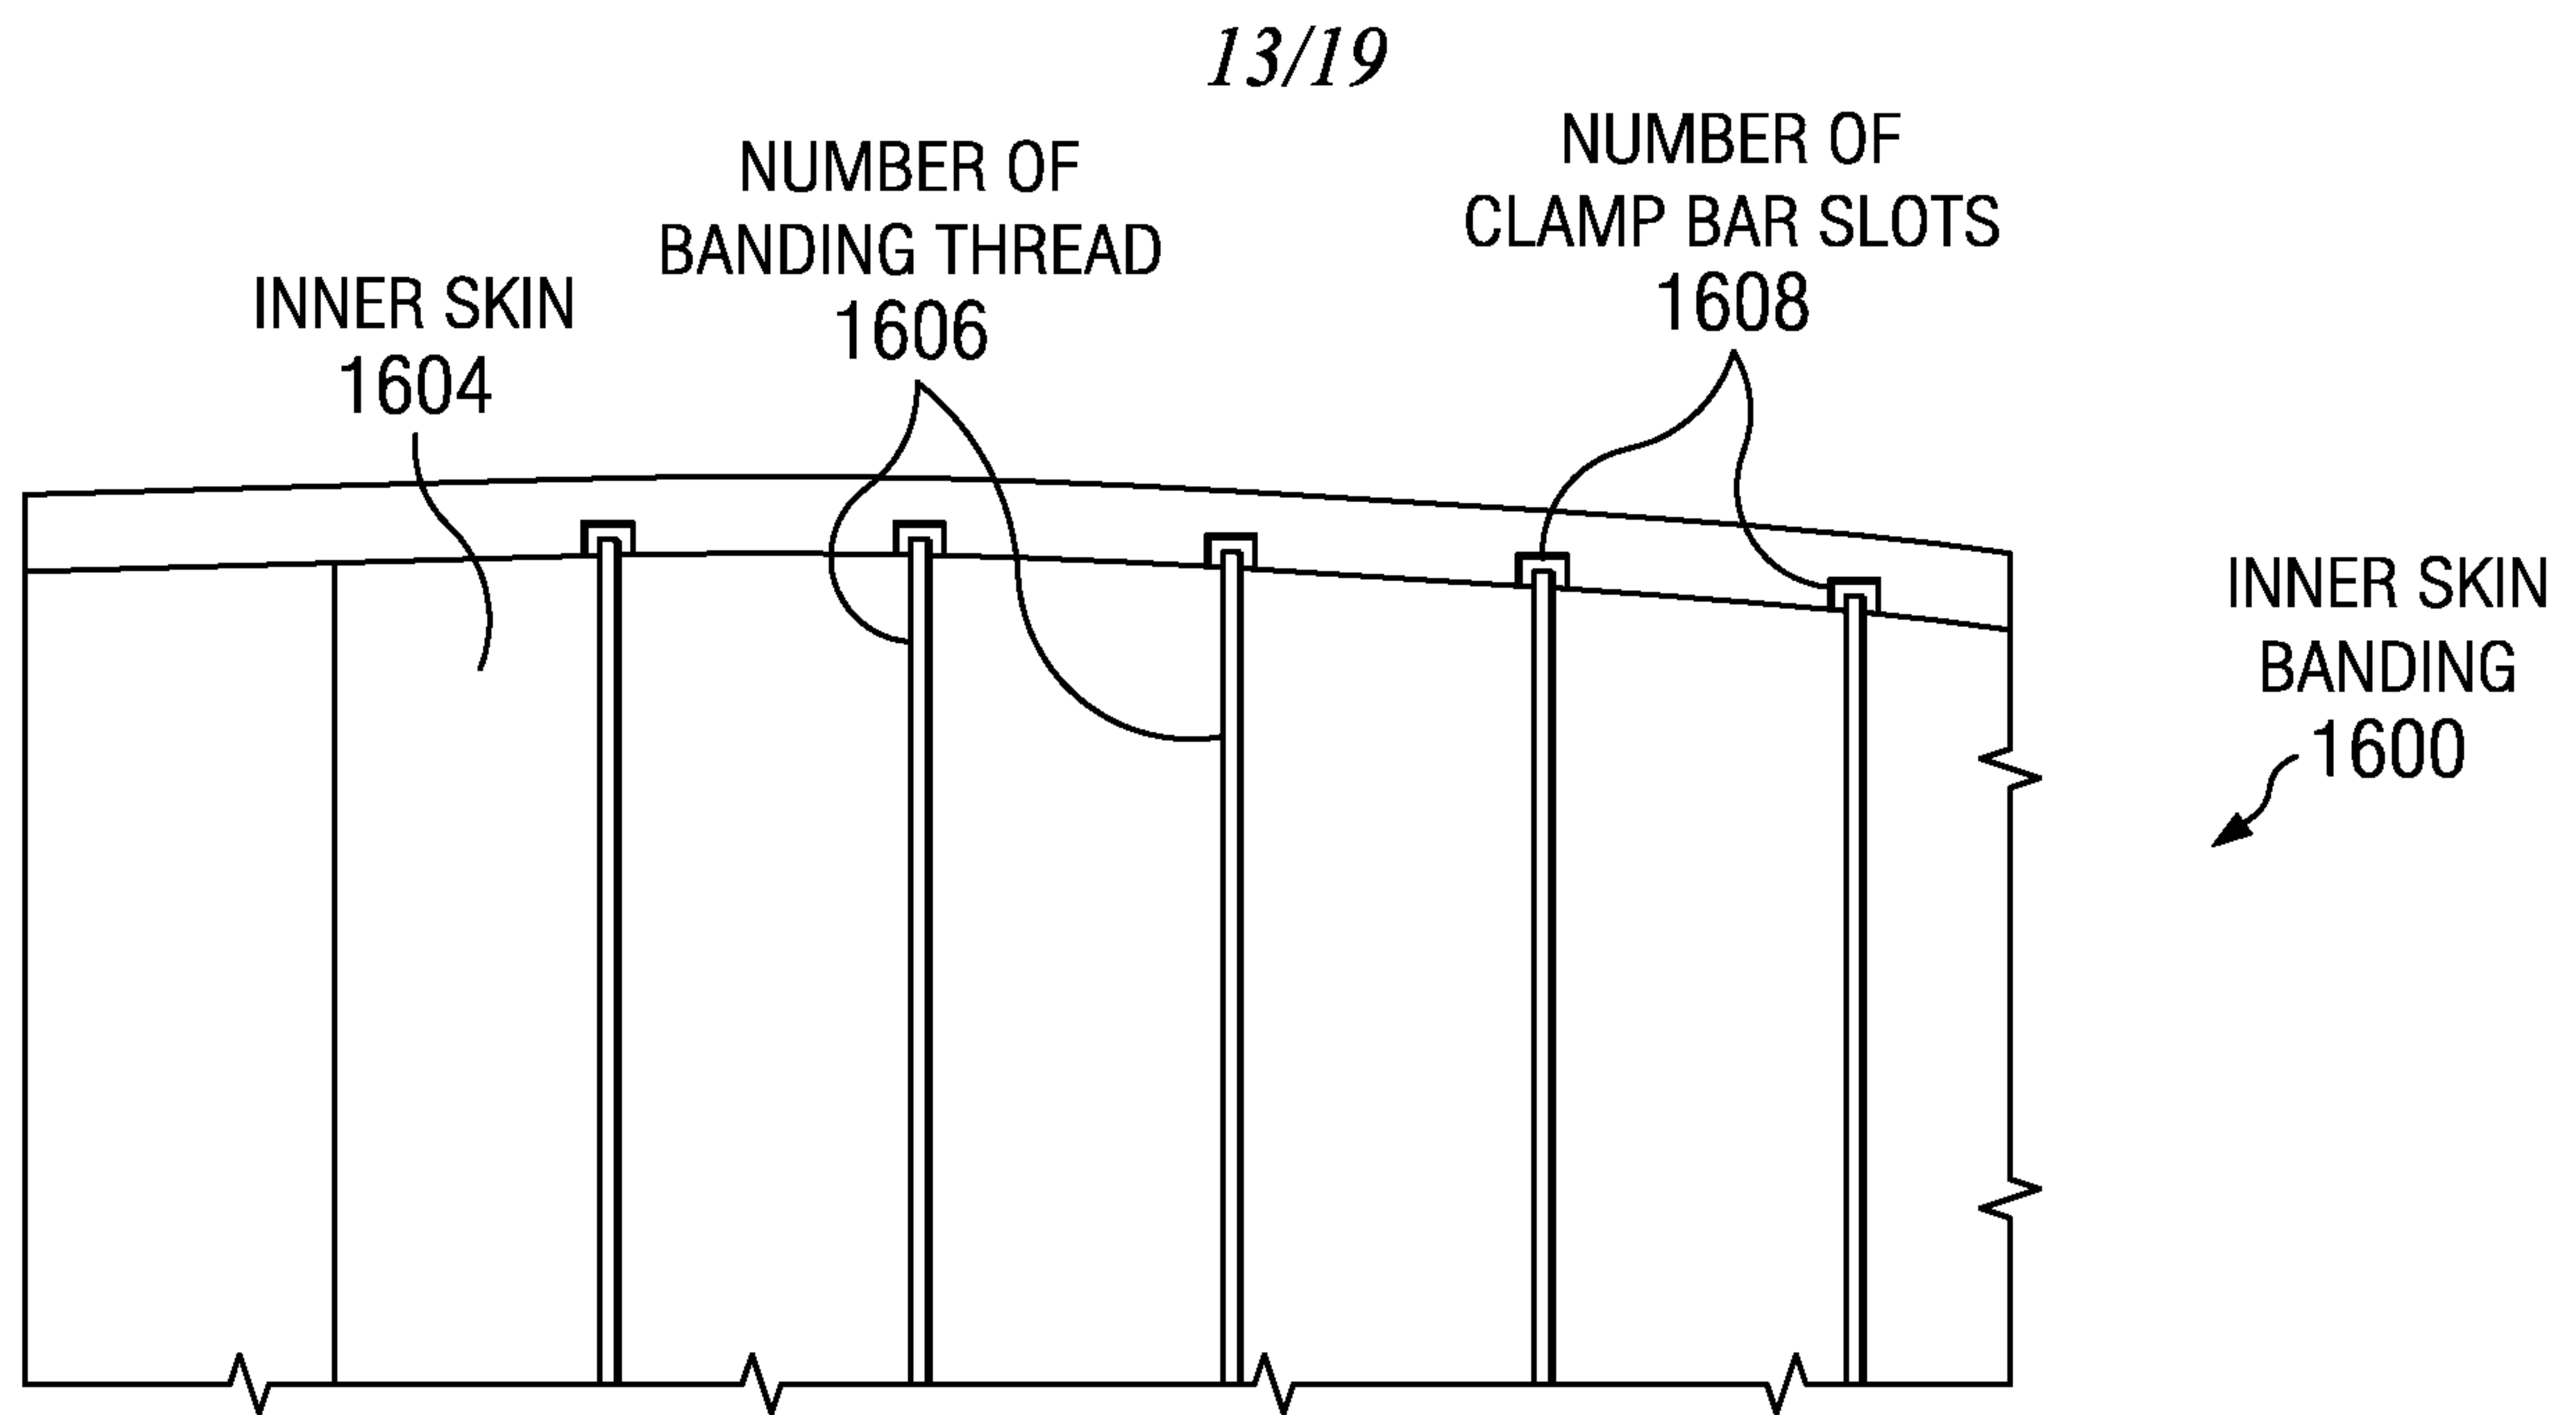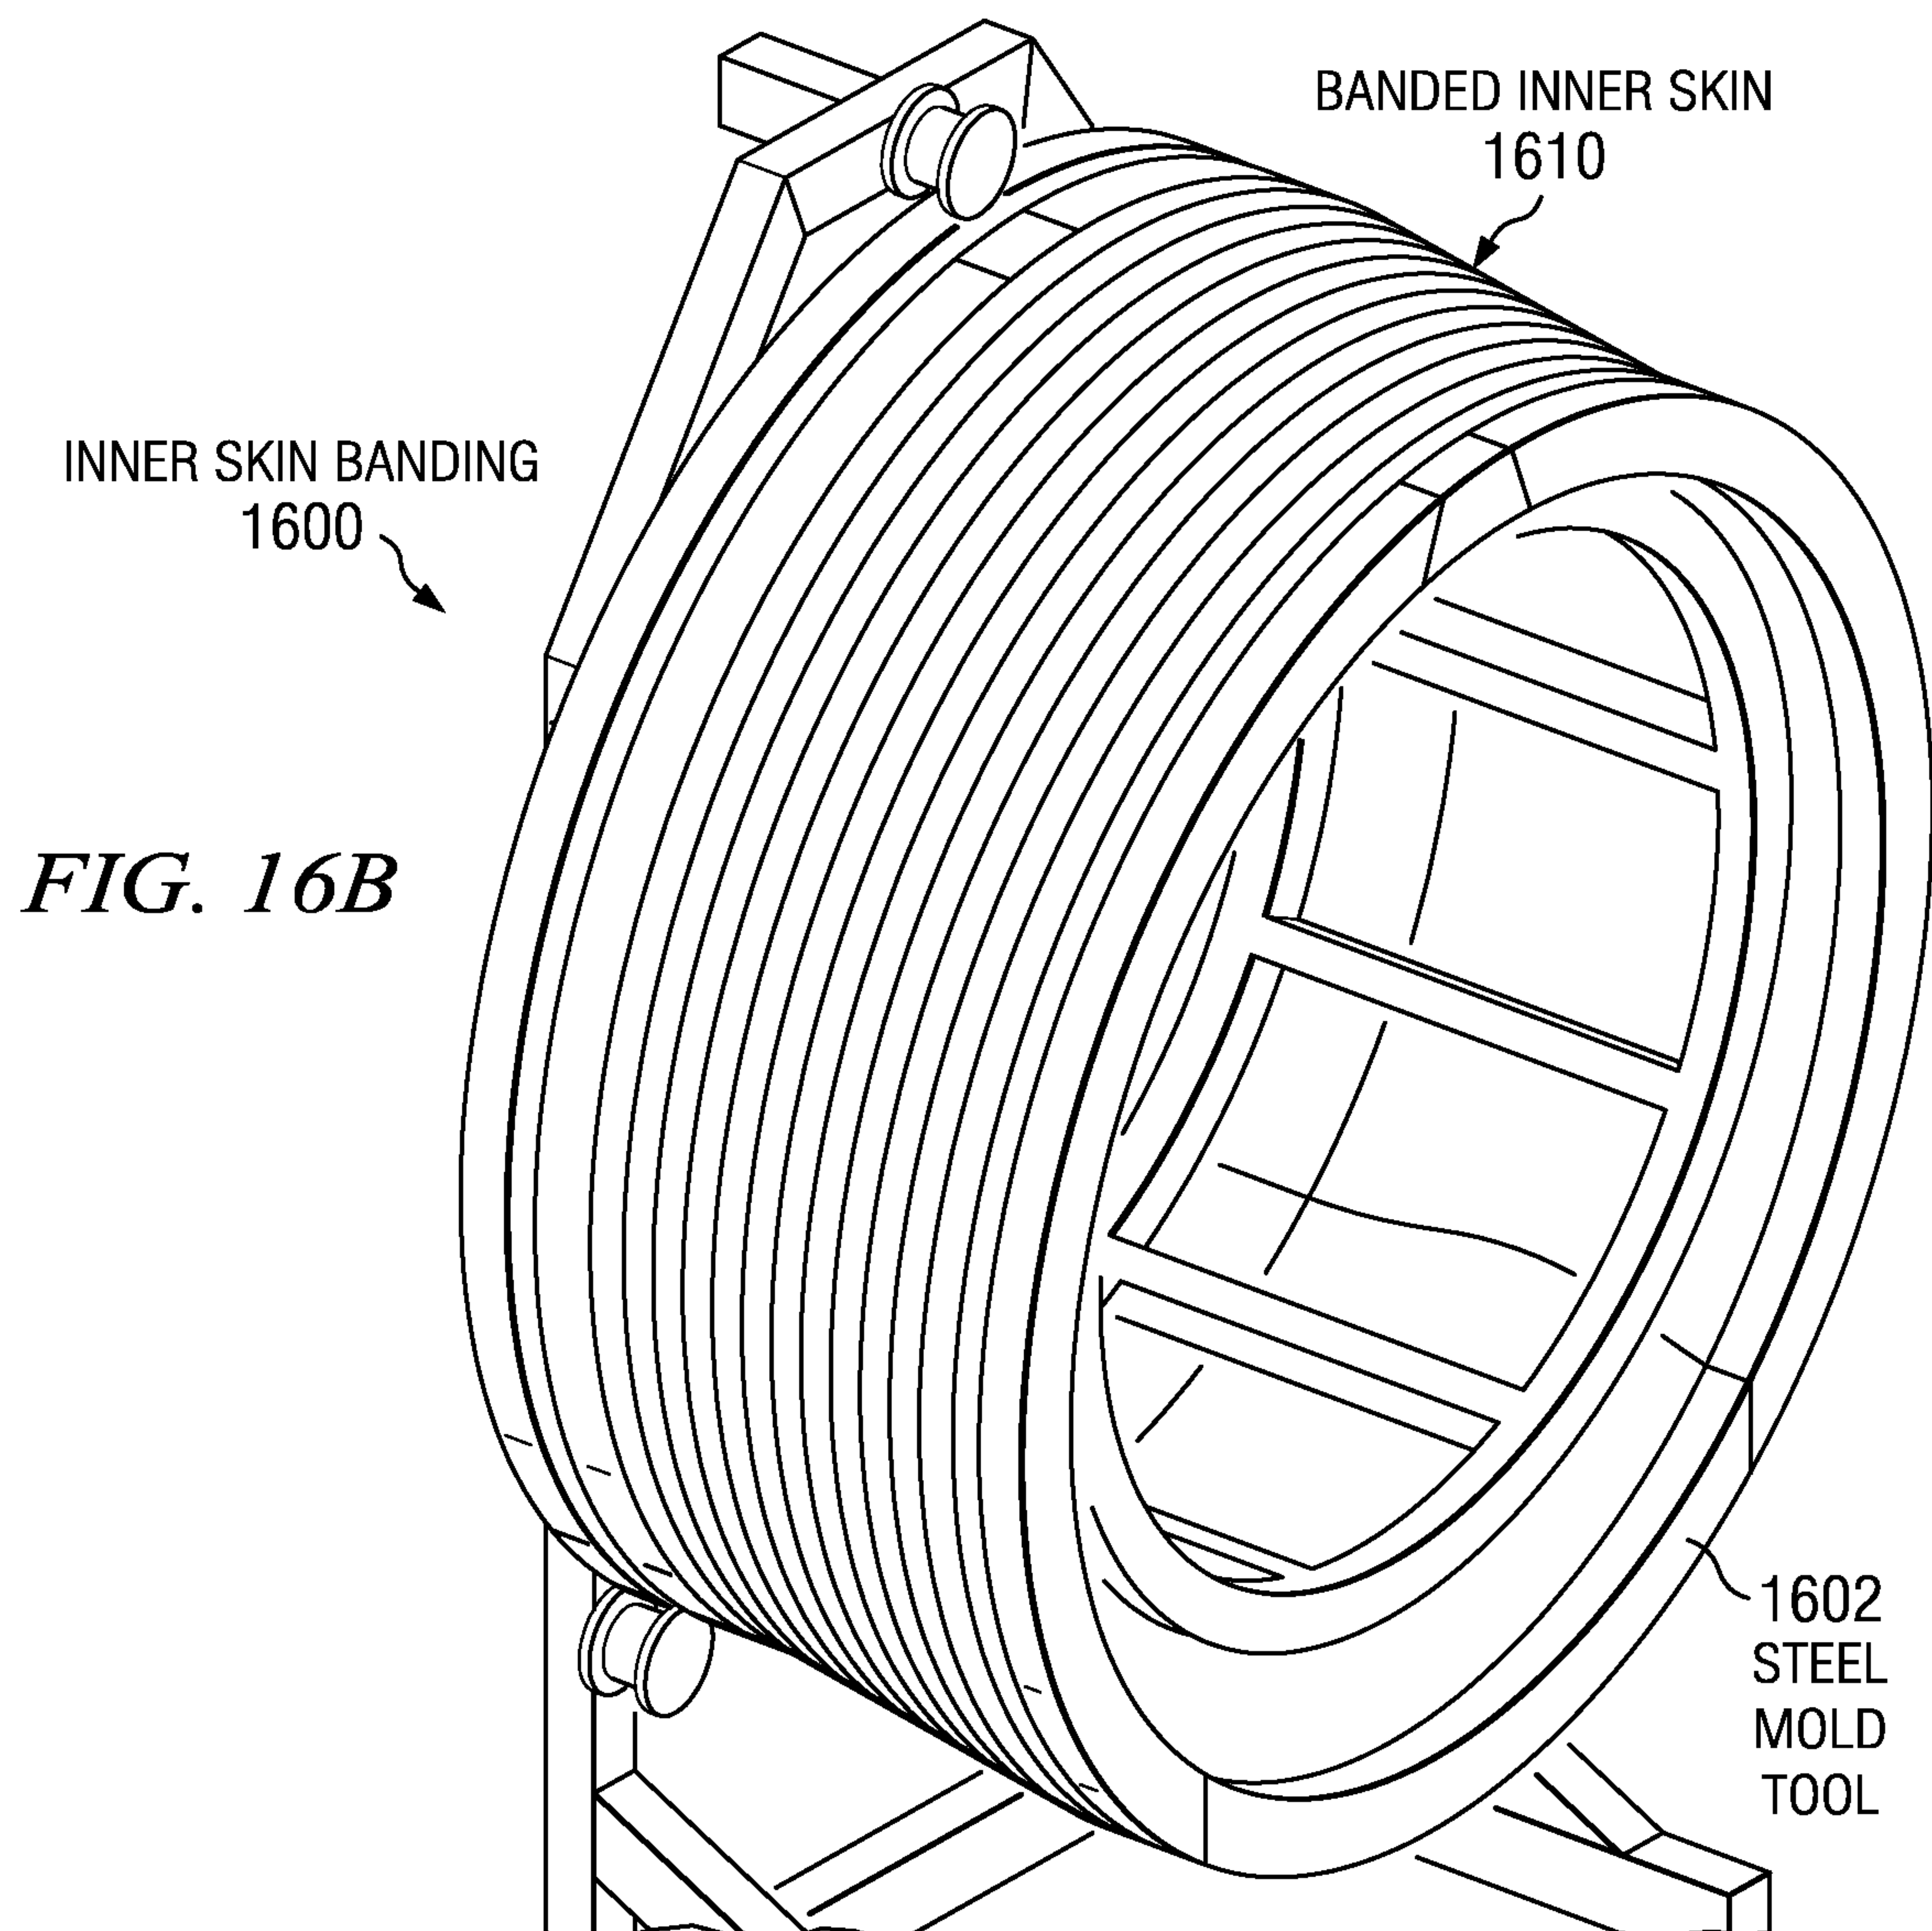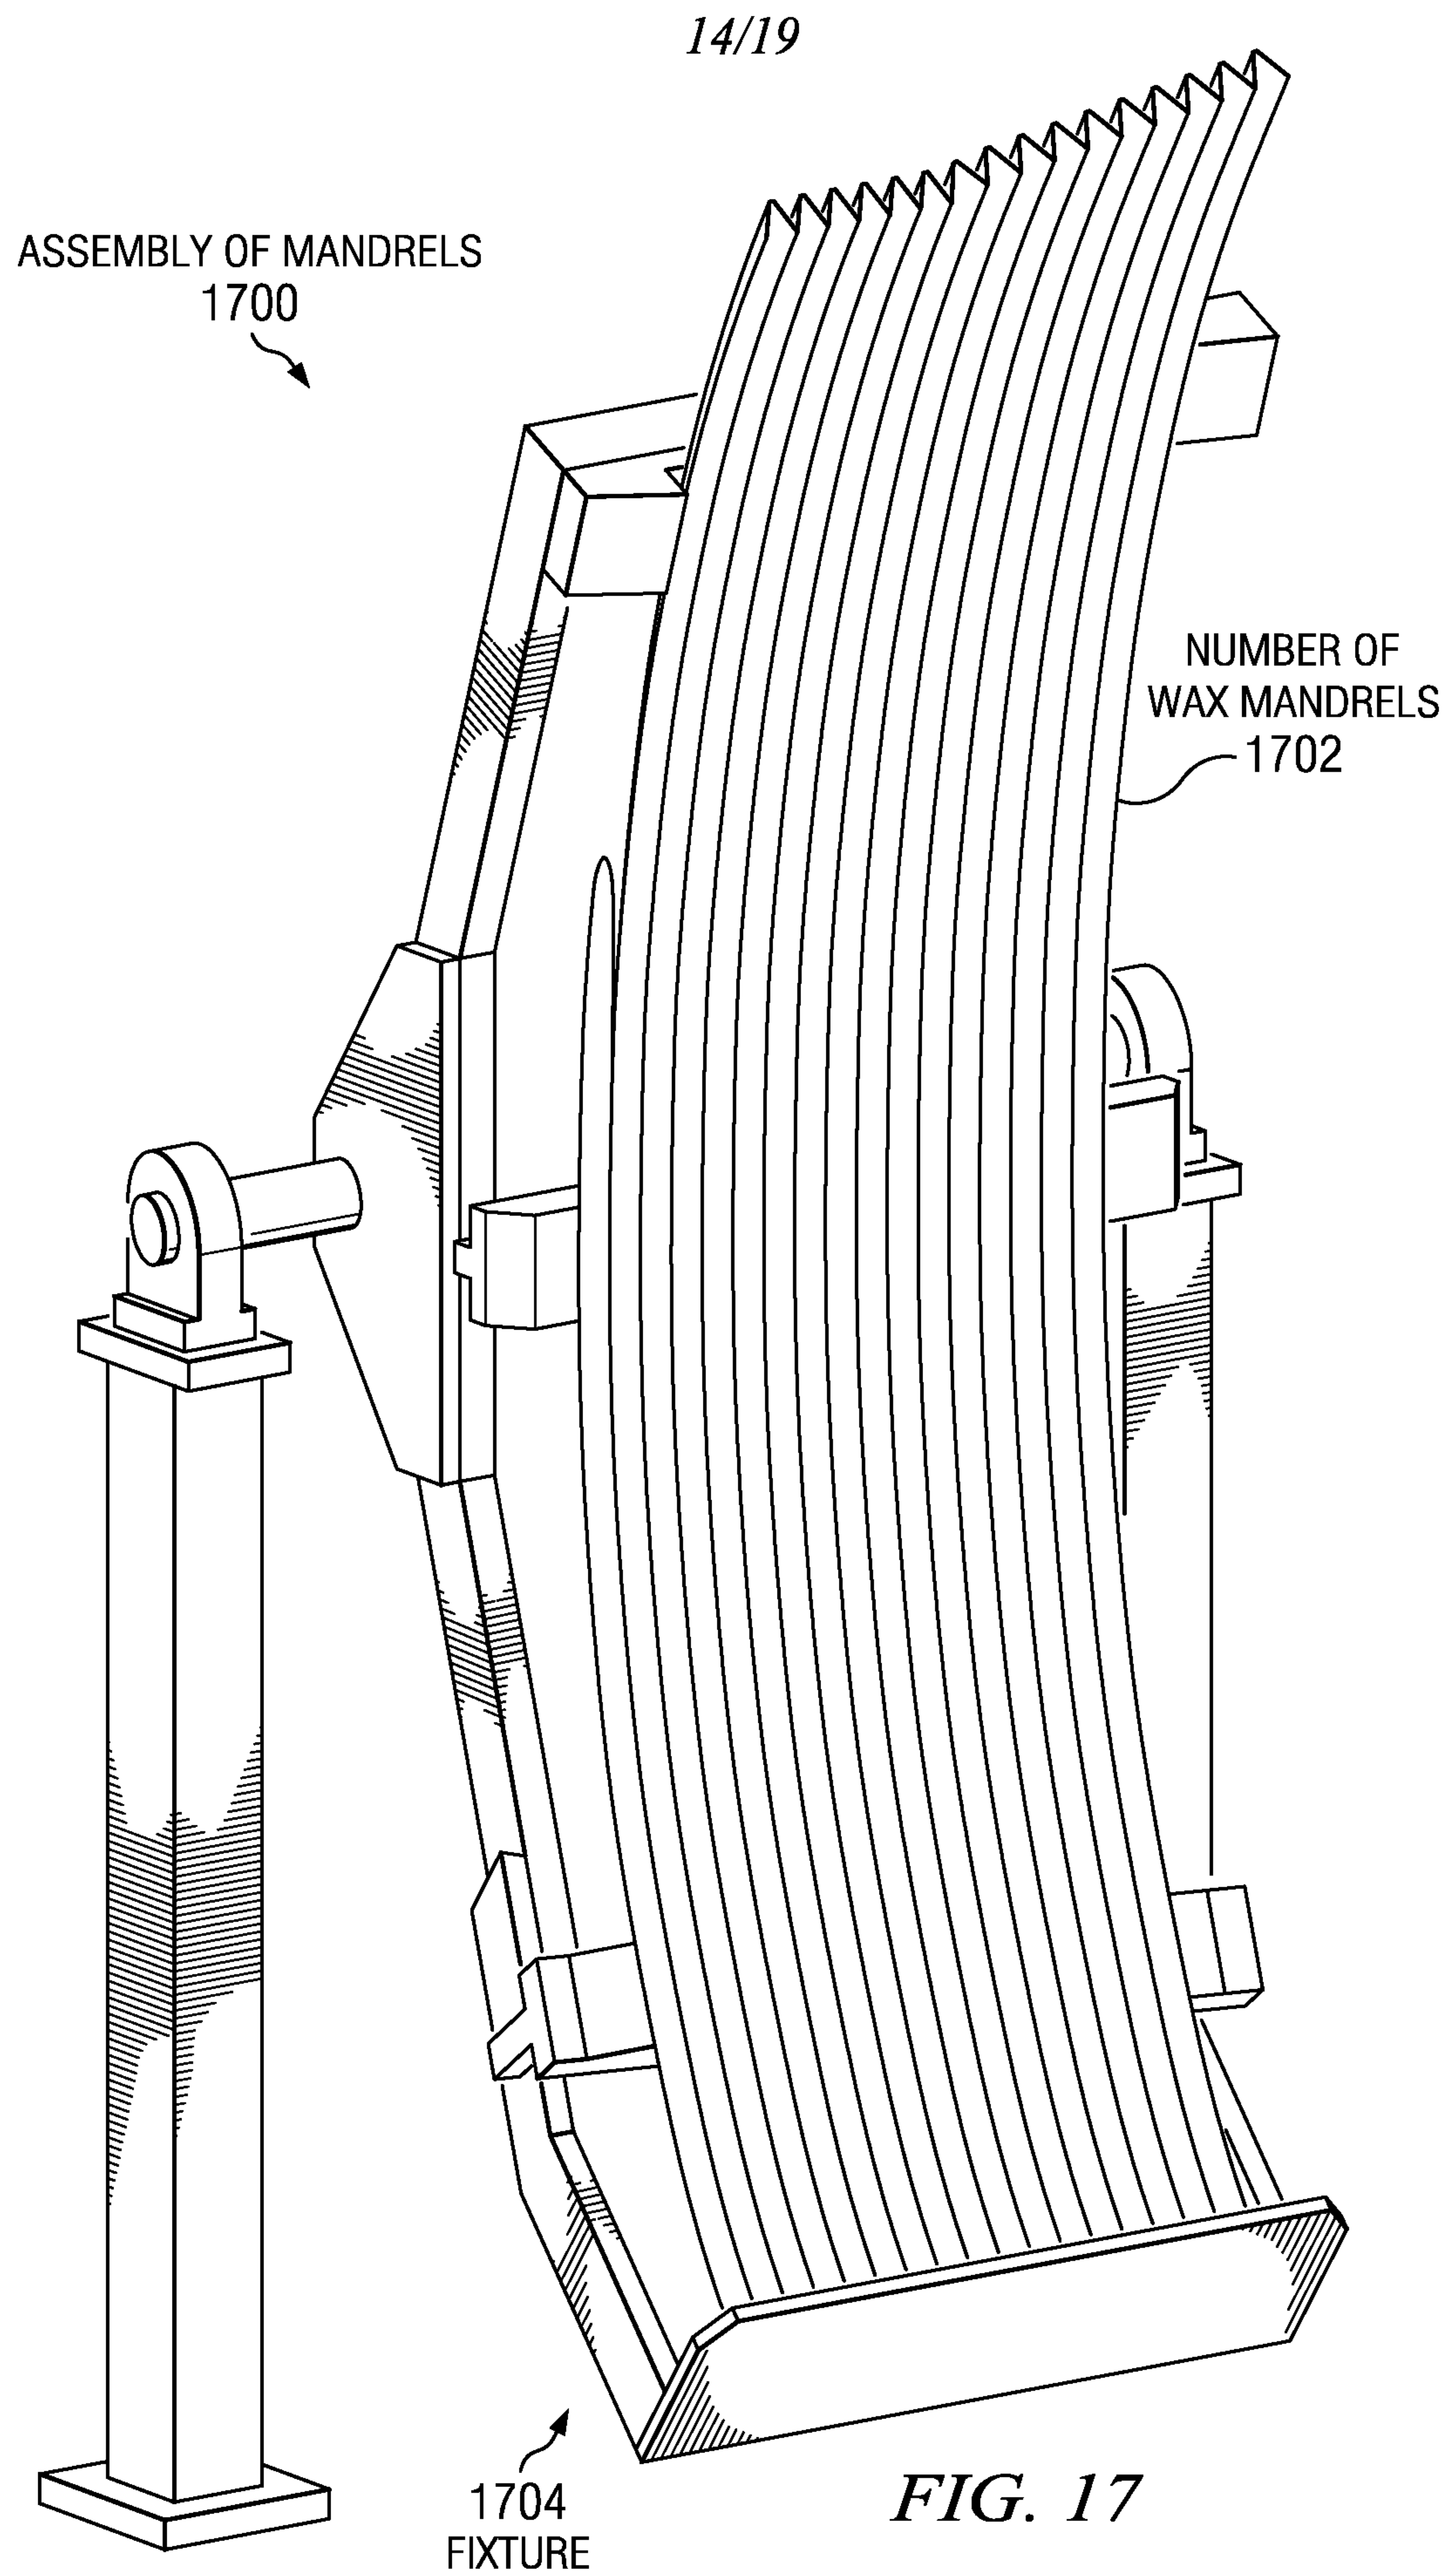

15/19

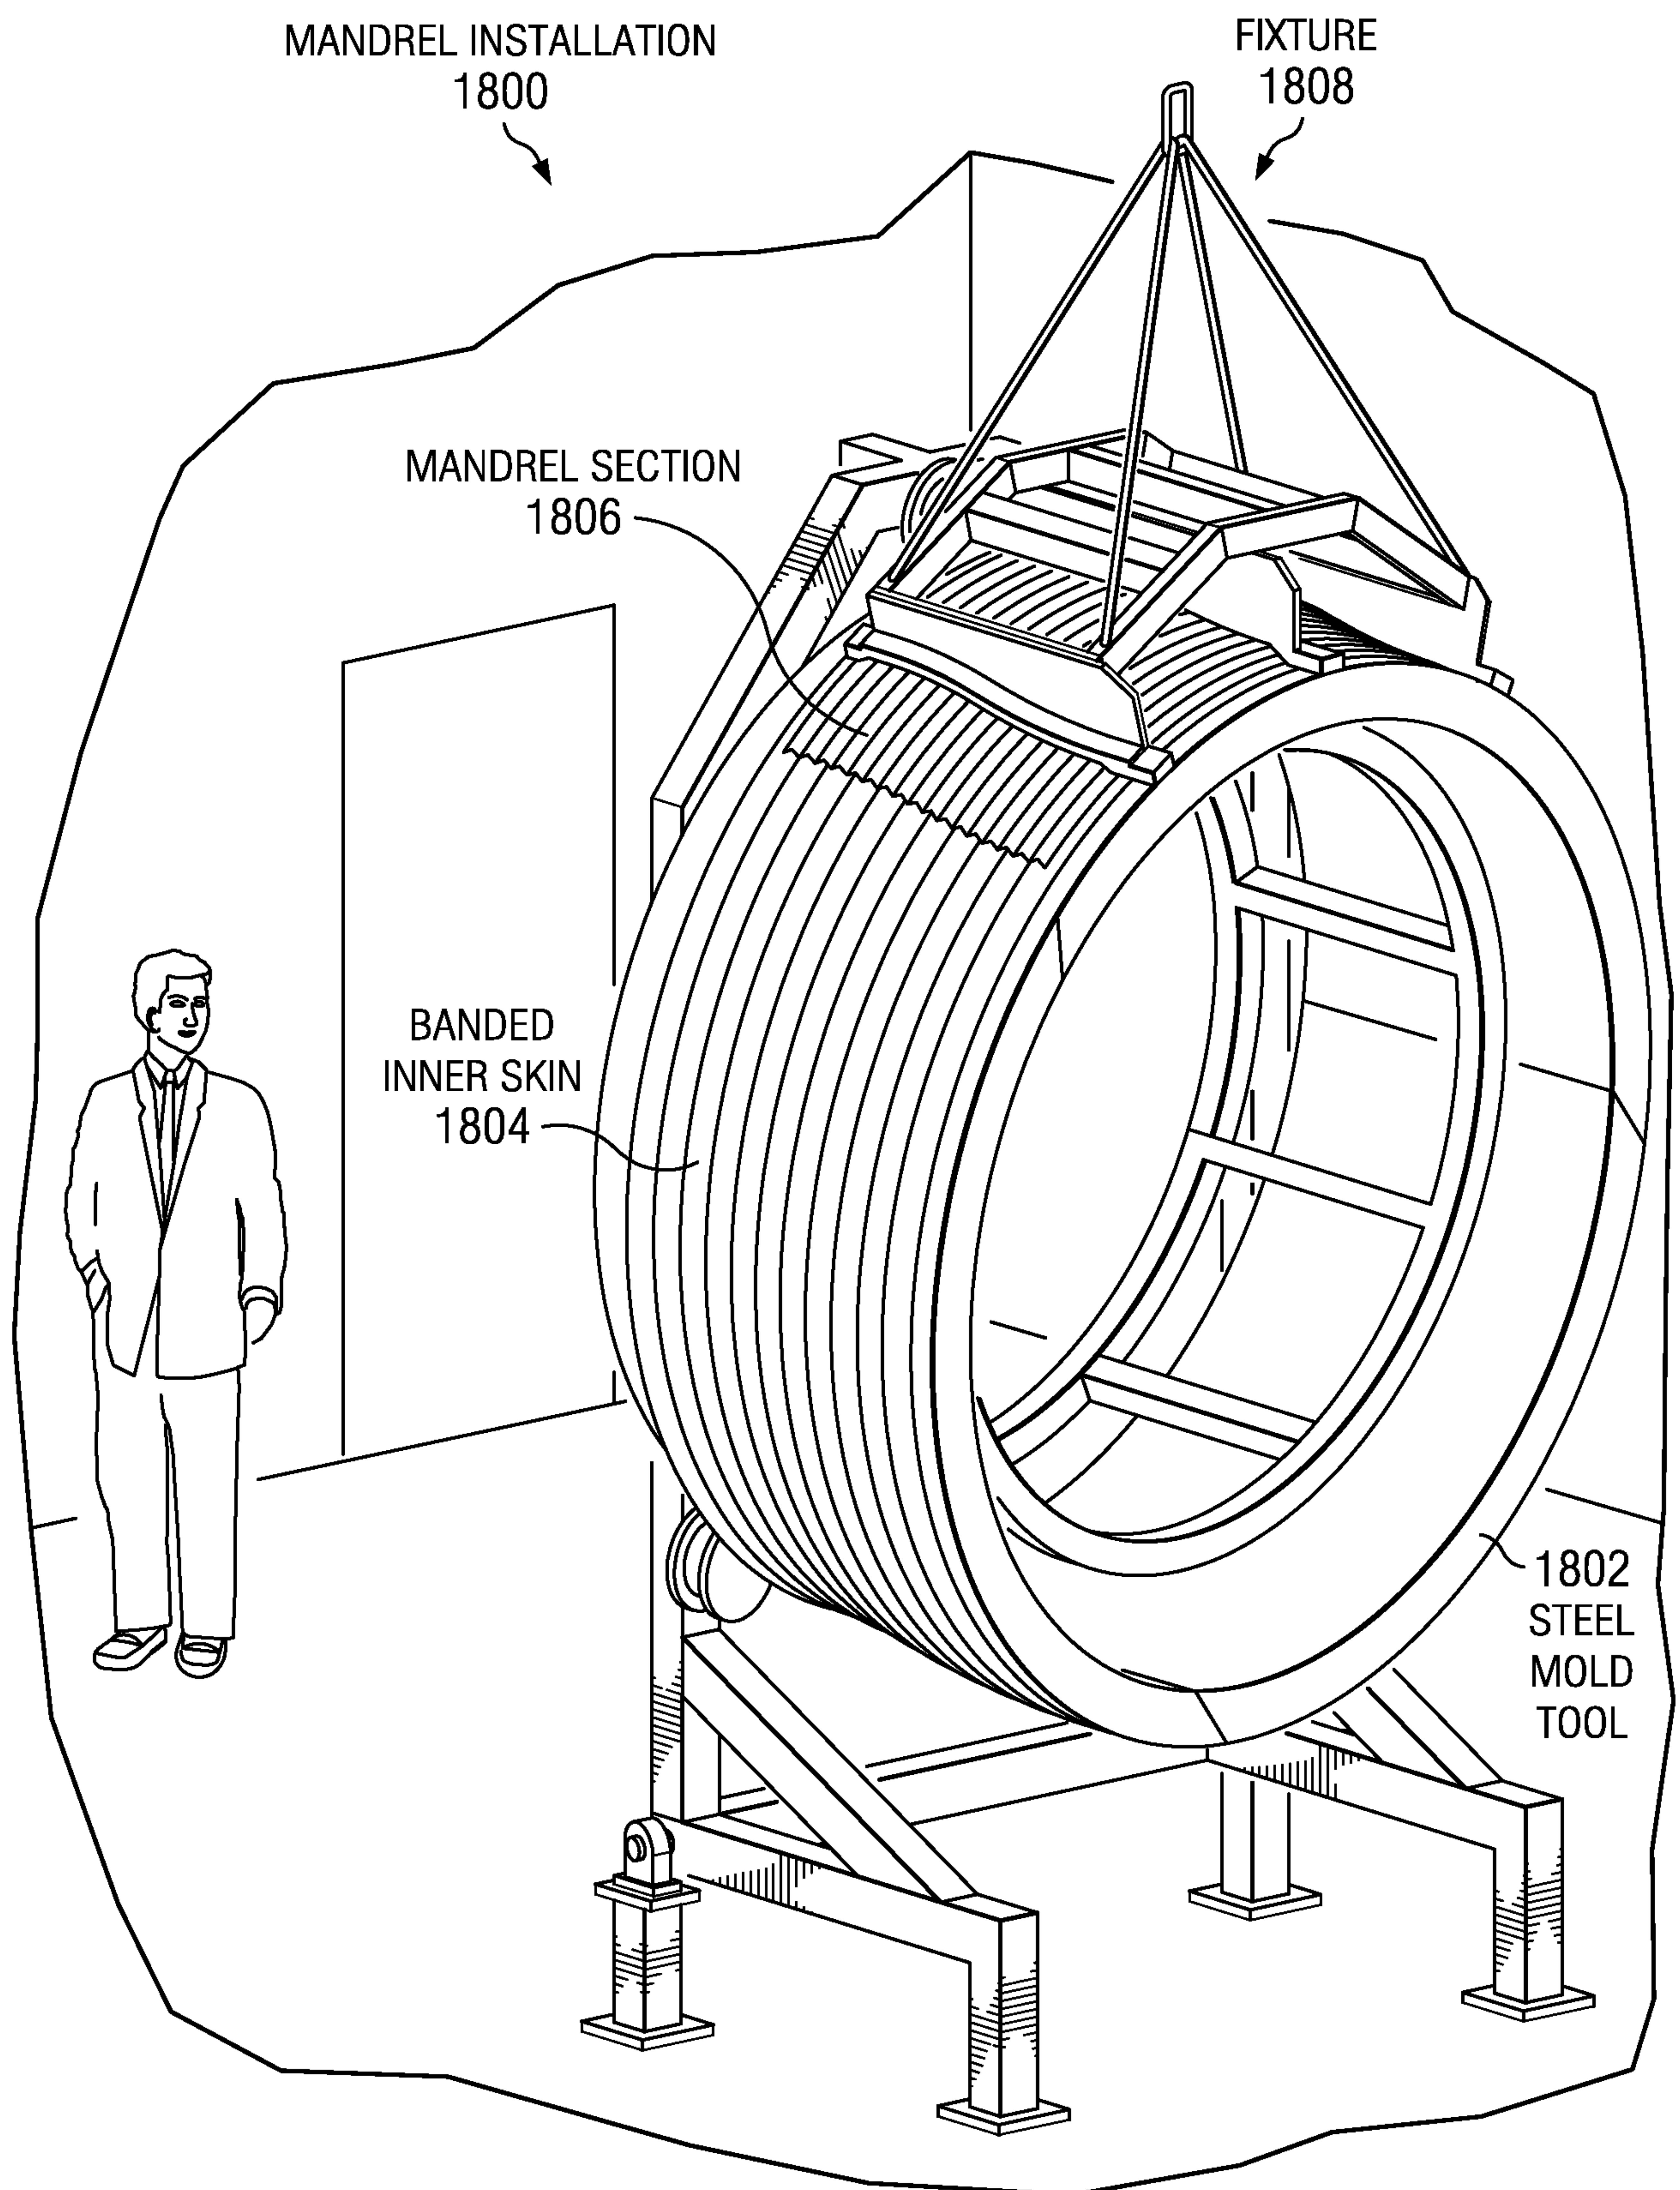
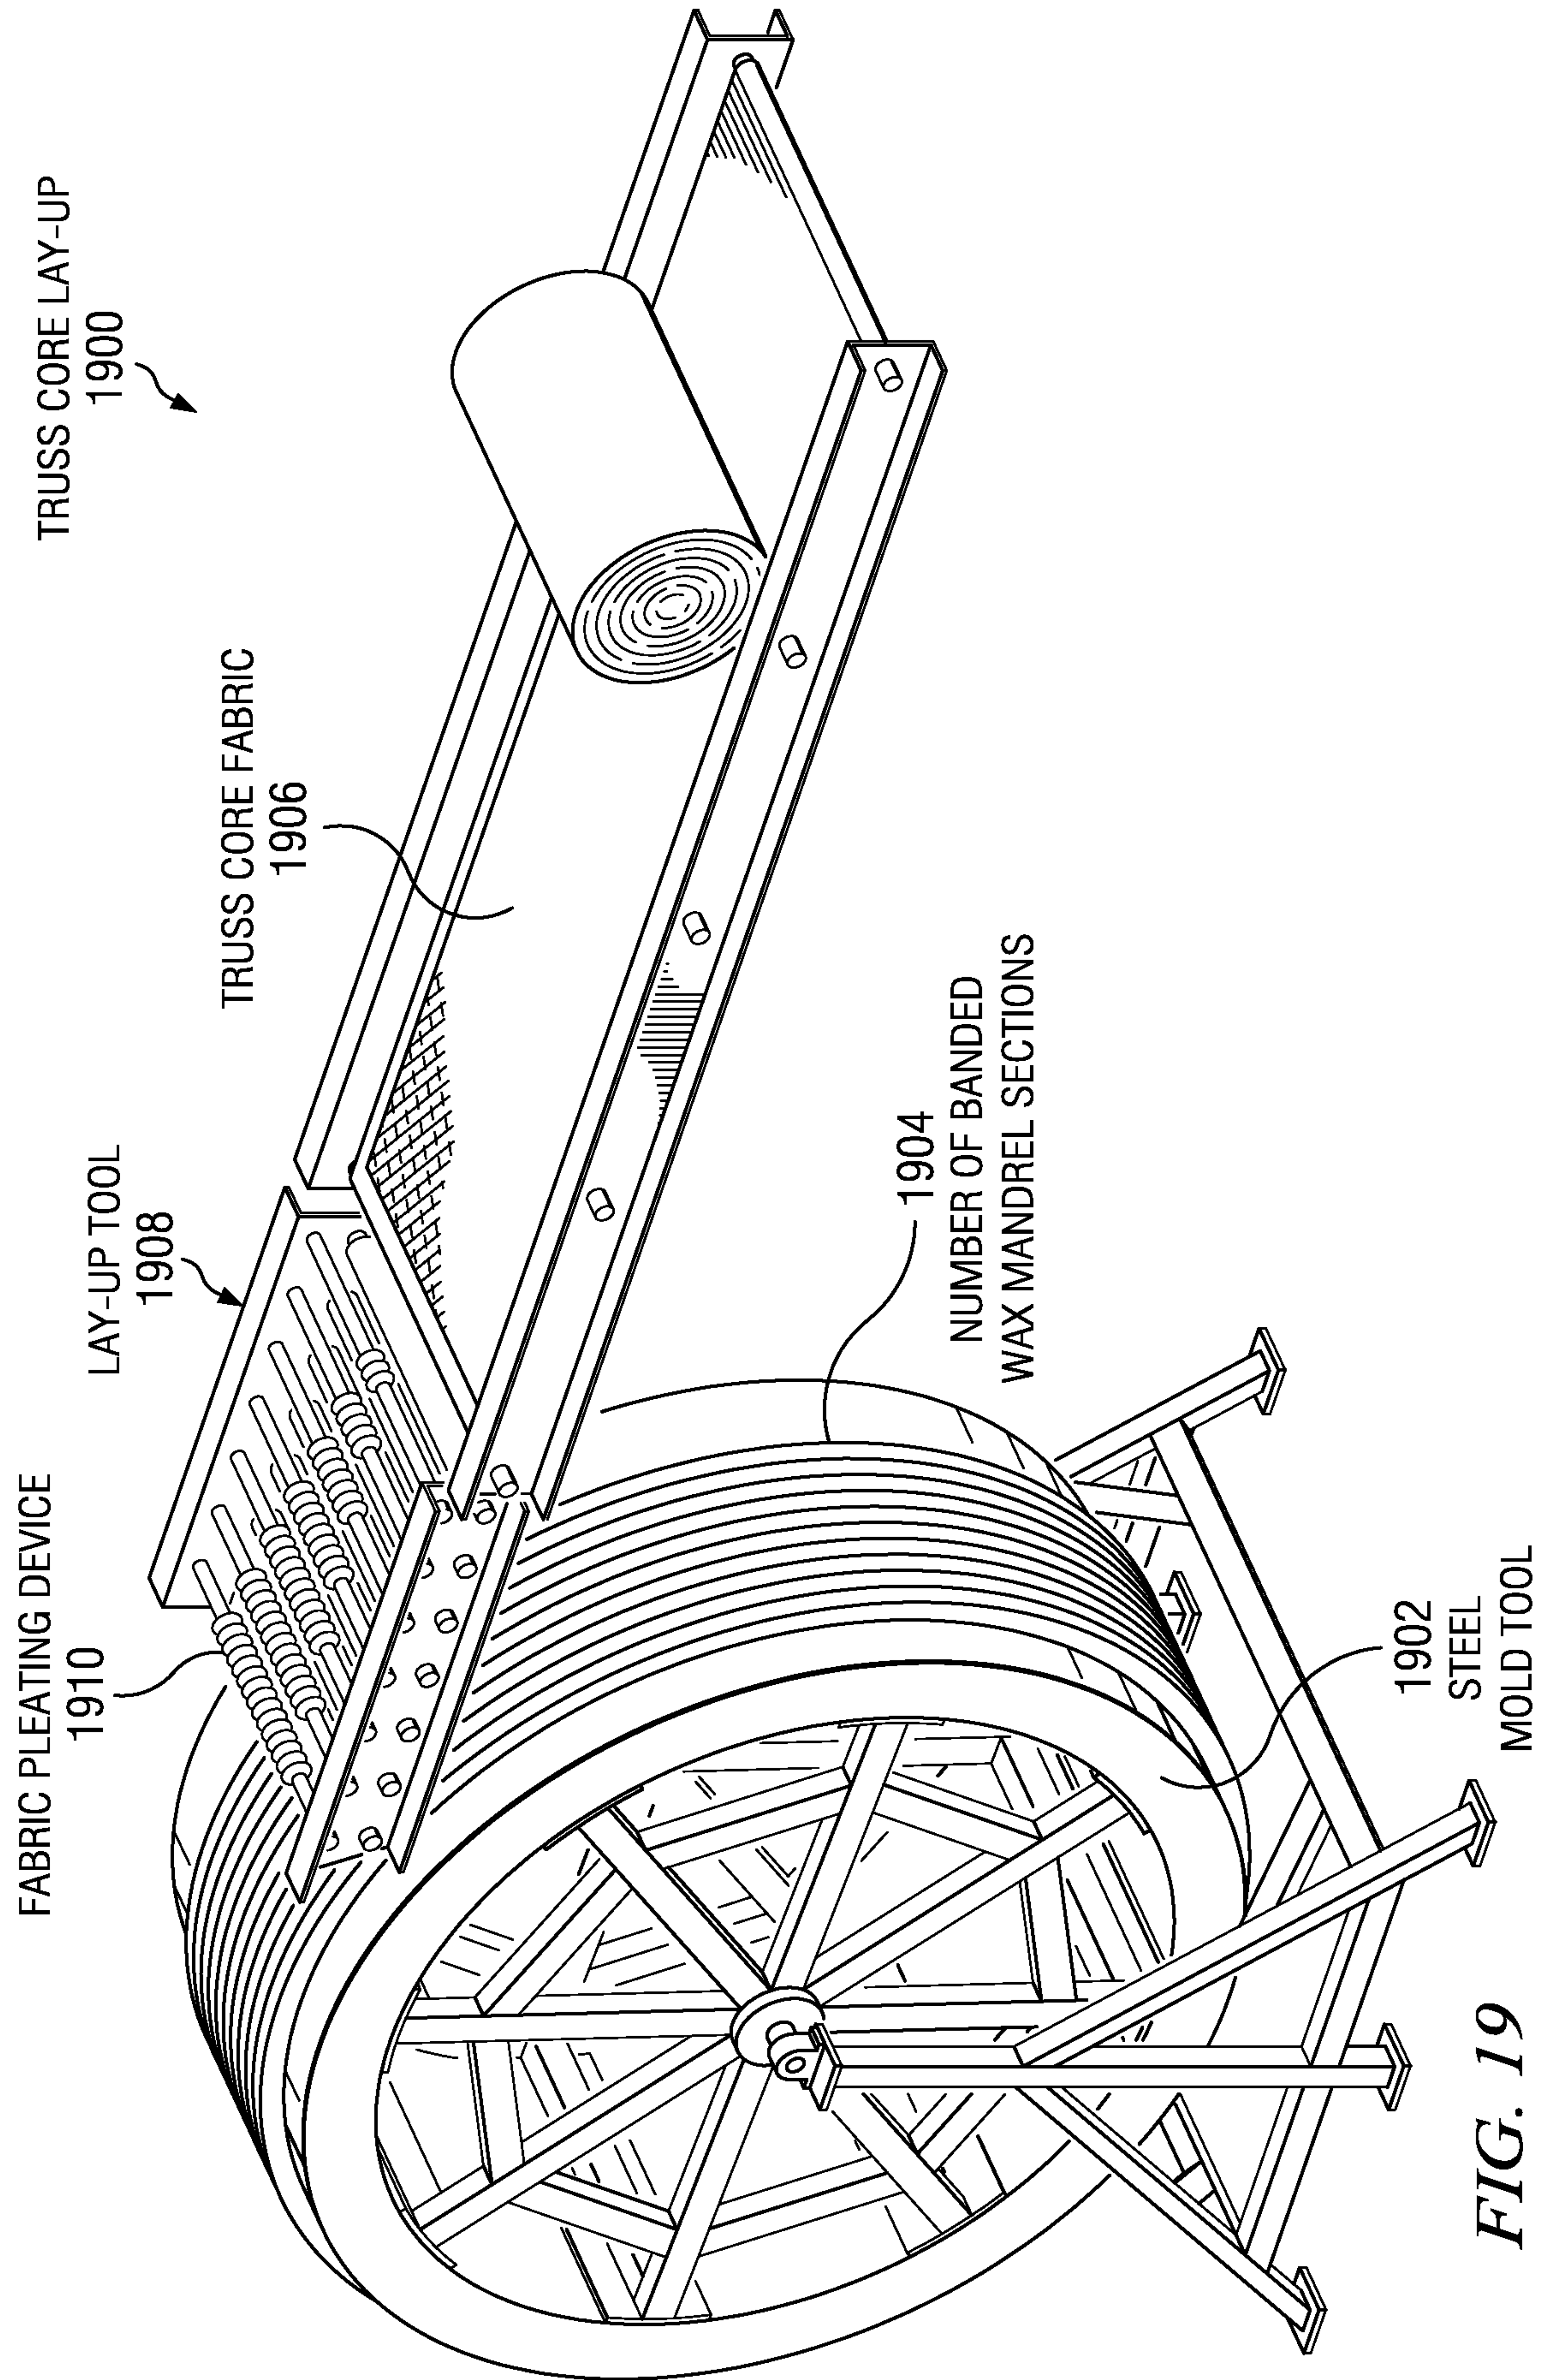
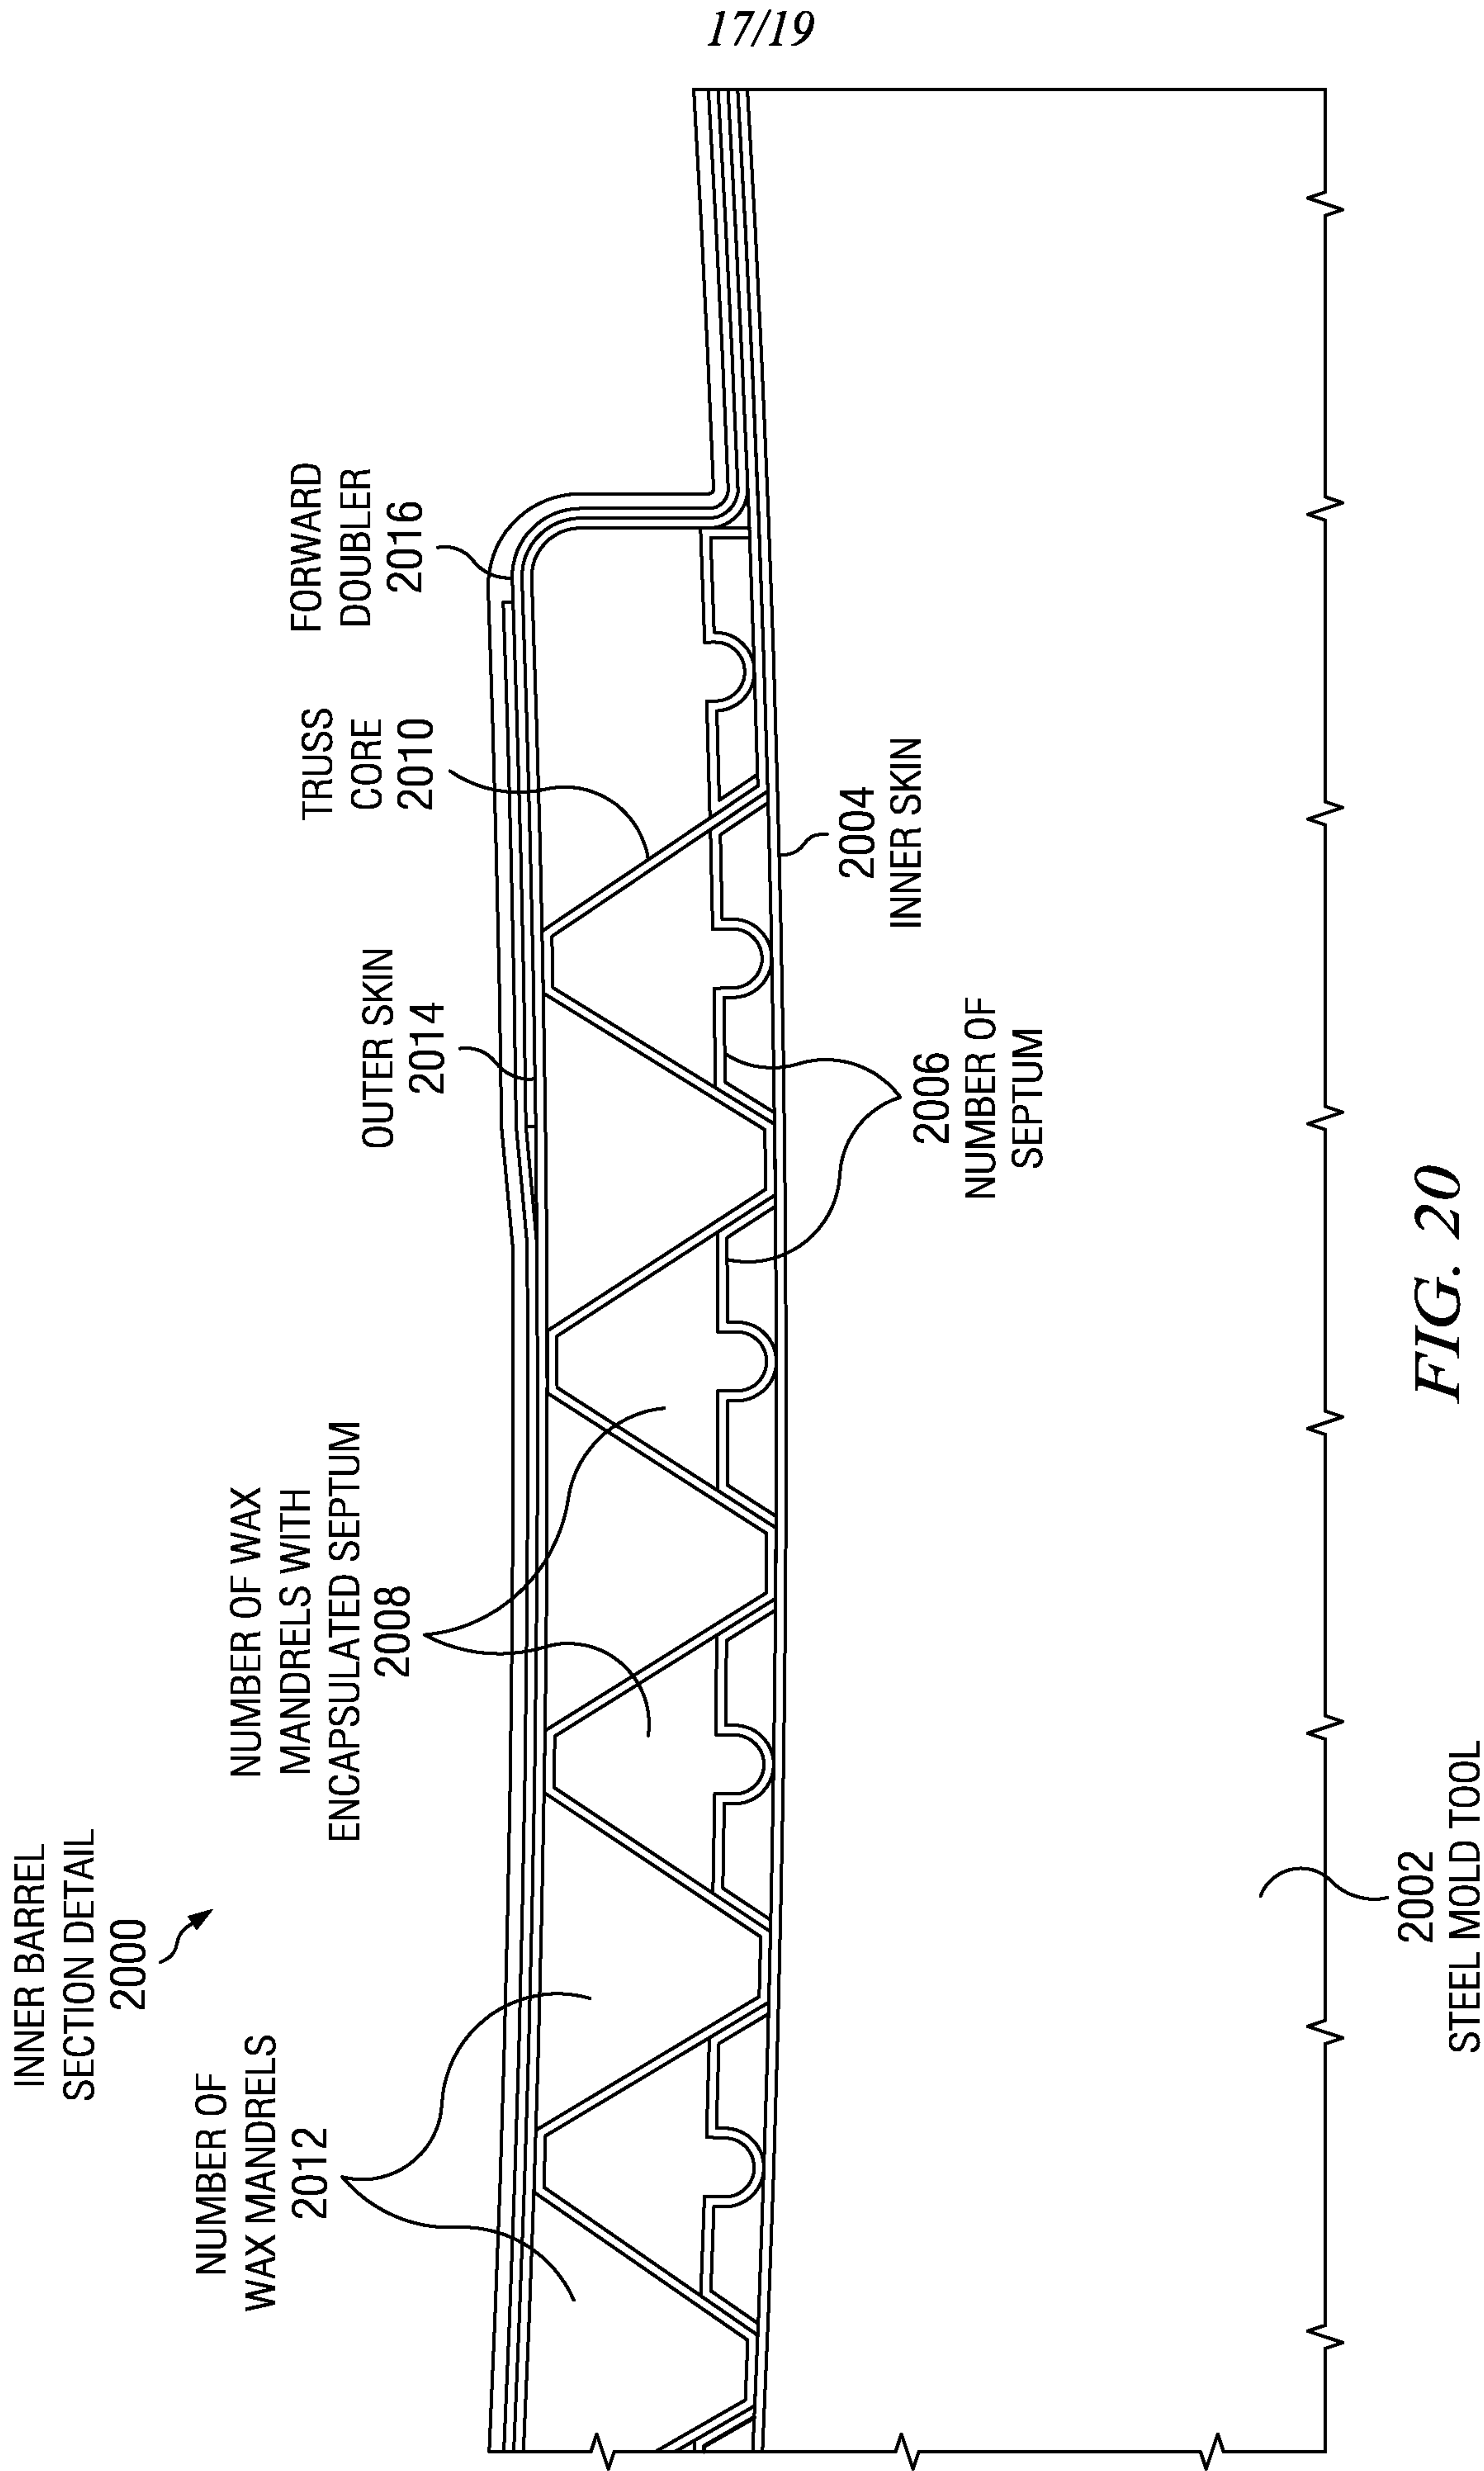
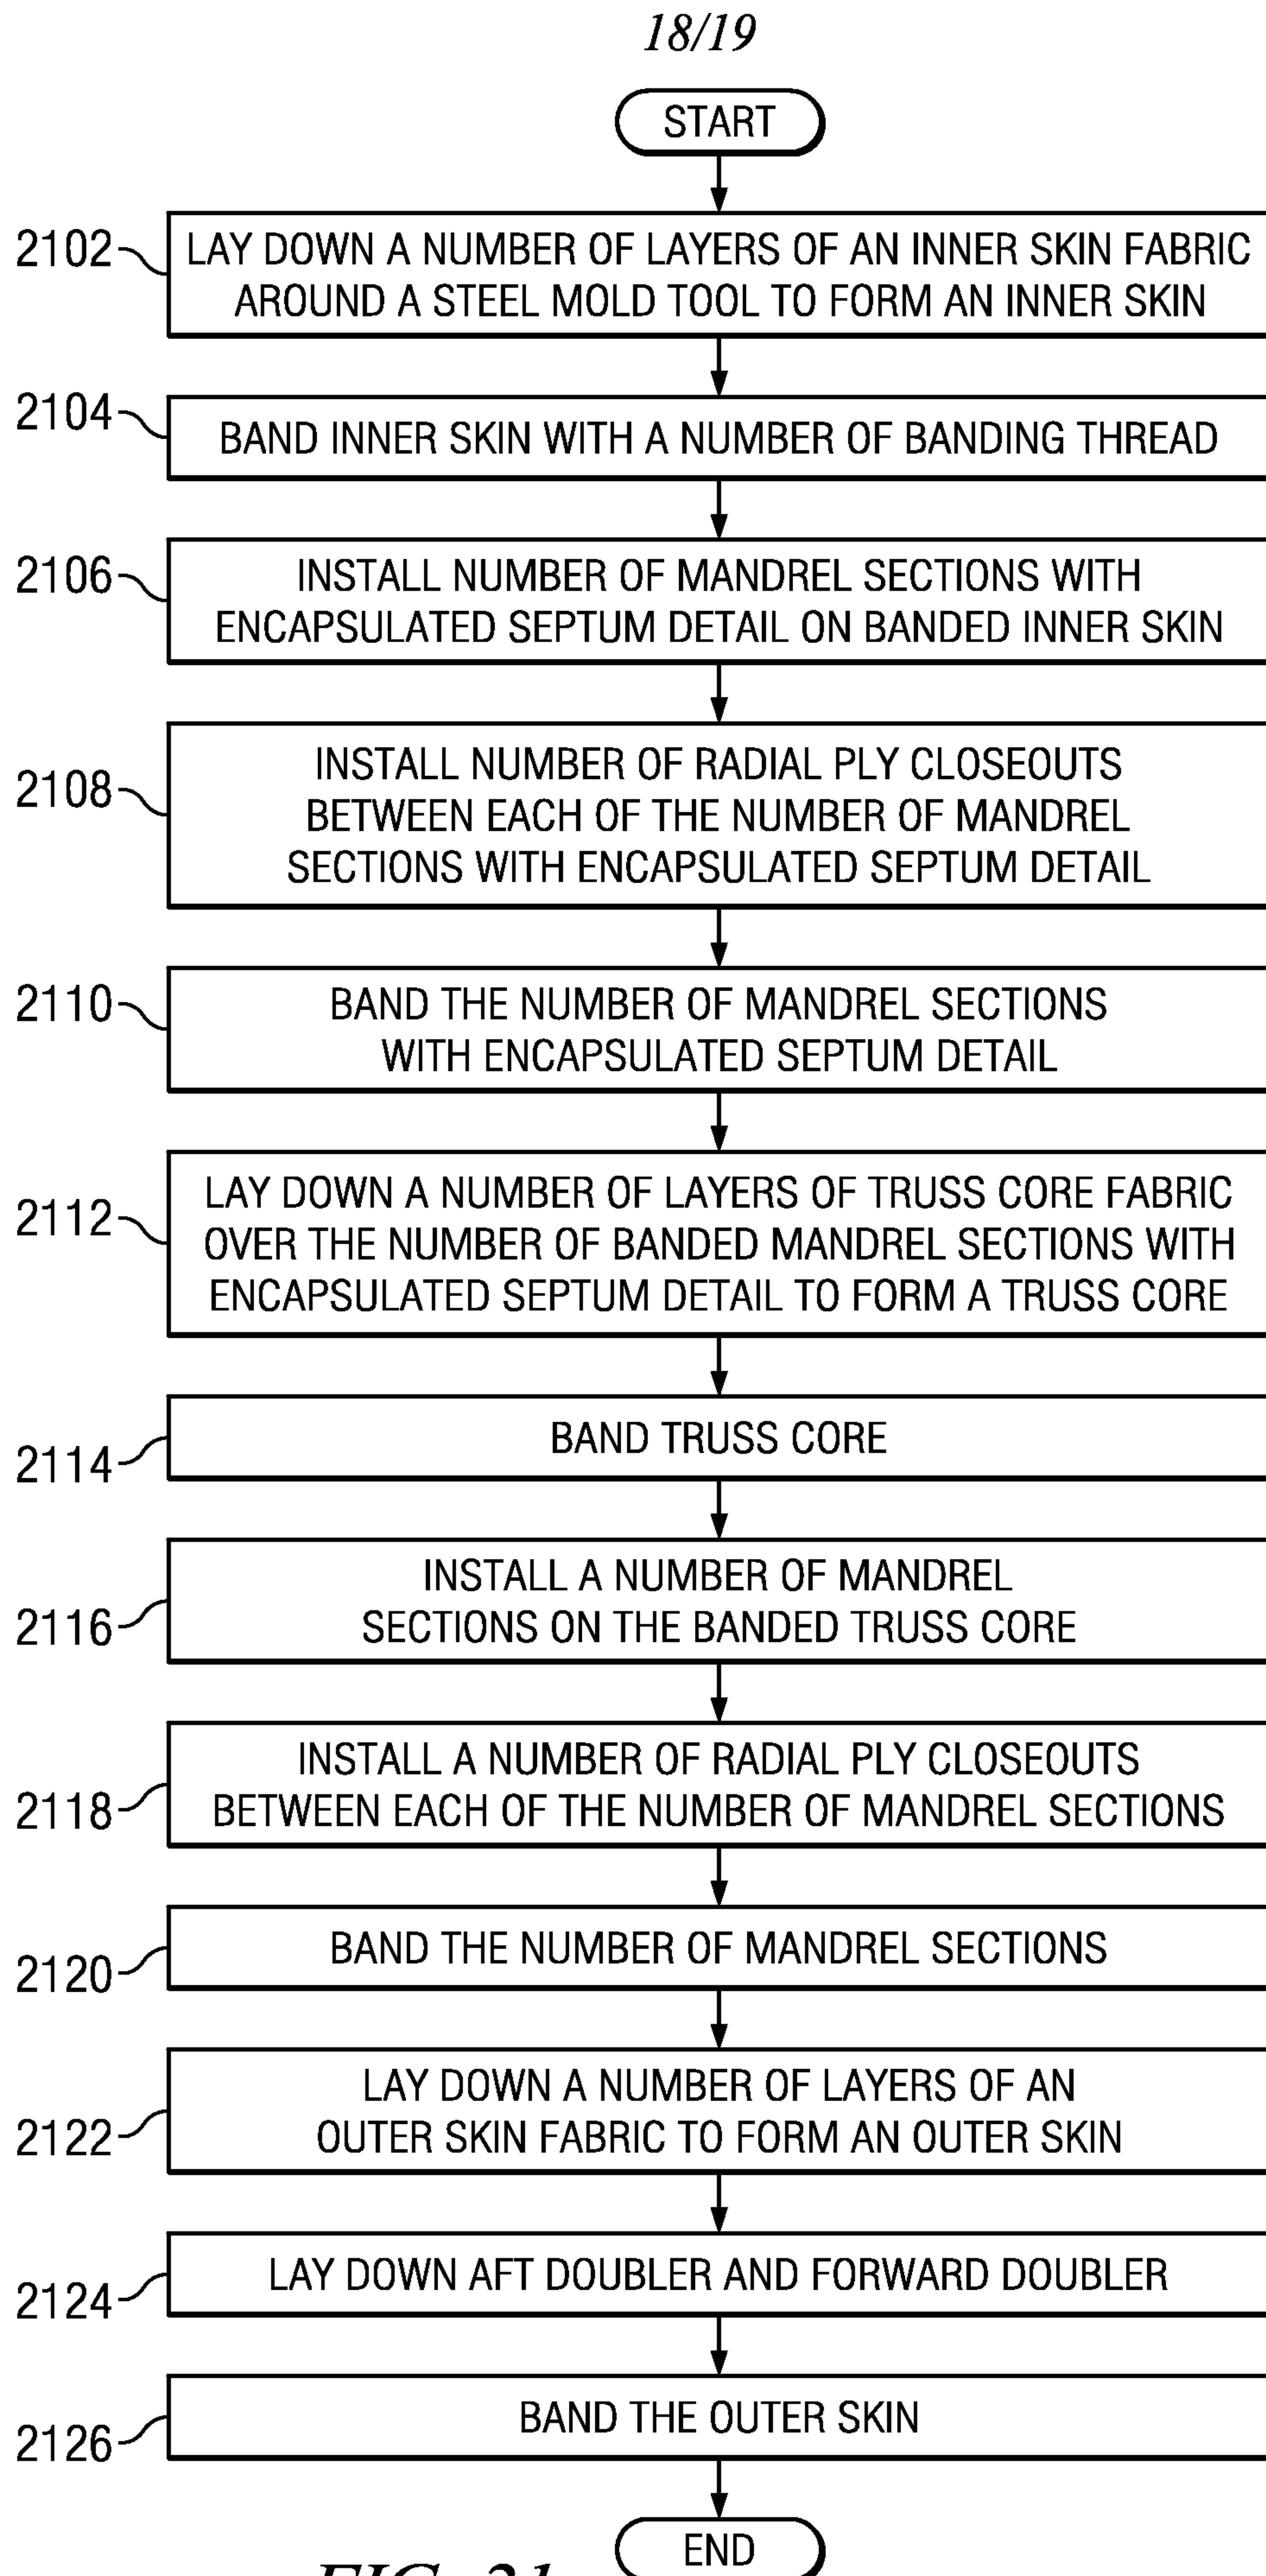


FIG. 18

16/19





*FIG. 21*

19/19

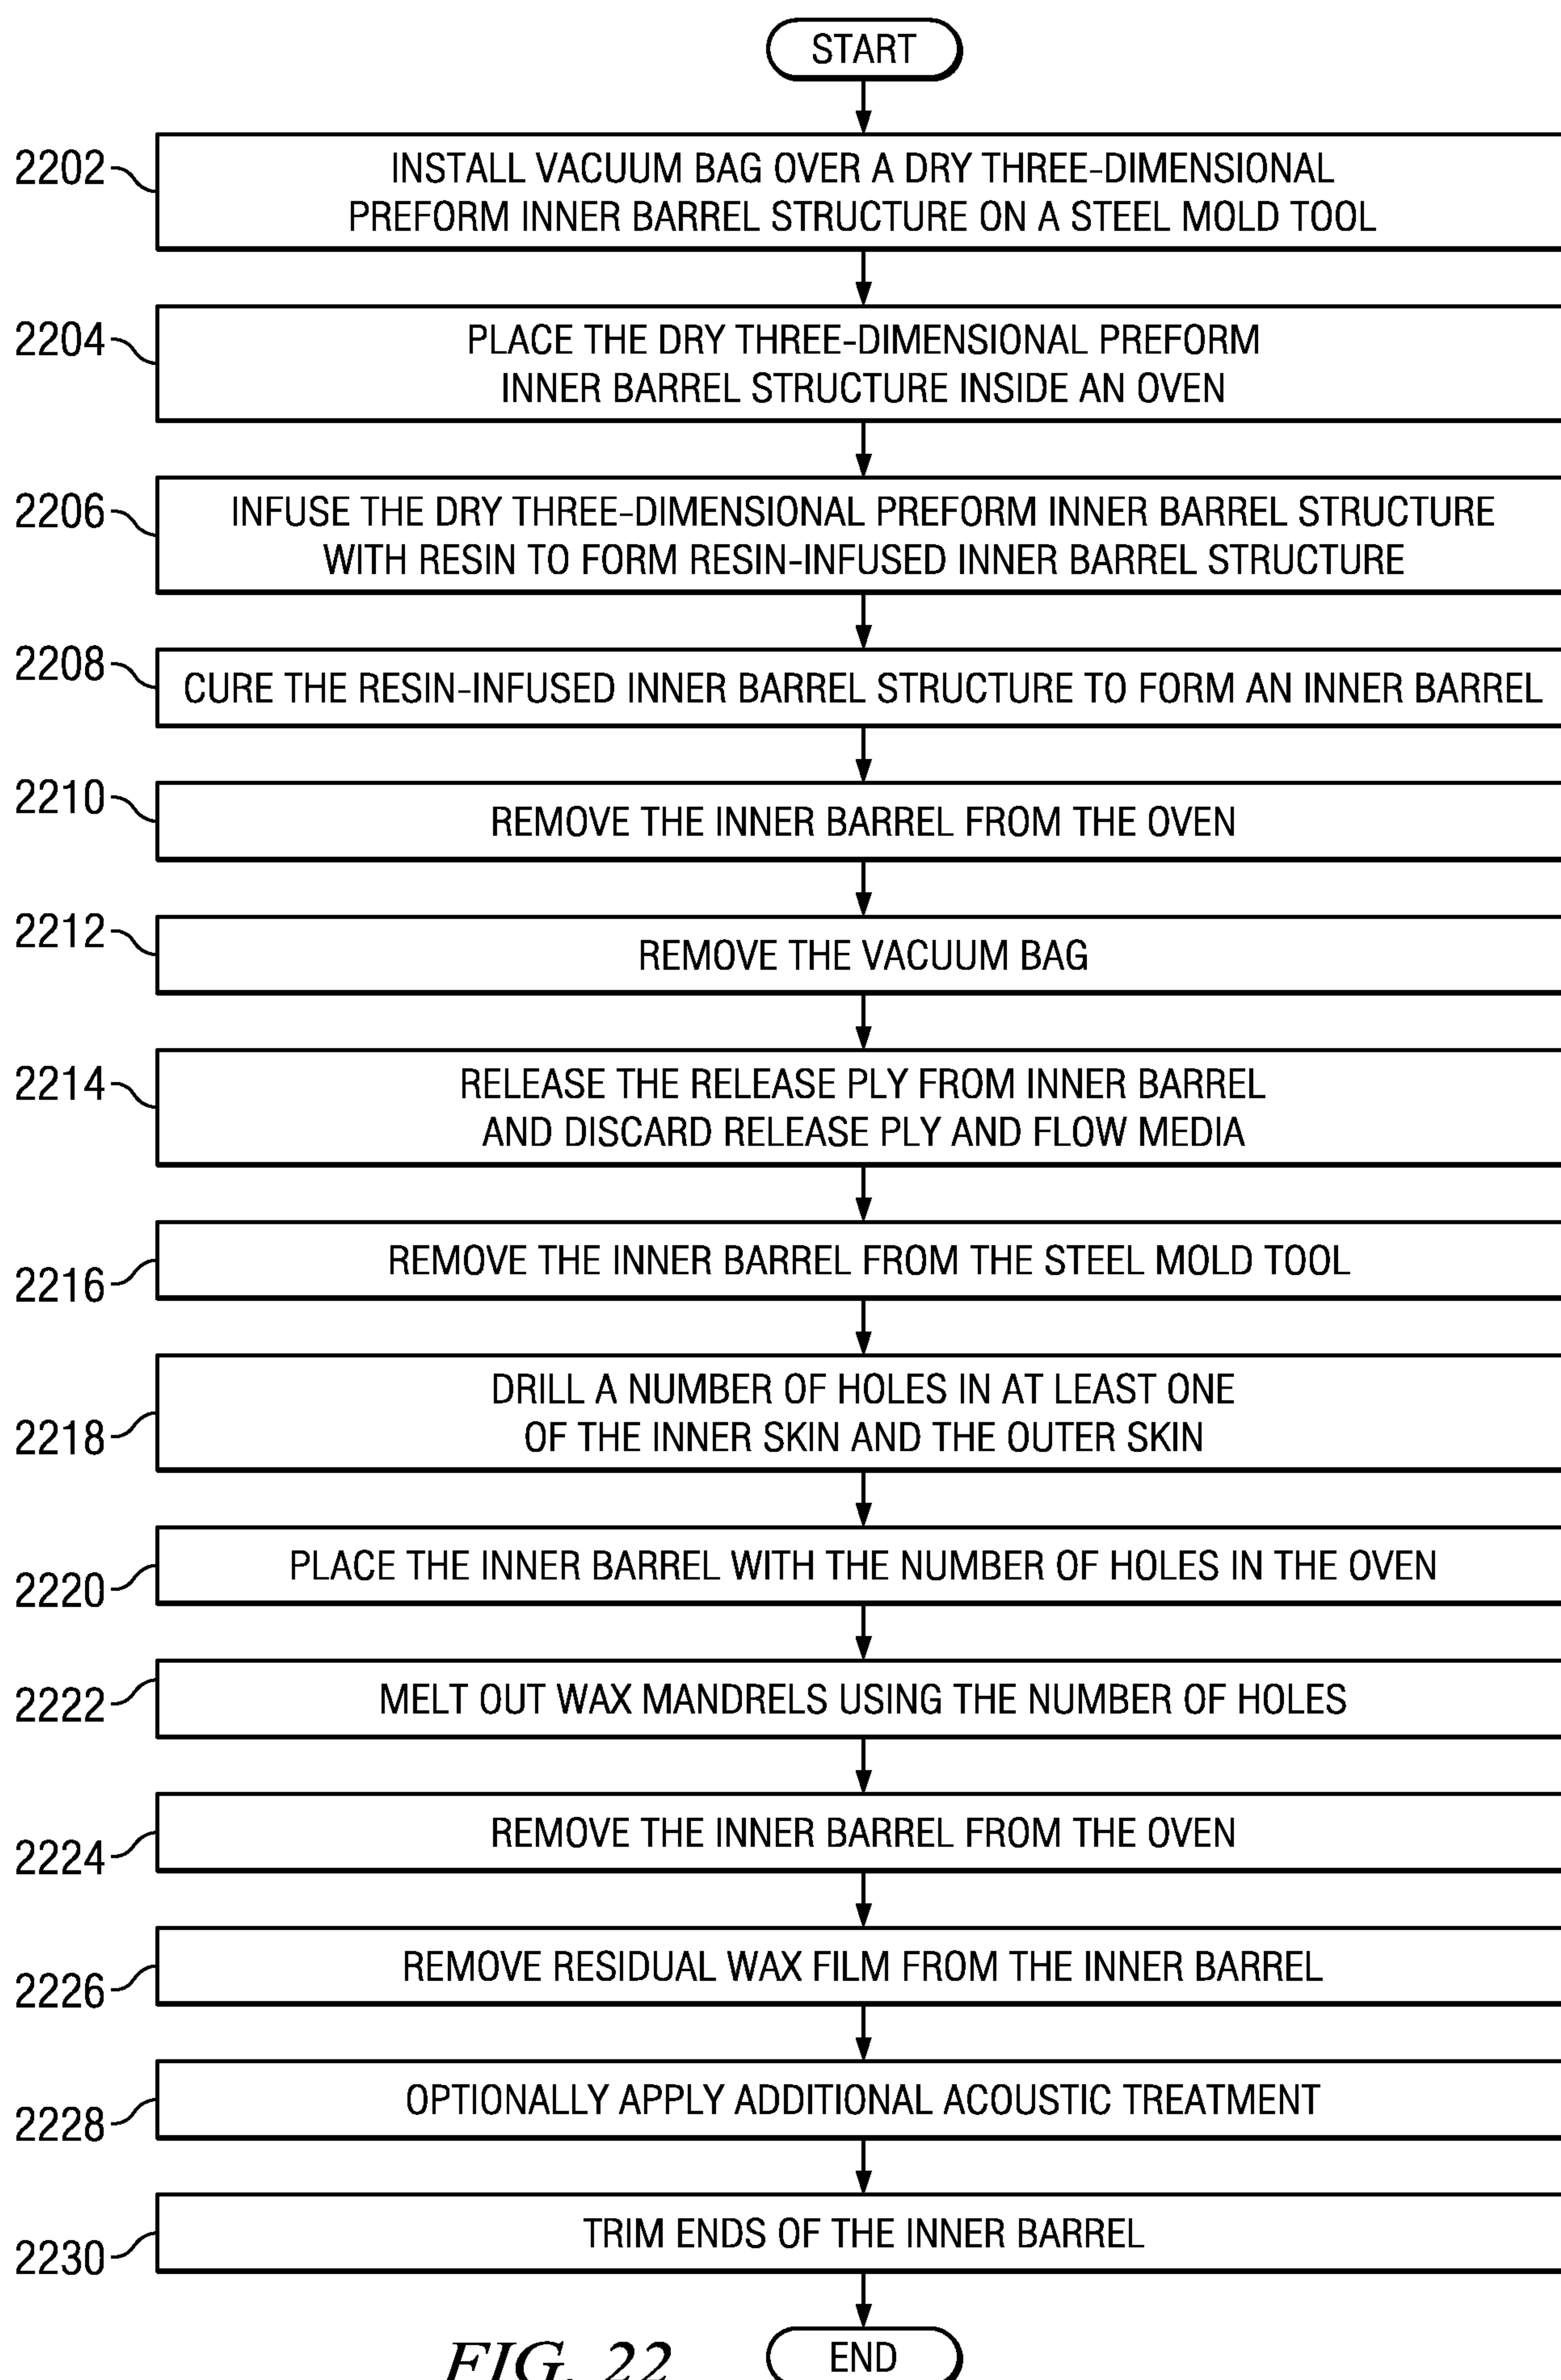


FIG. 22

INNER BARREL SECTION
700

AFT DOUBLER
712


OUTER SKIN
708

TRUSS
CORE
706

AFT
CLOSEOUT
710

FORWARD DOUBLER
714

NUMBER
OF SEPTUM
704

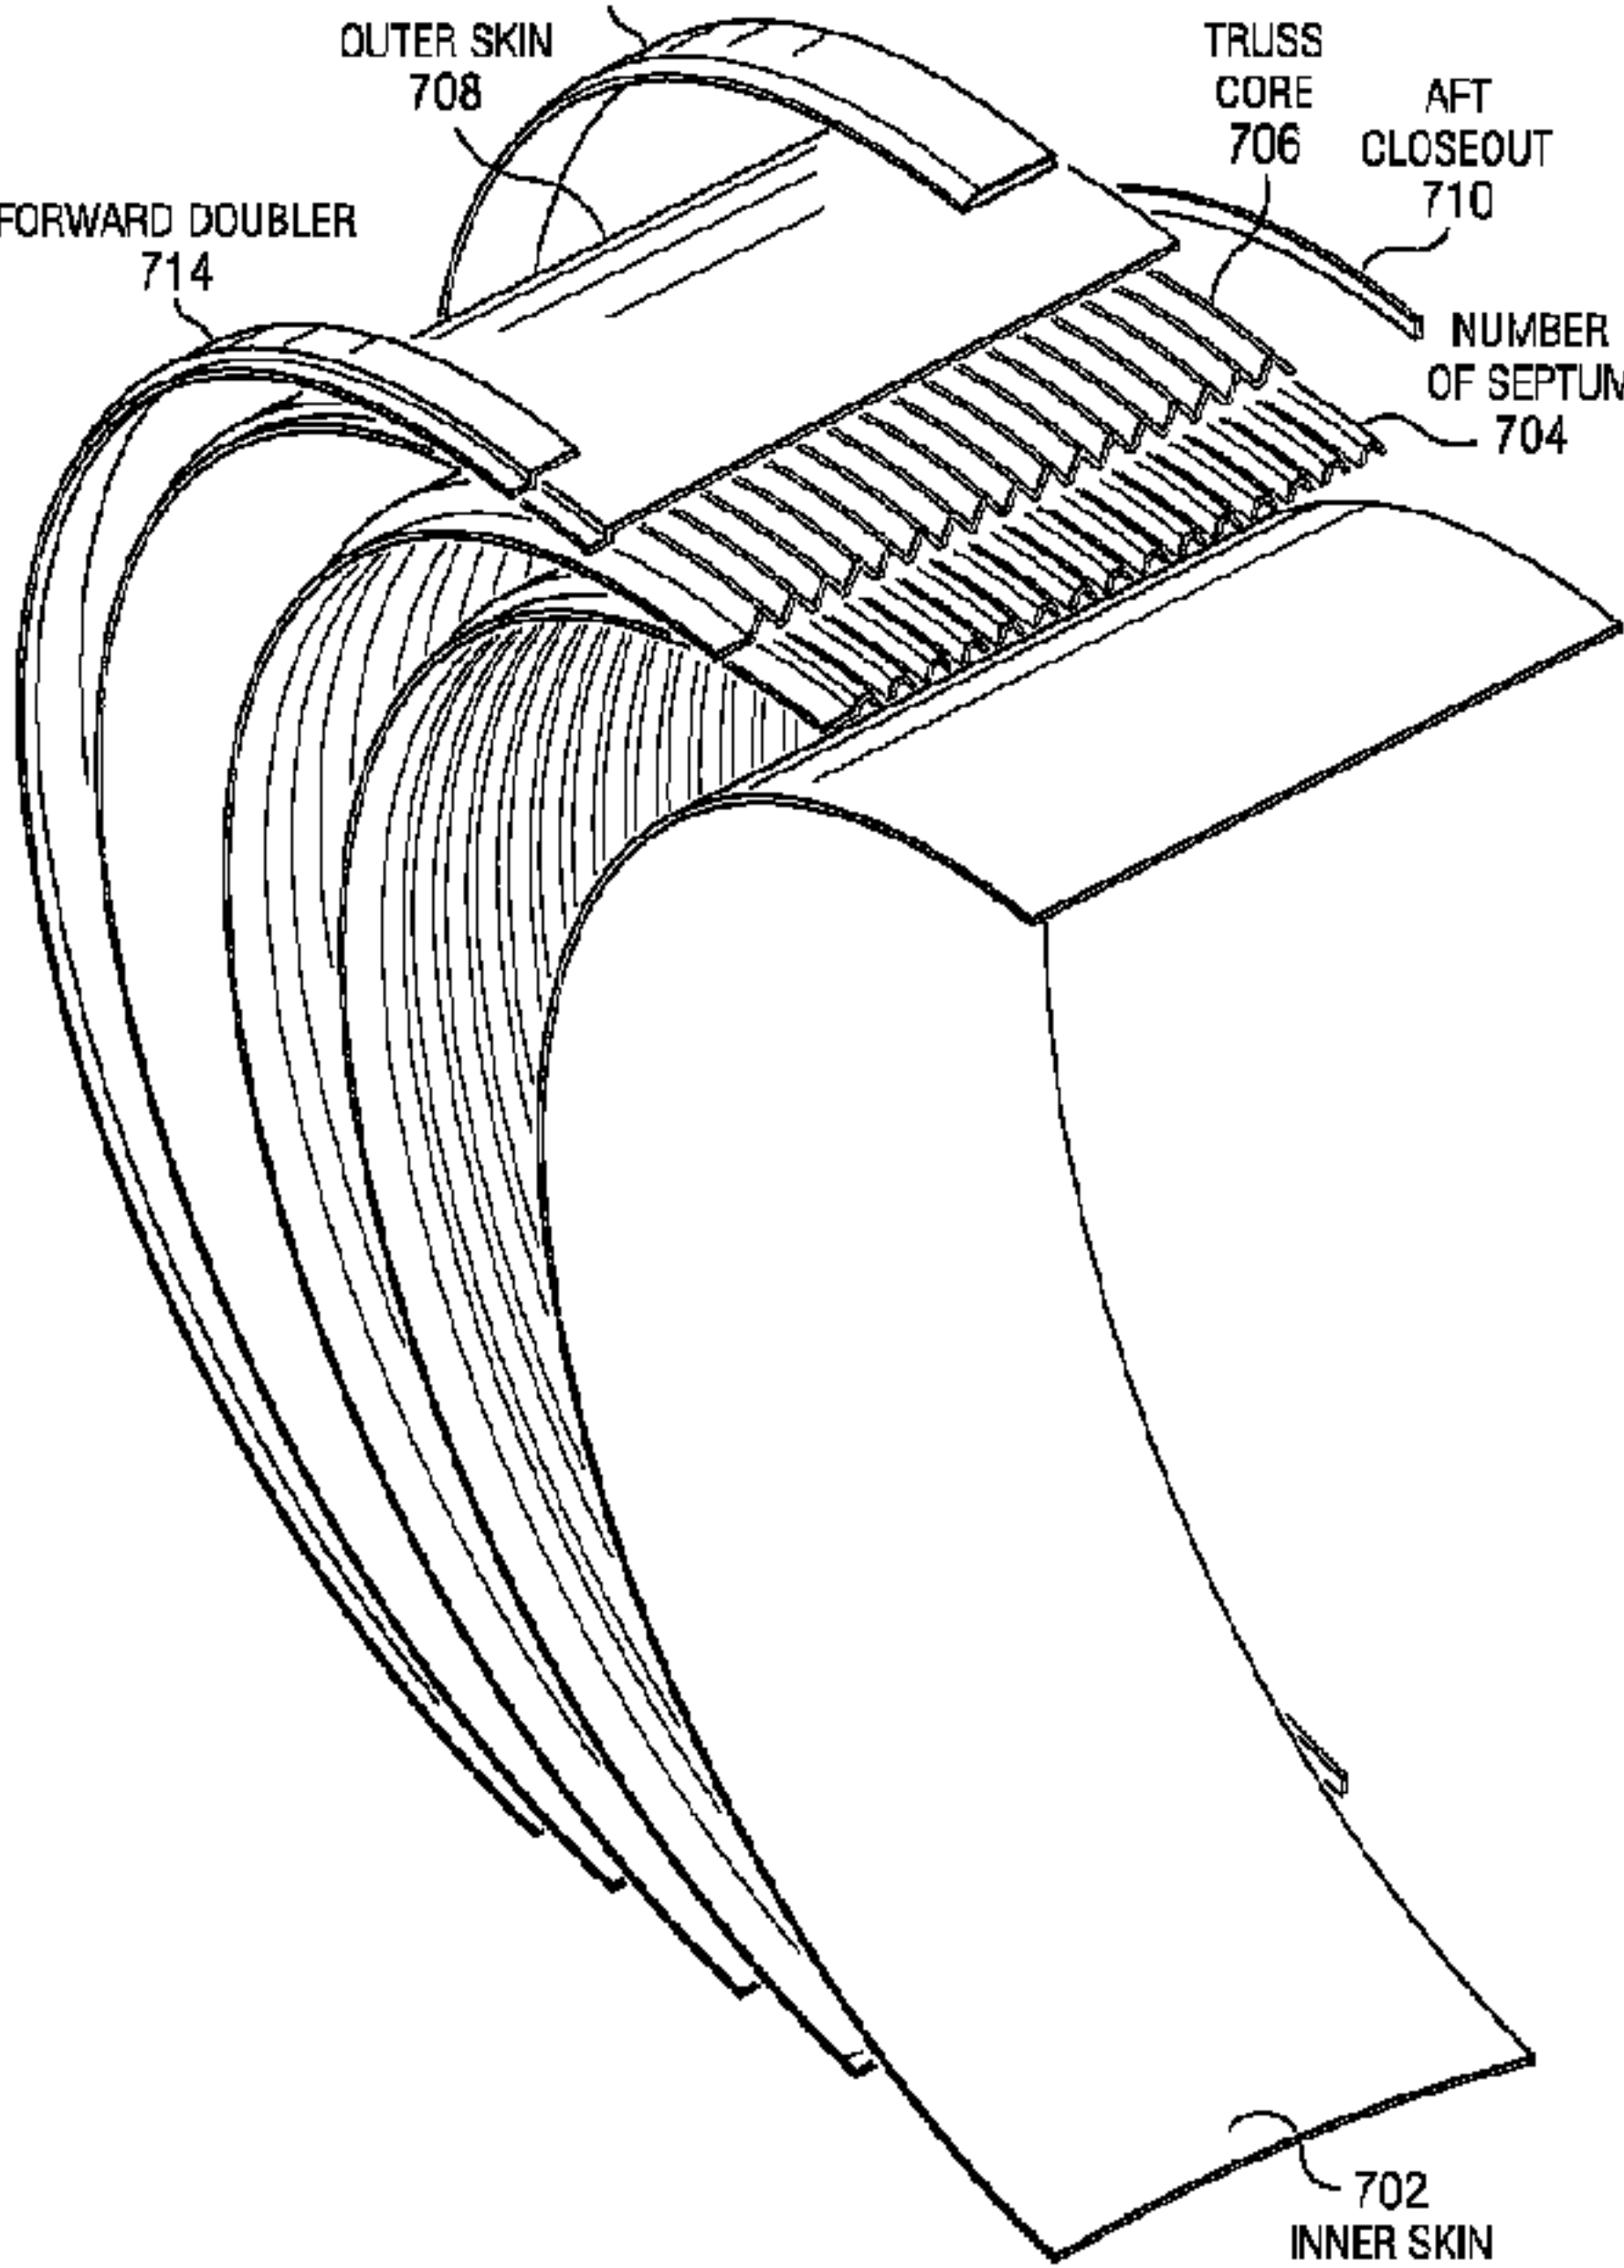

702
INNER SKIN