

(19)



(11)

EP 2 594 880 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
28.10.2020 Bulletin 2020/44

(51) Int Cl.:
F25D 27/00 (2006.01)

(21) Application number: **12007659.1**

(22) Date of filing: **12.11.2012**

(54) **Refrigerator**

Kühlschrank

Réfrigérateur

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **18.11.2011 KR 20110120776**

(43) Date of publication of application:
22.05.2013 Bulletin 2013/21

(73) Proprietor: **LG ELECTRONICS INC.
Yeongdeungpo-gu
Seoul 07336 (KR)**

(72) Inventors:
• **Seo, Woonkyu**
642-711 Gyeongsangnam (KR)
• **Kim, Seonkyu**
642-711 Gyeongsangnam (KR)

- **Yoon, Seungjin**
642-711 Gyeongsangnam (KR)
- **Hwang, Jungyeon**
642-711 Gyeongsangnam (KR)
- **Lee, Daesung**
642-711 Gyeongsangnam (KR)

(74) Representative: **Ter Meer Steinmeister & Partner
Patentanwälte mbB
Nymphenburger Straße 4
80335 München (DE)**

(56) References cited:
WO-A1-2011/105026 WO-A1-2011/108246
JP-A- 2009 299 978 JP-A- 2010 008 017
JP-A- 2011 179 780

EP 2 594 880 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND

1. Field

[0001] The invention relates to a refrigerator, and more particularly, to a refrigerator efficiently using the space of a refrigerating compartment and/or freezing compartment.

2. Background

[0002] Generally, a refrigerator stores items in a frozen or refrigerated state by lowering an internal temperature of a compartment thereof through discharge of cold air generated by a refrigeration cycle including a compressor, a condenser, an expansion valve, and an evaporator. Such a refrigerator may include a freezing compartment for storing items in a frozen state, and a refrigerating compartment for storing items at low temperature. A Kimchi refrigerator may store items such as Kimchi or vegetables in a fresh state.

[0003] A refrigerator may include a plurality of doors, at least one of the plurality of doors being connected to a refrigerator body by hinges to open or close a front side of the refrigerator body. In addition to the hinged door, the refrigerator may include a drawer type door mounted to a front wall of a drawer slidably installed in the refrigerator. Items of various sizes and shapes may be stored in the freezing and refrigerating compartments, which may include a plurality of racks to vertically partition the storage compartment to receive such items. When a freezing compartment door and/or a refrigerating compartment door is opened, a lighting device may be activated to improve visibility in the freezing compartment or refrigerating compartment. Heat generated by such a lighting device may increase an internal temperature of the refrigerator thus wasting energy.

[0004] WO 2011/108246 A1 describes a refrigerator having: a main box having an opening in the front face thereof; a semiconductor light emitting element disposed on an inner wall of the main box and emitting light to the inside of the main box; and a cover member. The cover member is provided with a transmission section disposed in such a manner that the transmission axis which is the axis perpendicular to the outer surface of the transmission section facing the inside of the main box is tilted away toward the inner side from the inner wall axis which is the axis perpendicular to the inner wall surface on which the semiconductor light emitting element is disposed.

[0005] JP 2011 179780 A describes a similar refrigerator further having a shielding member disposed at an opening section side of the refrigerator with respect to the transmitting section to hide an inner part of the cover member.

[0006] WO 2011/105026 A1 describes a refrigerator

having a light emitting unit and a cover member having a transmission portion through which light to be emitted by a semiconductor light emitting element is transmitted. The transmission portion has an incident surface portion perpendicular to the optical axis on the surface through which light enters.

[0007] JP 2010 008017 A describes a refrigerator with a lighting system having a plurality of light emitting diodes for lighting the refrigerating room.

[0008] JP 2009 299978 A describes a refrigerator having a lighting device by a plurality of light emitting diodes disposed on an inner wall in the refrigerating compartment.

3. Invention

[0009] The invention is indicated in the independent claim. Further embodiments are indicated in the dependent claims. The refrigerator of the invention necessarily comprises all the features mentioned in claim 1. Any statement, in the following description, suggesting that a feature mentioned in claim 1 is optional, should be ignored. In the following description, "embodiments" will be described. In case these embodiments are not in accordance with claim 1, they do not fall within the scope of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The embodiments will be described in detail with reference to the following drawings in which like reference numerals refer to like elements wherein:

FIG. 1 is a front view of a refrigerator according to an exemplary embodiment as broadly described herein;

FIG. 2 is a front view of the refrigerator shown in FIG. 1 with its doors open;

FIG. 3 is a perspective view of a light source installed in a refrigerator, according to an embodiment as broadly described herein;

FIG. 4 is an enlarged view of the light source shown in FIG. 3;

FIG. 5 is a sectional view of the light source shown in FIG. 4; and

FIG. 6 is a perspective view of a light source installed in a refrigerator, according to another embodiment as broadly described herein.

DETAILED DESCRIPTION

[0011] Reference will now be made in detail to various embodiments, examples of which are illustrated in the accompanying drawings.

[0012] In accordance with the refrigerator illustrated in the embodiment shown in FIG. 1 and 2, the refrigerator, which is designated by reference numeral "10", is applicable not only to a top mount type refrigerator in which

the inner space of the refrigerator is vertically partitioned to define a freezing compartment and a refrigerating compartment such that the freezing compartment is arranged above the refrigerating compartment, but also to a side-by-side type refrigerator in which the inner space of the refrigerator is laterally partitioned to define a freezing compartment and a refrigerating compartment such that the freezing compartment and refrigerating compartment are laterally arranged. Simply for ease of discussion and illustration, exemplary embodiments will be described in conjunction with a bottom freezer type refrigerator. That is, the inner space of the exemplary refrigerator 10 is vertically partitioned by a barrier 16 to define a freezing compartment 32 positioned below the refrigerating compartment 22.

[0013] Generally, the freezing compartment 32 may be maintained at a sub-zero temperature, and the refrigerating compartment 22 may be maintained at a temperature relatively higher than that of the freezing compartment 32.

[0014] The refrigerator 10 may include a body which defines an outer appearance of the refrigerator 10 while also protecting mechanical devices received therein. The body of the refrigerator 10 may include an outer case 12 which defines an outer appearance of the refrigerator 10, and an inner case 14 which defines storage compartments therein, namely, the freezing compartment 32 and the refrigerating compartment 22. A certain space may be defined between the outer case 12 and the inner case 14. A passage for circulation of cold air may be formed in the space.

[0015] A machinery chamber may be formed in the space between the outer case 12 and the inner case 14 to accommodate a refrigerant cycle device for generating cold air through circulation of a refrigerant. Using the refrigerant cycle device, the interior of the refrigerator 10 may be maintained at low temperature to maintain a desired freshness level of items stored in the refrigerator 10. The refrigerant cycle device may include, for example, a compressor for compressing a refrigerant, and an evaporator for changing the phase of the refrigerant from liquid to gas, to cause the refrigerant to exchange heat with the outside of the refrigerant cycle device.

[0016] The refrigerator 10 may include a freezing compartment door 30 for opening or closing the freezing compartment 32, and a refrigerating compartment door 20 for opening or closing the refrigerating compartment 22. Each of the freezing compartment door 30 and refrigerating compartment door 20 may be pivotally mounted to the body of the refrigerator 10 at one end thereof by hinges. Each of the freezing compartment door 30 and refrigerating compartment door 20 may include a plurality of doors. That is, as shown in FIG. 2, each of the freezing compartment door 30 and refrigerating compartment door 20 may be configured such that it opens forward while being pivotally moved about opposite lateral edges of the refrigerator 10.

[0017] The barrier 16 may be positioned horizontally

between the freezing compartment 32 and the refrigerating compartment 22, to partition the freezing compartment 32 and refrigerating compartment 22. The barrier 16 may be formed at the inner case 14 such that it has a certain thickness. The barrier 16 may extend horizontally to vertically partition the freezing compartment 32 and refrigerating compartment 22 such that the freezing compartment 32 and refrigerating compartment 22 are disposed below and above the barrier 16, respectively.

[0018] A partition wall 18 may be positioned in the freezing compartment 32, for example at a central portion thereof, to partition the freezing compartment 32 into two separate spaces. The partition wall 18 may be vertically installed at the inner case 14 such that the freezing compartment 32 is divided into two laterally arranged compartments. In this case, the freezing compartment door 30 may include two doors for opening or closing respective freezing compartments 32.

[0019] In the embodiment shown in FIGs. 1 and 2, there is no partition wall installed in the refrigerating compartment 22 to laterally partition the refrigerating compartment 22. However, a partition wall may be installed in the refrigerating compartment 22, as in the freezing compartment 32.

[0020] Racks, drawers, baskets, and the like may be disposed in each of the freezing compartment 32 and refrigerating compartment 22, to store various items.

[0021] A drawer 40 may be mounted in the freezing compartment and slidably extracted or retracted. Food and other such items may be stored in the drawer 40. A vertically-extending cover may be mounted to a front wall of the drawer 40 to preserve cold air in the freezing compartment 32 even when the freezing compartment door 30 is opened.

[0022] A plurality of drawers 40 may be provided in the freezing compartment 32. In this case, the drawers 40 may be arranged at opposite sides of the partition wall 18, and stacked vertically.

[0023] A light source 150 may be installed in the freezing compartment 32 and/or refrigerating compartment 22. The light source 150 may operate when the freezing compartment door 30 or refrigerating compartment door 20 is opened. The light source 150 may emit light toward the interior of the freezing compartment 32 and/or refrigerating compartment 22 to improve visibility therein.

[0024] As shown in FIG. 3, the refrigerator shown in FIGs. 1 and 2 includes a recess 130 formed in the inner case 14, the recess 130 having a predetermined depth, with the light source 150 received in the recess 130 and a cover 140 extending across the recess 130.

[0025] In certain embodiments, the light source 150 may be a light emitting diode (LED).

[0026] An LED is a semiconductor device in which light is emitted when current flows through a compound such as gallium arsenide. Such an LED may have a structure in which, when current passes through a conductive material layer between electrodes attached to upper and lower surfaces of the conductive material layer, electrons

and holes called "positively-charged particles" are coupled between the electrodes, thereby emitting photons of light. In accordance with the characteristics of the conductive material, light emitted from the conductive material may exhibit various colors such as, for example, yellow, green, blue, and white. For purpose of discussion, a white LED will be applied to the light source as embodied and broadly described herein.

[0027] Such an LED may efficiently and effectively convert electricity into light, when compared to other light emitting devices such as a tungsten bulb or a neon lamp. Since the LED may generate significantly less heat, and may be significantly smaller and lighter, the LED may provide a longer lifespan. In addition, the time taken from initiation of current flow to emission of light may be relatively short, thus providing improved response characteristics.

[0028] Accordingly, when an LED is used as the light source 150 in the freezing compartment 32 and/or refrigerating compartment 22, items stored in the refrigerator may be more rapidly identified due to the reduced amount of time taken for the LED to emit light.

[0029] Also, since such an LED light source 150 does not emit any appreciable amount of heat, especially when compared to other light sources, the temperature of the freezing compartment 32 and/or refrigerating compartment 22 is not affected, i.e., increased, due to heat generated by the light source 150, thus reducing energy required to drive a refrigeration cycle device and maintain a desired temperature in the compartments 32/22.

[0030] In particular, as discussed above, the light source 150 may direct emitted light toward a rear portion of the inner case 14. In the view provided in FIG. 2, the rear side of the inner case 14 corresponds to an interior of the refrigerator 10, and the front side of the inner case 14 corresponds to a user access side of the refrigerator 10. Hereinafter, for ease of description and clarity, the following description will be provided on the assumption that the rear side of the inner case 14 corresponds to an inward direction of the freezing compartment 32 or refrigerating compartment 22, whereas the front side of the inner case 14 corresponds to an outward direction of the freezing compartment 32 or refrigerating compartment 22.

[0031] To access the interior of the refrigerator, the user first opens the freezing compartment door 30 or the refrigerating compartment door 20, and may then access the freezing compartment 32 or refrigerating compartment 22. At this time, the user is positioned at the front side of the freezing compartment 32 or refrigerating compartment 22, and visually opposite to the irradiation direction of light emitted from the light source 150. Accordingly, light emitted from the light source 150 does not shine in the eyes of the user.

[0032] An LED used in accordance with such an embodiment may emit light exhibiting relatively high linearity and relatively high intensity of illumination. For this reason, when light from the LED is directed toward the user,

the user may become uncomfortable. In order to avoid such a situation, in accordance with the invention, the light source 150 is installed such that light emitted by the light source 150 is directed to the rear side of the inner case 14. In particular, the light source 150 may be directed toward a rear wall of the inner case 14.

[0033] The light source 150 is received in the recess 130 such that it does not protrude outward from the inner case 14. As shown in FIG. 3, a plurality of racks may be installed around a region where the light source 150 is installed. The racks may be installed in the refrigerating compartment 22 or freezing compartment 33 at various levels as appropriate. In this regard, the light source 150, which may be disposed adjacent to the racks, may be installed such that it does not protrude outward from the inner case 14. To this end, in accordance with an embodiment as broadly described herein, the light source 150 may be installed at one or more lateral sides of the inner case 14, received in the recess 130, so that it does not interfere with extraction or retraction of the racks.

[0034] The light source 150 may include a plurality of aligned LEDs. In certain embodiments, the recess 130 and light source 150 may be installed in a vertically elongated manner. Thus, it may be possible to uniformly irradiate light into the interior of the inner case 14. Since light emitted from an LED generally exhibits high linearity, as compared to other light sources, such a plurality of LEDs may be arranged at regular intervals in order to irradiate light throughout the interior of the refrigerating compartment 22 or the freezing compartment 32.

[0035] FIG. 4 is an enlarged detail view of the light source installation shown in FIG. 3, and FIG. 5 is a sectional view of a portion of FIG. 4.

[0036] As shown in FIGs. 4 and 5, the recess 130 includes a first inclined surface 132 directed to the front side of the freezing compartment 32 or refrigerating compartment 22, and a second inclined surface 134 directed to the rear side of the freezing compartment 32 or refrigerating compartment 22. The first inclined surface 132 and second inclined surface 134 may be arranged such that they contact each other at confronting ends thereof in the form of a "V" shape while defining an obtuse angle therebetween. In certain embodiments, the first inclined surface 132 and second inclined surface 134 may be arranged such that they contact each other at confronting ends thereof while defining a right angle or an acute angle therebetween. However, for ease of description, the following description will be provided only in conjunction with arrangement shown in FIGs. 4 and 5.

[0037] As discussed above, the first inclined surface 132 and second inclined surface 134 are directed to the front side and the rear side, respectively, of the freezing compartment 32 or refrigerating compartment 22, indicating that a normal direction of the first inclined surface 132 is directed to the front side and the normal direction of the second inclined surface 132 is directed to the rear side of the freezing compartment 32 or refrigerating compartment 22 as appropriate.

[0038] The recess 130 may also include extension surfaces 136 each forming a side surface connecting the first and second inclined surfaces 132 and 134. Two extension surfaces 136 may be formed at opposite ends of the first inclined surface 132, respectively, to connect the first and second inclined surfaces 132 and 134. A shape of each extension surface 136 may be defined by the end edges of the first and second inclined surfaces 132 and 134. Thus, the extension surface 136 may have a substantially triangular shape. In certain embodiments, the extension surface 136 may be provided as a reflective member capable of reflecting light so as to enhance the efficiency of light emitted from the light source 150.

[0039] The cover 140 may be provided in the recess 130 surrounding the light source 150 to seal the space where the light source 150 is installed, and to prevent the light source 150 from being directly exposed to the freezing compartment 32 or refrigerating compartment 22. When the light source 150 is exposed to the freezing compartment 32 or refrigerating compartment 22, heat generated by the light source 150 may be transmitted to the freezing compartment 32 or refrigerating compartment 22 through direct heat exchange, increasing the internal temperature of the freezing compartment 32 or refrigerating compartment 22. In order to avoid such direct heat exchange, the cover 140 may have a predetermined thickness or greater.

[0040] The cover 140 includes an inclined piece 142 directed to the rear side of the inner case 14 and contacting the first inclined surface 132. Since the inclined piece 142 is directed to the rear side of the inner case 14, light emitted by the light source 150 may be directed to the rear side of the inner case 14, namely, the inside of the freezing compartment 32 or refrigerating compartment 22, through the inclined piece 142.

[0041] The inclined piece 142 is made of a transparent material so that light emitted from the light source 150 may be directed to the rear side of the inner case 14 after passing through the inclined piece 142.

[0042] Irregularities may be formed at the inclined piece 142 to scatter light emitted by the light source 150. Such irregularities may form a diffusion pattern 142a that scatters the light from the light source 150 in various directions within a range in which the light is directed to the rear side of the inner case 14. Since the LED used as the light source 150 may exhibit high linearity, light emitted by the light source 150 may be directed only to the rear side of the inner case 14 unless the light is scattered by these irregularities forming such a diffusion pattern 142a. If not scattered in this manner, any regions to which light from the light source 150 is not directly irradiated may exhibit relatively low intensity of illumination.

[0043] To this end, as shown in FIG. 5, irregularities may be provided on the inclined piece 142 to scatter light emitted by the light source 150 such that it is irradiated to region(s) to which light would not otherwise be directly irradiated.

[0044] The cover 140 also includes an extension piece

144 extending substantially in parallel to the inner case 14. In this case, it may be possible to prevent light emitted by the light source 150 from being irradiated toward the front side of the inner case 14 through the extension piece 144.

[0045] In certain embodiments, which are not in accordance with the present invention, the extension piece 144 may instead be installed such that it is inclined by a predetermined angle with regard to the surface of the inner case 14. If the extension piece 144 is inclined by such a predetermined angle, the extension piece 144 may still be directed to the rear side of the inner case 14. If the extension piece 144 were directed to the front side of the inner case 14, light emitted by the light source 150 would be irradiated toward the front side of the inner case 14, directing the light at the user and causing discomfort.

[0046] The extension piece 144 is made of a semi-transparent material, to avoid light passing through the extension piece 144 from being directly irradiated at the user. The extension piece 144 is not made of a non-transmissive material through which light cannot pass at all, as this would cause some degradation of energy efficiency, as some portion of the light emitted by the light source 150 would not be used.

[0047] In the embodiment shown in FIG. 6, the recess 130 and light source 150 are installed at a top of the inner case 14, rather than in a lateral side of the inner case 14. That is, the recess 130 and light source 150 may be installed at any one of the top side and/or the lateral sides of the freezing compartment 32 and/or refrigerating compartment 22.

[0048] Even in the case in which the light source 150 is installed in the top surface of the inner case 14, the light source 150 may be directed toward the rear side of the inner case 14.

[0049] Also, although the light source 150 is installed in the refrigerating compartment 22 in the embodiment shown in FIG. 2, it may also be installed in the freezing compartment 32 in the same manner.

[0050] As apparent from the above description, enhancement in energy efficiency may be achieved, as energy required to drive the light source may be reduced.

[0051] Additionally, an amount of heat generated during driving of the light source may be reduced when using an LED as the light source. Accordingly, the energy required to drive a refrigeration cycle in order to again lower the temperature, which may have been increased by the heat generated by the light source, may be saved.

[0052] Further, it may be possible to prevent light emitted by the light source from being directed directly to the user, thereby avoiding user discomfort due to the light from the light source.

[0053] A refrigerator is provided that is capable of reducing heat generated by a light source, thereby achieving an enhancement in energy efficiency during operation of the refrigerator.

[0054] A refrigerator is provided that is capable of preventing light emitted from a light source from being di-

rected at a user, thereby avoiding discomfort due to the light.

[0055] A refrigerator as embodied and broadly described herein may include an inner case for defining a freezing compartment and/or a refrigerating compartment therein, a recess formed at the inner case to have a predetermined depth, a light source received in the recess, and a cover received in the recess while surrounding the light source, wherein the light source irradiates light toward a rear side of the inner case, wherein the cover comprises an extension piece substantially extending in parallel to the inner case while being received in the recess.

[0056] The recess includes a first inclined surface directed to a front side of the freezing compartment or a front side of the refrigerating compartment, and a second inclined surface directed to a rear side of the freezing compartment or a rear side of the refrigerating compartment.

[0057] The cover also includes an inclined piece directed to the rear side of the inner case. The inclined piece contacts the first inclined surface.

[0058] The inclined piece may be formed with irregularities for scattering light emitted from the light source.

[0059] The inclined piece is made of a transparent material.

[0060] The extension piece is made of a semi-transparent material.

[0061] The extension piece may have a predetermined inclination such that the extension piece is directed to the rear side of the inner case. However, such an embodiment is not in accordance with the present invention.

[0062] The light source is received in the recess such that the light source is not protruded outwardly of the inner case.

[0063] The recess may include extension surfaces each forming a side surface connecting the first inclined surface and the second inclined surface.

[0064] The light source may include a light emitting diode (LED).

[0065] Any reference in this specification to "one embodiment," "an embodiment," "example embodiment," etc., means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention. The appearances of such phrases in various places in the specification are not necessarily all referring to the same embodiment. Further, when a particular feature, structure, or characteristic is described in connection with any embodiment, it is submitted that it is within the purview of one skilled in the art to effect such feature, structure, or characteristic in connection with other ones of the embodiments.

Claims

1. A refrigerator, comprising:

an inner case (14) defining a storage compartment (32; 22) therein; and
a recess (130) formed in the inner case (14) comprising:

a first inclined wall (132) directed to a front side of the storage compartment (32; 22) and
a second inclined wall (134) directed to a rear side of the storage compartment (32; 22),

wherein refrigerator further comprises:

a plurality of aligned light sources (150) received in the recess (130) and positioned in the recess (130) so as to direct emitted light toward a rear side of the inner case (14); and
a cover (140) received in the recess (130) and surrounding the light sources, wherein the cover (140) comprises:

a first panel (144) extending substantially in parallel to the inner case; and
a second panel (142) extending at a predetermined angle from the first panel (144) to direct light emitted by the light sources (150) toward the rear side of the inner case (14), said second panel (142) contacting the first inclined wall and made of a transparent material,

characterized in that

the first panel (144) is made of a semi-transparent material; and
a diffusion pattern (142a) is formed on the second panel (142) of the cover (140) for scattering light emitted by the light sources (150).

2. The refrigerator of claim 1, wherein
the first inclined wall extends at a first angle from a first top peripheral edge of the recess (130); and
the second inclined wall extends at a second angle from a second top peripheral edge of the recess (130), opposite the first top peripheral edge thereof, a bottom edge of the second inclined wall joining a bottom edge of the first inclined wall such that the recess (130) has a V-shaped cross section.
3. The refrigerator of claim 2, wherein the first and second panels (144; 142) of the cover (140) are positioned below the first and second top peripheral edges of the recess (130), respectively, such that the cover (140) does not protrude outward beyond the recess into the storage compartment (32; 22).

4. The refrigerator of claim 1, wherein the diffusion pattern (142a) comprises a plurality of irregularities formed on an interior side of the second panel (142) facing the light sources (150).

5

5. The refrigerator of claim 2, wherein the first inclined wall of the recess (130) faces the second panel (142) of the cover (140), and the second panel (142) of the cover (140) faces the rear side of the inner case (14), and wherein the light sources (150) are installed on the first inclined wall of the recess so as to emit light for transmission through the second panel (142) and toward the rear side of the inner case (14).

10

6. The refrigerator of claim 2, wherein the recess (130) further comprises first and second end walls respectively connecting opposite ends of the first and second inclined walls.

15

7. The refrigerator of claim 1, wherein the light sources (150) comprise light emitting diodes (LED).

20

Patentansprüche

25

1. Kühlschrank, der Folgendes umfasst:

ein Innengehäuse (14), in dem ein Aufbewahrungsfach (32; 22) definiert ist; und
eine in dem Innengehäuse (14) gebildete Aussparung (130), die Folgendes umfasst:

30

eine erste geneigte Wand (132), die zu einer Vorderseite des Aufbewahrungsfachs (32; 22) gerichtet ist, und
eine zweite geneigte Wand (134), die zu einer Rückseite des Aufbewahrungsfachs (32; 22) gerichtet ist,

35

wobei der Kühlschrank ferner Folgendes umfasst:

40

mehrere ausgerichtete Lichtquellen (150), die in der Aussparung (130) aufgenommen sind und in der Weise in der Aussparung (130) positioniert sind, dass sie ausgesendetes Licht in Richtung einer Rückseite des Innengehäuses (14) lenken; und
eine Abdeckung (140), die in der Aussparung (130) aufgenommen ist und die Lichtquellen umgibt, wobei die Abdeckung (140) Folgendes umfasst:

45

eine erste Platte (144), die im Wesentlichen parallel zu dem Innengehäuse verläuft; und
eine zweite Platte (142), die unter einem vorgegebenen Winkel zu der ers-

55

ten Platte (144) verläuft, um durch die Lichtquellen (150) ausgesendetes Licht in Richtung der Rückseite des Innengehäuses (14) zu lenken, wobei die zweite Platte (142) die erste geneigte Wand berührt und aus einem lichtdurchlässigen Material hergestellt ist,

dadurch gekennzeichnet, dass

die erste Platte (144) aus einem halbdurchlässigen Material hergestellt ist; und
auf der zweiten Platte (142) der Abdeckung (140) ein Streumuster (142a) gebildet ist, um durch die Lichtquellen (150) ausgesendetes Licht zu streuen.

2. Kühlschrank nach Anspruch 1, wobei die erste geneigte Wand unter einem ersten Winkel von dem ersten oberen Umfangsrand der Aussparung (130) ausgeht; und
die zweite geneigte Wand unter einem zweiten Winkel von einem zweiten oberen Umfangsrand der Aussparung (130), der ihrem ersten oberen Umfangsrand gegenüberliegt, ausgeht, wobei ein unterer Rand der zweiten geneigten Wand mit einem unteren Rand der ersten geneigten Wand in der Weise verbunden ist, dass die Aussparung (130) einen V-förmigen Querschnitt besitzt.

3. Kühlschrank nach Anspruch 2, wobei die erste und die zweite Platte (144; 142) der Abdeckung (140) unter dem ersten bzw. dem zweiten oberen Umfangsrand der Aussparung (130) positioniert sind, so dass die Abdeckung (140) nicht über die Aussparung hinaus in das Aufbewahrungsfach (32; 22) nach außen vorsteht.

4. Kühlschrank nach Anspruch 1, wobei das Streumuster (142a) mehrere Unregelmäßigkeiten umfasst, die auf einer den Lichtquellen (150) zugewandten Innenseite der zweiten Platte (142) gebildet sind.

5. Kühlschrank nach Anspruch 2, wobei die erste geneigte Wand der Aussparung (130) der zweiten Platte (142) der Abdeckung (140) zugewandt ist und wobei die zweite Platte (142) der Abdeckung (140) der Rückseite des Innengehäuses (14) zugewandt ist und wobei die Lichtquellen (150) an der ersten geneigten Wand der Aussparung in der Weise eingebaut sind, dass sie Licht für den Durchgang durch die zweite Platte (142) und in Richtung der Rückseite des Innengehäuses (14) aussenden.

6. Kühlschrank nach Anspruch 2, wobei die Aussparung (130) ferner eine erste bzw. eine zweite Stirnwand, die jeweils gegenüberliegende Enden der ersten und der zweiten geneigten Wand verbinden, umfasst.

7. Kühlschrank nach Anspruch 1, wobei die Lichtquellen (150) Leuchtdioden (LED) umfassen.

Revendications

1. Réfrigérateur comportant :

un caisson intérieur (14) définissant un compartiment de stockage (32 ; 22) dans celui-ci ; et un évidement (130) formé dans le caisson intérieur (14) comportant :

une première paroi inclinée (132) dirigée vers un côté avant du compartiment de stockage (32 ; 22) et

une seconde paroi inclinée (134) dirigée vers un côté arrière du compartiment de stockage (32 ; 22),

dans lequel le réfrigérateur comporte en outre :

une pluralité de sources de lumière alignées (150) reçues dans l'évidement (130) et positionnées dans l'évidement (130) de manière à diriger de la lumière émise vers un côté arrière du caisson intérieur (14) ; et un couvercle (140) reçu dans l'évidement (130) et entourant les sources de lumière, dans lequel le couvercle (140) comporte :

un premier panneau (144) s'étendant de manière sensiblement parallèle au caisson intérieur ; et

un second panneau (142) s'étendant à un angle prédéterminé par rapport au premier panneau (144) pour diriger la lumière émise par les sources de lumière (150) vers le côté arrière du caisson intérieur (14), ledit second panneau (142) venant en contact avec la première paroi inclinée et étant constitué d'un matériau transparent,

caractérisé en ce que

le premier panneau (144) est constitué d'un matériau semi transparent ;

et

un motif de diffusion (142a) est formé sur le second panneau (142) du couvercle (140) pour diffuser de la lumière émise par les sources de lumière (150).

2. Réfrigérateur selon la revendication 1, dans lequel la première paroi inclinée s'étend à un premier angle à partir d'un premier bord périphérique supérieur de l'évidement (130) ; et la seconde paroi inclinée s'étend à un second angle

à partir d'un second bord périphérique supérieur de l'évidement (130), opposé au premier bord périphérique supérieur de celui-ci, un bord inférieur de la seconde paroi inclinée rejoignant un bord inférieur de la première paroi inclinée de telle sorte que l'évidement (130) a une section en forme de V.

3. Réfrigérateur selon la revendication 2, dans lequel les premier et second panneaux (144 ; 142) du couvercle (140) sont positionnés sous les premier et second bords périphériques supérieurs de l'évidement (130), respectivement, de telle sorte que le couvercle (140) ne fait pas saillie vers l'extérieur au-delà de l'évidement dans le compartiment de stockage (32 ; 22).

4. Réfrigérateur selon la revendication 1, dans lequel le motif de diffusion (142a) comporte une pluralité d'irrégularités formées sur un côté intérieur du second panneau (142) dirigé vers les sources de lumière (150).

5. Réfrigérateur selon la revendication 2, dans lequel la première paroi inclinée de l'évidement (130) est dirigée vers le second panneau (142) du couvercle (140), et le second panneau (142) du couvercle (140) est dirigé vers le côté arrière du caisson intérieur (14), et dans lequel les sources de lumière (150) sont installées sur la première paroi inclinée de l'évidement de manière à émettre de la lumière en vue d'une transmission à travers le second panneau (142) et vers le côté arrière du caisson intérieur (14).

6. Réfrigérateur selon la revendication 2, dans lequel l'évidement (130) comporte en outre des première et seconde parois d'extrémité reliant respectivement des extrémités opposées des première et seconde parois inclinées.

7. Réfrigérateur selon la revendication 1, dans lequel les sources de lumière (150) comportent des diodes électroluminescentes (LED).

FIG. 1

10

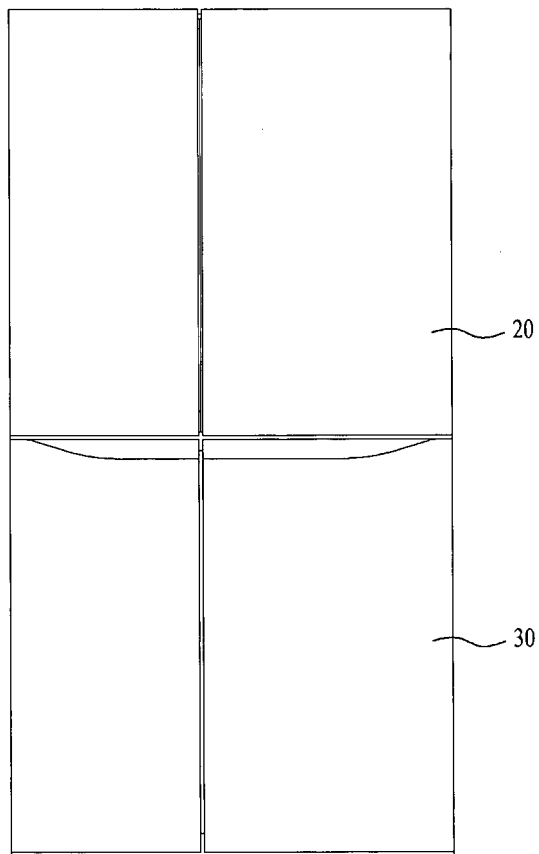


FIG. 2

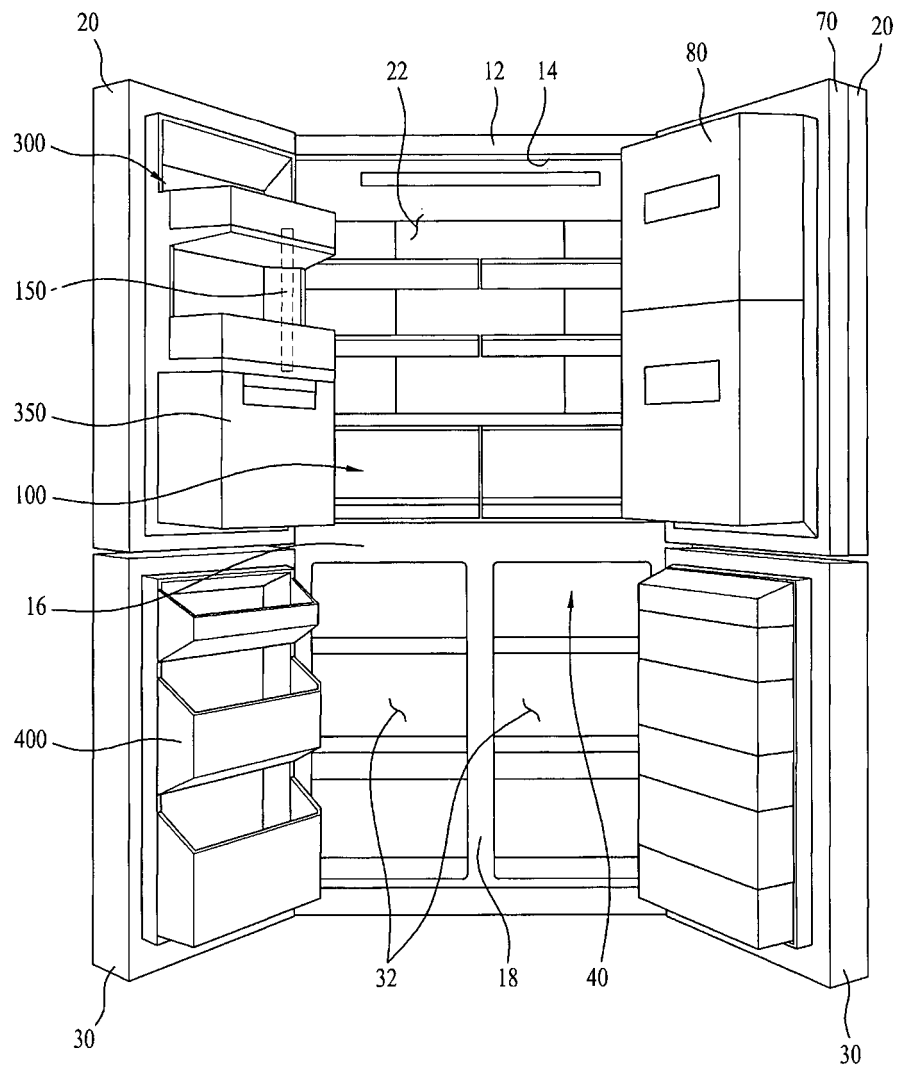


FIG. 3

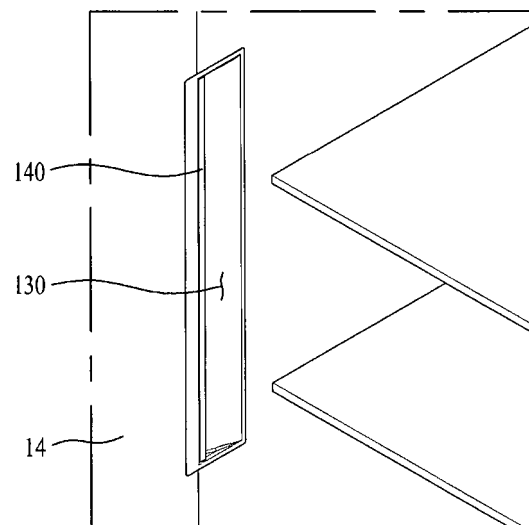


FIG. 4

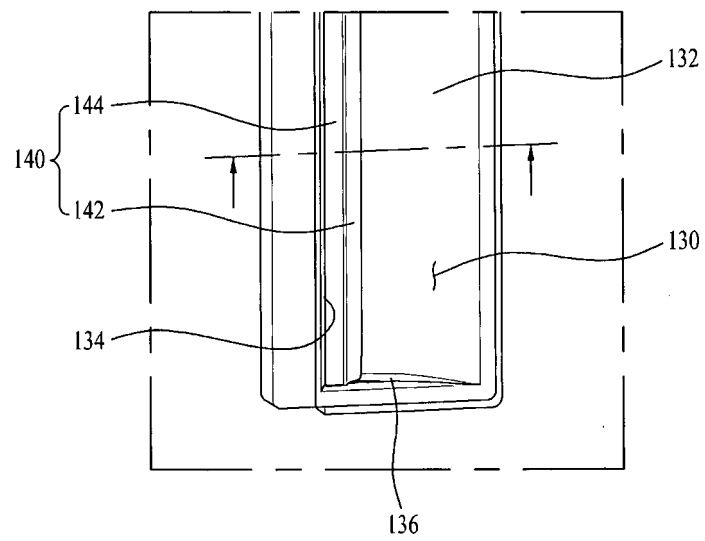


FIG. 5


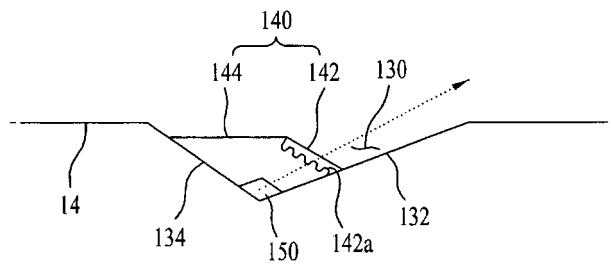


FIG. 6

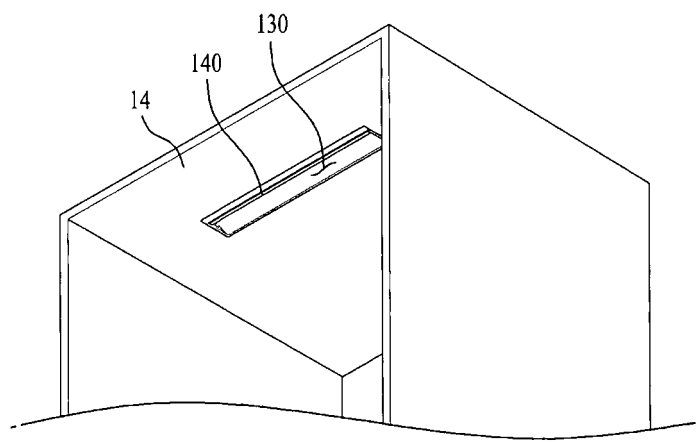

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2011108246 A1 [0004]
- JP 2011179780 A [0005]
- WO 2011105026 A1 [0006]
- JP 2010008017 A [0007]
- JP 2009299978 A [0008]