



US010107114B2

(12) **United States Patent**  
**Aiello et al.**

(10) **Patent No.:** **US 10,107,114 B2**  
(45) **Date of Patent:** **Oct. 23, 2018**

(54) **ROTOR WITH RELIEF FEATURES AND ONE-SIDED LOAD SLOTS**

(75) Inventors: **Nicholas Aiello**, New Haven, CT (US);  
**James Cosby**, West Hartford, CT (US)

(73) Assignee: **United Technologies Corporation**,  
Farmington, CT (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1901 days.

(21) Appl. No.: **13/314,121**

(22) Filed: **Dec. 7, 2011**

(65) **Prior Publication Data**

US 2013/0149158 A1 Jun. 13, 2013

(51) **Int. Cl.**  
**F01D 5/30** (2006.01)  
**F01D 5/32** (2006.01)  
**F01D 5/02** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **F01D 5/32** (2013.01); **F01D 5/3038** (2013.01); **Y10T 29/49321** (2015.01)

(58) **Field of Classification Search**  
CPC ..... F01D 5/066; F01D 5/3023; F01D 5/303; F01D 5/3038; F01D 5/3046; F01D 5/3069; F01D 5/32; Y10T 29/49321  
USPC .... 416/214 R, 214 A, 215, 216, 220 R, 248; 29/889.21  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

4,033,705 A 7/1977 Luebering  
4,432,697 A \* 2/1984 Miura et al. .... 416/198 A

4,451,204 A \* 5/1984 Pask ..... 416/215  
4,907,944 A \* 3/1990 Kroger et al. .... 415/65  
5,071,313 A 12/1991 Nichols  
5,112,193 A 5/1992 Greer et al.  
5,435,694 A 7/1995 Kray et al.  
5,522,706 A 6/1996 Mannava et al.  
6,592,330 B2 7/2003 Leeke et al.  
2001/0055527 A1\* 12/2001 Yvon Goga et al. .... 416/215  
2011/0116933 A1 5/2011 Aiello

**FOREIGN PATENT DOCUMENTS**

EP 1170463 1/2002  
EP 1801355 6/2007  
EP 2333243 6/2011  
EP 2549060 1/2013

**OTHER PUBLICATIONS**

European Search Report for Application No. 12195723.7 dated Feb. 24, 2017.


\* cited by examiner




*Primary Examiner* — Richard Edgar  
*Assistant Examiner* — Alexander White  
(74) *Attorney, Agent, or Firm* — Carlson, Gaskey & Olds, P.C.


(57) **ABSTRACT**

An exemplary turbomachine rotor assembly includes a pair of spaced rails that extend around a cylindrical surface to define a rotor hub. The rails define a space for receiving blades. Load slots are formed in one of the rails. A relief feature is formed in an opposite surface of an opposing rail. The load slots and relief feature utilized to move at least one of the blades into the space.


**6 Claims, 4 Drawing Sheets**

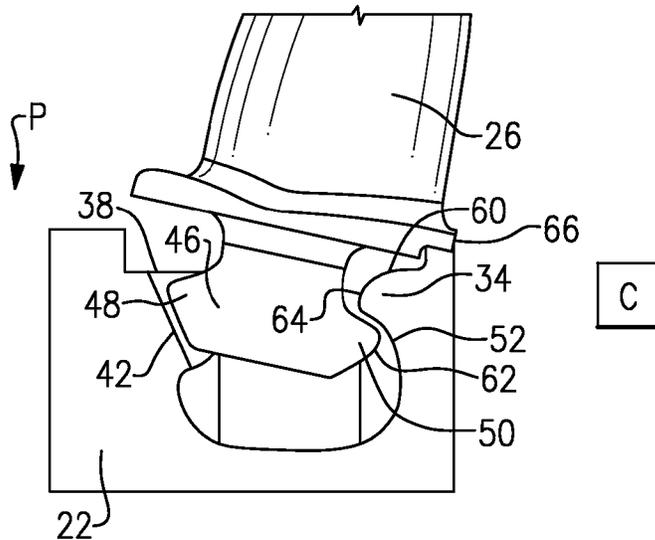

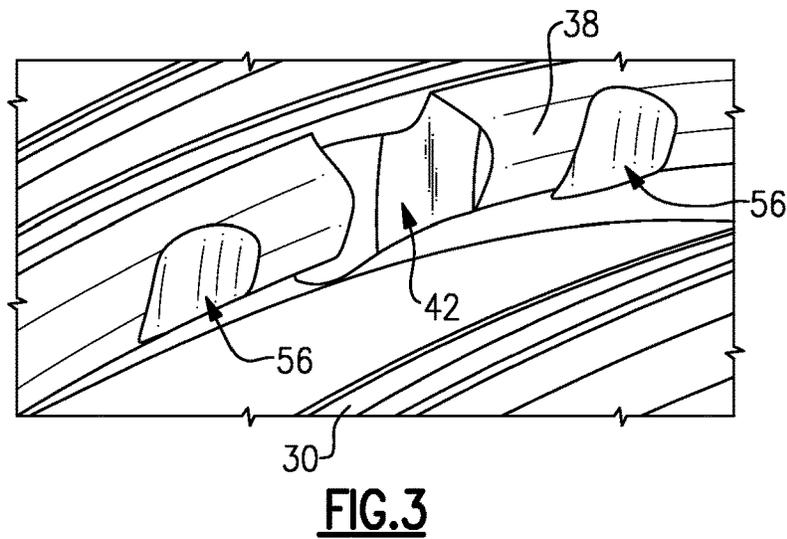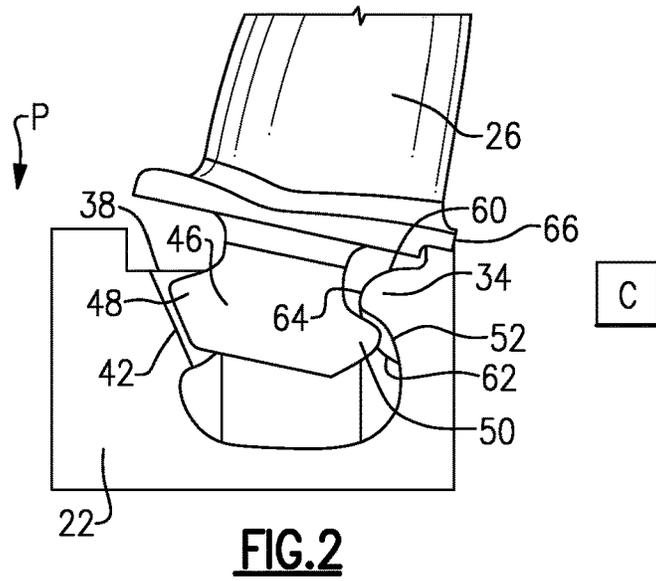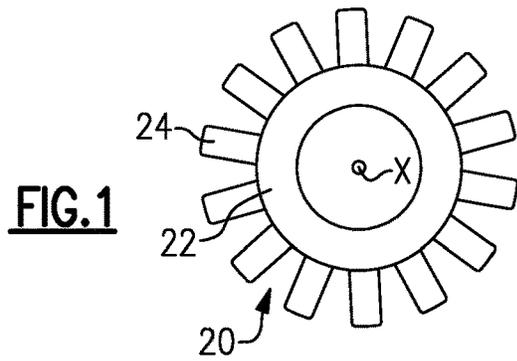


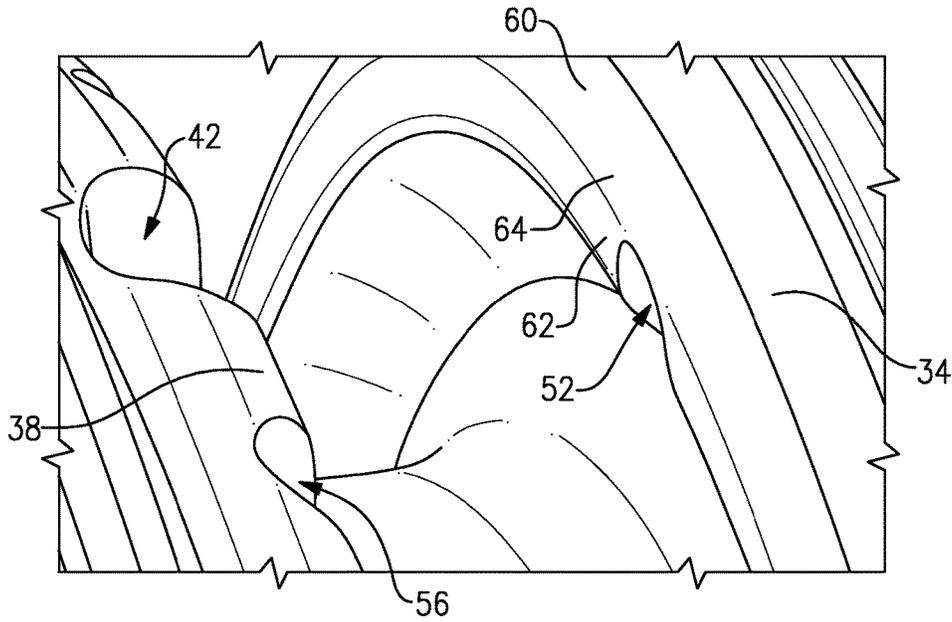


**FIG. 4**

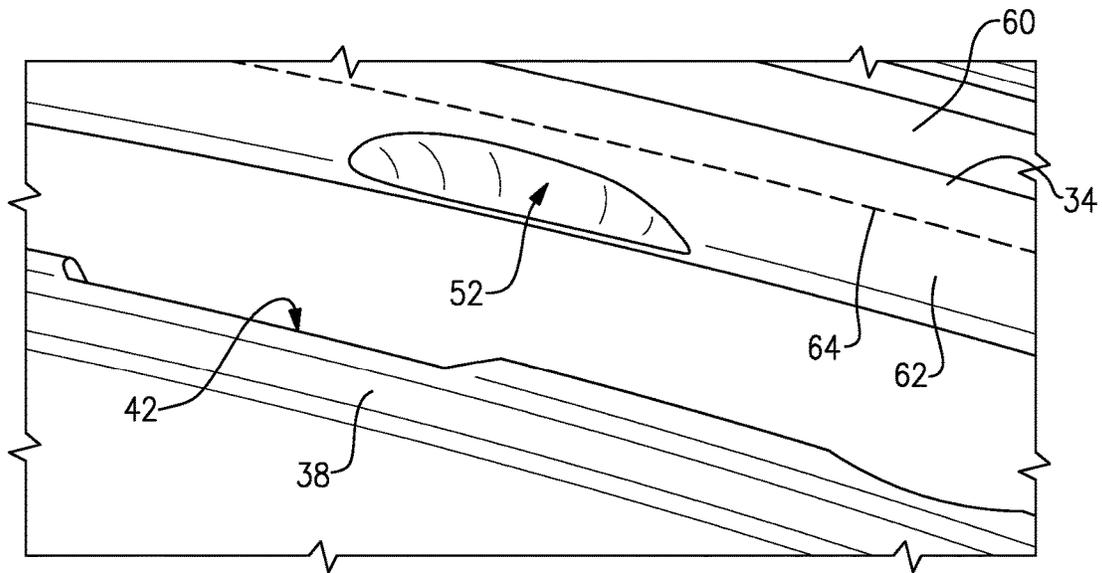


**FIG. 5**

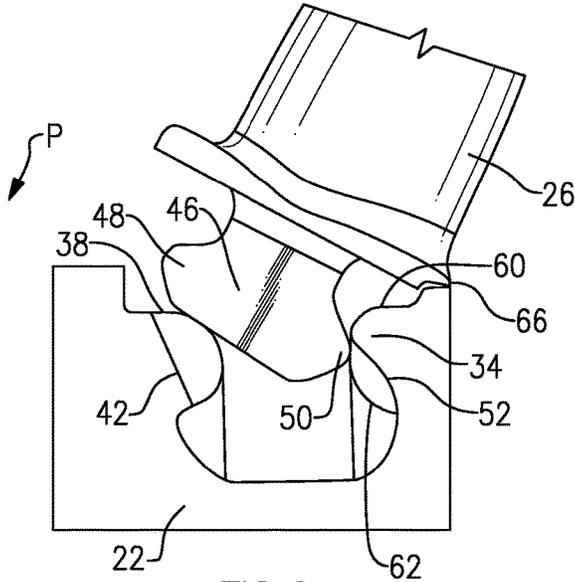


**FIG. 6**

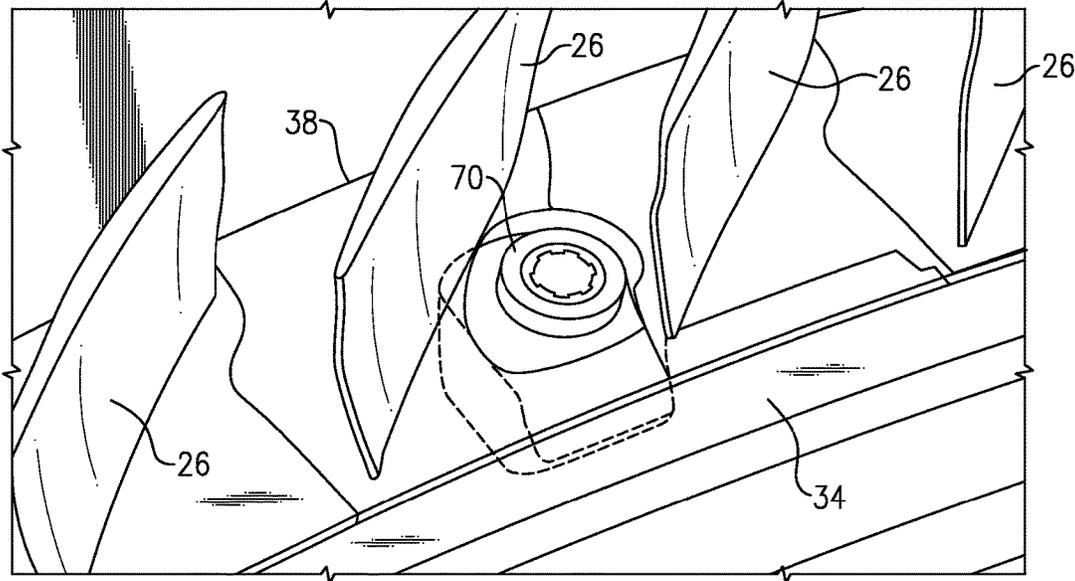

**FIG. 7**

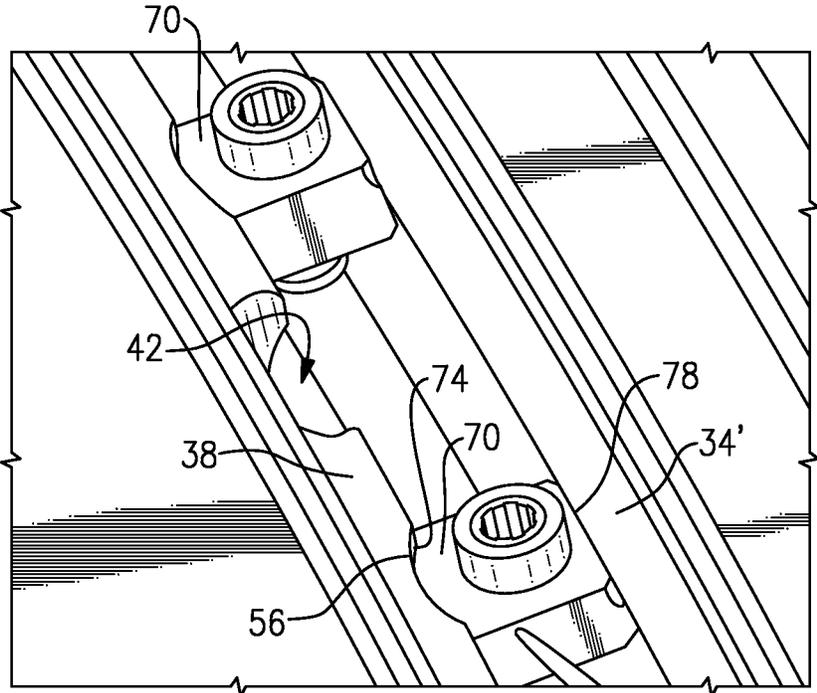

**FIG. 8**

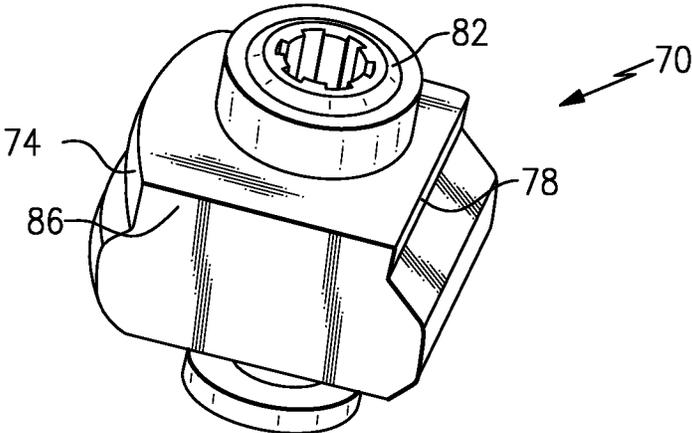

**FIG. 9**

## ROTOR WITH RELIEF FEATURES AND ONE-SIDED LOAD SLOTS

### BACKGROUND

This disclosure relates to a tangential compressor or turbine rotor having relief features formed on one of the two rails in the rotor and load slots formed on the other of the two rails in the rotor.

Turbomachines, such as gas turbine engines, are known. Turbomachines typically include a compressor that compresses air and delivers it downstream into a combustion section. The compressed air is mixed with fuel and combusted. The products of combustion pass downstream through a turbine. The compressor and turbine include rotors. Arrays of removable blades are mounted to the rotors.

When mounting the removable blades to the rotor, the removable blades are moved into load slots formed in the two opposed rails in the rotor. The load slots are formed at circumferentially spaced locations. Each of the load slots extend radially from radially inward facing surfaces of the rails to radially outward facing surfaces of the rails. During installation, the relatively wide root of each individual blade is moved into the load slots. The blades are then slid into a mount space between the rails, at locations that are circumferentially offset from the load slots. The blades are moved circumferentially until they fill the entire space. In addition, locks are positioned at several circumferentially spaced locations between the blades to take up remaining space and inhibit the blades from moving circumferentially relative to the rotor.

In the prior art, circumferentially aligned pairs of load slots are formed in the opposing rails to accommodate the roots of the blades. Some prior art designs may utilize a single load slot formed in the rail that faces the compressor rather than a circumferentially aligned pair of load slots. The single load slot is much larger than each of the load slots in the circumferentially aligned pairs. The larger load slot may undesirably accelerate fatigue in the rail.

### SUMMARY

An exemplary turbomachine rotor assembly includes a pair of spaced rails that extend around a cylindrical surface to define a rotor hub. The rails define a space for receiving blades. Load slots are formed in one of the rails. A relief feature is formed in an opposite surface of an opposing rail. The load slots and relief feature are utilized to move at least one of the blades into the space.

Another example turbomachine rotor assembly includes a pair of spaced rails that extend around a cylindrical surface to define a rotor hub. The rails define a space for receiving blades. Blade load slots are formed in one of the rails. The blade load slots extend from an outwardly facing surface of the one of the rails to an inwardly facing surface of the other of the rails. Relief features are formed on an underside of the opposed rail. The relief feature is circumferentially aligned with the blade load slots. The blades are moved into the space through the blade load slots and the relief feature. The blades are then moved circumferentially to be adjacent to other blades.

A rotor assembly method includes moving a blade into a space between a pair of spaced rails that extend around a cylindrical surface to define a rotor hub. The method then moves the blade circumferentially to an installed position within the rotor hub. The blade moves through a blade load

slot formed on one of the spaced rails, and through a relief feature formed on the other of the spaced rails.

### BRIEF DESCRIPTION OF THE DRAWINGS

The various features and advantages of the disclosed examples will become apparent to those skilled in the art from the detailed description. The figures that accompany the detailed description can be briefly described as follows: FIG. 1 shows the mounting of a blade within a turbine rotor.

FIG. 2 shows a portion of the FIG. 1 turbine rotor and a blade insertion step.

FIG. 3 shows a perspective view of a portion of the FIG. 1 turbine rotor.

FIG. 4 shows another perspective view of a portion of the FIG. 1 turbine rotor.

FIG. 5 shows yet another perspective view of a portion of the FIG. 1 turbine rotor.

FIG. 6 shows a portion of the FIG. 1 turbine rotor and a blade insertion step that is earlier than the blade insertion step shown in FIG. 2.

FIG. 7 shows lock members of the FIG. 1 turbine rotor.

FIG. 8 shows another feature of the lock members.

FIG. 9 shows another detail of the lock member.

### DETAILED DESCRIPTION

FIG. 1 schematically shows a turbine rotor 20 for use in a gas turbine engine or another type of turbomachine. The rotor 20 incorporates a rotor hub 22, and an array of blades 24 spaced about the circumference of the rotor hub 22. The rotor hub 22 is centered for rotation about a central axis X, as is known. While the example embodiments will be described with reference to a turbine rotor, other examples have application in a compressor rotor.

As shown in FIGS. 2-4, a blade 26 in the array 24 is mounted between rear rail 34 and forward rail 38, through a load slot 42. The rear rail 34 and forward rail 38 together make up a pair of spaced rails.

The load slot 42 is formed in the “cold side” forward rail 38, and is not formed in the “hot side” rear rail 34. The “cold side” forward rail 38 may be further from a combustion section C than the “hot side” rear rail 34 when the rotor 20 is mounted within a gas turbine engine. While the “hot side” will typically face toward the combustion section, in certain applications, and at certain turbine stages, it is possible for the opposed “upstream” side of the turbine to be the hot side. Further, when the features of this disclosure are applied to a compressor rotor, the hot side may also be facing toward the combustion section, or away, depending on the particular application.

As shown, the blade has a root section 46 having a forward ear 48, which is received under the forward rail 38, and a rear ear 50, which moves through the load slot 42.

A relief feature 52 is formed in the underside of the rear rail 34. The relief feature 52 facilitates movement of the root section 46, and particularly the rear ear 50, through the load slot 42.

Due to the relief feature 52, the load slot 42 does not need to be as large. That is, the load slot 42 can be made shallower because of the relief feature 52 accommodating some of the root section 46 during installation.

The load slot 42 is formed in the forward rail 38, and there is no corresponding slot in the rear rail 34. The relief feature 52, however, does correspond to the circumferential location of the load slot 42. In addition, as shown in FIG. 2A, the

forward rail **38** is formed with lock slots **56**, while the rear rail **34** does not have any such lock slots **56**.

The rear rail **34** includes a radially outward facing surface **60** and a radially inward facing surface **62** that meet at an interface **64**. The example relief feature **52** is formed entirely within the radially inward facing surface **62** and does not extend past the interface **64**. That is, there is no portion of the relief feature **52** extending into the radially outward facing surface **60**. In this example, the radially outward facing surface **60** is continuous and uninterrupted about the entire circumference of the rear rail **34**. Also, in this example, the relief feature **52** is concave.

The load slot **42**, in contrast to the relief feature **52**, does extend from an outwardly facing surface of the forward rail **38** to an inwardly facing surface of the forward rail **38**.

As shown in FIGS. **2** and **6**, when initially mounting the blade **26** within the rotor hub **22**, the forward ear **48** is rotated into the load slot **42** about a back edge **66** of the blade **26** in a direction **P**. The relief feature **52** provides room for the rear ear **50** of the root section **46**. The forward ear **48** may be "hooked" under a ladder seal (not shown) during installation.

After the blade **26** is fully rotated into the load slot **42**, the blade **22** can be moved circumferentially, with the ears **48** and **50** remaining underneath portions of the forward rail **38** and rear rail **34**, such that the blades **26** can be aligned and positioned across the entire circumference of the rotor **20** (see FIG. **1**). In applications, there may be two load slots **42** spaced by 180° about the circumference of the rotor hub **22**. Essentially, the forward rail **38** and rear rail **34** define a space to receive and mount the blades **26**.

FIG. **7** shows another detail, wherein blades **26** have been mounted between the forward rail **38** and rear rail **34**. In addition, other blades **26** are shown, which have a space to surround a lock member **70**.

Lock members **70** are typically positioned on each side of a pair of blades **26** that sit circumferentially closest to the load slot **42** when the rotor **20** is fully assembled with blades **26**. In addition, other lock members **70** are provided at circumferentially spaced locations.

In this example, there are a total of eight locks, spaced evenly about the circumference of the rotor **20**, but with two sets of locks secured on each side of the load slot **42**.

As shown in FIG. **8**, the locks **70** are received with a curved side **74** sitting in the lock slot **56**, and a relatively flat side **78** facing the rear rail **34**.

FIG. **9** shows the lock member **70** having a flat side **78**, the curved side **74**, and receiving a lock pin, or set screw **82**, which is tightened to secure the lock member **70** within the rotor hub **22** once the rotor **20** is fully assembled.

As shown, the curved (or barrel) side **74** is on one side of the lock member **70**, with the relatively flat side **78** on the opposite side. Flat side walls **86** extend between the curved side **74** and the flat side **78**.

While the disclosed embodiment incorporates both blade and lock slots, rotors coming within the scope of this disclosure could use only one of the two in combination with the relief feature.

Features of the disclosed examples include incorporating a relief feature on an aft rail to enable making the load slot on the forward rail shallower. The relief feature helps balance fatigue life between the two rails. Unlike the load slot, the relief feature does not penetrate the top of the aft rail, which keeps stress concentrations in a lower temperature and lower stress area.

The preceding description is exemplary rather than limiting in nature. Variations and modifications to the disclosed examples may become apparent to those skilled in the art that do not necessarily depart from the essence of this disclosure. Thus, the scope of legal protection given to this disclosure can only be determined by studying the following claims.

We claim:

1. A turbomachine rotor assembly comprising:
  - a pair of spaced rails including a first rail and a second rail opposing the first rail, the pair of spaced rails extending around a cylindrical surface to define a rotor hub, and the pair of spaced rails defining a space for receiving blades;
  - a plurality of blade load slots formed in the first rail, the blade load slots extending from an outwardly facing surface of the first rail to an inwardly facing surface of the first rail; and
  - a plurality of relief features formed on an underside of the second rail and circumferentially aligned with the plurality of blade load slots, the blades moved into the space through one of the plurality of blade load slots and one of the plurality of relief features, and then moved circumferentially to be adjacent to other blades.
2. The turbomachine rotor assembly of claim **1**, wherein the first rail is a cold side rail when mounted in a turbomachine, and the second rail is a hot side rail when mounted in the turbomachine.
3. The turbomachine rotor assembly of claim **2**, wherein the second rail faces a combustion section when mounted in the turbomachine.
4. The turbomachine rotor assembly of claim **1**, including a plurality of lock slots formed in the first rail, the second rail, or both, the plurality of lock slots being utilized to move locks in the space, and the plurality of blade load slots being utilized to move the blades into the space.
5. The turbomachine rotor assembly of claim **4**, wherein the locks include a curved surface facing a curved surface of the lock slots, and an opposed relatively flat surface facing the second rail.
6. The turbomachine rotor assembly of claim **1**, wherein the turbomachine rotor assembly is a compressor section rotor.

\* \* \* \* \*