



US00RE48677E

(19) **United States**
(12) **Reissued Patent**
Kim et al.

(10) **Patent Number: US RE48,677 E**
(45) **Date of Reissued Patent: Aug. 10, 2021**

(54) **MOBILE TERMINAL AND CONTROL METHOD THEREOF**

H04L 63/108 (2013.01); *H04W 12/06* (2013.01); *H04W 88/02* (2013.01)

(71) Applicant: **LG ELECTRONICS INC.**, Seoul (KR)

(58) **Field of Classification Search**

CPC G06F 21/36; G06F 3/0488; G06F 3/04883; G06F 3/04886

(72) Inventors: **Kanguk Kim**, Seoul (KR); **Taiyoung Choi**, Seoul (KR); **Keumsung Hwang**, Seoul (KR); **Byonggyo Lee**, Seoul (KR)

USPC 345/173; 455/411; 726/26, 27; 715/764, 788, 863, 864

See application file for complete search history.

(73) Assignee: **LG ELECTRONICS INC.**, Seoul (KR)

(56) **References Cited**

U.S. PATENT DOCUMENTS

(21) Appl. No.: **16/275,156**

5,936,614 A * 8/1999 An G06F 3/04886 345/173

(22) Filed: **Feb. 13, 2019**

7,593,000 B1 * 9/2009 Chin G06F 21/32 345/156

Related U.S. Patent Documents

(Continued)

Reissue of:

(64) Patent No.: **9,697,347**
Issued: **Jul. 4, 2017**
Appl. No.: **15/053,902**
Filed: **Feb. 25, 2016**

OTHER PUBLICATIONS

United States Patent and Trademark Office U.S. Appl. No. 15/053,915, Final Office Action dated Aug. 16, 2016, 37 pages.

(Continued)

U.S. Applications:

(63) Continuation of application No. 13/708,904, filed on Dec. 7, 2012, now Pat. No. 9,390,250.

Primary Examiner — Adam L Basehoar

(74) *Attorney, Agent, or Firm* — Lee Hong Degerman Kang & Waimey

(30) **Foreign Application Priority Data**

Dec. 8, 2011 (KR) 10-2011-0130666

(57) **ABSTRACT**

The present invention relates to a mobile terminal and a control method thereof. The mobile terminal displays a plurality of figures arranged in a first composition on a touch screen when a specific mode is locked, rearranges the plurality of figures in a second composition different from the first composition upon receiving a specific input, and determines whether to unlock the specific mode on the basis of a pattern which is input using the plurality of figures arranged in the first or second composition.

16 Claims, 19 Drawing Sheets


(51) **Int. Cl.**

G06F 3/041 (2006.01)
G06F 21/36 (2013.01)
G06F 3/044 (2006.01)
G06F 1/32 (2019.01)
G06F 3/0488 (2013.01)

(Continued)

(52) **U.S. Cl.**

CPC **G06F 21/36** (2013.01); **G06F 1/3203** (2013.01); **G06F 3/044** (2013.01); **G06F 3/0416** (2013.01); **G06F 3/04883** (2013.01);

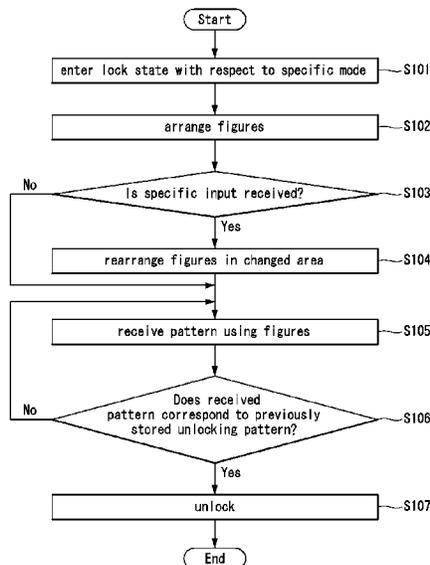

(51) Int. Cl. H04W 88/02 H04W 12/06 H04W 12/08 H04L 29/06 H04M 1/66 G06F 1/3203	(2009.01) (2021.01) (2021.01) (2006.01) (2006.01) (2019.01)	2012/0125442 A1* 2012/0162261 A1 2012/0176320 A1* 2012/0252410 A1* 2013/0017846 A1* 2013/0065517 A1* 2013/0100030 A1* 2013/0147795 A1 2013/0159936 A1* 2013/0233689 A1* 2013/0234942 A1* 2013/0237288 A1* 2013/0241842 A1* 2013/0285933 A1* 2014/0137036 A1* 2014/0152593 A1* 2014/0351761 A1* 2014/0362119 A1* 2015/0046825 A1* 2015/0084885 A1* 2015/0128081 A1* 2015/0212610 A1* 2016/0179277 A1 2016/0179278 A1 2016/0216869 A1* 2017/0031542 A1* 2017/0123638 A1*	5/2012 6/2012 7/2012 10/2012 1/2013 3/2013 4/2013 6/2013 6/2013 9/2013 9/2013 9/2013 9/2013 10/2013 5/2014 6/2014 11/2014 12/2014 2/2015 3/2015 5/2015 7/2015 6/2016 6/2016 7/2016 2/2017 5/2017	Sutherland Kim et al. Burrell, IV Williams Schoppe Svensson Los Kim et al. Yamaguchi Ng Yoo Lee Ma Sim Han Wu Bae Freund Li Kawamoto Hsieh Tian Kim et al. Kim et al. Yan Ryu Yamada	E02F 9/268 137/2 G06F 1/1626 345/168 G06F 21/36 455/411 G06F 3/0488 455/466 H04W 12/00 455/39 G06F 3/023 345/169 G06F 3/04845 345/660 G06F 3/04845 345/660 G06F 3/04883 345/156 G06F 21/36 382/181 G06F 3/04883 715/800 G06F 3/04845 G06F 3/04883 G06F 3/04886 G06F 3/04883 G06F 21/36 726/2 G06F 3/0481 715/799 G06F 21/36 345/173 G06F 3/0488 345/173 G06F 3/04886 715/773 G06F 3/04886 715/773 G06F 3/0486 455/566 G06F 3/04883 715/863 H04L 12/5815 715/753 G06F 3/04886 345/663 G06F 1/1643 455/411 G06F 1/3203 455/411 G06F 17/30126 348/231.2 G06F 3/0488 345/168 G06F 3/04886 715/773
--	--	--	--	--	--

(56) **References Cited**

U.S. PATENT DOCUMENTS

8,209,630 B2*	6/2012	Thimbleby	G06F 3/04845 345/660
8,381,125 B2*	2/2013	Leffert	G06F 3/04845 345/660
8,493,338 B2*	7/2013	Nakajoh	G06F 3/04883 345/156
8,588,739 B2	11/2013	Kawabata	
8,904,479 B1*	12/2014	Johansson	G06F 21/36 382/181
8,910,079 B2*	12/2014	Yoo	G06F 3/04883 715/800
9,229,612 B2*	1/2016	Chang	G06F 3/04845
9,390,250 B2	7/2016	Kim et al.	
9,607,141 B2	3/2017	Kim et al.	
9,697,347 B2	7/2017	Kim et al.	
10,282,081 B2*	5/2019	Park	G06F 3/04883
10,372,896 B2*	8/2019	Kwon	G06F 3/04886
10,891,047 B2*	1/2021	Seo	G06F 3/04883
2007/0150842 A1	6/2007	Chaudhri et al.	
2008/0083015 A1*	4/2008	Kim	G06F 21/36 726/2
2009/0259967 A1*	10/2009	Davidson	G06F 3/0481 715/799
2009/0289916 A1*	11/2009	Dai	G06F 21/36 345/173
2010/0020035 A1	1/2010	Ryu et al.	
2010/0117973 A1	5/2010	Chiang	
2010/0171709 A1*	7/2010	Toyokawa	G06F 3/0488 345/173
2010/0241985 A1*	9/2010	Kim	G06F 3/04886 715/773
2010/0299597 A1	11/2010	Shin et al.	
2011/0028186 A1*	2/2011	Lee	G06F 3/0486 455/566
2011/0041102 A1*	2/2011	Kim	G06F 3/04883 715/863
2011/0187497 A1	8/2011	Chin	
2011/0202853 A1*	8/2011	Mujkic	H04L 12/5815 715/753
2011/0242138 A1*	10/2011	Tribble	G06F 3/04886 345/663
2011/0294467 A1*	12/2011	Kim	G06F 1/1643 455/411
2011/0300831 A1*	12/2011	Chin	G06F 1/3203 455/411
2012/0050009 A1	3/2012	Hsieh	
2012/0062764 A1*	3/2012	Shinozawa	G06F 17/30126 348/231.2
2012/0113007 A1*	5/2012	Koch	G06F 3/0488 345/168
2012/0117506 A1*	5/2012	Koch	G06F 3/04886 715/773

OTHER PUBLICATIONS

United States Patent and Trademark Office U.S. Appl. No. 15/053,915, Office Action dated May 5, 2016, 21 pages.
 United States Patent and Trademark Office U.S. Appl. No. 13/708,904, Office Action dated Feb. 25, 2015, 21 pages.
 United States Patent and Trademark Office U.S. Appl. No. 15/053,915, Office Action dated Aug. 16, 2016, 27 pages.
 United States Patent and Trademark Office U.S. Appl. No. 15/053,902, Office Action dated Aug. 19, 2016, 23 pages.
 Karlson et al., "ThumbSpace: Generalized One-Handed Input for Touchscreen-Based Mobile Devices," Interact 2007, Computer Science, 14 pages.

* cited by examiner

FIG. 1

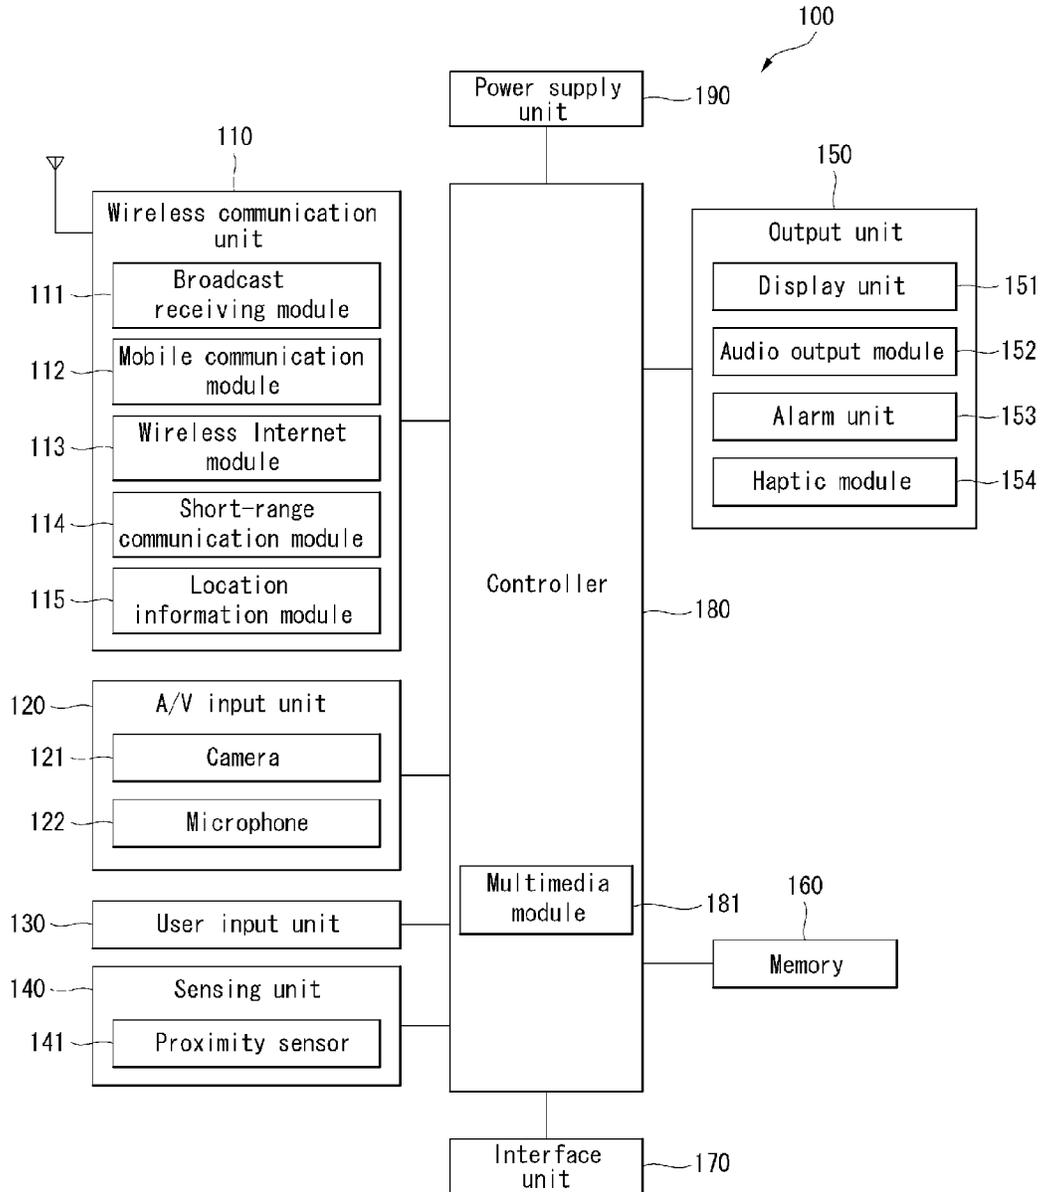


FIG. 2

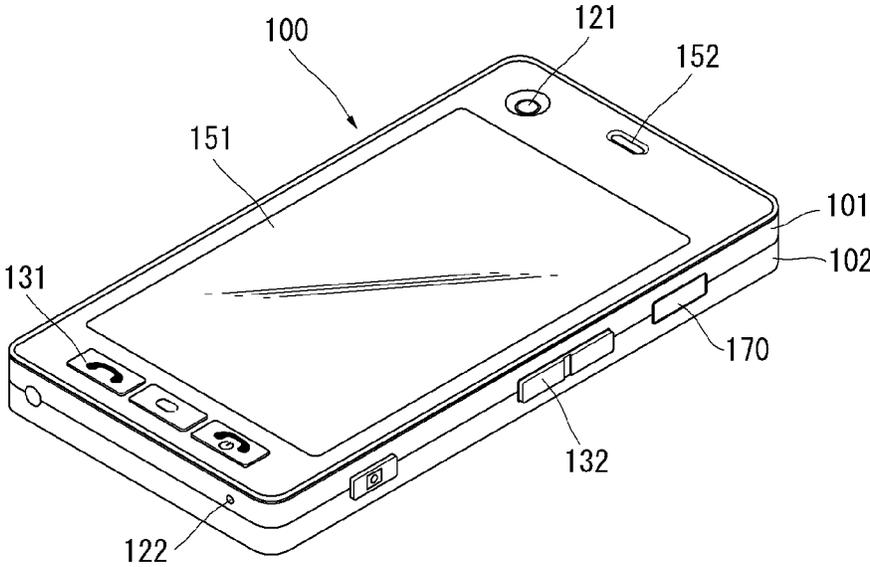


FIG. 3

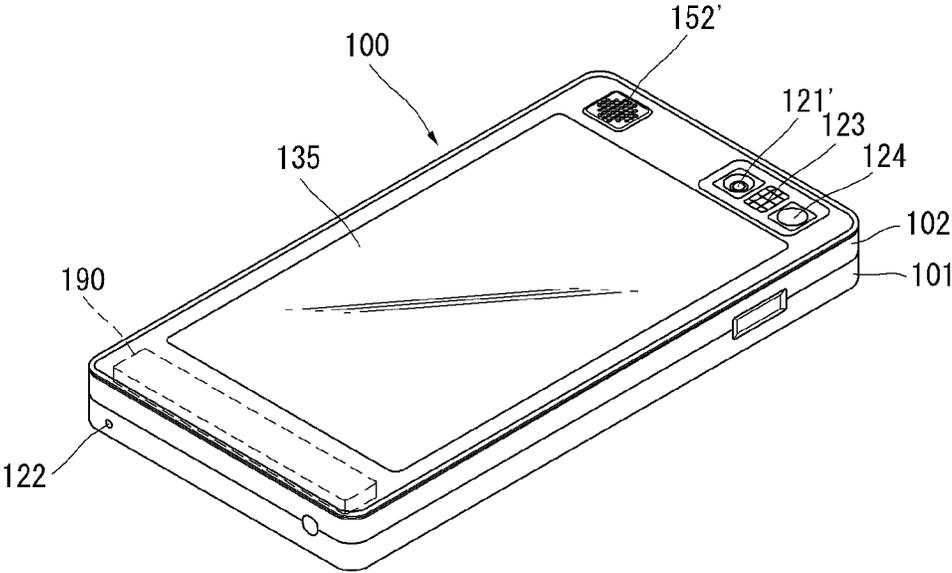


FIG. 4

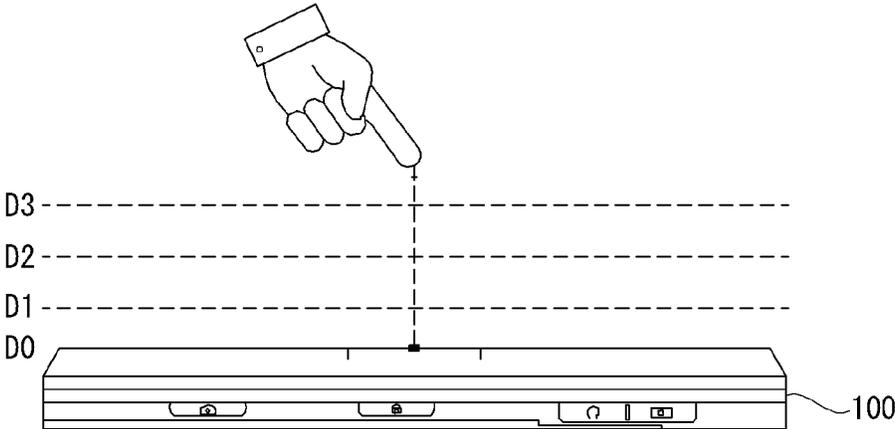


FIG. 5

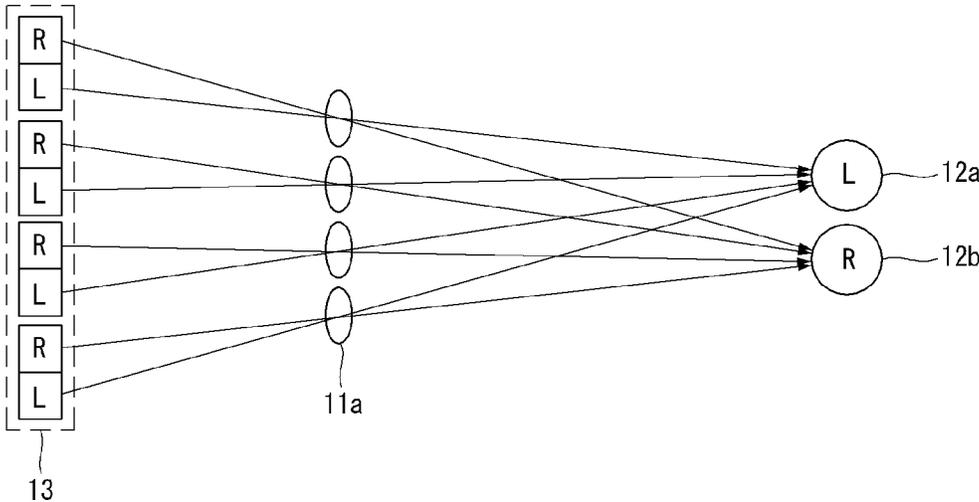


FIG. 6

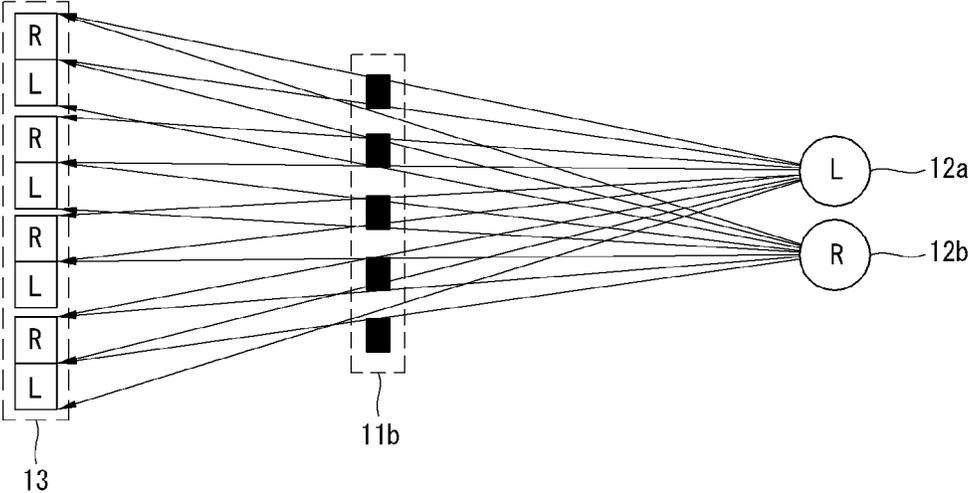


FIG. 7

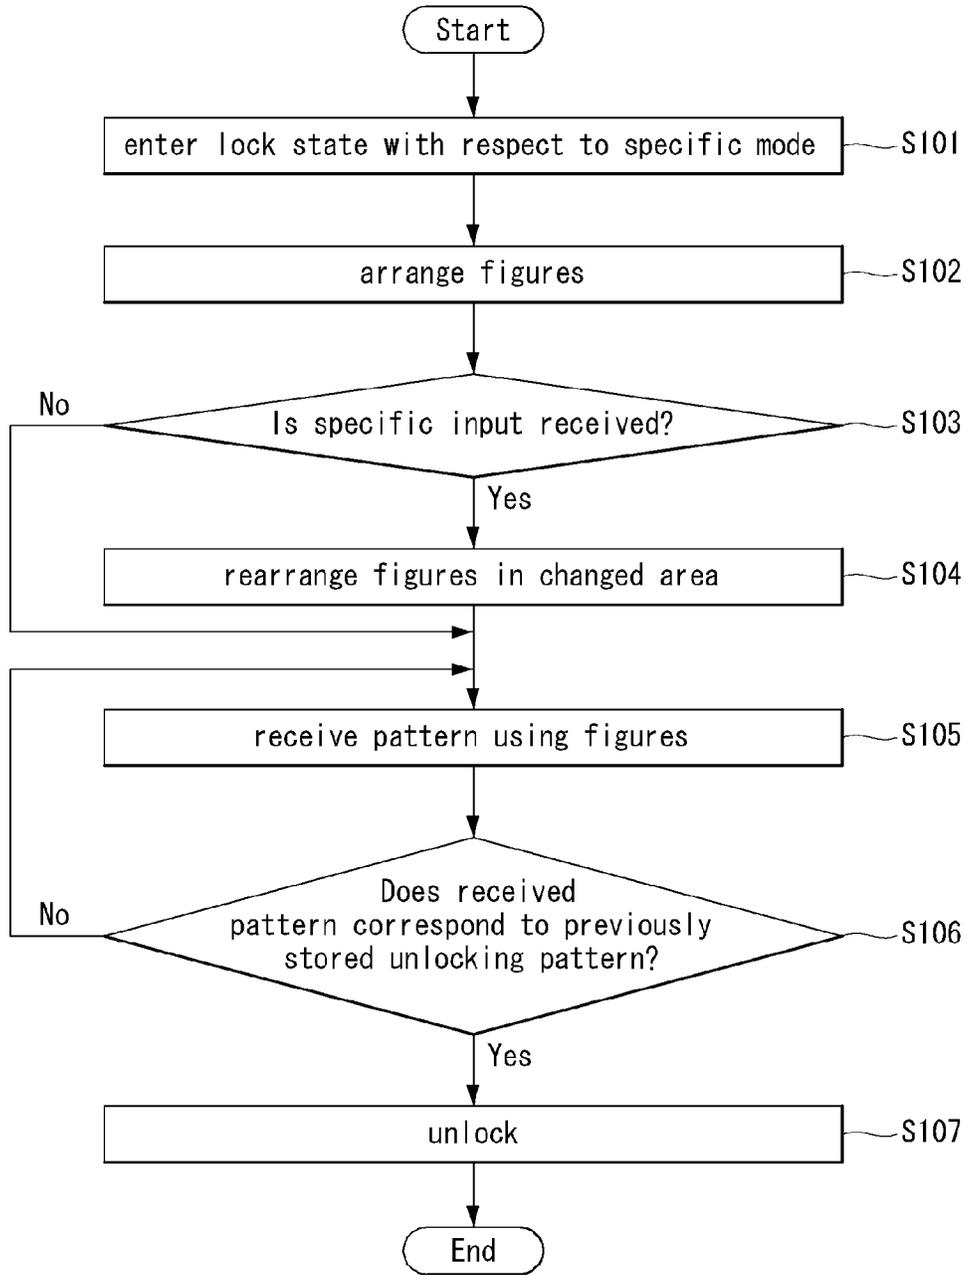


FIG. 8

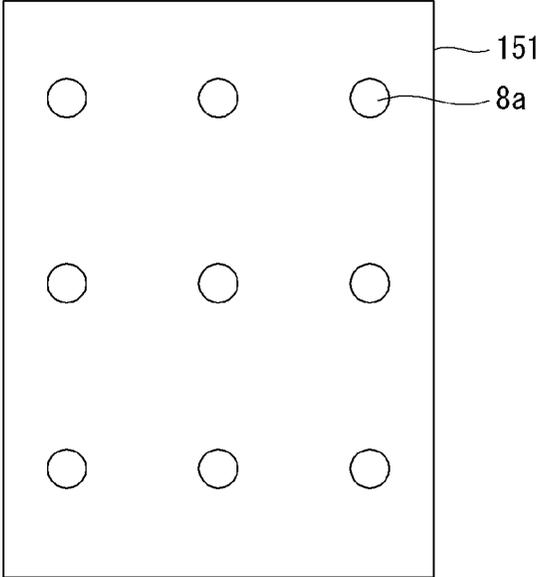


FIG. 9

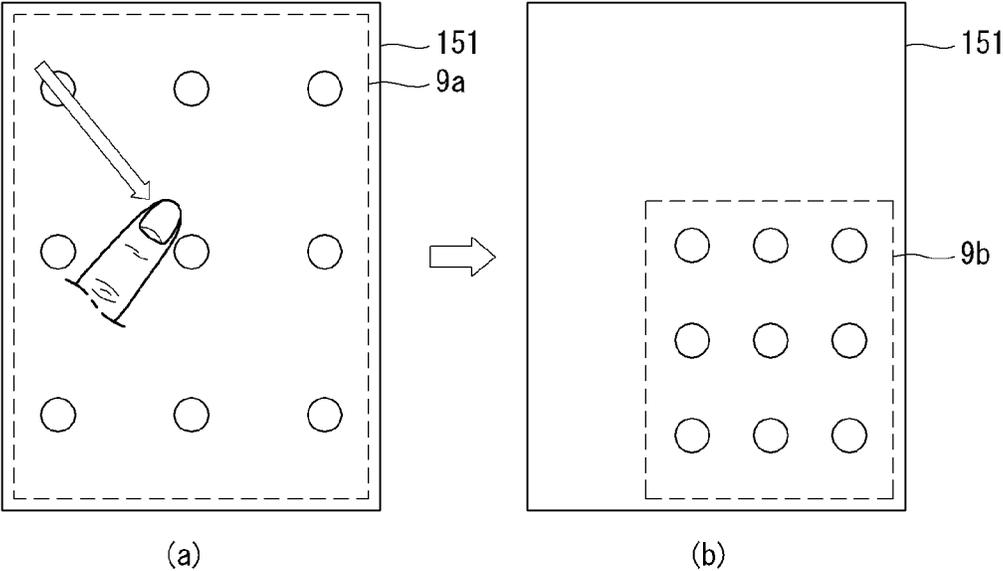


FIG. 10

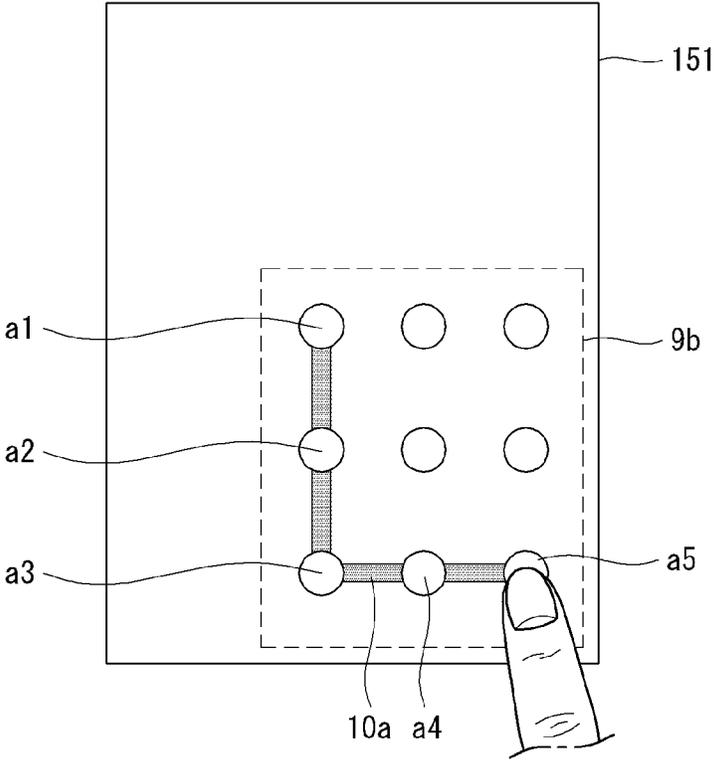


FIG. 11

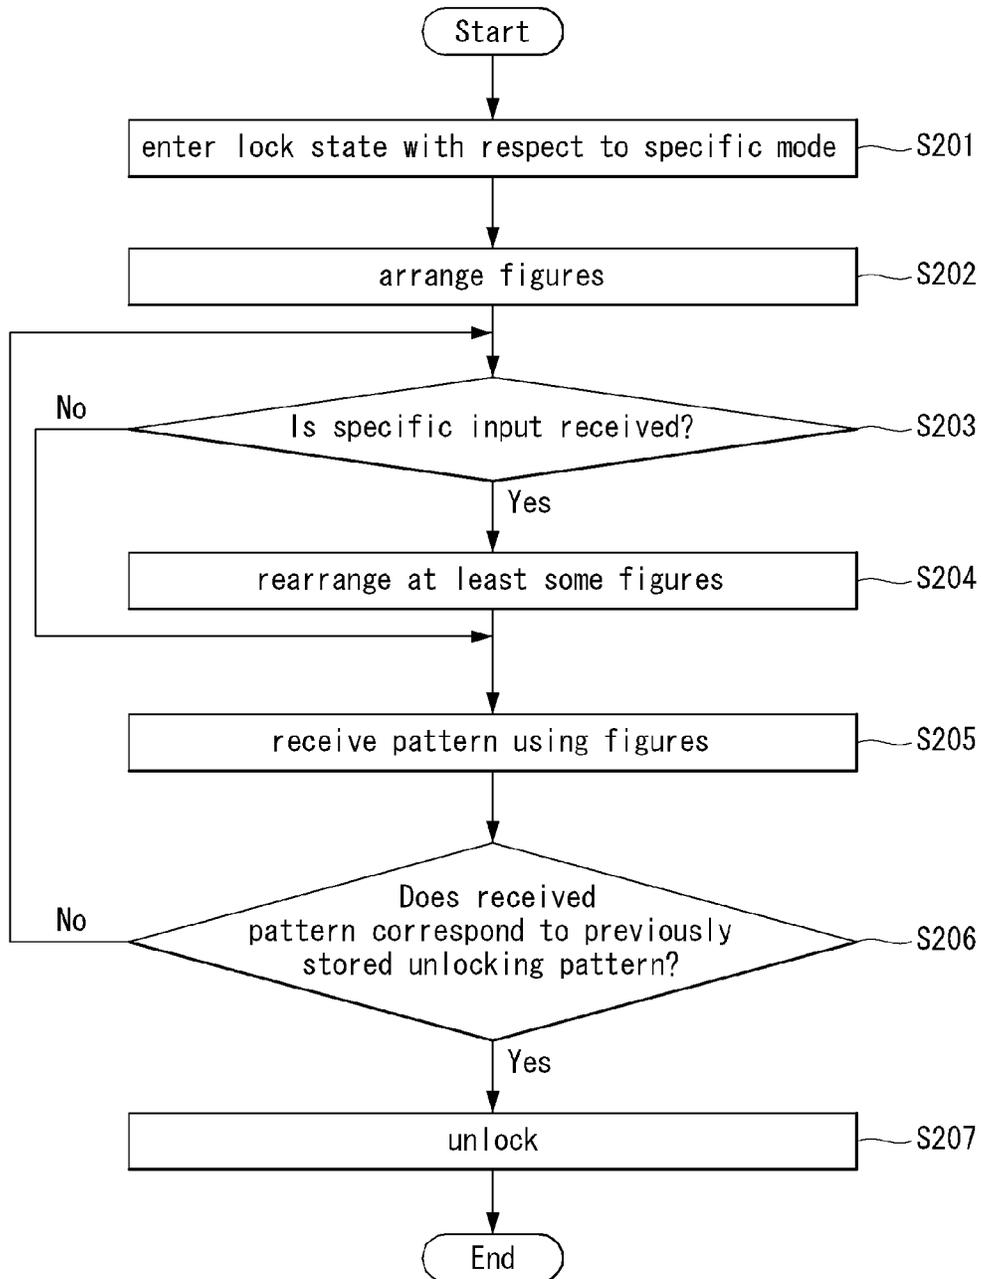


FIG. 12

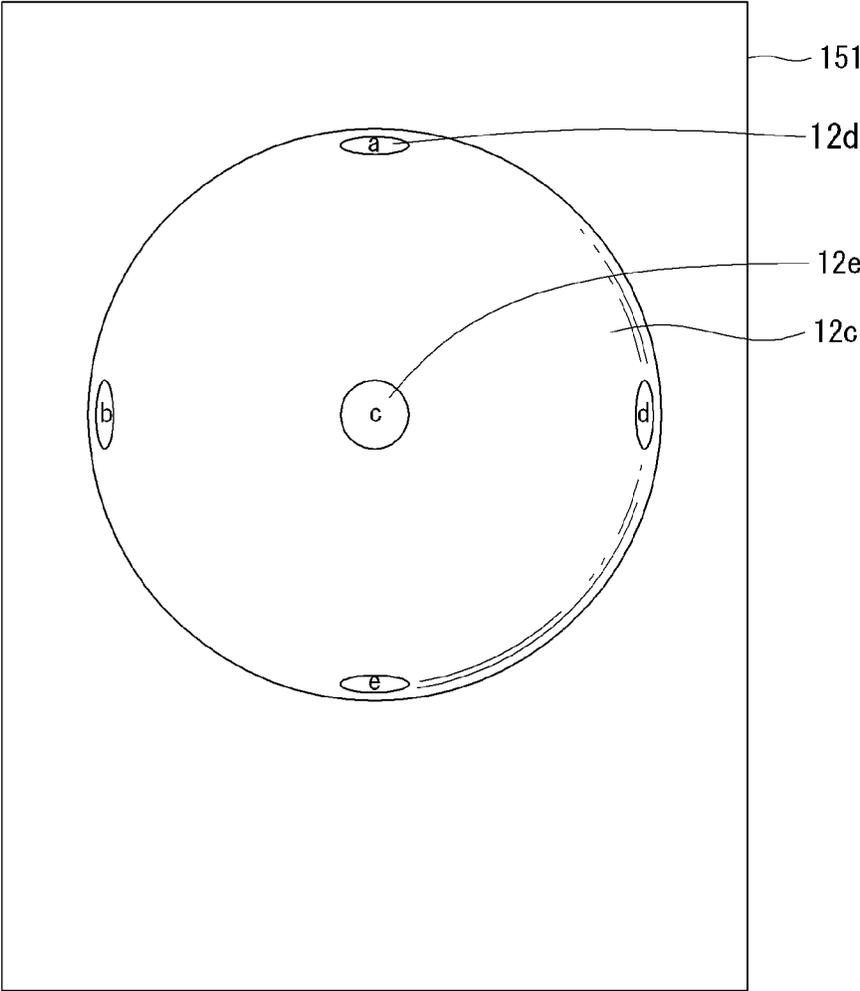


FIG. 13

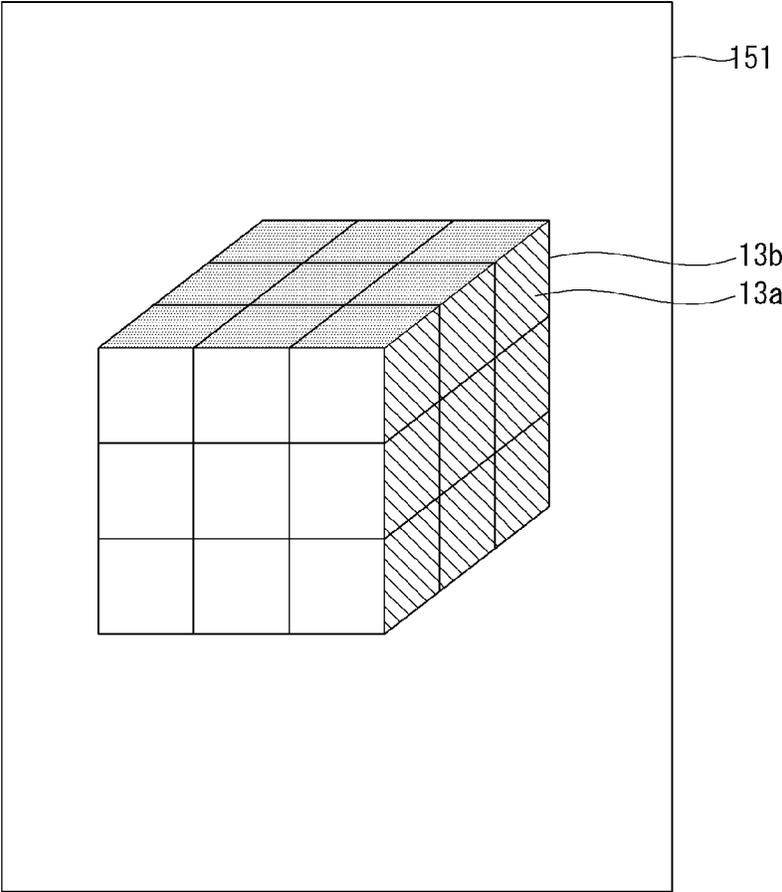


FIG. 14

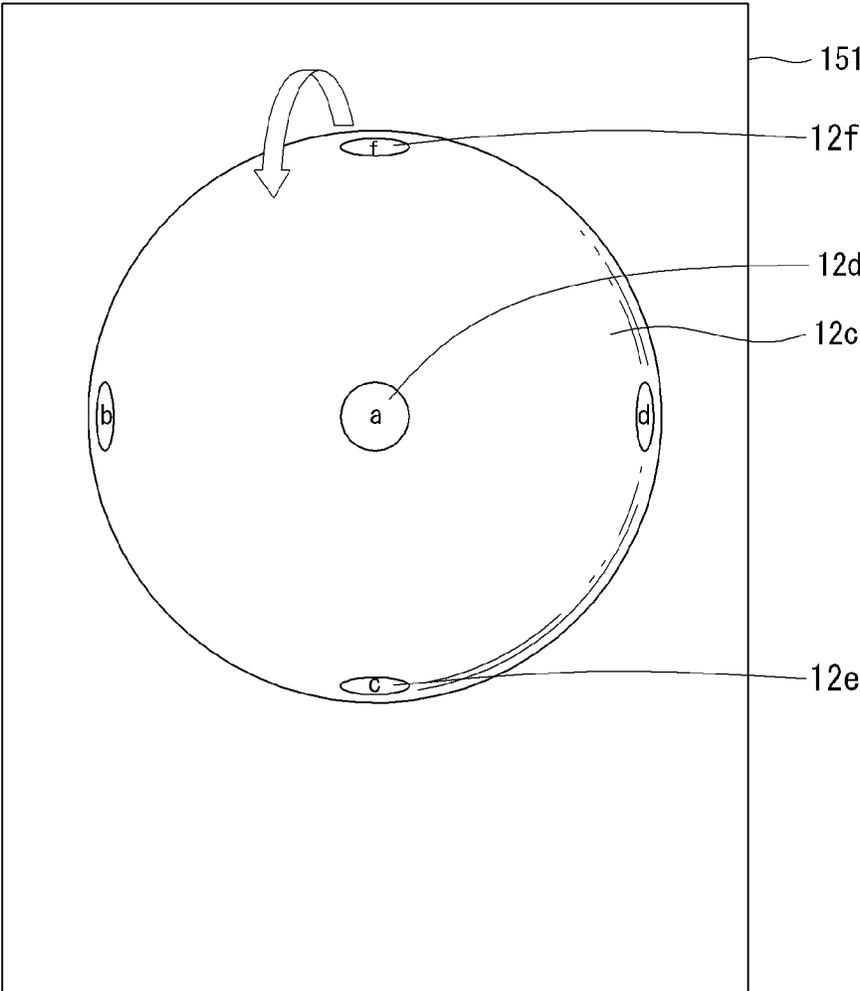


FIG. 15

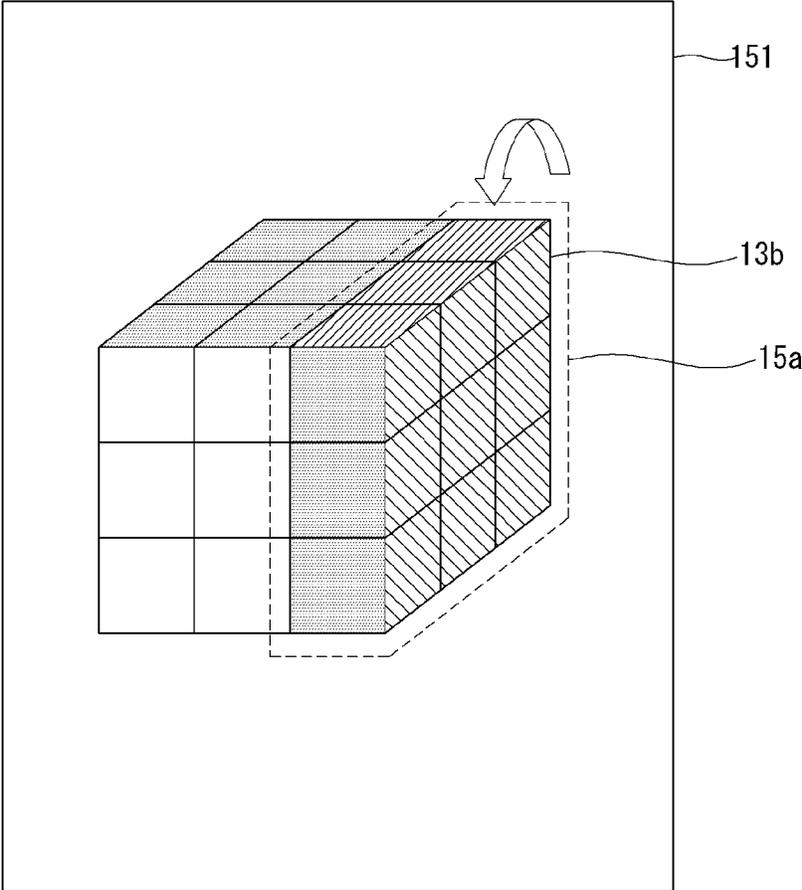


FIG. 16

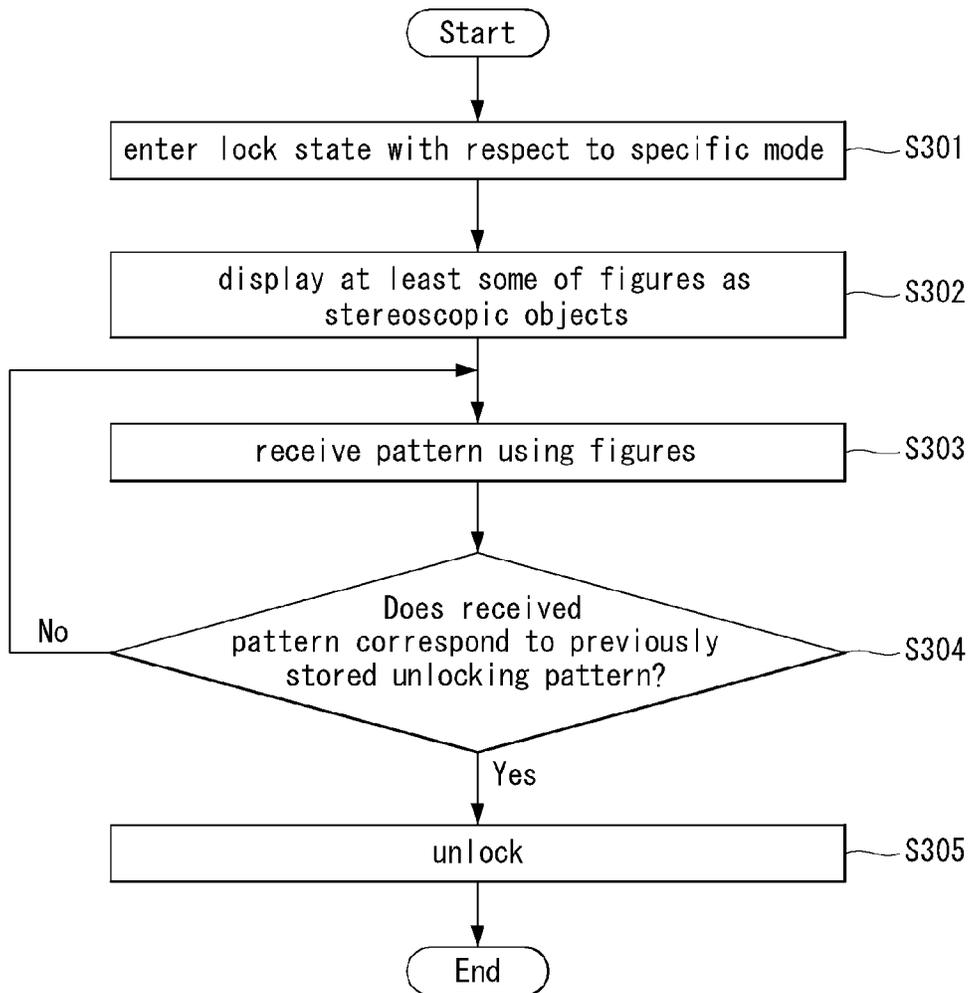


FIG. 17

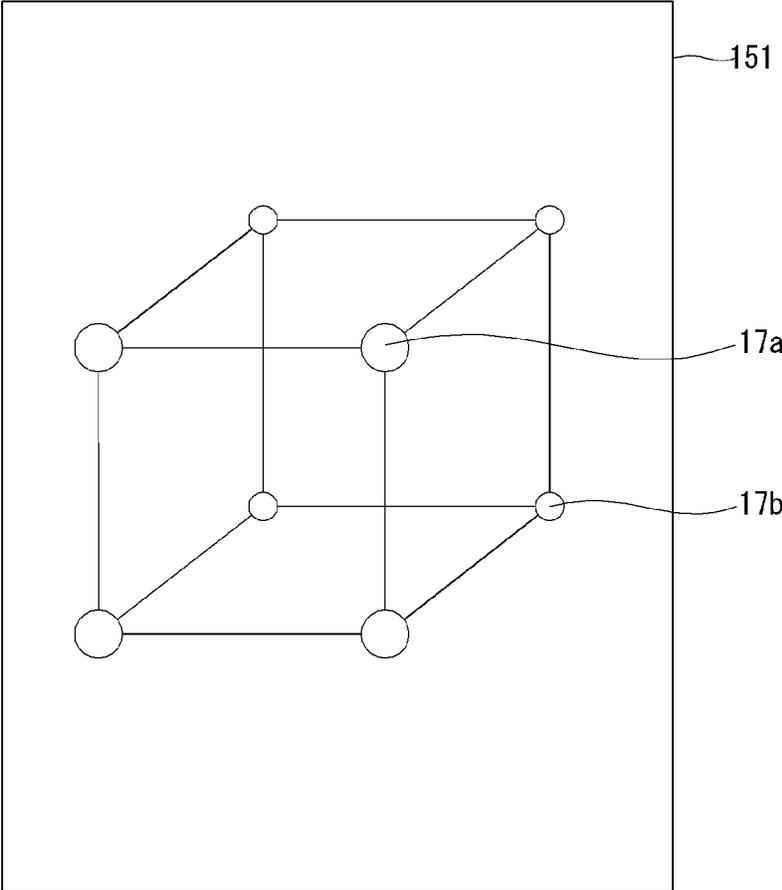


FIG. 18


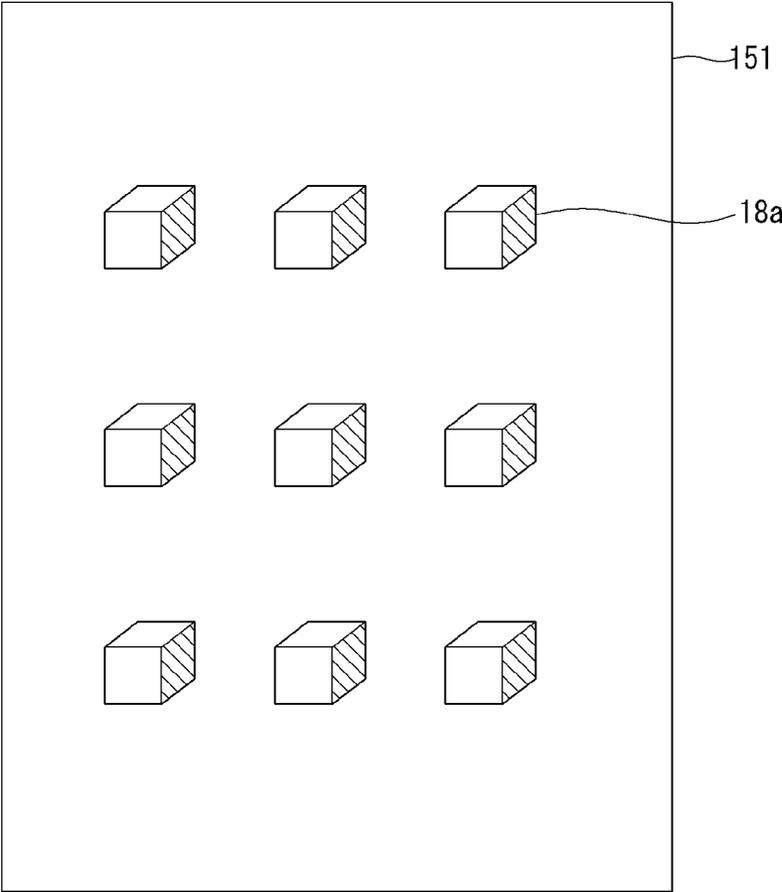


FIG. 19

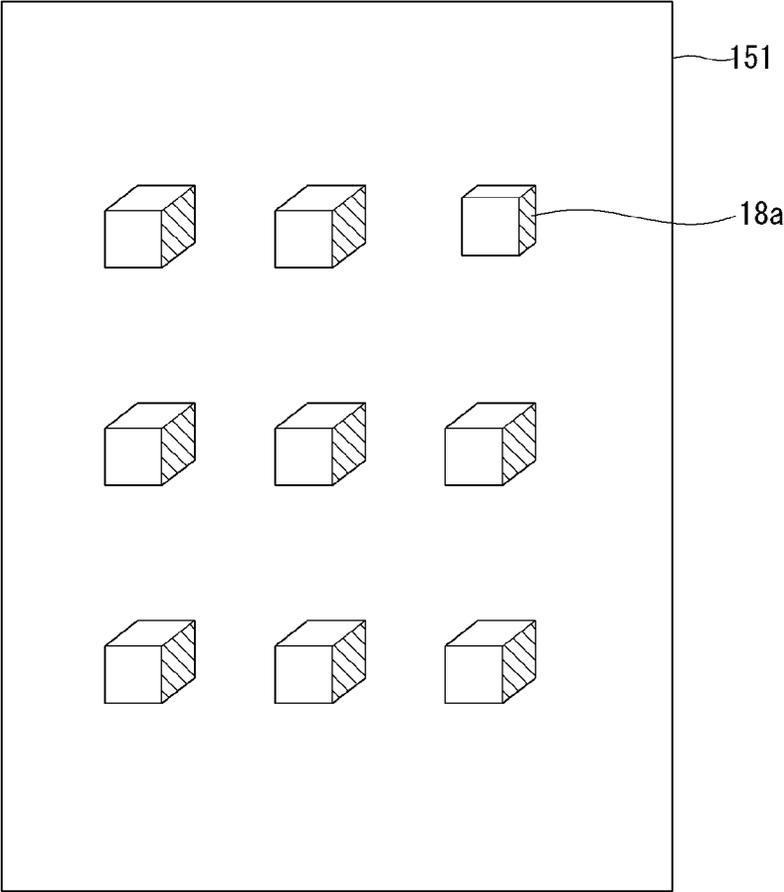

MOBILE TERMINAL AND CONTROL METHOD THEREOF

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a reissue of U.S. Pat. No. 9,697,347 B2, which issued on Jul. 4, 2017, from U.S. patent application Ser. No. 15/053,902, filed on Feb. 25, 2016, which is a continuation of U.S. application Ser. No. 13/708,904, filed on Dec. 7, 2012, now U.S. Pat. No. 9,390,250, which claims the benefit of earlier filing date and right of priority to Korean Patent Application No. 10-2011-0130666, filed on Dec. 8, 2011, the contents of which are all hereby incorporated by reference herein in their entirety.

TECHNICAL FIELD

The present invention relates to a mobile terminal and a control method thereof.

DISCUSSION OF THE RELATED ART

Terminals can be classified into a mobile terminal and a stationary terminal according to mobility. The mobile terminal can be divided into a handheld terminal and a vehicle mount terminal according to portability of users.

With increasing propagation of a mobile terminal including a touch screen, various methods for locking/unlocking a touch screen are proposed.

Among the methods, a method of unlocking the touch screen using an unlocking pattern displays points through which a pattern can be input on a screen and determines whether to unlock the touch screen by comparing a pattern formed by touching points displayed on the screen with a previously registered unlocking pattern.

SUMMARY

An object of the present invention is to provide a mobile terminal and a control method thereof to improve user convenience and provide a user-friendly unlocking method.

According to one aspect of the present invention, there is provided a mobile terminal including: a touch screen; a memory configured to store an unlocking pattern for a specific mode; and a controller configured to display a plurality of figures arranged in a first composition on the touch screen when the specific mode is locked, to rearrange the plurality of figures in a second composition different from the first composition upon receiving a specific input, and to determine whether to unlock the specific mode on the basis of a pattern which is input using the plurality of figures arranged in the first or second composition.

According to another aspect of the present invention, there is provided a mobile terminal including: a touch screen including a panel for generating stereoscopic vision; a memory configured to store an unlocking pattern for a specific mode; and a controller configured to display a plurality of figures as stereoscopic objects when the specific

mode is locked, to receive a pattern on the basis of the depths of the plurality of stereoscopic objects, and to unlock the specific mode when the received pattern corresponds to the unlocking pattern.

According to another aspect of the present invention, there is provided a method of controlling a mobile terminal, including: displaying a plurality of figures for receiving an unlocking pattern for a specific mode in a first area; displaying the plurality of figures in a second area different from the first area upon receiving a specific input; receiving a pattern corresponding to a trajectory generated by at least one touched figure from the plurality of figures or the order of touching figures; and entering the specific mode when the received pattern corresponds to the unlocking pattern.

The mobile terminal and control method thereof according to the present invention can improve user convenience and provide a user-friendly unlocking method.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention.

FIG. 1 is a block diagram of a mobile terminal according to an embodiment of the present invention;

FIG. 2 is a perspective view of the mobile terminal shown in FIG. 1;

FIGS. 3 and 4 illustrate operations of a touch pad of the mobile terminal shown in FIG. 2;

FIGS. 5 and 6 are views for explaining a method of displaying a stereoscopic image using binocular parallax according to embodiments of the present invention;

FIG. 7 is a flowchart illustrating a method of controlling a mobile terminal 100 according to a first embodiment of the present invention;

FIG. 8 shows an example of initially arranging figures through which an unlocking pattern is input in the mobile terminal 100 according to the first embodiment of the present invention;

FIG. 9 shows an example of rearranging the figures in the mobile terminal according to the first embodiment of the present invention;

FIG. 10 shows an example of receiving an unlocking pattern using figures in the mobile terminal according to the first embodiment of the present invention;

FIG. 11 is a flowchart illustrating a method of controlling the mobile terminal according to a second embodiment of the present invention;

FIGS. 12 and 13 show examples of arranging figures used to receive an unlocking pattern in the mobile terminal according to the second embodiment of the present invention;

FIGS. 14 and 15 show examples of rearranging figures;

FIG. 16 is a flowchart illustrating a method of controlling the mobile terminal according to a third embodiment of the present invention;

FIGS. 17 and 18 show examples of displaying figures as three-dimensional objects in the mobile terminal according to the third embodiment; and

FIG. 19 shows an example of receiving a pattern using the figures shown in FIG. 18.

DETAILED DESCRIPTION

Arrangements and embodiments may now be described more fully with reference to the accompanying drawings, in

which exemplary embodiments may be shown. Embodiments may, however, be embodied in many different forms and should not be construed as being limited to embodiments set forth herein; rather, embodiments may be provided so that this disclosure will be thorough and complete, and will fully convey the concept to those skilled in the art.

A mobile terminal may be described below with reference to the accompanying drawings. In the following description, suffixes “module” and “unit” may be given to components of the mobile terminal in consideration of only facilitation of description and do not have meanings or functions discriminated from each other.

The mobile terminal may include a cellular phone, a smart phone, a laptop computer, a digital broadcasting terminal, personal digital assistants (PDA), a portable multimedia player (PMP), a navigation system and/or so on.

FIG. 1 is a block diagram of a mobile terminal according to an embodiment of the present invention. Other embodiments, configurations and arrangements may also be provided.

As shown, the mobile terminal 100 may include a wireless communication unit 110 (or radio communication unit), an audio/video (A/V) input unit 120, a user input unit 130, a sensing unit 140, an output unit 150, a memory 160, an interface 170, a controller 180, and a power supply 190. The components shown in FIG. 1 may be essential parts and/or a number of components included in the mobile terminal 100 may vary. Components of the mobile terminal 100 may now be described.

The wireless communication unit 110 may include at least one module that enables radio communication between the mobile terminal 100 and a radio communication system or between the mobile terminal 100 and a network in which the mobile terminal 100 is located. For example, the wireless communication unit 110 may include a broadcasting receiving module 111, a mobile communication module 112, a wireless Internet module 113, a short range communication module 114 (or local area communication module), and a location information module 115 (or position information module).

The broadcasting receiving module 111 may receive broadcasting signals and/or broadcasting related information from an external broadcasting management server through a broadcasting channel. The broadcasting channel may include a satellite channel and a terrestrial channel, and the broadcasting management server may be a server that generates and transmits broadcasting signals and/or broadcasting related information or a server that receives previously created broadcasting signals and/or broadcasting related information and transmits the broadcasting signals and/or broadcasting related information to a terminal.

The broadcasting signals may include not only TV broadcasting signals, radio broadcasting signals, and data broadcasting signals but also signals in the form of a combination of a TV broadcasting signal and a radio broadcasting signal. The broadcasting related information may be information on a broadcasting channel, a broadcasting program or a broadcasting service provider, and may be provided even through a mobile communication network. In the latter case, the broadcasting related information may be received by the mobile communication module 112.

The broadcasting related information may exist in various forms. For example, the broadcasting related information may exist in the form of an electronic program guide (EPG) of a digital multimedia broadcasting (DMB) system or in the form of an electronic service guide (ESG) of a digital video broadcast-handheld (DVB-H) system.

The broadcasting receiving module 111 may receive broadcasting signals using various broadcasting systems. More particularly, the broadcasting receiving module 111 may receive digital broadcasting signals using digital broadcasting systems such as a digital multimedia broadcasting-terrestrial (DMB-T) system, a digital multimedia broadcasting-satellite (DMB-S) system, a media forward link only (MediaFLO) system, a DVB-H and integrated services digital broadcast-terrestrial (ISDB-T) systems. The broadcasting receiving module 111 may receive signals from broadcasting systems providing broadcasting signals other than the above-described digital broadcasting systems.

The broadcasting signals and/or broadcasting related information received through the broadcasting receiving module 111 may be stored in the memory 160. The mobile communication module 112 may transmit/receive a radio signal to/from at least one of a base station, an external terminal and a server on a mobile communication network. The radio signal may include a voice call signal, a video telephony call signal or data in various forms according to transmission and reception of text/multimedia messages.

The wireless Internet module 113 may correspond to a module for wireless Internet access and may be included in the mobile terminal 100 or may be externally attached to the mobile terminal 100. Wireless LAN (WLAN or Wi-Fi), wireless broadband (Wibro), world interoperability for microwave access (Wimax), high speed downlink packet access (HSDPA) and so on may be used as a wireless Internet technique.

The short range communication module 114 may correspond to a module for short range communication. Further, Bluetooth®, radio frequency identification (RFID), infrared data association (IrDA), ultra wideband (UWB) and/or Zig-Bee® may be used as a short range communication technique.

The location information module 115 may confirm or obtain a location or a position of the mobile terminal 100. The location information module 115 may obtain position information by using a global navigation satellite system (GNSS). The GNSS is a terminology describing a radio navigation satellite system that revolves around the earth and transmits reference signals to predetermined types of radio navigation receivers such that the radio navigation receivers can determine their positions on the earth's surface or near the earth's surface. The GNSS may include a global positioning system (GPS) of the United States, Galileo of Europe, a global orbiting navigational satellite system (GLONASS) of Russia, COMPASS of China, and a quasi-zenith satellite system (QZSS) of Japan, for example.

A global positioning system (GPS) module is a representative example of the location information module 115. The GPS module may calculate information on distances between one point or object and at least three satellites and information on a time when distance information is measured and apply trigonometry to the obtained distance information to obtain three-dimensional position information on the point or object according to latitude, longitude and altitude at a predetermined time.

A method of calculating position and time information using three satellites and correcting the calculated position and time information using another satellite may also be used. Additionally, the GPS module may continuously calculate a current position in real time and calculate velocity information using the location or position information.

The A/V input unit 120 may input (or receive) an audio signal and/or a video signal. The A/V input unit 120 may include a camera 121 and a microphone 122. The camera

5

121 may process image frames of still images or moving images obtained by an image sensor in a video telephony mode or a photographing mode. The processed image frames may be displayed on a display unit **151**, which may be a touch screen.

The image frames processed by the camera **121** may be stored in the memory **160** or may be transmitted to an external device through the wireless communication unit **110**. The mobile terminal **100** may also include at least two cameras **121**.

The microphone **122** may receive an external audio signal in a call mode, a recording mode and/or a speech recognition mode, and the microphone **122** may process the received audio signal into electric audio data. The audio data may then be converted into a form that can be transmitted to a mobile communication base station through the mobile communication module **112** and output in the call mode. The microphone **122** may employ various noise removal algorithms (or noise canceling algorithm) for removing or reducing noise generated when the external audio signal is received.

The user input unit **130** may receive input data for controlling operation of the mobile terminal **100** from a user. The user input unit **130** may include a keypad, a dome switch, a touch pad (constant voltage/capacitance), a jog wheel, a jog switch and/or so on.

The sensing unit **140** may sense a current state of the mobile terminal **100**, such as an open/close state of the mobile terminal **100**, a position of the mobile terminal **100**, whether a user touches the mobile terminal **100**, a direction of the mobile terminal **100**, and acceleration/deceleration of the mobile terminal **100**, and the sensing unit **140** may generate a sensing signal for controlling operation of the mobile terminal **100**. For example, in an example of a slide phone, the sensing unit **140** may sense whether the slide phone is opened or closed. Further, the sensing unit **140** may sense whether the power supply **190** supplies power and/or whether The interface unit **170** is connected to an external device. The sensing unit **140** may also include a proximity sensor **141**. The sensing unit **140** may sense a motion of the mobile terminal **100**.

The output unit **150** may generate visual, auditory and/or tactile output, and the output unit **150** may include the display unit **151**, an audio output module **152**, an alarm unit **153** and a haptic module **154**. The display unit **151** may display information processed by the mobile terminal **100**. The display unit **151** may display a user interface (UI) and/or a graphic user interface (GUI) related to a telephone call when the mobile terminal **100** is in the call mode. The display unit **151** may also display a captured and/or received image, a UI or a GUI when the mobile terminal **100** is in the video telephony mode or the photographing mode.

The display unit **151** may include at least one of a liquid crystal display, a thin film transistor liquid crystal display, an organic light-emitting diode display, a flexible display and/or a three-dimensional display. The display unit **151** may be of a transparent type or a light transmissive type. That is, The display unit **151** may include a transparent display.

The transparent display may be a transparent liquid crystal display. A rear structure of The display unit **151** may also be of a light transmissive type. Accordingly, a user may see an object located behind the body (of the mobile terminal **100**) through the transparent area of the body of the mobile terminal **100** that is occupied by The display unit **151**.

The mobile terminal **100** may also include at least two displays **151**. For example, the mobile terminal **100** may include a plurality of displays **151** that are arranged on a

6

single face at a predetermined distance or integrated displays. The plurality of displays **151** may also be arranged on different sides.

When The display unit **151** and a sensor sensing touch (hereafter referred to as a touch sensor) form a layered structure that is referred to as a touch screen, The display unit **151** may be used as an input device in addition to an output device. The touch sensor may be in the form of a touch film, a touch sheet, and/or a touch pad, for example.

The touch sensor may convert a variation in pressure applied to a specific portion of The display unit **151** or a variation in capacitance generated at a specific portion of The display unit **151** into an electric input signal. The touch sensor may sense pressure of touch as well as position and area of the touch.

When the user applies a touch input to the touch sensor, a signal corresponding to the touch input may be transmitted to a touch controller. The touch controller may then process the signal and transmit data corresponding to the processed signal to the controller **180**. Accordingly, the controller **180** may detect a touched portion of The display unit **151**.

The proximity sensor **141** (of the sensing unit **140**) may be located in an internal region of the mobile terminal **100**, surrounded by the touch screen, and/or near the touch screen. The proximity sensor **141** may sense an object approaching a predetermined sensing face or an object located near the proximity sensor **141** using an electromagnetic force or infrared rays without having mechanical contact. The proximity sensor **141** may have a lifetime longer than a contact sensor and may thus have a wide application in the mobile terminal **100**.

The proximity sensor **141** may include a transmission type photo-electric sensor, a direct reflection type photo-electric sensor, a mirror reflection type photo-electric sensor, a high-frequency oscillating proximity sensor, a capacitive proximity sensor, a magnetic proximity sensor, and/or an infrared proximity sensor. A capacitive touch screen may be constructed such that proximity of a pointer is detected through a variation in an electric field according to the proximity of the pointer. The touch screen (touch sensor) may be classified as a proximity sensor **141**.

For ease of explanation, an action of the pointer approaching the touch screen without actually touching the touch screen may be referred to as a proximity touch and an action of bringing the pointer into contact with the touch screen may be referred to as a contact touch. The proximity touch point of the pointer on the touch screen may correspond to a point of the touch screen at which the pointer is perpendicular to the touch screen.

The proximity sensor **141** may sense the proximity touch and a proximity touch pattern (e.g., a proximity touch distance, a proximity touch direction, a proximity touch velocity, a proximity touch time, a proximity touch position, a proximity touch moving state, etc.). Information corresponding to the sensed proximity touch action and proximity touch pattern may then be displayed on the touch screen.

The audio output module **152** may output audio data received from the wireless communication unit **110** or stored in the memory **160** in a call signal receiving mode, a telephone call mode or a recording mode, a speech recognition mode and a broadcasting receiving mode. The audio output module **152** may output audio signals related to functions, such as a call signal incoming tone and a message incoming tone, performed in the mobile terminal **100**. The audio output module **152** may include a receiver, a speaker, a buzzer, and/or the like. The audio output module **152** may

output sounds through an earphone jack. The user may hear the sounds by connecting an earphone to the earphone jack.

The alarm unit **153** may output a signal for indicating generation of an event of the mobile terminal **100**. For example, an alarm may be generated when receiving a call signal, receiving a message, inputting a key signal, and/or inputting a touch. The alarm unit **153** may also output signals in forms different from video signals or audio signals, for example, a signal for indicating generation of an event through vibration. The video signals and/or the audio signals may also be output through The display unit **151** or the audio output module **152**.

The haptic module **154** may generate various haptic effects that the user can feel. One example of the haptic effects is vibration. An intensity and/or pattern of vibration generated by the haptic module **154** may also be controlled. For example, different vibrations may be combined and output or may be sequentially output.

The haptic module **154** may generate a variety of haptic effects including an effect of stimulus according to an arrangement of pins vertically moving against a contact skin surface, an effect of stimulus according to a jet force or sucking force of air through a jet hole or a sucking hole, an effect of stimulus of rubbing the skin, an effect of stimulus according to contact of an electrode, an effect of stimulus using an electrostatic force, and an effect according to a reproduction of cold and warmth using an element capable of absorbing or radiating heat in addition to vibrations.

The haptic module **154** may not only transmit haptic effects through direct contact but may also allow the user to feel haptic effects through a kinesthetic sense of the user's fingers or arms. The mobile terminal **100** may also include a plurality of haptic modules **154**.

The memory **160** may store a program for operations of the controller **180** and/or temporarily store input/output data such as a phone book, messages, still images, and/or moving images. The memory **160** may also store data about vibrations and sounds in various patterns that are output from when a touch input is applied to the touch screen.

The memory **160** may include at least a flash memory, a hard disk type memory, a multimedia card micro type memory, a card type memory, such as SD or XD memory, a random access memory (RAM), a static RAM (SRAM), a read-only memory (ROM), an electrically erasable programmable ROM (EEPROM), a programmable ROM (PROM) magnetic memory, a magnetic disk and/or an optical disk. The mobile terminal **100** may also operate in relation to a web storage that performs a storing function of the memory **160** on the Internet.

The interface unit **170** may serve as a path to external devices connected to the mobile terminal **100**. The interface unit **170** may receive data from the external devices or power and transmit the data or power to internal components of the mobile terminal **100** or transmit data of the mobile terminal **100** to the external devices. For example, The interface unit **170** may include a wired/wireless headset port, an external charger port, a wired/wireless data port, a memory card port, a port for connecting a device having a user identification module, an audio I/O port, a video I/O port, and/or an earphone port.

The interface unit **170** may also interface with a user identification module that is a chip that stores information for authenticating authority to use the mobile terminal **100**. For example, the user identification module may be a user identify module (UIM), a subscriber identify module (SIM) and/or a universal subscriber identify module (USIM). An identification device (including the user identification mod-

ule) may also be manufactured in the form of a smart card. Accordingly, the identification device may be connected to the mobile terminal **100** through a port of The interface unit **170**.

The interface unit **170** may also be a path through which power from an external cradle is provided to the mobile terminal **100** when the mobile terminal **100** is connected to the external cradle or a path through which various command signals input by the user through the cradle are transmitted to the mobile terminal **100**. The various command signals or power input from the cradle may be used as signals for confirming whether the mobile terminal **100** is correctly set in the cradle.

The controller **180** may control overall operations of the mobile terminal **100**. For example, the controller **180** may perform control and processing for voice communication, data communication and/or video telephony. The controller **180** may also include a multimedia module **181** for playing multimedia. The multimedia module **181** may be included in the controller **180** or may be separated from the controller **180**.

The controller **180** may perform a pattern recognition process capable of recognizing handwriting input or picture-drawing input applied to the touch screen as characters or images. The power supply **190** may receive external power and internal power and provide power required for operations of the components of the mobile terminal **100** under control of the controller **180**.

According to hardware implementation, embodiments may be implemented using at least one of application specific integrated circuits (ASICs), digital signal processors (DSPs), digital signal processing devices (DSPDs), programmable logic devices (PLDs), field programmable gate arrays (FPGAs), processors, controllers, micro-controllers, microprocessors, and/or electrical units for executing functions. Embodiments may be implemented by the controller **180**.

According to software implementation, embodiments such as procedures or functions may be implemented with a separate software module that executes at least one function or operation. Software codes may be implemented according to a software application written in an appropriate software language. The software codes may be stored in the memory **160** and executed by the controller **180**.

FIG. 2 is a front perspective view of a mobile terminal or a handheld terminal **100** according to an example embodiment of the present invention. The handheld terminal **100** has a bar type terminal body. However, the present invention is not limited to a bar type terminal and can be applied to terminals of various types including slide type, folder type, swing type and swivel type terminals having at least two bodies that are relatively movably combined.

The terminal body includes a case (a casing, a housing, a cover, etc.) forming the exterior of the terminal **100**. In the present embodiment, the case can be divided into a front case **101** and a rear case **102**. Various electronic components are arranged in the space formed between the front case **101** and the rear case **102**. At least one middle case can be additionally arranged between the front case **101** and the rear case **102**. The cases can be formed of plastics through injection molding or made of a metal material such as stainless steel (STS) or titanium (Ti).

The display unit **151**, the audio output unit **152**, the camera **121**, the user input unit **130/131** and **132**, the microphone **122** and the interface unit **170** can be arranged in the terminal body, specifically, in the front case **101**. The display unit **151** occupies most part of the main face of the

front case **101**. The audio output unit **152** and the camera **121** are arranged in a region in proximity to one of both ends of the display unit **151** and the user input unit **131** and the microphone **122** are located in a region in proximity to the other end of the display unit **151**. The user input unit **132** and The interface unit **170** are arranged on the sides of the front case **101** and the rear case **102**.

The user input unit **130** is operated to receive commands for controlling the operation of the handheld terminal **100** and can include a plurality of operating units **131** and **132**. The operating units **131** and **132** can be referred to as manipulating portions and employ any tactile manner in which a user operates the operating units **131** and **132** while having tactile feeling. First and second operating units **131** and **132** can receive various inputs. For example, the first operating unit **131** receives commands such as start, end and scroll and the second operating unit **132** receives commands such as control of the volume of sound output from the audio output unit **152** or conversion of the display unit **151** to a touch recognition mode.

FIG. 3 is a rear perspective view of the handheld terminal shown in FIG. 2 according to an embodiment of the present invention.

Referring to FIG. 3, a camera **121'** can be additionally attached to the rear side of the terminal body, that is, the rear case **102**. The camera **121'** has a photographing direction opposite to that of the camera **121** shown in FIG. 2 and can have pixels different from those of the camera **121** shown in FIG. 2.

For example, it is desirable that the camera **121** has low pixels such that it can capture an image of the face of a user and transmit the image to a receiving part in case of video telephony while the camera **121'** has high pixels because it captures an image of a general object and does not immediately transmit the image in many cases. The cameras **121** and **121'** can be attached to the terminal body such that they can be rotated or pop-up.

A flash bulb **123** and a mirror **124** are additionally arranged in proximity to the camera **121'**. The flash bulb **123** lights an object when the camera **121'** takes a picture of the object. The mirror **124** is used for the user to look at his/her face in the mirror when the user wants to self-photograph himself/herself using the camera **121'**.

An audio output unit **152'** can be additionally provided on the rear side of the terminal body. The audio output unit **152'** can achieve a stereo function with the audio output unit **152** shown in FIG. 2 and be used for a speaker phone mode when the terminal is used for a telephone call.

A broadcasting signal receiving antenna can be additionally attached to the side of the terminal body in addition to an antenna for telephone calls. The antenna constructing a part of the broadcasting receiving module **111** shown in FIG. 1 can be set in the terminal body such that the antenna **124** can be pulled out of the terminal body. The power supply **190** for providing power to the handheld terminal **100** is set in the terminal body. The power supply **190** can be included in the terminal body or detachably attached to the terminal body.

A touch pad **135** for sensing touch can be additionally attached to the rear case **102**. The touch pad **135** can be of a light transmission type as the display unit **151**. In this case, if the display unit **151** outputs visual information through both sides thereof, the visual information can be recognized through the touch pad **135**. The information output through both sides of the display unit **151** can be controlled by the

touch pad **135**. Otherwise, a display is additionally attached to the touch pad **135** such that a touch screen can be arranged even in the rear case **102**.

The touch pad **135** operates in connection with the display unit **151** of the front case **101**. The touch pad **135** can be located in parallel with the display unit **151** behind the display unit **151**. The touch panel **135** can be identical to or smaller than the display unit **151** in size.

Next, FIG. 4 is a conceptual view illustrating a proximity depth of the proximity sensor **141**. As shown in FIG. 4, when a pointer such as the user's finger, a pen, or the like, approaches the touch screen, the proximity sensor **141** disposed within or near the touch screen detects it and outputs a proximity signal. The proximity sensor **141** may also be configured to output a different proximity signal according to the distance (referred to as a 'proximity depth', hereinafter) between the closely touched pointer and the touch screen.

FIG. 4 also shows the section of the touch screen with the proximity sensor **141** for detecting, for example, three proximity depths. The proximity sensor **141** may detect three or less or four or more proximity depths. In more detail, when the pointer is fully brought into contact with the touch screen **d0**, this position is recognized as a contact touch. When the pointer is positioned to be spaced apart by shorter than a distance **d1** on the touch screen, this position is recognized as a proximity touch with a first proximity depth.

If the pointer is positioned to be spaced apart by the distance longer than the distance **d1** but shorter than a distance **d2** on the touch screen, this position is recognized as a proximity touch with a second proximity depth. Also, if the pointer is positioned to be spaced apart by the distance longer than the distance **d2** but shorter than a distance **d3**, this position is recognized as a proximity touch with a third proximity depth. If the pointer is positioned to be spaced apart by longer than the distance **d3** on the touch screen, this position is recognized that the proximity touch has been released.

Accordingly, the controller **180** can recognize the proximity touches as various input signals according to the proximity depths and proximity positions of the pointer, and control various operations according to the various input signals.

FIGS. 5 and 6 are views for explaining a method of displaying a stereoscopic image using binocular parallax according to embodiments of the present invention. FIG. 5 illustrates a method using a lenticular lens array and FIG. 6 illustrates a method using a parallax barrier.

Binocular parallax refers to the apparent difference in position of an object as seen separately by one eye, and then by the other. When the brain of a person combines an image viewed through the left eye and an image viewed through the right eye, the combined image is seen as a stereoscopic image by the person.

In the following description, the phenomenon that a person feels stereoscopic effect according to binocular parallax is called 'stereoscopic vision' and an image that generates stereoscopic vision is called 'stereoscopic image'. The stereoscopic image can use a moving image or a still image.

An object included in a stereoscopic image is referred to as 'stereoscopic object' and content generated such that it causes stereoscopic vision is referred to as 'stereoscopic content'. The stereoscopic content may include a stereoscopic image, a stereoscopic object, etc.

11

Methods of displaying a stereoscopic image using the binocular parallax are classified into a stereoscopic method and an auto-stereoscopic method.

The stereoscopic method includes a method using shades having wavelength selectivity, a patterned retarder method using light-shielding effect according to polarization difference, and a field sequential glasses method that alternately provides left and right images within the afterimage lag time of eyes. In addition, there is a method that sets filters having difference transmittance for left and right eyes and obtains stereoscopic effect with respect to motion to the left and right according to a time difference of the visual system, caused by the transmittance difference.

The auto-stereoscopic method that causes stereoscopic effect at the side of an image display plane instead of an observer includes a method using a parallax barrier, a method using a lenticular lens, a method using a microlens array, etc.

Referring to FIG. 5, the display unit 151 includes a lenticular lens array 11a in order to display a stereoscopic image. The lenticular lens array 11a is located between a display plane 13 on which a pixel L to be viewed by the left eye 12a and a pixel R to be viewed by the right eye 12b are alternately arranged in the horizontal direction and the left and right eyes 12a and 12b and provides optical discrimination directivity for the pixel L and the pixel R. Accordingly, an image that has passed through the lenticular lens array 11a is divided and observed by the left eye 12a and the right eye 12b, and the human brain combines the image viewed through the left eye 12a and the image viewed through the right eye 12b so as to see a stereoscopic image.

Referring to FIG. 6, the display unit 151 includes a parallax barrier 11b in the form of a vertical lattice to display a stereoscopic image. The parallel barrier 11b is located between the display plane 13 on which the pixel L to be viewed by the left eye 12a and the pixel R to be viewed by the right eye 12b are alternately arranged in the horizontal direction and the left and right eyes 12a and 12b, and an image is divided at the left eye 12a and the right eye 12b through apertures in the form of a vertical lattice and viewed. Accordingly, the human brain combines then image viewed through the left eye 12a and the image viewed through the right eye 12b to see a stereoscopic image. The parallax barrier 11b is turned on only when a stereoscopic image is displayed to separate incidence views and turned off when a plane image is displayed to pass the incidence views without separating them.

The above stereoscopic image display methods merely describe the present invention and the present invention is not limited thereto. The present invention can display a stereoscopic image using binocular parallax through various methods in addition to the above-described methods.

Exemplary embodiments of the present invention will now be described.

The embodiments can be implemented in the mobile terminal 100 described with reference to FIGS. 1 to 4.

The display unit 151 may include a panel for generating stereoscopic vision. The panel can have a structure for generating stereoscopic vision through the method using a lenticular lens or the method using a parallax barrier, as described above.

It is assumed that the display unit 151 is a touch screen for convenience of description. As described above, the touch screen 151 can perform both the information display function and information input function, as described above. However, the present invention is not limited thereto.

12

In the specification, a touch gesture means a gesture corresponding to contact touch or proximity touch, and touch input means input received by a touch gesture.

Touch gestures are divided into tapping, drag, flicking, press, multi-touch, pinch-in, pinch-output, etc.

Tapping refers to a motion of slightly pressing the touch screen 151 and releasing the touch and corresponds to a touch gesture such as clicking of a mouse of a computer.

Drag is a motion of touching the touch screen 151, moving the touch to a specific point and releasing the touch. When an object is dragged, the object may be moved and displayed in the drag direction.

Flicking refers to a motion of touching the touch screen 151, moving the touch to a specific direction (up, down, left, right, or diagonal direction) and then releasing the touch. Upon reception of touch input by flicking, the mobile terminal 100 processes a specific operation on the basis of a flicking direction, speed, etc. For example, the mobile terminal 100 can perform an operation of turning over the pages of e-book on the basis of a flicking direction.

Press refers to a motion of touching the touch screen 151 and then maintaining the touch for a predetermined time or longer.

Multi-touch refers to a motion of simultaneously touching a plurality of points of the touch screen 151.

Pinch-in refers to a motion of dragging a plurality of pointers that are multi-touching the touch screen 151 to a direction in which the pointers become close to one another. That is, pinch-in means drag started from at least one of the multi-touched points and generated in a direction in which the points become close to one another.

Pinch-out refers to a motion of dragging a plurality of pointers that are multi-touching the touch screen 151 to a direction in which the pointers become apart from one another. That is, pinch-out means drag started from at least one of multi-touched points and generated in a direction in which the points become apart from one another.

In the specification, the sensing unit 140 can obtain a rotation velocity or angular velocity according to rotation of the mobile terminal on an axis, that is, rotation of the mobile terminal 100 using a gyroscope. Furthermore, the sensing unit 140 can obtain acceleration of gravity according to movement of the mobile terminal 100 through an accelerometer. In addition, the sensing unit 140 can obtain the orientation of the mobile terminal 100 like a compass through a magnetic sensor.

The controller 180 can obtain a motion of the mobile terminal 100 on the basis of at least one of the angular velocity acquired through the gyroscope, the acceleration of gravity, acquired through accelerometer, and the orientation of the mobile terminal 100 acquired through the magnetic sensor. For example, when the mobile terminal 100 rotates on an axis that traverses the body of the mobile terminal 100 vertically or horizontally, the controller 180 can acquire a tilting state of the mobile terminal 100, which includes a tilting degree, tilting velocity, tilting direction, etc. of the body of the mobile terminal 100.

In the specification, motions of the mobile terminal 100 are defined as 'tilting', 'snapping', 'shaking', 'flicking', and 'tapping'.

Tilting and snapping mean a motion of tilting the mobile terminal 100 and may be discriminated from each other on the basis of a rotating velocity of the mobile terminal 100.

Tilting refers to a motion of tilting the mobile terminal 100 at lower than a predetermined velocity and snapping refers to a motion of tilting the mobile terminal 100 at higher than the predetermined velocity.

13

Shaking refers to a motion of consecutively snapping the mobile terminal **100** at least twice. Flicking refers to a motion of turning the mobile terminal **100**. That is, flicking means a motion of changing the directions of the front side and the rear side of the mobile terminal **100**.

Tapping refers to a motion of lightly tapping the surface of the mobile terminal **100**. Tapping can be sensed through a gyroscope, a magnetic sensor, an accelerometer, etc. as well as a touch sensor.

A method of controlling the mobile terminal **100** according to a first embodiment of the invention and operations of the mobile terminal **100** to implement the control method will now be described in detail with reference to FIGS. **7** to **10**.

FIG. **7** is a flowchart illustrating the mobile terminal according to the first embodiment of the invention and FIGS. **8** and **9** are views for explaining the control method shown in FIG. **7**.

Referring to FIG. **7**, the controller **180** locks a specific mode of the mobile terminal **100** (**S101**).

For example, the specific mode may be a mode in which information or a command can be received from a user through a touch operation of the user via the touch screen **151**. This mode can be called an activation mode. In the case of a terminal employing a touch screen, the touch screen is generally controlled to be locked to prevent an erroneous operation when the user does not manipulate the terminal for a predetermined time.

A case in which the specific mode is the activation mode of the touch screen **151** will now be described as an example. However, it is noted that the specific mode is not limited to the activation mode.

Upon reception of a control input for requesting the locked specific mode to be unlocked, the controller **180** arranges a plurality of figures for receiving an unlocking pattern on the touch screen (**S102**).

The unlocking pattern is used as authentication information for determining whether to unlock the specific mode and may be generated in the form of at least one trajectory that connect some of the plurality of figures or in the order of touching some of the plurality of figures.

When the plurality of figures for receiving the unlocking pattern is initially arranged in step **S102**, the plurality of figures may be arranged in a first area.

FIG. **8** shows an example of initially arranging the figures for receiving the unlocking pattern.

Referring to FIG. **8**, the controller **180** can arrange FIG. **8a** as points at a predetermined interval on the same plane. The controller **180** evenly arranges the figures on the overall screen.

Referring back to FIG. **7**, upon reception of a specific input while the figures for receiving the unlocking pattern are displayed (**S103**), the controller **180** changes the area in which the figures are displayed. That is, the controller **180** rearranges and displays the figures in the changed area (**S104**).

FIG. **9** shows an example of rearranging the figures.

Referring to FIG. **9(a)**, the controller displays the figures for receiving the unlocking pattern in a first area **9a**.

When the user drags the first area **9a**, the controller **180** re-sets an area in which the figures will be displayed on the basis of the direction and distance of the drag. That is, the controller **180** sets a second area **9b** reduced from the first area **9a** as the area in which the figures will be displayed and rearranges the figures in the second area **9b**.

Referring back to FIG. **7**, the controller **180** receives a pattern using the figures displayed on the screen (**S105**).

14

When the received pattern corresponds to a previously stored unlocking pattern (**S106**), the controller **180** unlocks the specific mode (**S106**). That is, the controller **180** controls the mobile terminal **100** to operate in the activation mode of the touch screen **151**.

When the user inputs a pattern using the figures in step **S105**, the controller **180** can display the touched figures such that the touched figures are distinguished from other figures or display a trajectory formed by the touched figures on the screen to allow the user to intuitively recognize the pattern input by him/her.

FIG. **10** shows an example of receiving the unlocking pattern using figures.

Referring to FIG. **10**, the controller **180** receives a pattern **10a** corresponding to figures **a1** to **a5** touched by the user while the plurality of figures is displayed in the second area.

The pattern **10a** can include the order of touching the figures **a1** to **a5** by the user or a trajectory formed by the touched figures **a1** to **a5**.

The controller **180** compares the received pattern **10a** with the previously stored unlocking pattern and unlocks the touch screen **151** when the two patterns correspond to each other.

As described above, according to the first embodiment of the present invention, it is possible to change the area in which the figures for receiving the unlocking pattern are displayed according to user input. Accordingly, the user can move the figures to a position at which the user conveniently inputs the unlocking pattern. Particularly, when the user has difficulty in inputting the unlocking pattern with one hand because the touch screen of the mobile terminal **100** is large, the user can move the figures to a position at which he/she can easily input the pattern, thereby improving user convenience.

While display positions of the figures are moved while the figures are displayed when an unlocking request for the specific mode is received from the user in the first embodiment of the present invention, the present invention is not limited thereto. According to exemplary embodiments of the present invention, the controller **180** can change the display positions of the figures using an additional screen for setting the display positions of the figures. In this case, the controller **180** displays the figures in an area set through the additional screen at the user's request for unlocking the specific mode.

Furthermore, while the display positions of the figures are changed using drag input in the first embodiment of the present invention, the present invention is not limited thereto. According to the present invention, the controller **180** can change the display positions of the figures on the basis of inputs in different forms, such as button manipulation, tapping, tilting of the mobile terminal **100**, etc.

A method of controlling the mobile terminal **100** according to a second embodiment of the present invention and operations of the mobile terminal **100** to implement the control method will now be described with reference to FIGS. **11** to **15**.

FIG. **11** is a flowchart illustrating the method of controlling the mobile terminal **100** according to the second embodiment of the present invention and FIGS. **12** to **15** are views for explaining the control method shown in FIG. **11**.

Referring to FIG. **11**, the controller **180** locks a specific mode of the mobile terminal **100** (**S201**).

Upon reception of a control input for requesting the specific mode to be unlocked, the controller **180** arranges a plurality of figures for receiving an unlocking pattern (**S202**).

15

The controller **180** can display tridimensionality and arrange figures on the surface of the tridimensionality in step **S202**. In this case, the controller **180** can receive an unlocking pattern corresponding to a trajectory formed by some figures arranged on the surface of the tridimensionality or the order of touching the figures.

The controller **180** may combine the figures in the form of tridimensionality and display the figures in step **S202**. In this case, the controller **180** can receive the unlocking pattern corresponding to arrangement or arrangement positions of the figures.

When the controller **180** arranges the figures on the surface of the tridimensionality or combines the figures to display tridimensionality in step **S202**, it is possible to achieve 3-dimensional effect of the tridimensionality by controlling display characteristics such as shadow or acquire 3-dimensional effect of the tridimensionality using binocular parallax by activating the panel for producing stereoscopic vision.

FIGS. **12** and **13** show examples of arranging the figures used to receive the unlocking pattern.

Referring to FIG. **12**, the controller **180** displays a spherical tridimensionality **12c** on the screen and arranges FIGS. **12d** and **12e** in the form of a dot on the surface of the tridimensionality **12c** at a predetermined interval.

The spherical tridimensionality can be rotated and the composition of the figures displayed on the screen can be changed as the spherical tridimensionality rotates. That is, the surface of the sphere **12** displayed on the screen is changed when the sphere **12** rotates, and thus the composition of the figures displayed on the screen can be changed to correspond to the changed surface.

When the figures are arranged on the surface of the tridimensionality, the controller **180** may control a display characteristic such as color to be different for the respective figures or respectively allocating different identification information to the respective figures such that the figures can be distinguished even when the composition of the figures is changed according to rotation of the tridimensionality.

Referring to FIG. **12**, the controller **180** displays different identification information on the respective figures such that the user can identify the figures even when the composition of the figures is changed.

Referring to FIG. **13**, the user **180** uses cubic FIG. **13a** in order to receive the unlocking pattern. The cubic FIG. **13a** form a cube puzzle.

Figure groups respectively corresponding to rows or columns of the cube puzzle **13b** can be rotated on a principle similar to the cube operation principle, and figures are rearranged as they rotate.

As shown in FIG. **13**, when the figures are arranged in the form of a cube puzzle, a pattern of the colors of figures arranged on the front face of the cube puzzle can be used as the unlocking pattern. Accordingly, the controller **180** can divide the figures into a plurality of groups respectively corresponding different colors.

Referring back to FIG. **11**, when a specific input is received while the figures for receiving the unlocking pattern are displayed (**S203**), the controller **180** rearranges at least some figures displayed on the screen (**S204**).

The specific input can be applied in various manners in step **S203**.

For example, the specific input can be applied through a touch gesture. In this case, the controller **180** can rearrange the figures displayed on the screen on the basis of a touch position on the screen, a drag direction, etc.

16

Furthermore, the specific input can be applied according to a motion of the mobile terminal **100**. In this case, the controller **180** can rearrange the figures on the basis of the direction and degree of the motion of the mobile terminal **100**.

When the figures are arranged on the surface of the tridimensionality, the controller **180** can rotate the tridimensionality on which the figures are arranged upon receiving the specific input in steps **S203** and **S204**. Accordingly, the surface of the tridimensionality displayed on the screen is changed and the figures corresponding to the changed surface are displayed on the screen.

Furthermore, the controller **180** can change arrangement of the figures upon receiving the specific input in steps **S203** and **S204**. That is, the controller **180** can change arrangement of at least some figures when the specific input is received.

FIGS. **14** and **15** show examples of rearranging the figures.

Referring to FIG. **14**, when the mobile terminal **100** tilts, the controller **180** rotates and displays the spherical tridimensionality **12c** on the basis of the tilting direction, etc. When the area displayed on the screen is changed due to rotation of the tridimensionality, the controller **180** changes the composition of the figures displayed on the screen in response to the change of the area.

For example, the FIG. **12e** represented by 'c' is arranged on the front face of the sphere **12c** and the FIG. **12d** represented by 'a' is arranged on the top face of the sphere **12c** in FIG. **12**, whereas the FIG. **12d** represented by 'a' is located on the front face of the sphere **12d** and the FIG. **12e** represented by 'c' is arranged on the bottom face of the sphere **12c** according to rotation of the tridimensionality in FIG. **14**.

Referring to FIG. **15**, when the cube puzzle **13a** is dragged, the controller **180** rotates figures corresponding to a row **15a** including touched figures in the cube puzzle **13a** on the basis of the drag direction. Accordingly, figures arranged on the front face of the cube puzzle **13a** are changed and a color pattern corresponding to the front face of the cube puzzle **13a** is changed according to rearrangement of the figures on the front face of the cube puzzle **13a**.

Referring back to FIG. **11**, the controller **180** receives a pattern on the basis of user input applied to figures (**S205**). The controller **180** compares the received pattern with the previously stored unlocking pattern (**S206**), and unlocks the locked specific mode when the two patterns correspond to each other (**S207**). That is, the controller **180** controls the touch screen **151** to operate in the activation mode.

The controller **180** can receive the pattern on the basis of the order of touching figures displayed on the surface of the tridimensionality or a trajectory formed by the touched figures in step **S205**. In this case, the controller **180** can display the touched figures such that the touched figures are distinguished from other figures or display the trajectory formed by the touched figures such that the user can intuitively recognize the pattern input by him/her.

Furthermore, the controller **180** may receive the pattern on the basis of arrangement or arrangement positions of the figures in step **S205**.

According to the above-described second embodiment of the present invention, the mobile terminal **100** can rotate tridimensionality or change arrangement of figures three-dimensionally. Accordingly, the user can have fun inputting the unlocking pattern, compared to the case in which the user inputs the pattern using fixed figures.

17

A method of controlling the mobile terminal **100** according to a third embodiment of the present invention and operations of the mobile terminal **100** to implement the control method will now be described with reference to FIGS. **16** to **19**.

FIG. **16** is a flowchart illustrating the method of controlling the mobile terminal **100** according to the third embodiment of the present invention and FIGS. **17** to **19** are views for explaining the control method shown in FIG. **16**.

Referring to FIG. **16**, the controller **180** locks a specific mode of the mobile terminal **100** (S**301**).

Upon reception of a control input for requesting the specific mode to be unlocked, the controller **180** display a plurality of figures for receiving an unlocking pattern as stereoscopic objects (S**302**).

FIGS. **17** and **18** show examples of displaying the figures as stereoscopic objects.

Referring to FIG. **17**, the controller **180** divides the plurality of figures into two groups and controls depths of the figures according to stereoscopic vision such that the groups have different depths. That is, the controller **180** controls the depths of the figures according to stereoscopic vision thereof such that one group is seen as if it is protruded from the display plane and the other is seen as if it is located on the display plane.

For example, the controller **180** can set the depth of FIG. **17a** belonging to the first group such that the FIG. **17a** are seen as if they are protruded from the display plane and set the depth of FIG. **17b** belonging to the second group such that the FIG. **17b** are seen as if they are located on the display plane.

Referring to FIG. **18**, the controller **180** displays FIG. **18a** in the form of a button on the display. The controller **180** sets the depth of the FIG. **18a** according to stereoscopic vision thereof such that the figures are seen as if they are protruded from the display plane.

Referring back to FIG. **16**, the controller **180** receives a pattern on the basis of proximity touch or contact touch input of the user, applied to some of the figures displayed on the screen (S**303**).

The controller **180** compares the received pattern with the previously stored unlocking pattern (S**304**) and unlocks the locked specific mode when the two patterns correspond to each other (S**305**). That is, the controller **180** controls the touch screen **151** to operate in the activation mode.

The controller **180** can receive the pattern according to contact touch or proximity touch on the basis of the depth of each figure according to stereoscopic vision thereof in step S**303**.

For example, when the figures are displayed in different depths, as shown in FIG. **17**, the controller **180** can receive input on the basis of proximity touch for the FIG. **17a** that are seen as if they are protruded from the display plane and receive input on the basis of contact touch for the FIG. **17b** that are seen as if they are located on the display plane.

In this case, when some figures are touched according to contact touch or proximity touch, the controller **180** can receive the pattern corresponding to the trajectory generated on the basis of the order of touching the figures or the order of touching the figures.

Furthermore, when figures are displayed such that the figures are seen as if they are protruded from the display plane, as shown in FIG. **18**, the controller **180** can receive input applied to the figures on the basis of contact touch.

In this case, the controller **180** can change the depth of the figures touched according to proximity touch and receive the pattern corresponding to the changed depth of the figures.

18

FIG. **19** shows an example of receiving the pattern using the figures shown in FIG. **18**.

Referring to FIG. **19**, when specific FIG. **18a** are proximity-touched by the user, the controller **180** controls the depth of the FIG. **18a** to be seen as if they are recessed as compared to other figures. In this manner, the controller **180** changes the depth of the FIG. **18a** according to stereoscopic vision thereof and receives a pattern on the basis of the changed depth of the figures.

The controller **180** can permit each FIG. **18a** to be repeatedly touched and control the depth of each FIG. **18a** on the basis of the number or touches in stages. Furthermore, the controller **180** can change a degree by which the depth of each figure is changed according to touch methods.

For example, the controller **180** can control the depth of the FIG. **18a** when the FIG. **18a** is touched once to be seen deeper than the depth of the FIG. **18a** when it is touched twice.

Furthermore, the controller **180** can control the depth of the FIG. **18a** when the FIG. **18a** is dragged to be seen deeper than the depth of the FIG. **18a** when it is touched by tapping.

According to the third embodiment of the present invention, the unlocking pattern of the mobile terminal **100** is input using a stereoscopic object, and thus the user can experience stereoscopic vision as if he/she actually presses a button when inputting the unlocking pattern. Furthermore, it is possible to increase complexity of the unlocking pattern while minimizing complexity of unlocking pattern input process.

The above-described methods of controlling the mobile terminal may be written as computer programs and may be implemented in digital microprocessors that execute the programs using a computer readable recording medium. The method of controlling the mobile terminal may be executed through software. The software may include code segments that perform required tasks. Programs or code segments may also be stored in a processor readable medium or may be transmitted according to a computer data signal combined with a carrier through a transmission medium or communication network.

The computer readable recording medium may be any data storage device that can store data that can be thereafter read by a computer system. Examples of the computer readable recording medium may include read-only memory (ROM), random-access memory (RAM), CD-ROMs, DVD±ROM, DVD-RAM, magnetic tapes, floppy disks, optical data storage devices. The computer readable recording medium may also be distributed over network coupled computer systems so that the computer readable code is stored and executed in a distribution fashion.

A mobile terminal may include a first touch screen configured to display a first object, a second touch screen configured to display a second object, and a controller configured to receive a first touch input applied to the first object and to link the first object to a function corresponding to the second object when receiving a second touch input applied to the second object while the first touch input is maintained.

A method may be provided of controlling a mobile terminal that includes displaying a first object on the first touch screen, displaying a second object on the second touch screen, receiving a first touch input applied to the first object, and linking the first object to a function corresponding to the second object when a second touch input applied to the second object is received while the first touch input is maintained.

Any reference in this specification to “one embodiment,” “an embodiment,” “example embodiment,” etc., means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention. The appearances of such phrases in various places in the specification are not necessarily all referring to the same embodiment. Further, when a particular feature, structure, or characteristic is described in connection with any embodiment, it is submitted that it is within the purview of one skilled in the art to effect such feature, structure, or characteristic in connection with other ones of the embodiments.

Although exemplary embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the spirit and scope of the principles of this disclosure. More particularly, various variations and modifications are possible in the component parts and/or arrangements of the subject combination arrangement within the scope of the disclosure, the drawings and the appended claims. In addition to variations and modifications in the component parts and/or arrangements, alternative uses will also be apparent to those skilled in the art.

What is claimed is:

[1. A mobile terminal, comprising:

a touch screen located on a first side of the mobile terminal;

an input unit located on the first side of the mobile terminal, wherein the touch screen is different from the input unit, and wherein the location of the input unit is different from the location of the touch screen;

a memory configured to store an unlocking pattern; and a controller configured to:

cause the touch screen to display a first plurality of figures in a first area of the touch screen in a locked mode, wherein the first plurality of figures are displayed in a row-column format in which adjacent figures within a row are located at a first interval distance relative to each other;

cause the touch screen to display initially a second plurality of figures in a second area of the touch screen in response to receiving an input at the input unit, wherein the second area is smaller than the first area, wherein the displaying of the second plurality of figures occurs in the locked mode, wherein the second plurality of figures are displayed in a row-column format in which adjacent figures within a row are located at a second interval distance relative to each other, wherein an orientation of the row-column format of the second plurality of figures is the same as an orientation of the row-column format of the first plurality of figures, and wherein the second interval distance is less than the first interval distance; and

cause the touch screen to display a screen in an unlocked mode when a touch pattern received at the second area of the touch screen corresponds to the stored unlocking pattern, wherein the touch pattern is received at the second area after the second plurality of figures are displayed in the second area.]

[2. The mobile terminal of claim 1, wherein the first area is an overall area of the touch screen.]

[3. The mobile terminal of claim 1, wherein the first plurality of figures are evenly arranged relative to each other in the first area.]

[4. The mobile terminal of claim 1, wherein the input unit comprises a push button.]

[5. The mobile terminal of claim 1, wherein the controller is further configured to:

cause the touch screen to display the screen in the unlocked mode when the touch pattern is received in a particular order at particular figures of the second plurality of figures.]

[6. The mobile terminal of claim 1, wherein the controller is further configured to:

cause the touch screen to display a screen in the unlocked mode when a touch pattern received at the first area of the touch screen corresponds to the stored unlocking pattern.]

[7. The mobile terminal of claim 1, wherein the touch pattern represents touch input received at particular figures of the second plurality of figures.]

[8. The mobile terminal of claim 1, wherein the touch pattern represents drag input received at two or more adjacent figures of the second plurality of figures.]

[9. The mobile terminal of claim 1, wherein the first plurality of figures and the second plurality of figures are displayed in 2D or 3D.]

[10. The mobile terminal of claim 1, wherein the controller is further configured to:

cause the touch screen to terminate the displaying of the first plurality of figures after receiving the input at the input unit.]

[11. The mobile terminal of claim 1, wherein the touch pattern is a tapping.]

[12. The mobile terminal of claim 1, wherein a number of figures that define the first plurality of figures is same as a number of figures that define the second plurality of figures, and wherein the input at the input unit is received during a period of time that the first plurality of figures are displayed.]

[13. The mobile terminal of claim 1, wherein a number of figures that define the first plurality of figures is same as a number of figures that define the second plurality of figures, and wherein the row-column format of the first plurality of figures is same as the row-column format of the second plurality of figures.]

[14. The mobile terminal of claim 1, wherein the input unit comprises a dome switch.]

[15. The mobile terminal of claim 1, wherein the input unit comprises a touch pad.]

[16. The mobile terminal of claim 1, wherein the user input comprises a physical contact with the input unit.]

[17. The mobile terminal of claim 1, wherein the controller is further configured to:

cause the touch screen to continue to display the second plurality of figures in the second area in a locked state until a touch pattern received at the second area of the touch screen corresponds to the stored unlocking pattern.]

[18. An unlocking method for a mobile terminal having a touch screen and an input unit that is at a location that is different from a location of the touch screen, the method comprising:

displaying, on the touch screen, a first plurality of figures in a first area of the touch screen in a locked mode, and wherein the first plurality of figures are displayed in a row-column format in which adjacent figures within a row are located at a first interval distance relative to each other;

displaying initially, on the touch screen, a second plurality of figures in a second area of the touch screen in

21

response to receiving an input at the input unit, wherein the second area is smaller than the first area, wherein the displaying of the second plurality of figures occurs in the locked mode, wherein the second plurality of figures are displayed in a row-column format in which adjacent figures within a row are located at a second interval distance relative to each other, wherein an orientation of the row-column format of the second plurality of figures is the same as an orientation of the row-column format of the first plurality of figures, and wherein the second interval distance is less than the first interval distance; and

displaying, on the touch screen, a screen in an unlocked mode when a touch pattern received at the second area of the touch screen corresponds to a stored unlocking pattern, wherein the touch pattern is received at the second area after the second plurality of figures are displayed in the second area.]

[19. The method of claim 18, wherein the first plurality of figures are evenly arranged relative to each other in the first area.]

[20. The method of claim 18, wherein the input unit comprises a push button.]

[21. The method of claim 18, wherein the touch pattern represents touch input received at particular figures of the second plurality of figures.]

[22. The method of claim 18, wherein the touch pattern represents drag input received at two or more adjacent figures of the second plurality of figures.]

[23. The method of claim 18, further comprising: terminating the displaying of the first plurality of figures after receiving the input at an input unit of the mobile terminal.]

[24. The method of claim 18, wherein a number of figures that define the first plurality of figures is same as a number of figures that define the second plurality of figures, and wherein the input at the input unit is received during a period of time that the first plurality of figures are displayed.]

[25. The method of claim 18, wherein a number of figures that define the first plurality of figures is same as a number of figures that define the second plurality of figures, wherein the row-column format of the first plurality of figures is same as the row-column format of the second plurality of figures.]

[26. The method of claim 18, wherein the input unit comprises a dome switch.]

[27. The method of claim 18, wherein the input unit comprises a touch pad.]

[28. The method of claim 18, wherein the user input comprises a physical contact with the input unit.]

[29. The method of claim 18, further comprising: continuing to display the second plurality of figures in the second area in a locked state until a touch pattern received at the second area of the touch screen corresponds to the stored unlocking pattern.]

30. A mobile terminal, comprising:
a touch screen; and

a controller configured to:

in response to the mobile terminal not being manipulated for a predetermined time in an activation mode in which information or a command can be received through a touch operation of a user via the touch screen, enter a lock mode to lock the activation mode; in response to an input for unlocking the locked activation mode, cause the touch screen to display a first plurality of figures for unlock in a first area of the touch screen in the locked mode, wherein the first plurality of figures

22

are displayed in a first row-column format in which a closest spacing distance between adjacent figures within a row is a first distance;

cause the touch screen to replace the first plurality of figures with a second plurality of figures for unlock in a second area of the touch screen in the locked mode in response to a drag input received on the touch screen while the first plurality of figures are displayed, wherein displaying of the second plurality of figures in the second area occurs subsequent to the displaying of the first plurality of figures, wherein the second area is smaller than the first area, wherein the second plurality of figures are displayed in a second row-column format in which a closest spacing distance between adjacent figures within a row is a second distance, and wherein the second distance is less than the first distance; and cause the touch screen to display a screen in an unlocked mode in response to a touch pattern received on the touch screen displaying the second plurality of figures, the touch pattern corresponding to a previously registered unlocking pattern.

31. The mobile terminal of claim 30, wherein a location of the second area in the touch screen varies based on a direction of the drag input.

32. The mobile terminal of claim 31, wherein the location of the second area is biased to one corner of the touch screen.

33. The mobile terminal of claim 30, wherein the second area has a predetermined size.

34. The mobile terminal of claim 30, wherein a trajectory of the drag input is located outside the second plurality of figures.

35. The mobile terminal of claim 30, wherein an orientation of the second row-column format of the second plurality of figures is the same as an orientation of the first row-column format of the first plurality of figures.

36. The mobile terminal of claim 30, wherein the touch pattern corresponds to a trajectory generated by a drag input passing through two or more adjacent figures of the second plurality of figures in an order.

37. The mobile terminal of claim 30, wherein a number of the first plurality of figures is the same as a number of the second plurality of figures.

38. The mobile terminal of claim 30, wherein the first row-column format of the first plurality of figures is different in scale from the second row-column format of the second plurality of figures.

39. The mobile terminal of claim 30, wherein the controller is configured to:

cause the touch screen to continue to display the second plurality of figures in the locked mode until the received touch pattern corresponds to the previously registered unlocking pattern.

40. A mobile terminal, comprising:
a touch screen; and
a controller configured to:

in response to the mobile terminal not being manipulated for a predetermined time in an activation mode in which information or a command can be received through a touch operation of a user via the touch screen, enter a lock mode to lock the activation mode; in response to an input for unlocking the locked activation mode, cause the touch screen to display a first plurality of figures for unlock in a first area of the touch screen in the locked mode, wherein the first plurality of figures are displayed in a row-column format in which a

23

closest spacing distance between adjacent figures within a row is a first distance; cause the touch screen to replace the first plurality of figures with a second plurality of figures for unlock in a second area of the touch screen in the locked mode in response to receiving a drag input while the first plurality of figures are displayed, wherein displaying of the second plurality of figures in the second area occurs subsequent to the displaying of the first plurality of figures, wherein the second area is smaller than the first area, wherein a location of the second area is biased to one corner of the touch screen, wherein the second plurality of figures are displayed in a row-column format in which a closest spacing distance between adjacent figures within a row is a second distance, and wherein the second distance is less than the first distance; and

cause the touch screen to display a screen in an unlocked mode in response to a touch pattern on the second area of the touch screen, the touch pattern corresponding to a previously registered unlocking pattern.

41. The mobile terminal of claim 40, wherein the second area has a predetermined size.

42. The mobile terminal of claim 40, wherein a trajectory of the drag input is located outside the second plurality of figures.

43. A method of unlocking a mobile terminal, comprising: in response to the mobile terminal not being manipulated for a predetermined time in an activation mode in which information or a command can be received through a touch operation of a user via the touch screen, entering a lock mode to lock the activation mode;

24

in response to an input for unlocking the locked activation mode, displaying a first plurality of figures for unlock in a first area of a touch screen in the locked mode, wherein the first plurality of figures are displayed in a first row-column format in which a closest spacing distance between adjacent figures within a row is a first distance;

replacing the first plurality of figures with a second plurality of figures for unlock in a second area of the touch screen in the locked mode in response to a drag input received on the touch screen while the first plurality of figures are displayed, wherein displaying of the second plurality of figures in the second area occurs subsequent to the displaying of the first plurality of figures, wherein the second area is smaller than the first area, wherein the second plurality of figures are displayed in a second row-column format in which a closest spacing distance between adjacent figures within a row is a second distance, and wherein the second distance is less than the first distance; and

displaying a screen in an unlocked mode in response to a touch pattern received on the touch screen displaying the second plurality of figures, the touch pattern corresponding to a previously registered unlocking pattern.

44. The method of claim 43, wherein a location of the second area in the touch screen varies based on a direction of the drag input.

45. The method of claim 44, wherein the location of the second area is biased to one corner of the touch screen.

* * * * *