




(86) Date de dépôt PCT/PCT Filing Date: 2004/07/19
(87) Date publication PCT/PCT Publication Date: 2005/02/10
(85) Entrée phase nationale/National Entry: 2006/01/12
(86) N° demande PCT/PCT Application No.: ES 2004/000338
(87) N° publication PCT/PCT Publication No.: 2005/011442
(30) Priorité/Priority: 2003/07/31 (P2000301824) ES


(51) Cl.Int./Int.Cl. **A47C 27/14** (2006.01)
(71) Demandeur/Applicant:
QONFORT CONI, S.L., ES
(72) Inventeur/Inventor:
ALONSO CUCURULL, RICARDO, ES
(74) Agent: MBM & CO.

(54) Titre : **MATELAS A RESSORTS EN MOUSSE**
(54) Title: **FOAM SPRING MATTRESS**

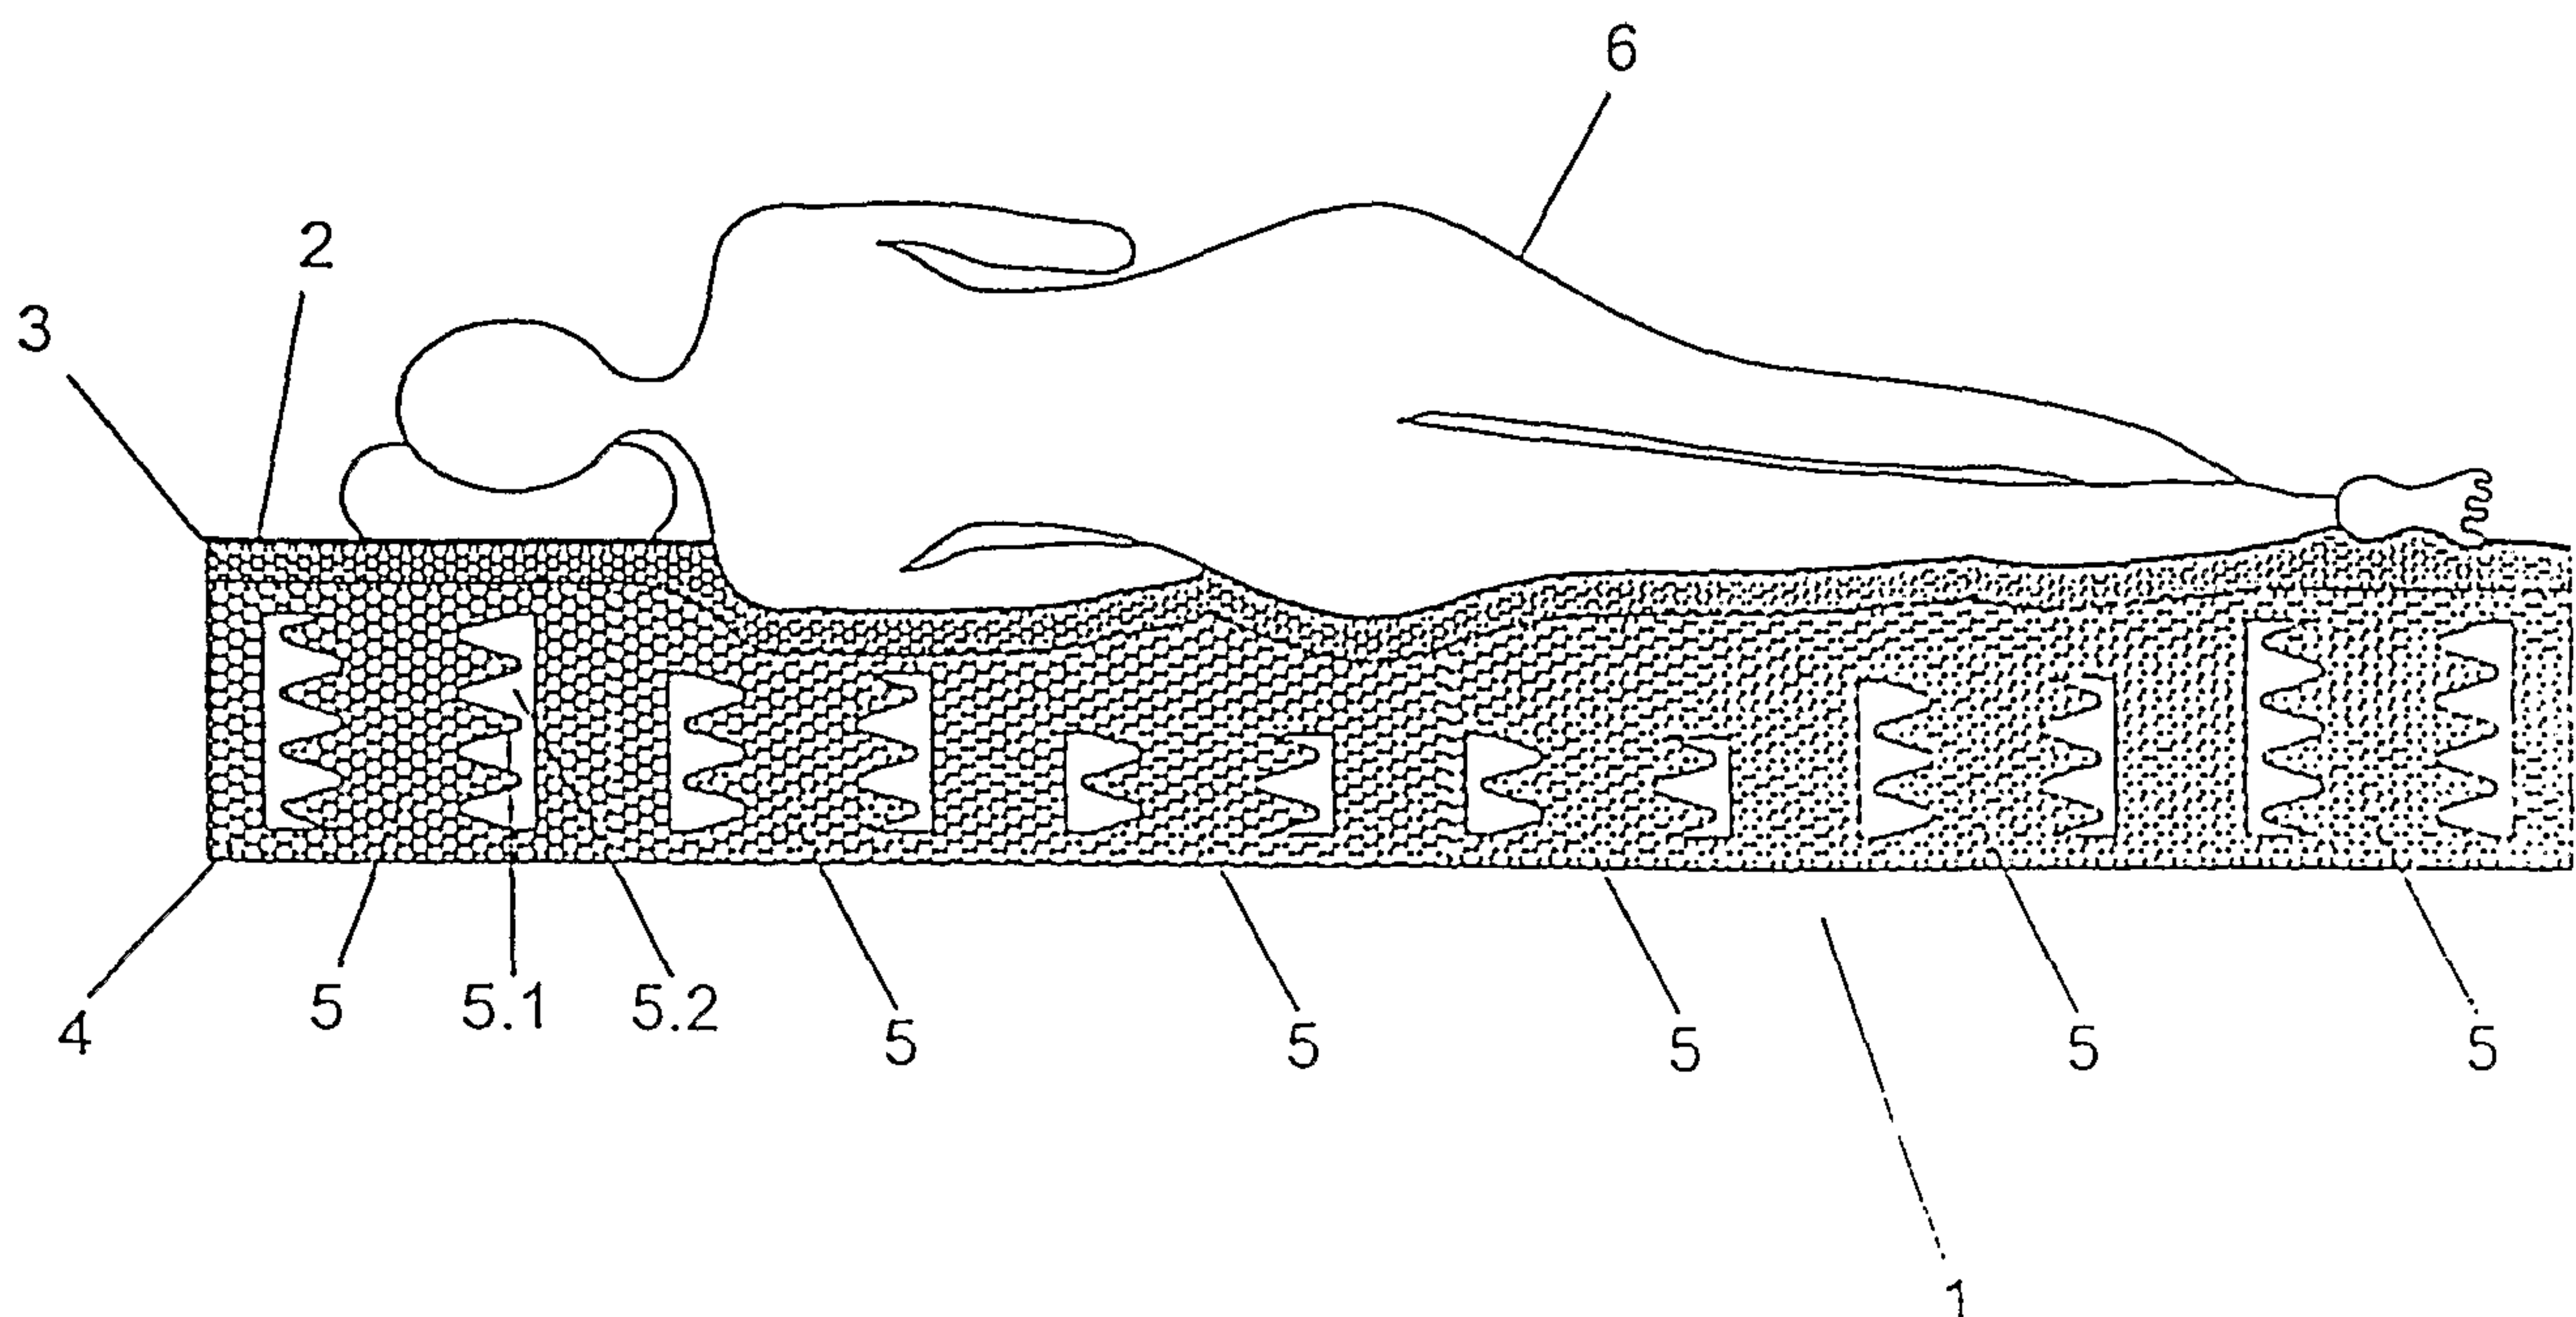

(57) **Abrégé/Abstract:**

The mattress (1) is made from a block of flexible polyurethane foam (4) with a density of 40 Kg/m³ or any other density, said block being firstly cut with a programmable automatic machine by the main side and then turned at a 90° degree angle by its small side. A certain amount of springs (5) is thereby formed depending on each type of mattress (1). The amount of spirals (5.1) of every spring (5) depends on the position of each spring in the mattress (1) with the purpose of varying the flexibility thereof so that the mattress (1) can perfectly adapt to the contour of every user or so that the flexibility can remain constant throughout the entire mattress. Multiple variations can be realized while the height of the entire mattress remains the same (less spirals having the same spiral thickness and more base and uncut, etc.; the width of a spiral can be changed, as well as the number of spirals, the inclination of the axis of the spiral, the total height of an area -bulge or cavity-, etc.) The upper surface of the product is covered with a viscous elastic layer (3) of polyurethane with a 50 Kg/m³ density, 4 cm thickness and a threaded padding (2).

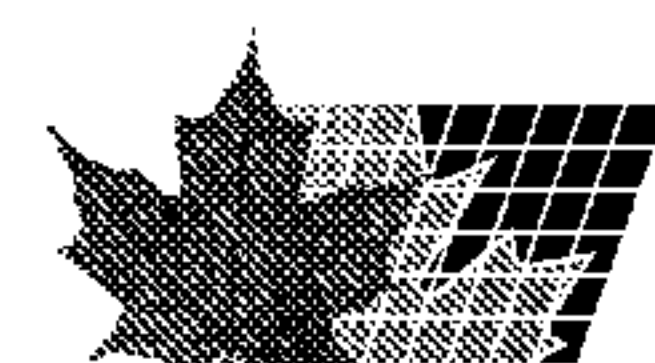

ABSTRACT

5 The mattress (1) is made of a block of flexible polyurethane foam (4) with a density of 40 Kg/m³ or of any other density, said block being firstly cut with a cut programmable automatic machine, by the main side and then turned at a 90° degree angle by its small side. A certain amount of springs (5) is thereby formed depending on each type of mattress (1).

10

 The amount of spirals (5.1) of every spring (5) depends on the position of each spring in the mattress (1) with the purpose of varying the flexibility thereof so that the mattress (1) can perfectly adapt to the contour to of every user or so that the flexibility can remain constant throughout the entire mattress. Multiple variations can be realized while the height of the mattress remains the same (less spirals having the same spiral thickness and more base and uncut, etc.; the width of a spiral can be changed, as well as the number of spirals, the inclination of the axis of the spirals, the total height of an area-budge or cavity, etc. The upper surface of the product is covered with a viscous elastic layer (3) of polyurethane with a 50 Kg/m³ density, 4 cm thickness and threaded padding (2)

20

FOAM SPRING MATTRESS

OBJECT OF THE INVENTION

This invention relates to a new type of mattress, completely made of foam, synthetic rubber, etc., and which is provided with a number of springs made up of the
5 same material as that of the mattress itself.

BACKGROUND OF THE INVENTION

There are currently a great number of types of mattresses on the market that
10 ensure giving people's bodies beneficial rest, and which also must fulfil the function of giving people proper support, being neither too soft nor too hard. The main varieties are the following:

- 15 • Wool mattress: currently they are produced very infrequently, because wool has been replaced by new materials. This type of mattress has as a drawback that with use, the wool becomes lumpy and that every two or three years it has to be re-carded so as to restore its consistency. In addition, mattress makers are very scarce nowadays.
- 20 • Spring mattress: it is made of steel springs that can be bi-conical (the upper and lower spirals are bigger than the central ones), or cylindrical (the spirals have all got the same diameter), and they are often individually insulated in order to prevent noise. On either side of the springs, the filling-holder is lined with a layer of horsehair, sisal or felt; a
25 cotton, wool or synthetic fibre filling, which in turn are also lined; and finally, the whole assembly is closed into the outer cover. These mattresses are solid and comfortable.

30 "Multi-elastic" mattresses differ from those of traditional springs in that they have a kind of thick net of metallic thread.

- Synthetic latex mattress: a chemical reconstruction of natural latex. These mattresses have a flat surface, and another one full of cells that

facilitate air circulation. They are very hygienic, but sensitive to light when they are exposed to it without their covers.

- 5 • Polyester mattress: the density of polyester used for producing mattresses must not be less than 25 kg/m^3 . The softness of the foam depends on this density. Since the regulations are not always respected, this type of material has acquired an undeservedly bad reputation. Before buying one of these mattresses, the consumer should insist that the density of the foam rubber should be specified. It
10 should also have a thickness of, at least, 10 cm to be of good quality.

With the objective of solving the described problems, a new type of mattress has been developed, which is described below.

15 **DESCRIPTION OF THE INVENTION**

This invention consists of a new type of mattress that is made from a block of flexible polyurethane foam of 40 Kg/m^3 or of any other density, and later with an automatic programmable machine, the interior of said block is cut first on its larger side
20 and later turning the block 90° , or turning to another angle in which case the springs would remain in an oblique arrangement, by the smaller side or vice-versa, thus forming a certain quantity of springs that depends on the size of each type of mattress. It can also be produced by injection, or by any other method.

25 The number of spirals that each spring has depends on the position of each one within the mattress with the objective of varying its flexibility and that the mattress should adjust perfectly to the shape of every individual person in the first shape of the mattress. However, in a second shape of the mattress designed to use each block of polyurethane foam to the maximum, the springs have the same number of spirals
30 throughout the entire surface of the mattress and the pressure created by each spring will depend on its deformation, being greater the more it is compressed, adjusting itself to the pressure points of the person who will be using it, reducing the pressure where other mattresses do not have such flexibility.

The nucleus of this type of spring mattress is made of a single piece and with a single material, or starting with a block that can be made by gluing pieces of different materials and densities. The product is completed on its upper face with a visco-elastic layer of flexible polyurethane of 50 Kg/m³ and 4 cm thick; or else the nucleus
5 can be finished with a flat shape using the same material as the block, and finally it can optionally include a three-dimensional knit padding.

The densities of the aforementioned materials are average values, these mattresses being amenable to the use of other, similar materials and with different
10 densities depending on the desired reduction of pressure in the support areas.

This mattress offers a number of advantages with respect to traditional mattresses, which are the following:

15 -They only sink down in the areas where they receive pressure. This property is maximally useful when the mattress is used by a couple with relatively different weights, thus preventing the person that weighs less from sliding towards the person that weighs more, maintaining the pressure in a proportional manner while avoiding deforming the mattress.

20

-It facilitates changing position.

-It facilitates adequate blood circulation, decreasing the pressure placed on the skin and greatly reducing the appearance of bedsores, and likewise decreasing the
25 healing period of patients that already suffer from bedsores.

-They relieve the pain of patients that suffer from bone fragility

-Comfortable and adaptable to the body.

30

-Greater durability than traditional spring mattresses.

-Free from toxic substances. It is totally innocuous upon body contact.

35

-Bactericide. Anti-allergenic. Fireproof. Recyclable.

This type of spring cut from a block of foam can be used not only for mattresses but also for any other kind of padded furniture, such as chairs, armchairs, seats, backrests and lower back support for vehicle seats, or for accessories such as
5 pillows or cushions, whether they are conventional, wedge-shaped or cervical, neck supports, etc.

DESCRIPTION OF THE DRAWINGS

10

In order to complete the description of the invention and with the objective of improving the understanding of its characteristics, a set of figures is attached in which in a purely illustrative and non-limiting manner, the following are represented:

15 Figure 1A is a view from the larger side of a two-place mattress (1) of polyurethane foam (4). The upper surface of the mattress (1) has a polyurethane visco-elastic layer (3) and padding (2). The springs (5) and the hollowed-out area (5.2) are shown, the outline of which is formed by the spirals (5.1) of each spring (5).

20 Figure 1B is a view of the smaller side of a two-place mattress (1) of polyurethane foam (4). The upper surface of the mattress (1) has a layer of visco-elastic polyurethane (3) and padding (2). The springs (5) and the hollowed-out area (5.2) are shown, the outline of which is formed by the spirals (5.1) of each spring (5).

25 Figure 2A is a view of the larger side of a one-place mattress (1) of polyurethane foam (4). The upper surface of the mattress (1) has a layer of visco-elastic polyurethane (3) and padding (2). The springs (5) and the hollowed-out area (5.2) are shown, whose outline is formed by the spirals (5.1) of each spring (5).

30 Figure 2B is a view of the smaller side of a one-place mattress (1) of polyurethane foam (4). The upper surface of the mattress (1) has a layer of visco-elastic polyurethane (3) and padding (2). The springs (5) and the hollowed-out area (5.2) are shown, whose outline is formed by the spirals (5.1) of each spring (5).

Figure 3A is a perspective view of a two-place mattress (1) of polyurethane foam (4). The upper surface of the mattress (1) has a layer of visco-elastic polyurethane (3) and padding (2). The distribution of the springs (5) is also visible on the larger side and on the smaller side of the mattress (1).

5

Figure 3B is the enlarged view of a spring (5) cut out of the interior area of a mattress (1) of polyurethane foam (4), in which the spirals (5.1) and the hollowed-out area (5.2) are detailed. The layer of visco-elastic polyurethane (3) and the padding (2) are also visible.

10

Figure 4 is the profile view of a mattress (1) of polyurethane foam (4) with the springs (5), the spirals (5.1), the hollowed-out area (5.2), the layer of visco-elastic polyurethane (3) and the padding (2). It is also shown how the mattress (1) adapts perfectly to the shape of the person (6) resting on it.

15

Figure 5 illustrates another, alternative form of mattress spring with lines that facilitate its use in mattresses of lesser thickness, such as cot mattresses. They are compressed as the aforementioned ones, and are three-dimensional, and are made with parallel and/or non-parallel cuts on two faces of the block as shown.

20

Figure 6 illustrates in a schematic manner an alternative form for the mattress of the invention where it can be seen how, within a parallelepiped block of polyurethane or other material, it can be made by cutting out two parts, each of them constituting the nucleus of a pyramid-trunk type mattress, the springs of each piece being complementary to the other piece with which it formed the block.

25

PREFERRED EMBODIMENTS OF THE INVENTION

Among the different types of spring mattresses that can be built based on this invention, the preferred embodiments are those described below.

30

In a first preferred embodiment, starting with a block of polyurethane foam (4) with a density of 40 Kg/m³ or that which is in accordance with the use and the model and size of each mattress (1), the spirals (5.1) are cut with an especially designed

machine expelling the excess material from the hollowed-out areas (5.2) and shaping the springs (5).

5 In order for each spring (5) to be shaped, the machine must first carry out the spiral (5.1) cutting along the larger side of the mattress (1) and later along the smaller side. In this way, the four sides of each spring are perfectly cut and shaped.

10 In a second preferred embodiment, the starting point is a parallelepiped rectangular block of polyurethane or other material, in accordance with the length and width that the final mattress should have, with a density of 40 kg/m^3 or that which is appropriate in accordance with its use, and it is cut by way of a blade that covers all of the length or width of the block, manoeuvred by an arm and a programmable machine.

15 In Figure 6, by way of the solid-line arrows, the course of the blade in relation to one of the lateral sides of the block is shown, though only partially. The blade attacks the block at the tip (7) and cuts the lateral walls of a pyramid trunk (9), the walls of which are not straight but rather zigzagged, with the particular feature that on the opposite wall, the zigzag is displaced with respect to the other wall so that the most salient part of one substantially coincides with the inward part of the other, thus
20 imitating the structure of a traditional spring of elastic material. After cutting out as many lateral walls as have been programmed, the blade is removed from the block at the tip (8) and returns to starting position (10).

25 It should be noted that up to now the block has been cut into two equal, complementary pieces formed by a platform (6) from which the pyramid trunks (9) jut out, which up to now only have two faces formed, one fitted into the other.

30 The block is then turned 90° on a vertical axis and the same process is carried out, so that the pyramid trunks (9) that form the springs (5) are completely cut out with four lateral zigzagging walls and the two bodies or nuclei of the mattress (1) that are formed by this process are completely separated. It is noteworthy that in this procedure, as well as forming two mattresses (1) at once, there is a minimal waste of polyurethane block mass or of other material, because both mattresses (1) are equal
35 and complementary. For example, two mattresses (1) can be obtained from a 173

mm-thick block, made up of a 25 mm-thick platform (6) and with a total height of 148 mm, thus making use of 100% of the material. More specifically, two mattresses (1) of 180 x 900 x 1900 can be obtained from a block of 210 x 900 x 2000 mm; from which, as can be seen, 30 mm of thickness is lost due to the platforms (6), 100 mm in length
5 due to a border (not shown) that is a result of the cutting process and is not usable, and no width at all is lost in the mattresses formed with respect to the width of the original block.

To finalise the production of the mattress (1), once the springs (5) have been
10 cut, an upper layer of visco-elastic polyurethane (3) can optionally be added to said mattress (1), including knit padding (2).

Having sufficiently described the nature of this invention, as well as a practical application of the same, it only needs be added that modifications may be added in
15 both its shape and its materials, as well as its production procedure, as long as these modifications do not substantially affect the characteristics claimed below.

AMENDED CLAIMS**(Received by the International Bureau on January 14, 2005.****claims 1-6 replaced by amended claims 1-2)**

5 1. Foam spring mattress (1), of the type of those that have a plurality of foam springs (5), that behave individually as elastic parts that after being deformed under the action of a force, recover their original shape and position once the action of said force ceases, characterised in that it comprises:

- 10 - a main body (4) of the mattress (1) made from a single block composed of a single material, or of several materials of different densities glued together beforehand, or made by injection, in a parallelepiped manner, of polyurethane or latex material with densities of between 30 and 90 kg/m³, in which a plurality of individual springs (5) are shaped by an operation of cutting or injection modelling, located either within the interior of said block, or in the upper area of
- 15 said block, said springs (5) having a prismatic or troncopyramidal general external shape, said prisms or pyramid trunks having lateral faces cut out in zigzag shapes (5.1; 5.2) so that the salient sections or spirals (5.1) and depressed sections (5.2) of the zigzag surface of each face coincide, respectively, with the inset sections (5.2) and salient sections or spirals (5.1) of
- 20 the face opposite it thus imitating the configuration of a traditional mattress, said springs (5) being amenable to including different number of salient sections or spirals (5.1) for different springs of a single main body (4) of said mattress (1) and said main body (4) of said mattress (1) being amenable to having different pluralities of said springs (5) and said springs (5) being
- 25 amenable to having being distributed in different ways depending on the area of the mattress and the distribution of the body weight of a person, with the objective that said main body (4) of said mattress (1) offering areas with different degrees of resistance to compression; and
- 30 - optionally, a viscoelastic layer (3) of 50 kg/m³ density, 4 cm thick polyurethane that serves as the upper surface of the mattress (1).

2. Foam spring mattress according to claim 1, characterised in that said cutting operation is carried out:

- 5 a) for mattresses (1) with interior springs (5) on said parallelepiped block in order to obtain a main body (4) of the mattress (1) by means of a specific cutting machine that shapes by means of a cutting blade that covers the entire length or width of the block two opposite faces of each spring (5) and partially, a platform (6) in which all of the springs (5) or each mattress (1) are integrated and a second step, after turning said block 90° around a vertical axis, in order to shape by means of the same cutting blade manoeuvred by said machine, that covers the entire width or length of the block, two second opposite faces adjacent to the first two opposite faces and completely the platform (6) in which all the springs (5) of each mattress (1) are integrated; or
- 10 b) for mattresses (1) with springs (5) located on the upper area of said block, on a parallelepiped block in order to obtain in the same operation two main bodies (4) or the mattress (1) by way of a specific cutting machine that shapes by means of a cutting blade that covers the entire length or width of the block, two first opposite faces of each spring (5) and partially, two platforms (6) in which all the springs (5) of each mattress (1) are integrated, and a second step, after turning said block 90° around a vertical axis, in order to shape by means of the same blade, which covers the entire width or length of the polyurethane block, two second opposite faces adjacent to the first opposite faces and completely
- 15 the two platforms (6) in which all the springs (5) of each mattress are integrated, with minimal waste of the material from the block since two main bodies (4) of the mattress (1) that are essentially equal and complementary are obtained.
- 20

1/6

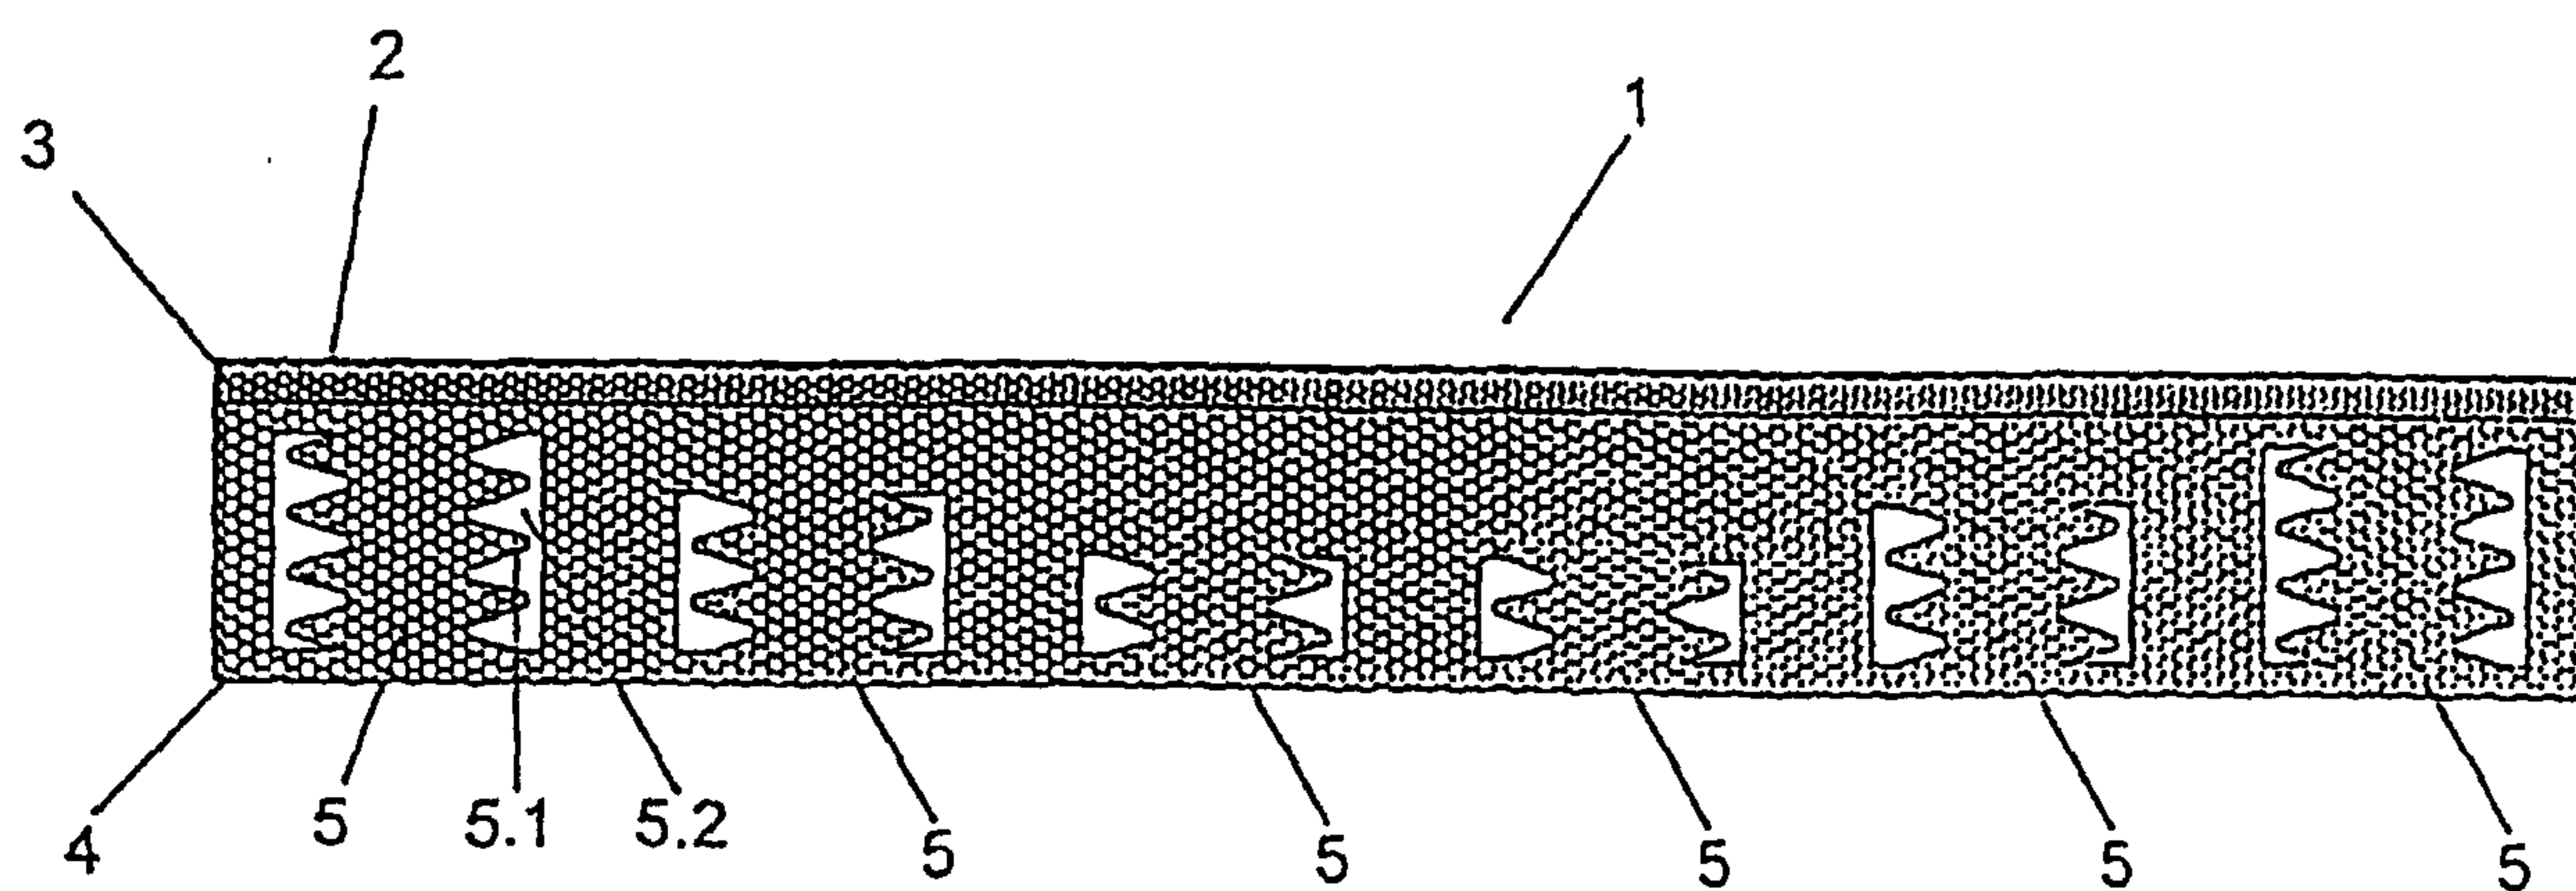


FIGURE 1A

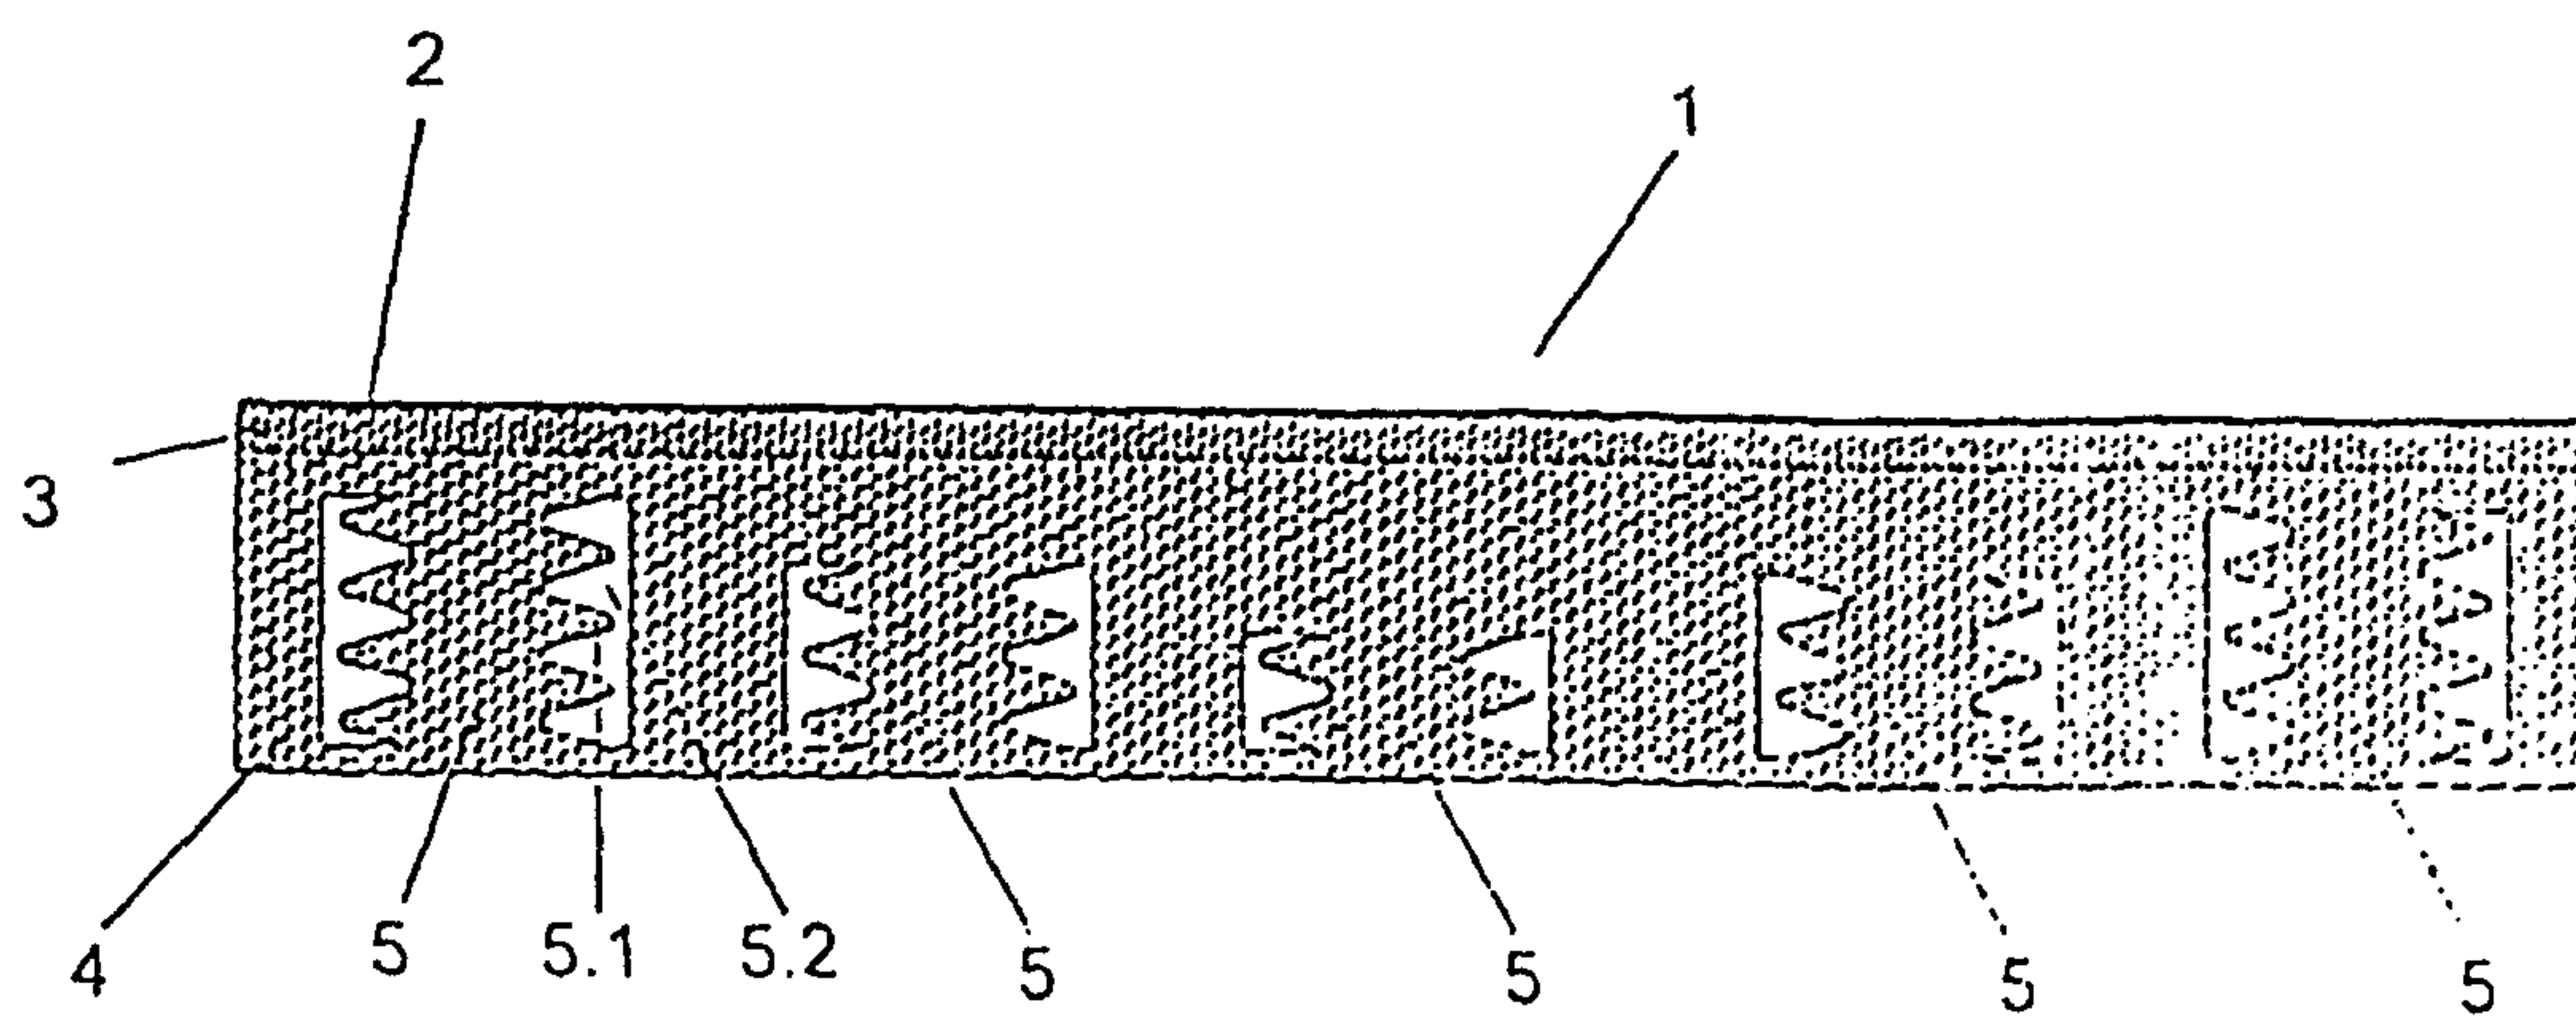


FIGURE 1B

2/6

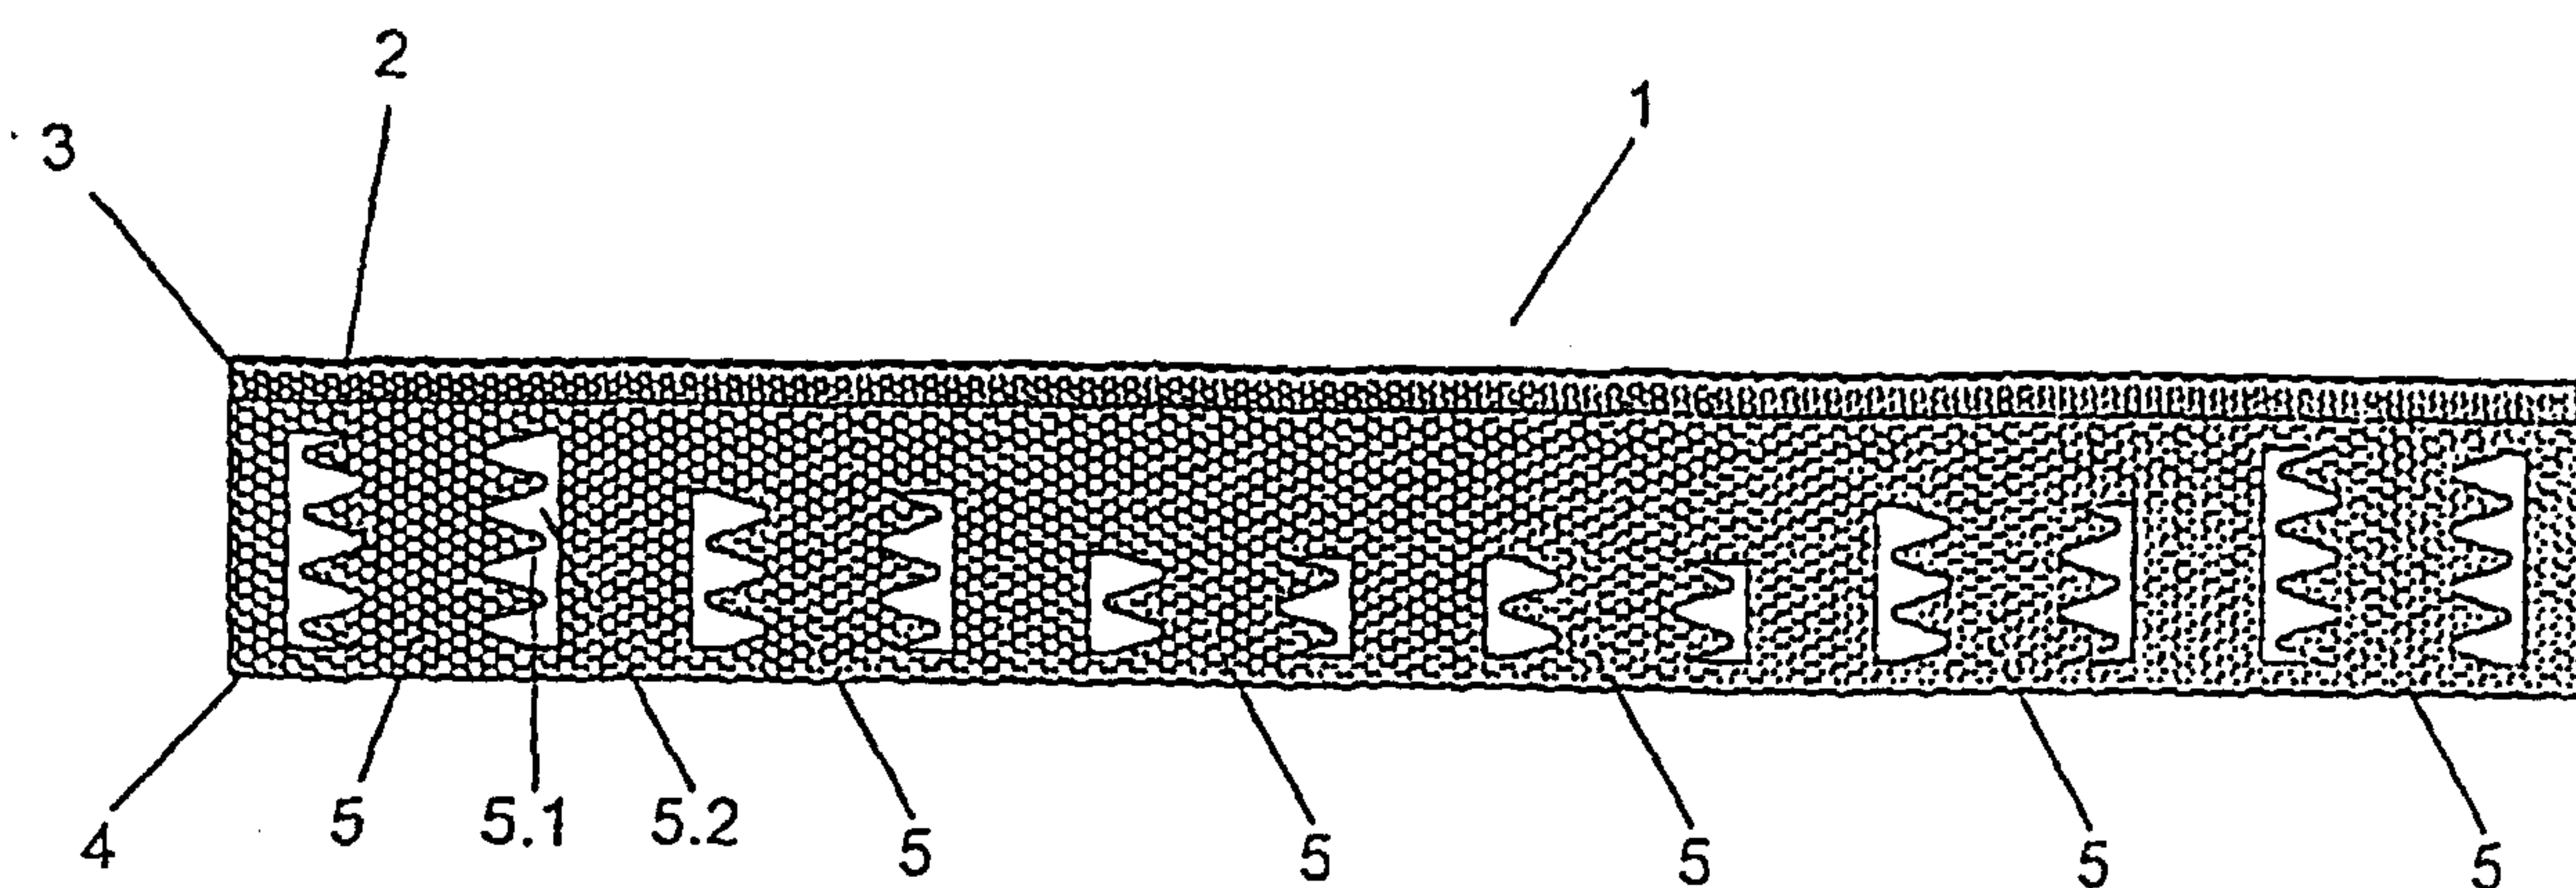


FIGURE 2A

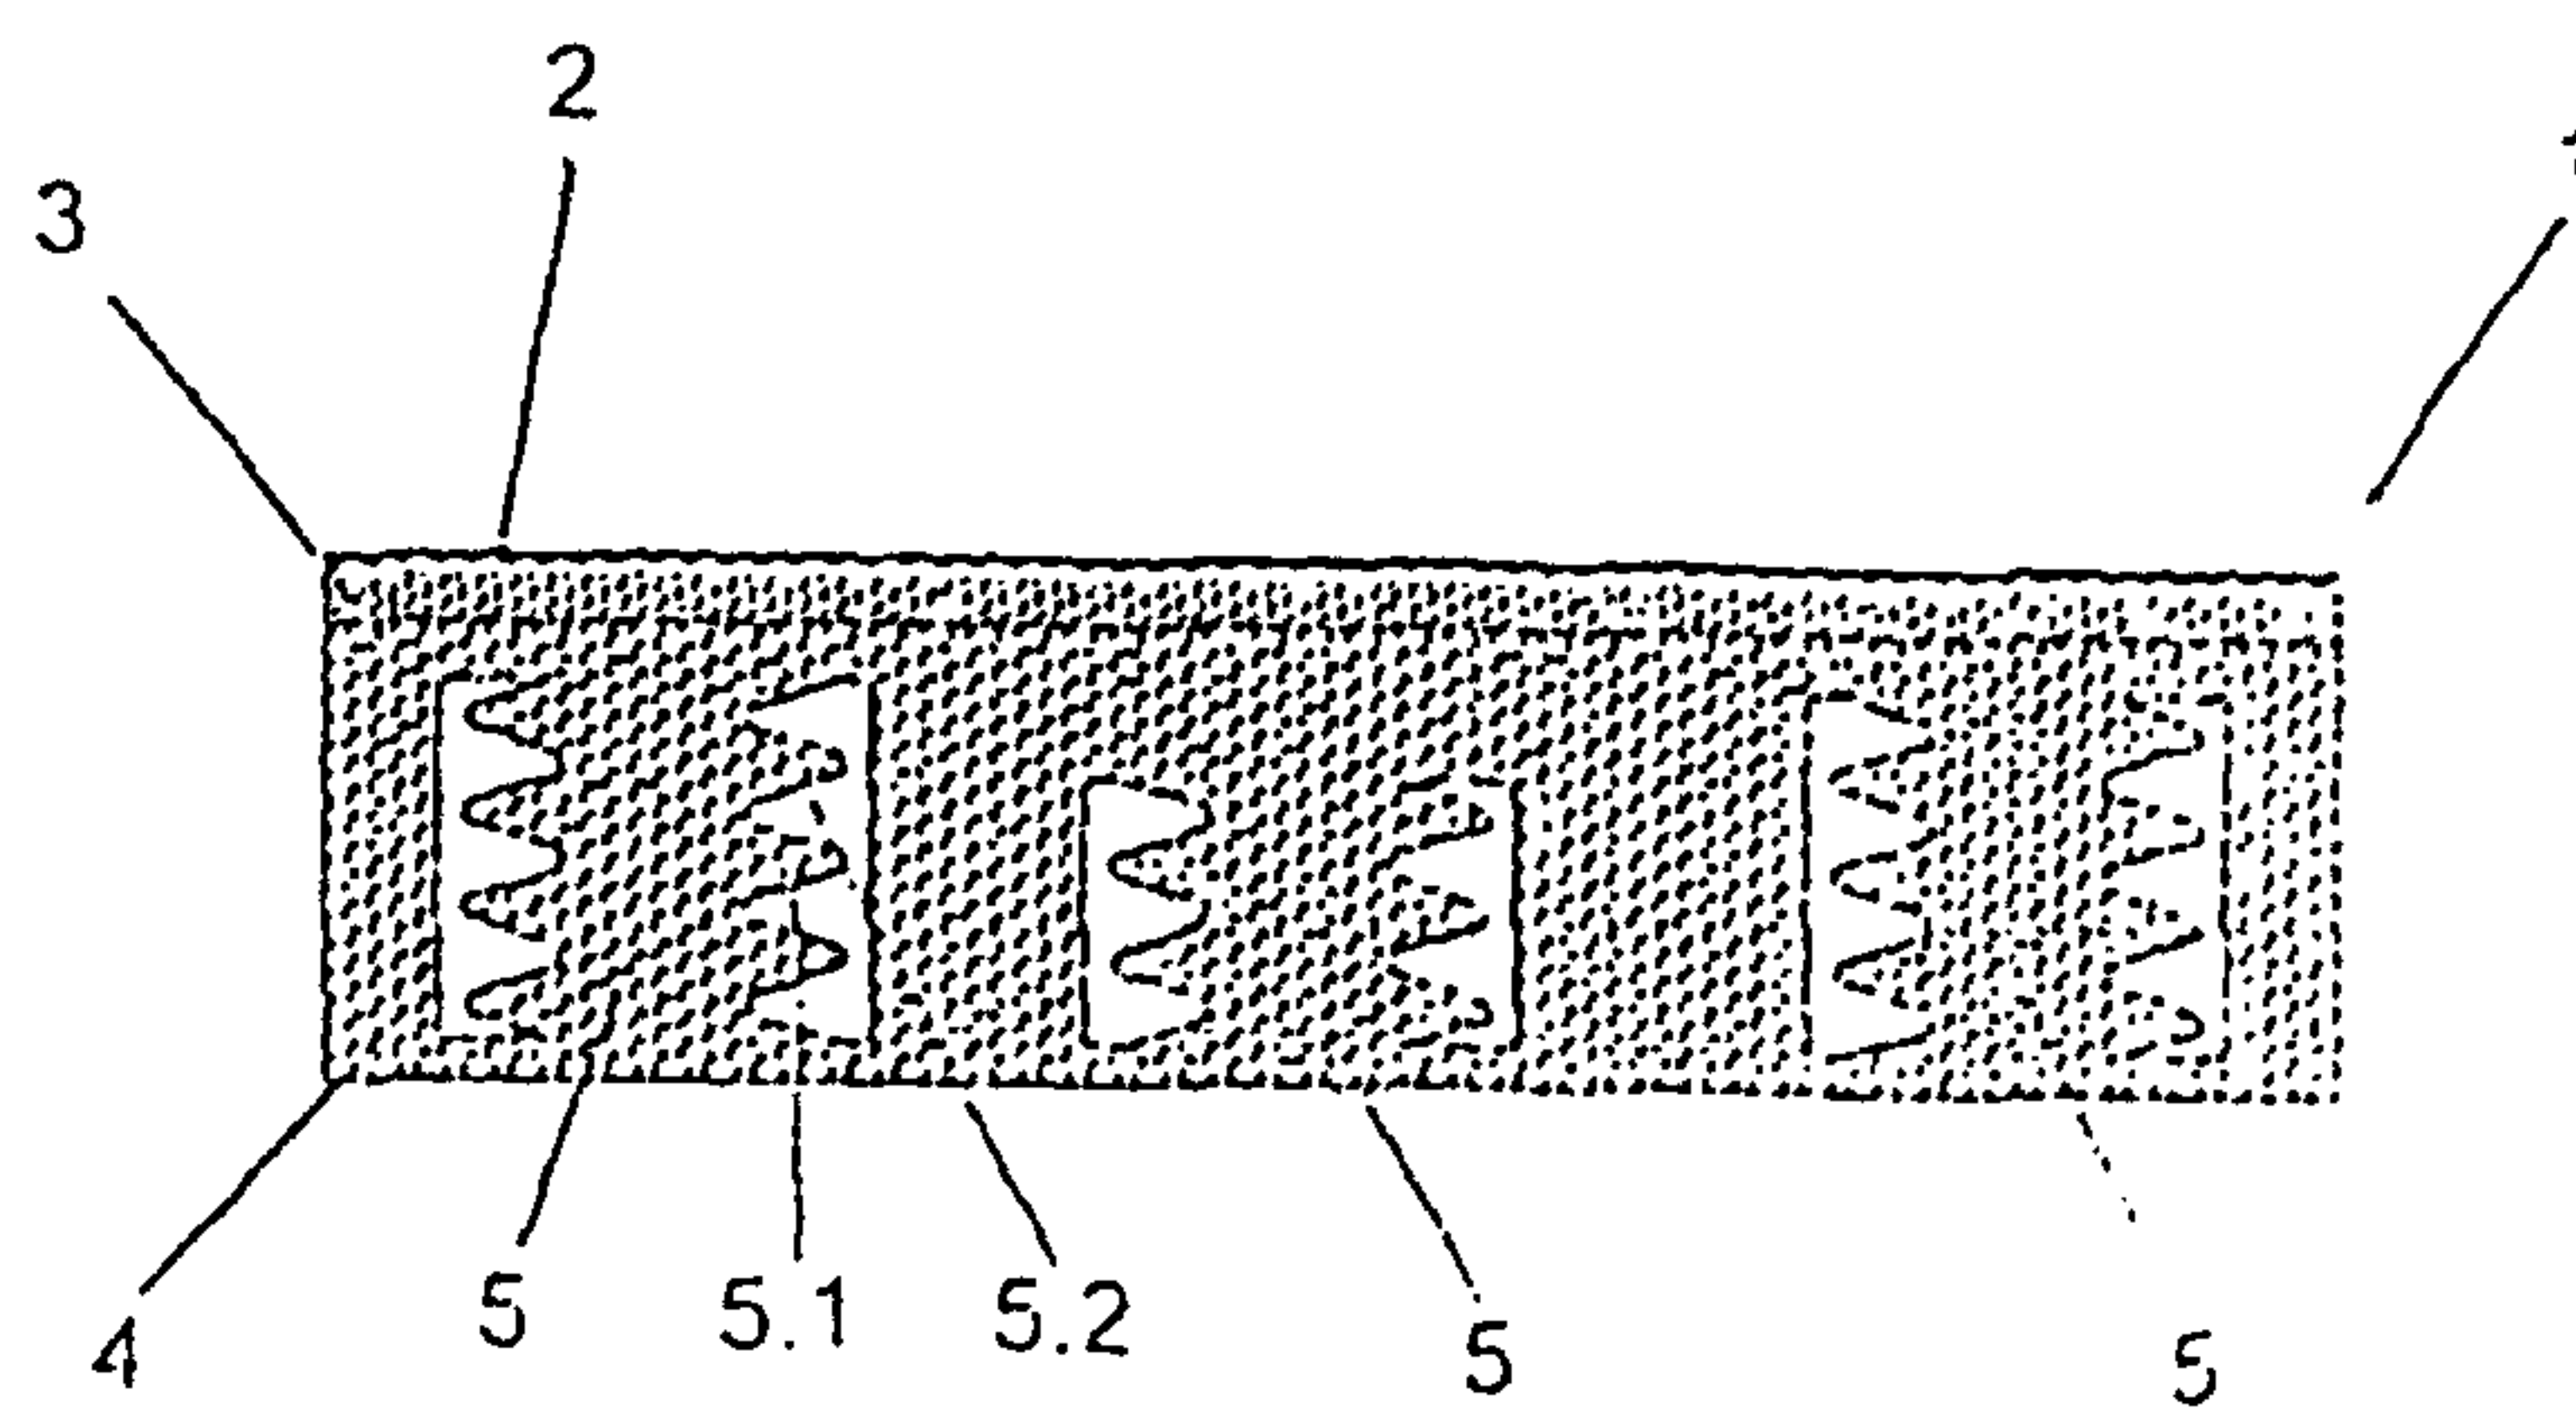


FIGURE 2B

3/6

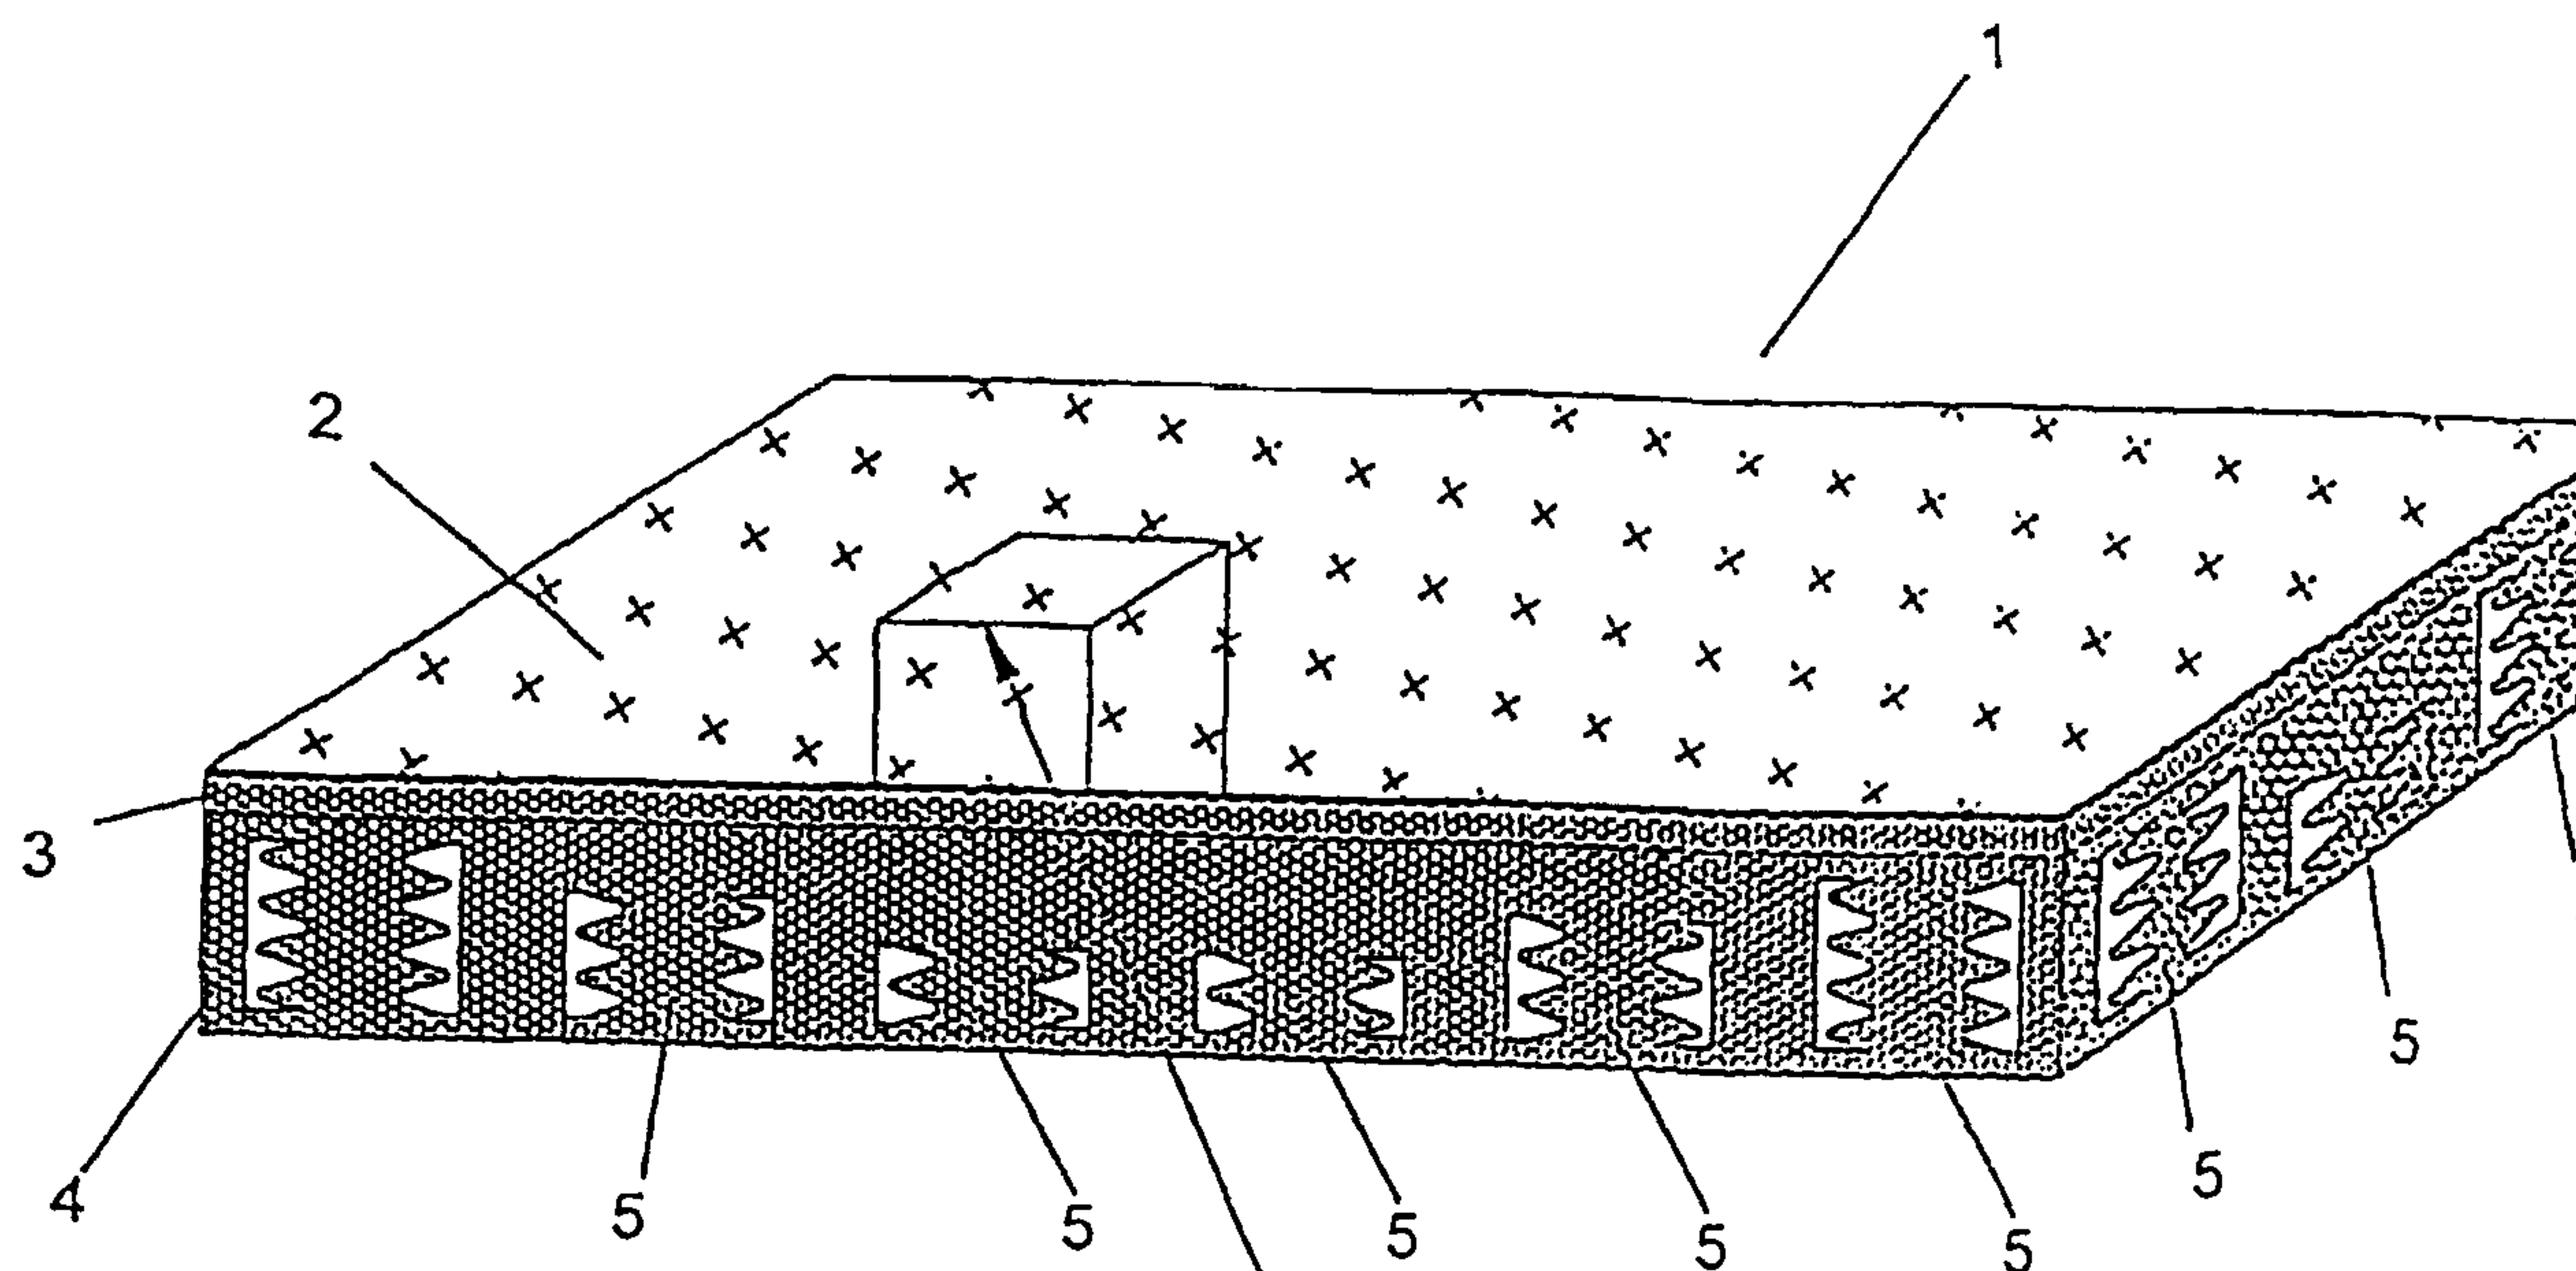


FIGURE 3A

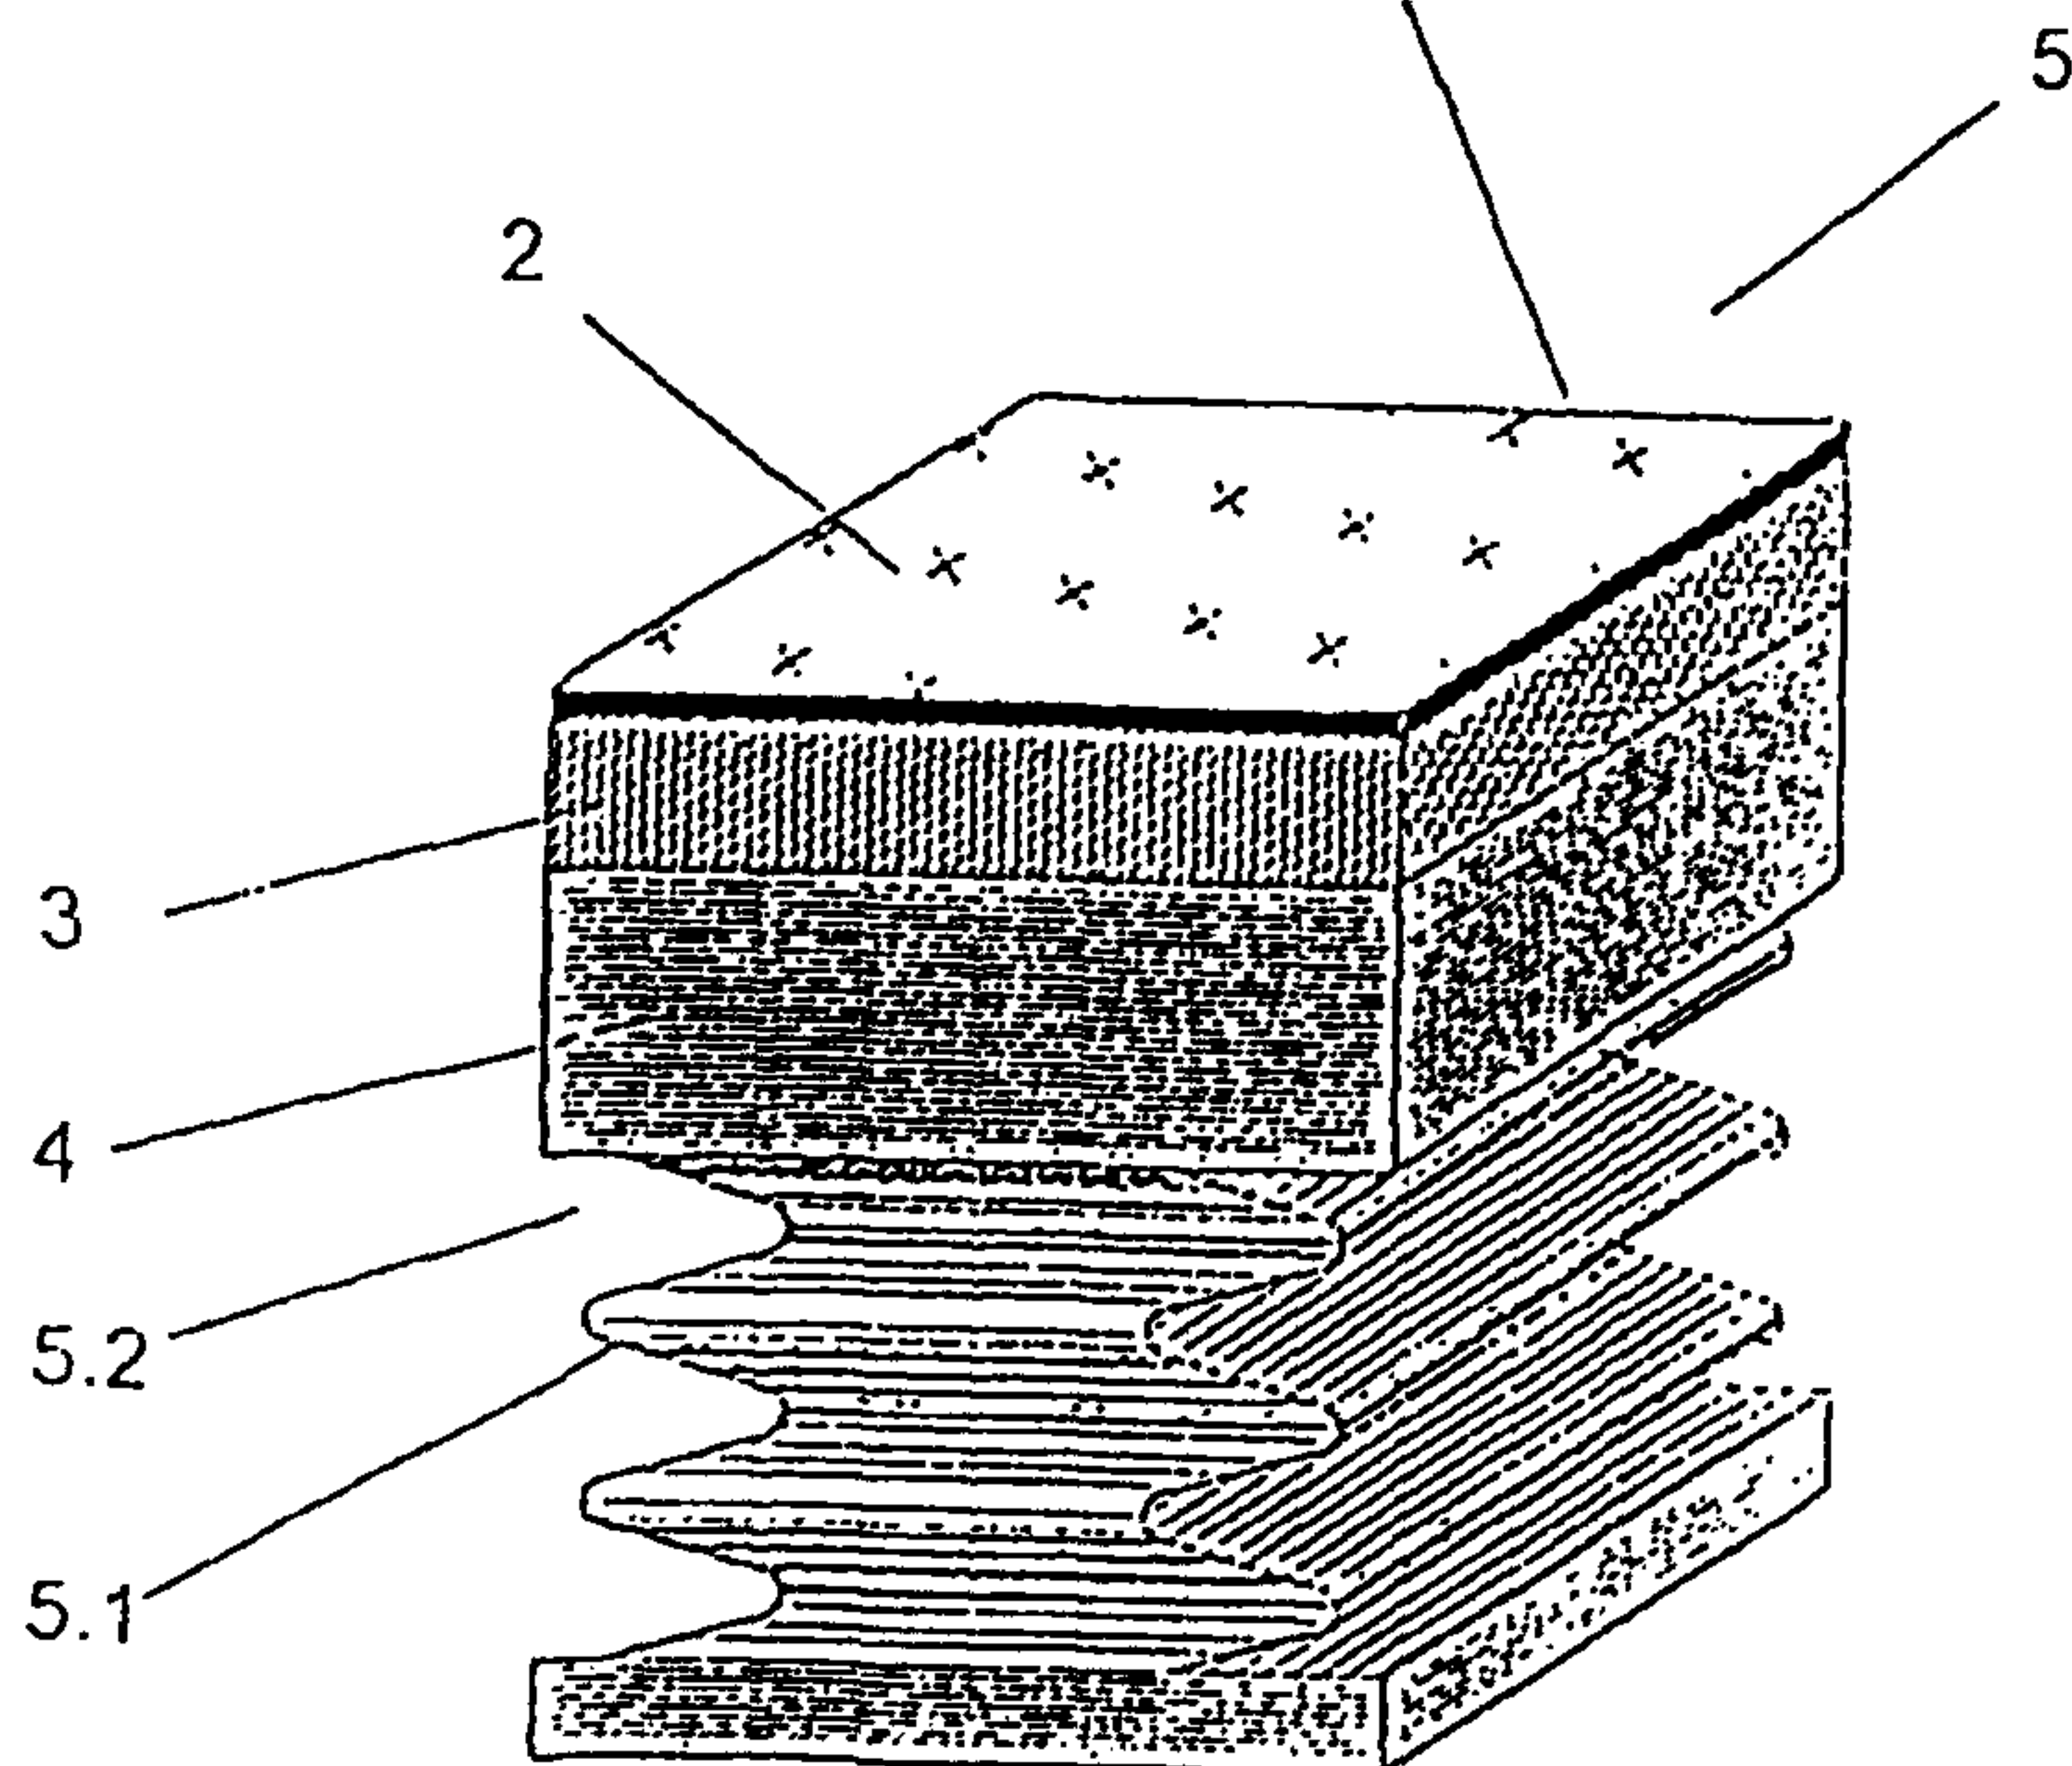


FIGURE 3B

4/6

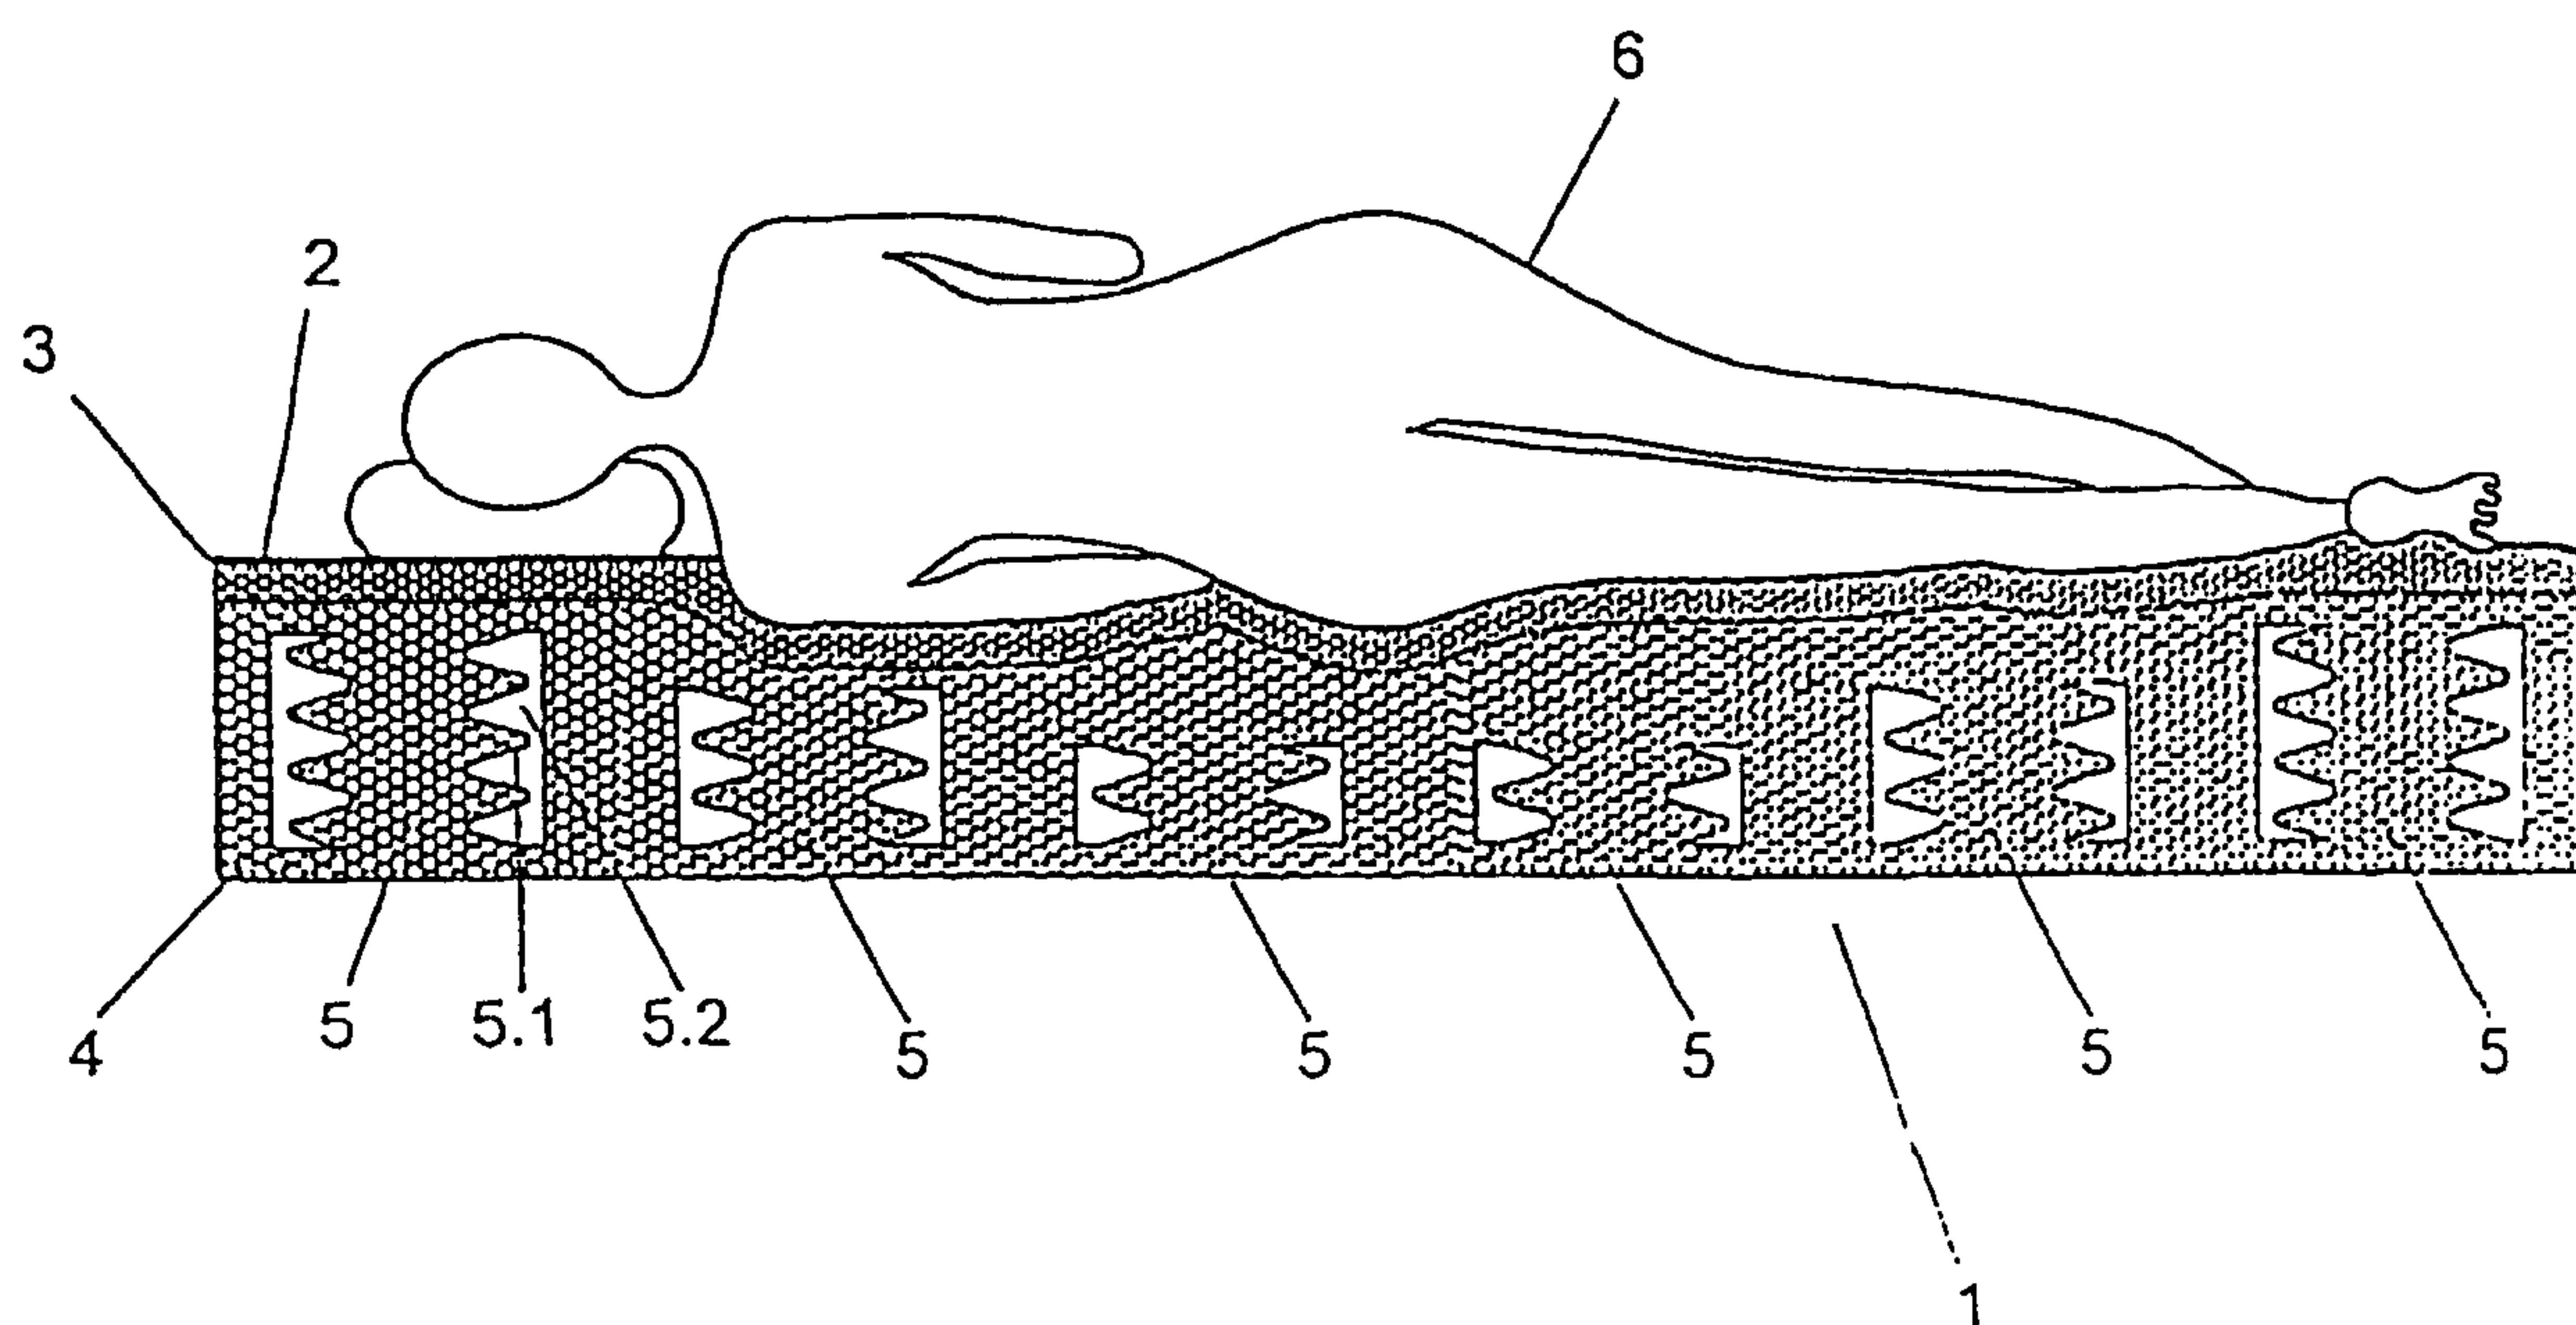


FIGURE 4

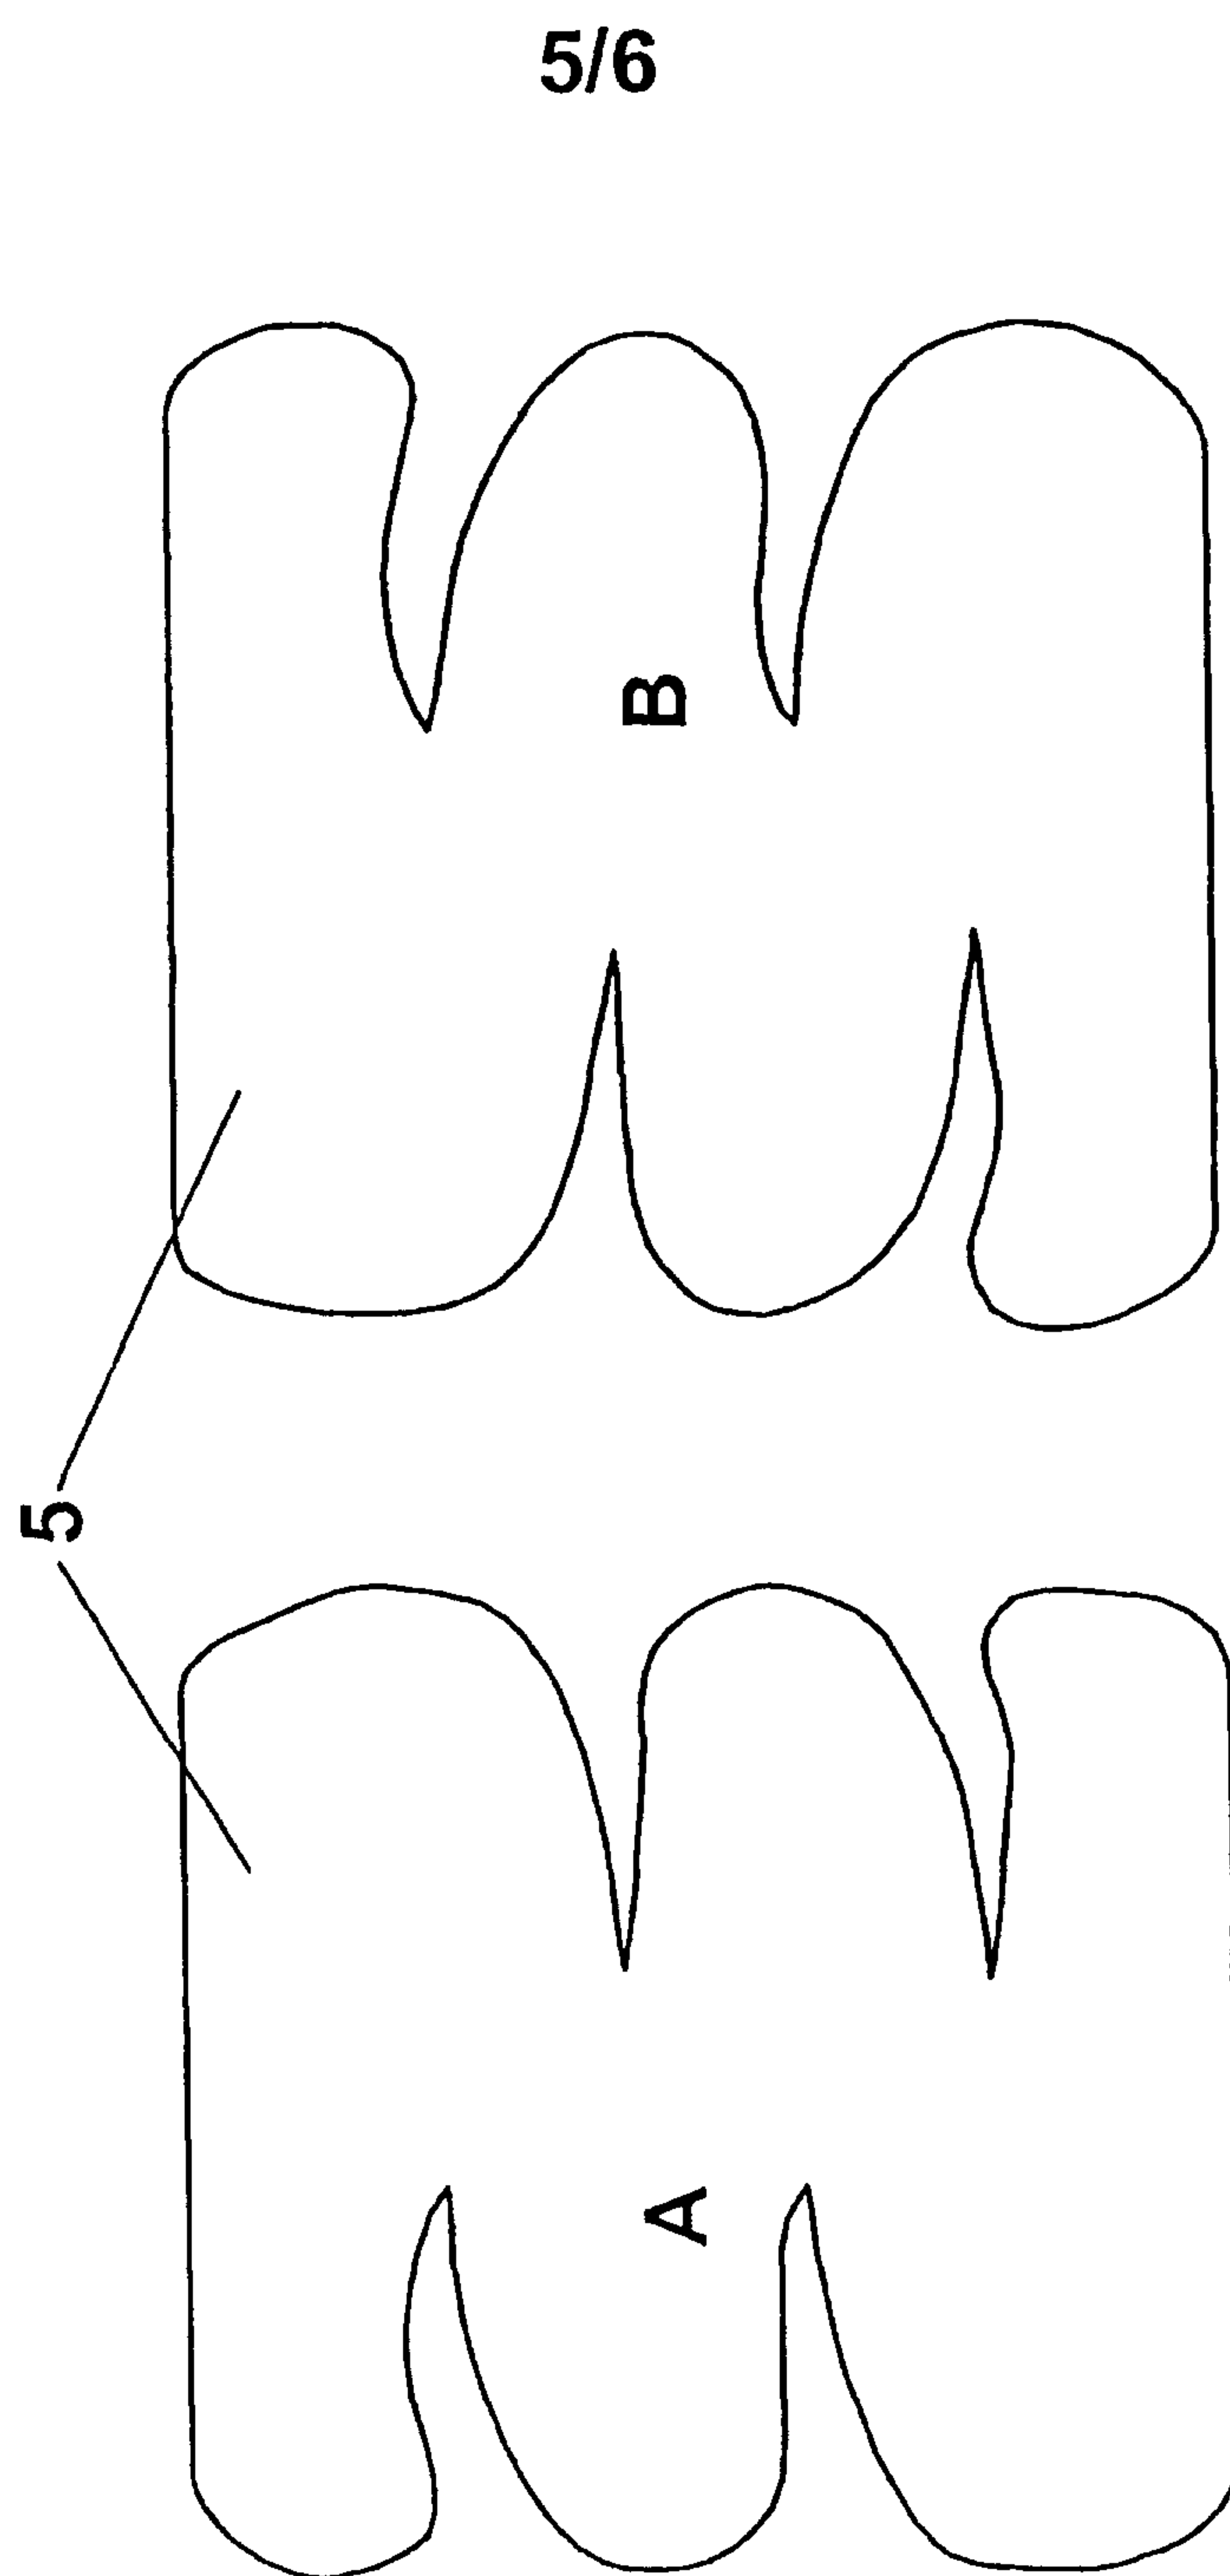


FIGURE 5

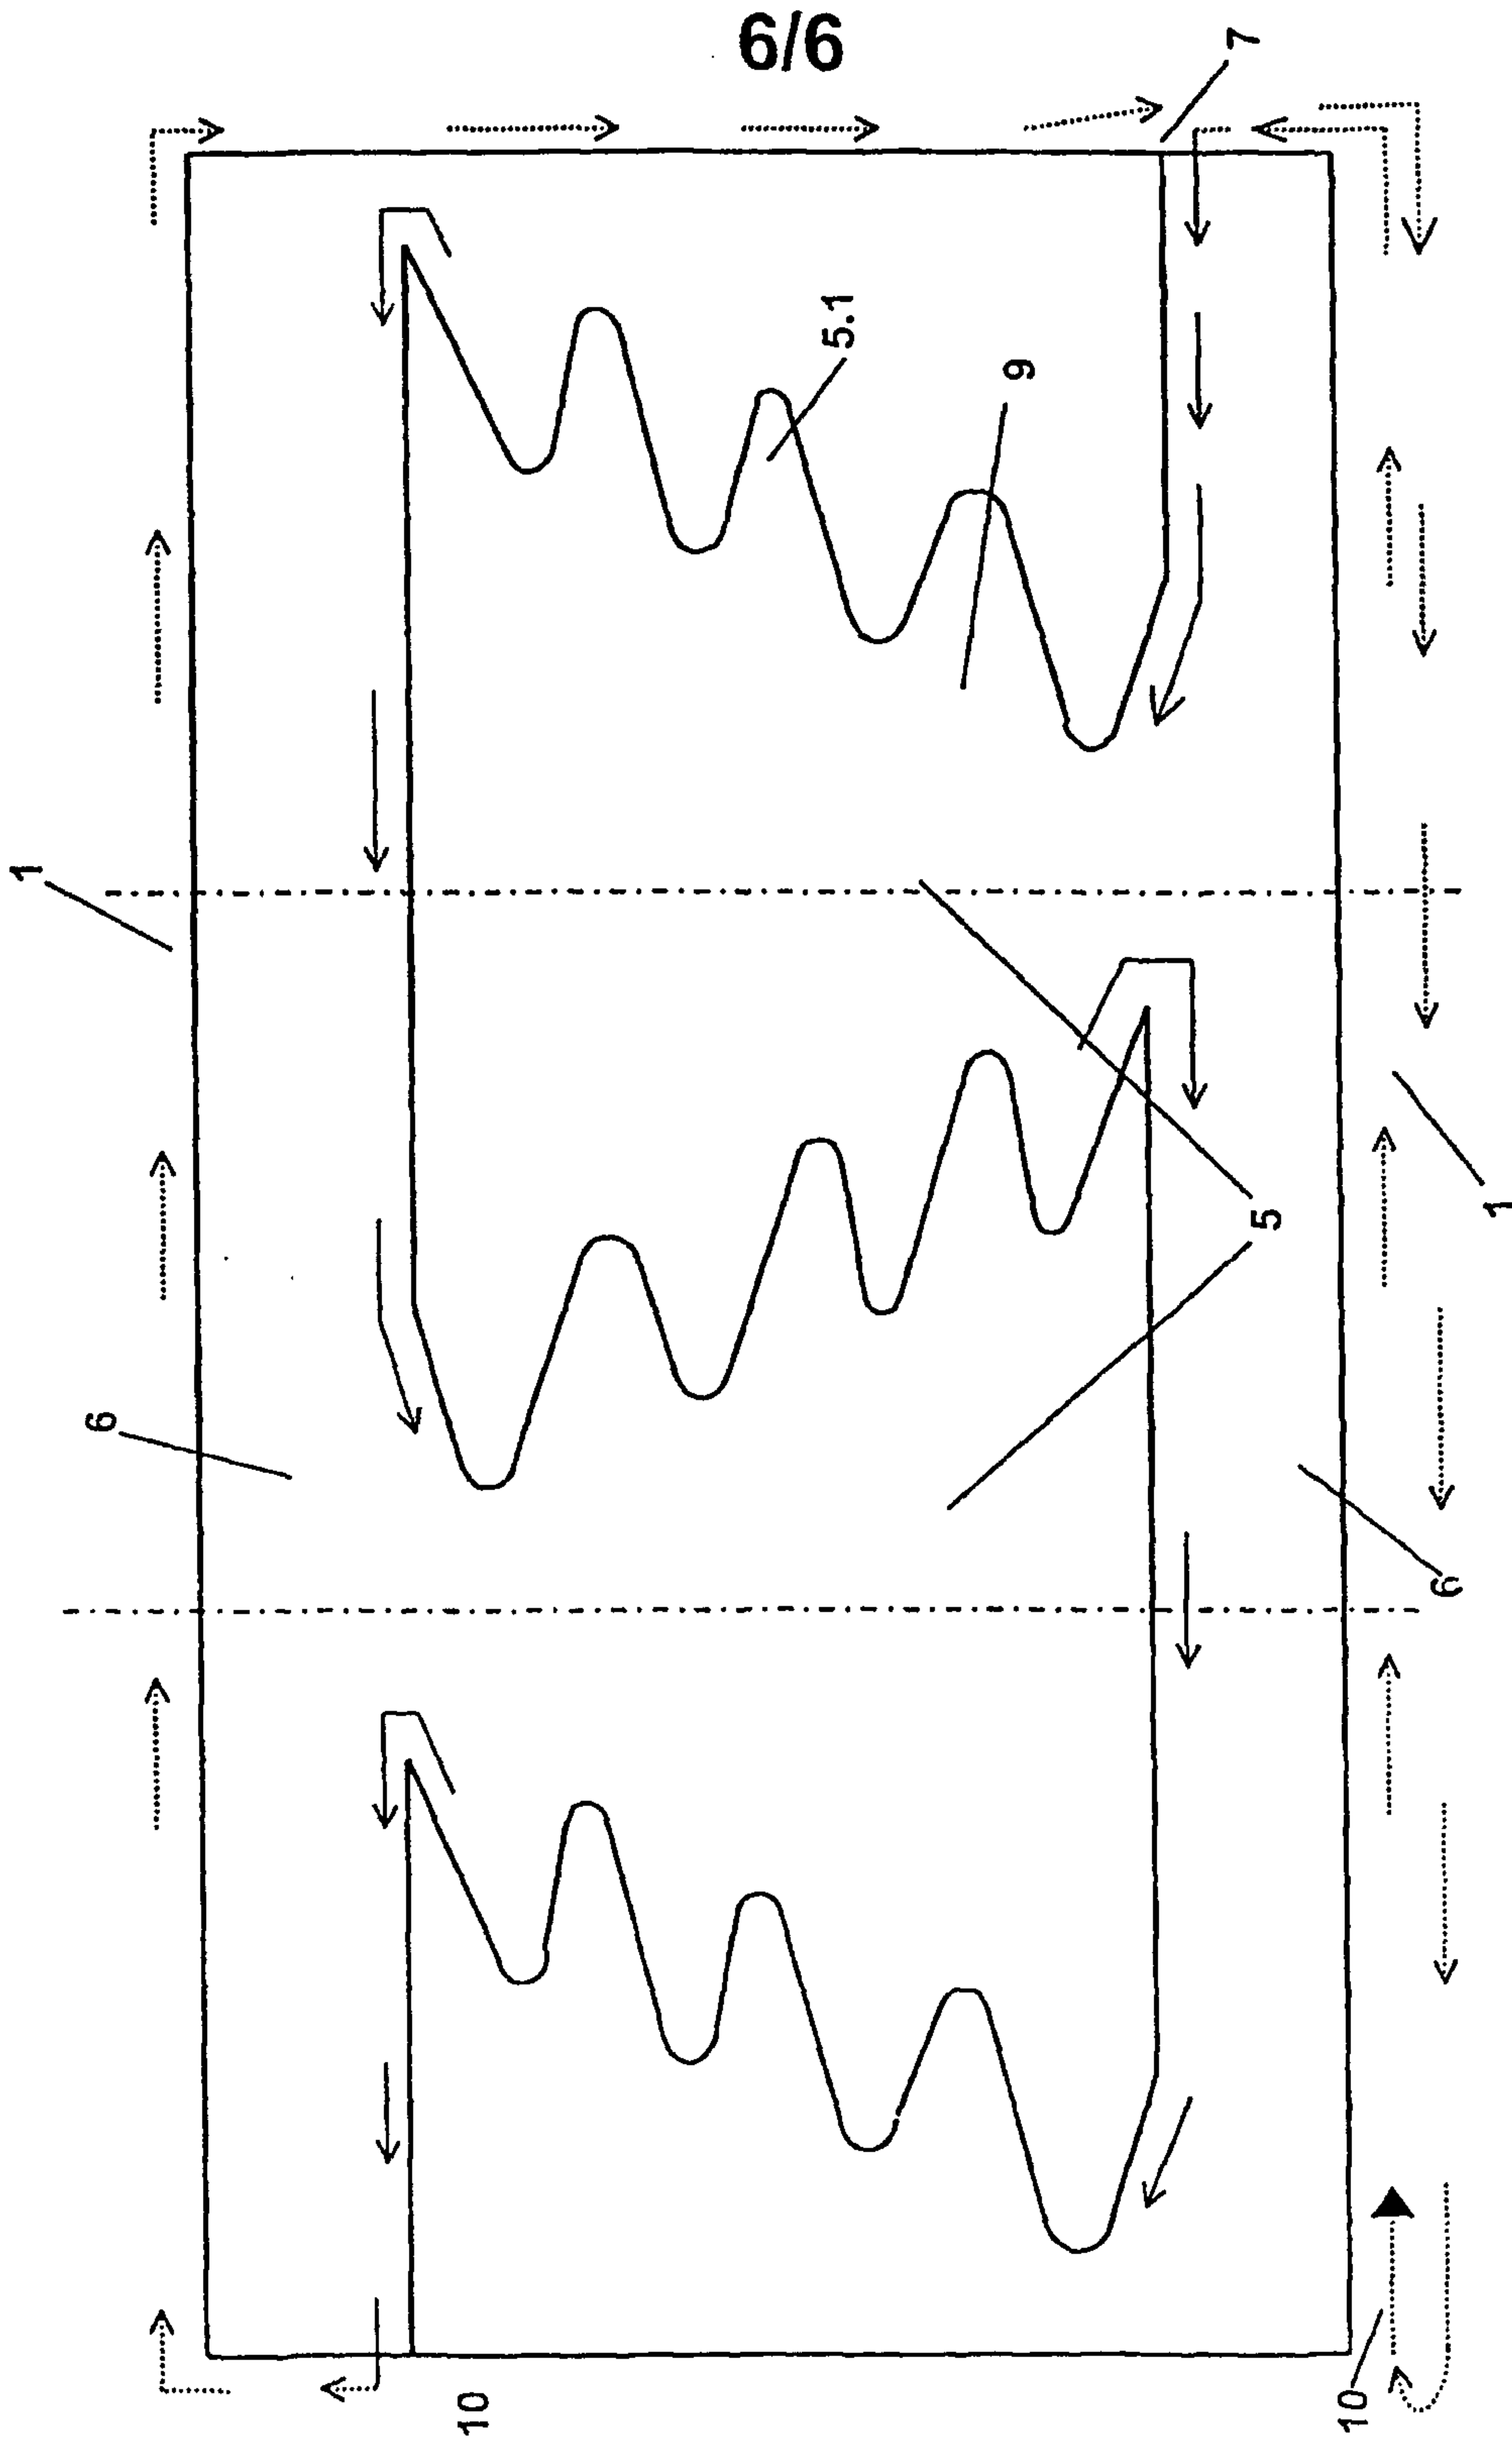


FIGURE 6

