



US00RE44271E

(19) **United States**  
(12) **Reissued Patent**  
**Keeter**

(10) **Patent Number:** **US RE44,271 E**  
(45) **Date of Reissued Patent:** **Jun. 11, 2013**

(54) **FINISHED SLOT AND ADJUSTABLE SHIRT COLLAR AND METHOD OF MANUFACTURING SAME**

(75) Inventor: **Jim Keeter**, New York, NY (US)

(73) Assignee: **Capital Mercury Apparel, Ltd.**, New York, NY (US)

(21) Appl. No.: **13/403,817**

(22) Filed: **Feb. 23, 2012**

**Related U.S. Patent Documents**

Reissue of:

(64) Patent No.: **8,065,747**  
Issued: **Nov. 29, 2011**  
Appl. No.: **11/255,987**  
Filed: **Oct. 24, 2005**

1,086,451	A *	2/1914	Glasgow	2/127
1,280,673	A *	10/1918	Cree	2/141.2
1,280,742	A *	10/1918	Hurd	2/131
1,313,932	A *	8/1919	Warshauer	2/116
1,814,760	A *	7/1931	Miller, Jr.	2/265
1,879,527	A *	9/1932	Sansone	2/127
1,945,104	A *	1/1934	Zilinsky	112/405
1,953,429	A *	4/1934	Newell	2/141.1
1,963,004	A *	6/1934	Tucker	2/127
1,982,527	A *	11/1934	Manekin	2/116
2,025,485	A *	12/1935	Tucker	2/127
2,318,295	A *	5/1943	Davidow	2/93
2,368,272	A *	1/1945	Sydenham et al.	2/458
2,385,638	A *	9/1945	Norwood	2/116
2,585,689	A *	2/1952	Schafer	2/127
2,646,570	A *	7/1953	Rinehart et al.	2/116
2,709,813	A *	6/1955	Clendenin, Jr.	2/130
2,713,686	A *	7/1955	Oster et al.	2/266
2,893,012	A *	7/1959	Kahn	2/116
3,142,843	A *	8/1964	Berger	2/128
3,170,165	A *	2/1965	Wise	2/116

(Continued)

U.S. Applications:

(63) Continuation-in-part of application No. 10/842,556, filed on May 11, 2004, now abandoned.

*Primary Examiner* — Alissa L Hoey

(74) *Attorney, Agent, or Firm* — Arent Fox LLP

(51) **Int. Cl.**  
**A41B 3/02** (2006.01)

(52) **U.S. Cl.**  
USPC ..... **2/141.1**; 2/141.2; 2/129

(58) **Field of Classification Search**  
USPC ..... 2/129, 141.1, 141.2, 131, 132, 116, 2/60, 98, 100, 265, 266, 222, 220, 221, 405, 2/235, 274, 275

See application file for complete search history.

(56) **References Cited**


**U.S. PATENT DOCUMENTS**

418,639	A *	12/1889	Batter	2/127
514,415	A *	2/1894	Cook	2/266
912,958	A *	2/1909	Hawks	24/101 R

(57) **ABSTRACT**

An adjustable collar having a finished slot through which a fabric strip passes unimpeded. A pair of flaps is formed by an outer band of the collar and abut the finished slot. The fabric strip is secured to a free end of an elastic strip, which is secured to a shirt band at a first end of the elastic strip. A button is secured to a free end of the fabric strip and the button passes through a horizontal buttonhole defined in an end of an outer portion of a neckband of the shirt. The fabric strip is retracted and hidden when the collar is open. The button is larger than a diameter of the finished slot to prevent the fabric strip from retracting completely therethrough.

**17 Claims, 4 Drawing Sheets**

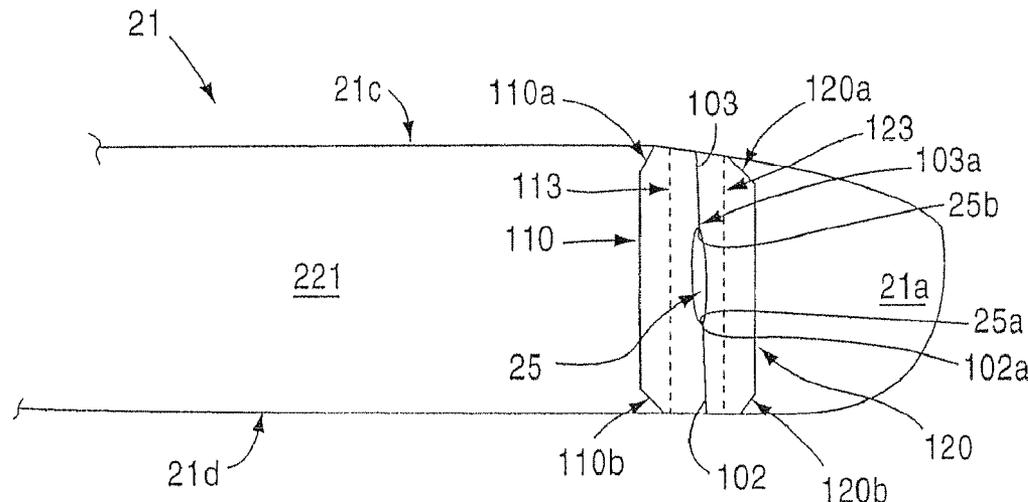

# US RE44,271 E

## U.S. PATENT DOCUMENTS

3,394,437	A *	7/1968	Sinclair	24/301	5,692,240	A *	12/1997	Steele	2/129
3,430,264	A *	3/1969	Beukenkamp, Jr.	2/116	5,898,941	A *	5/1999	Groshens	2/129
3,536,554	A *	10/1970	Weiss	24/659	5,950,240	A *	9/1999	Carpenter et al.	2/160
3,547,060	A *	12/1970	Lepore	112/431	6,018,822	A *	2/2000	Hernandez	2/405
3,587,501	A *	6/1971	Cruden	12/475.25	6,057,253	A *	5/2000	Groshens	442/313
3,629,866	A *	12/1971	Blue	2/132	6,081,926	A *	7/2000	Krause et al.	2/129
3,654,635	A *	4/1972	Cruden, Jr.	2/266	6,212,686	B1 *	4/2001	Krause et al.	2/129
3,675,279	A *	7/1972	Moden	24/659	6,250,116	B1 *	6/2001	Groshens	66/171
3,701,167	A *	10/1972	Spetz	2/266	6,279,161	B1 *	8/2001	Johnston	2/69
3,703,149	A *	11/1972	George	112/475.25	6,401,257	B1 *	6/2002	Tsuruta	2/266
3,725,959	A *	4/1973	Cruden	2/247	6,434,802	B1 *	8/2002	Pannone	24/306
3,793,647	A *	2/1974	Spetz	2/266	6,449,772	B1 *	9/2002	Donner	2/170
3,806,955	A *	4/1974	Weyrick et al.	2/266	6,874,164	B2 *	4/2005	Droppo et al.	2/141.2
3,828,365	A *	8/1974	Berger	2/128	6,986,165	B2 *	1/2006	Neff et al.	2/141.2
4,000,522	A *	1/1977	Swanson	2/116	7,310,825	B2 *	12/2007	St-Germain	2/123
4,445,233	A *	5/1984	Rubin	2/239	8,065,747	B2 *	11/2011	Keeter	2/141.1
4,648,137	A *	3/1987	Cooper	2/116	2004/0181845	A1 *	9/2004	Droppo et al.	2/141.2
4,670,908	A *	6/1987	Albert	2/139	2005/0022287	A1 *	2/2005	Neff et al.	2/129
4,825,472	A *	5/1989	Garafano	2/116	2005/0125876	A1 *	6/2005	Kato	2/129
5,029,345	A *	7/1991	Angheluta et al.	2/403	2005/0210561	A1 *	9/2005	Robinson	2/129
5,481,995	A *	1/1996	Hiratsuka et al.	112/437	2005/0251891	A1 *	11/2005	Keeter	2/129
5,669,078	A *	9/1997	Scremin et al.	2/247					

\* cited by examiner

Fig.1

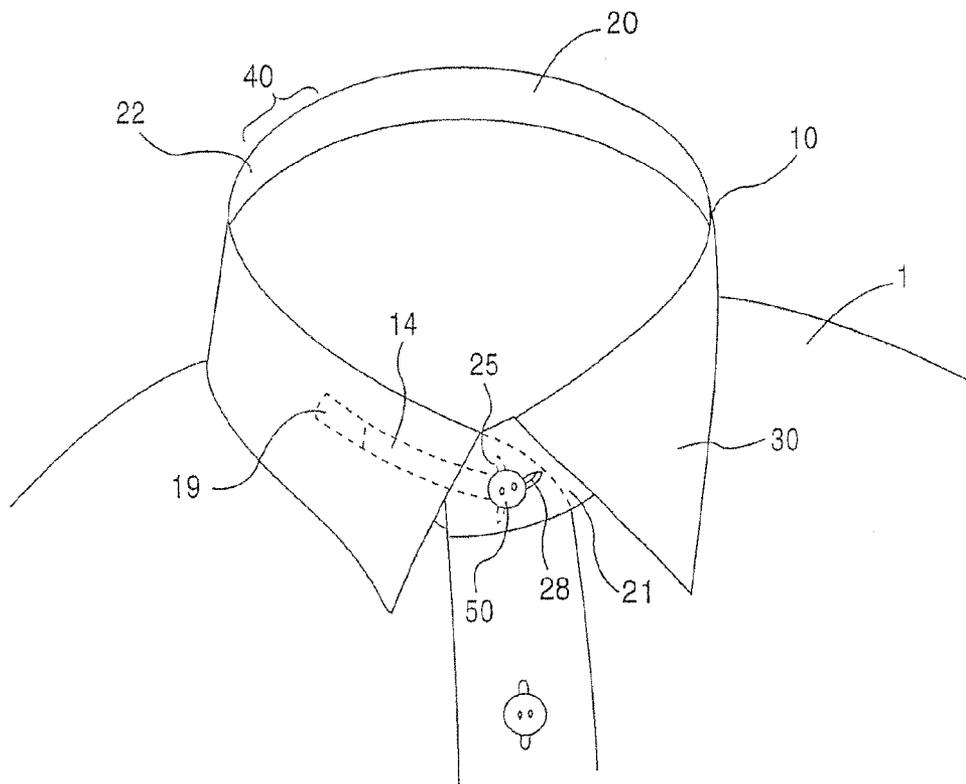


Fig.2A

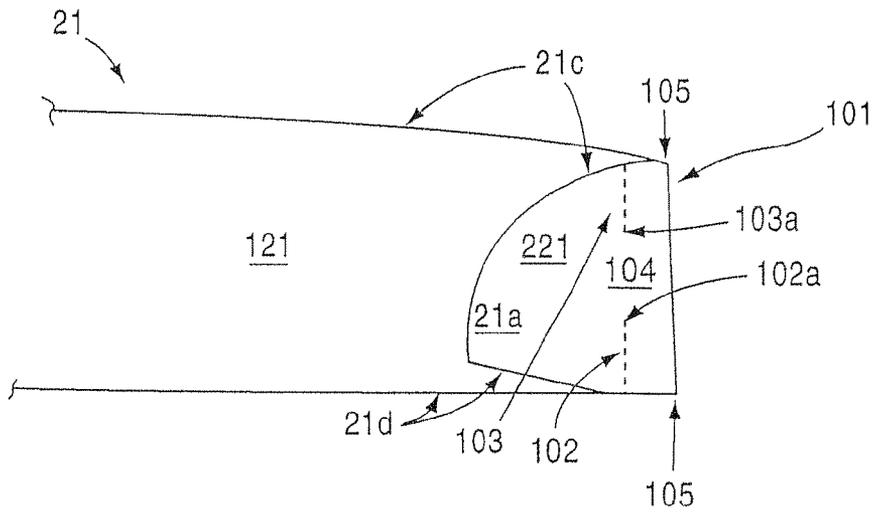


Fig.2B

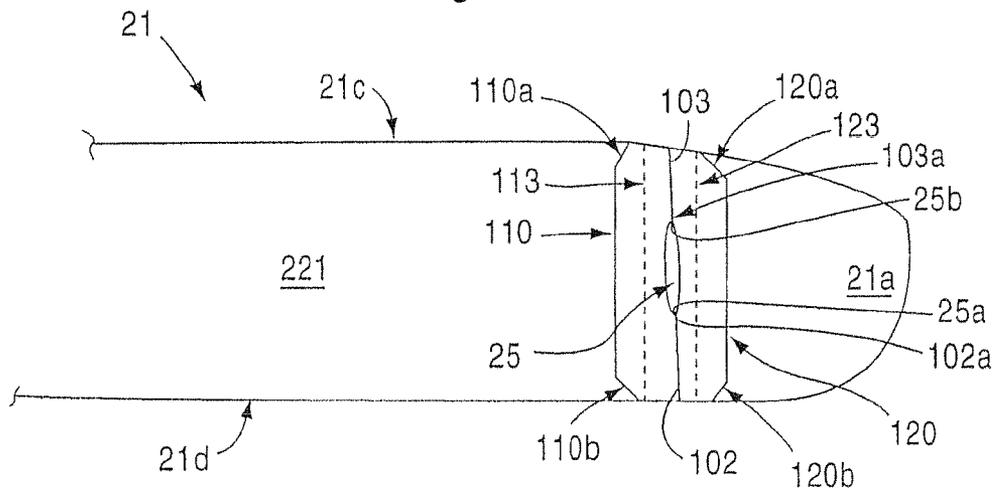


Fig.2C

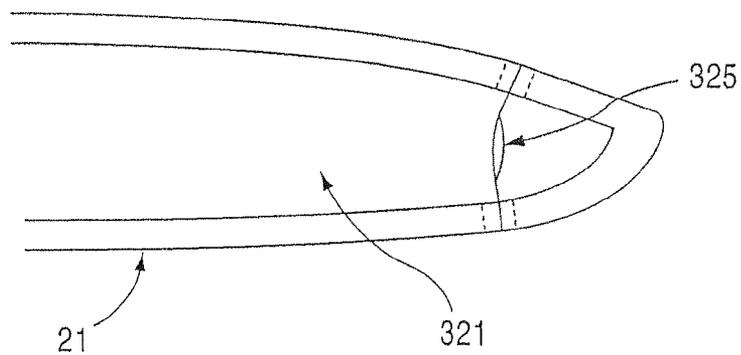


Fig.3

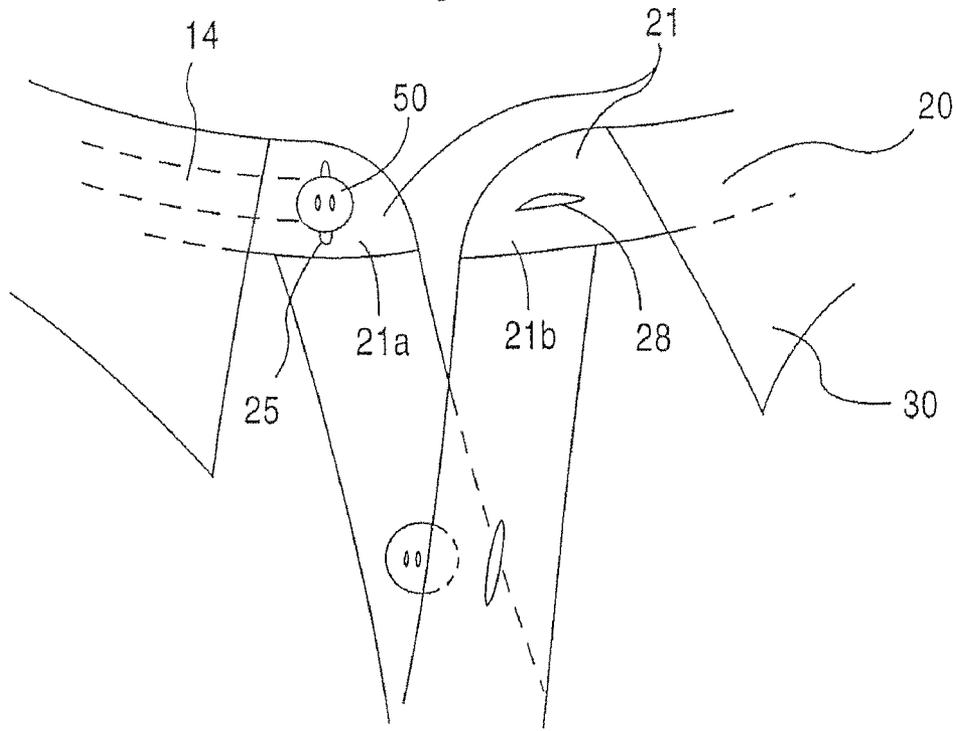


Fig.4

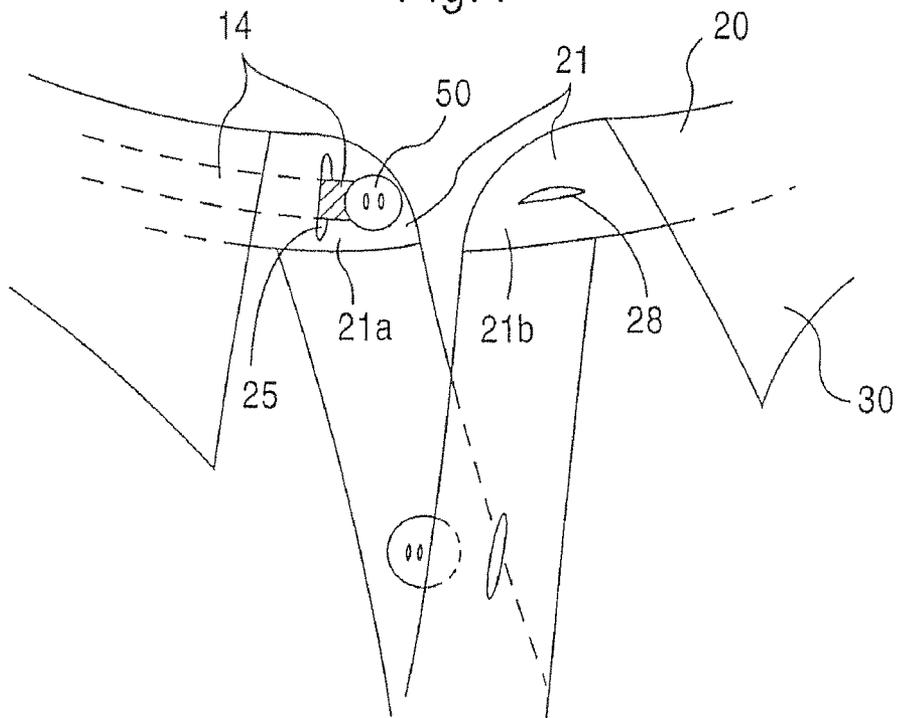


Fig.5


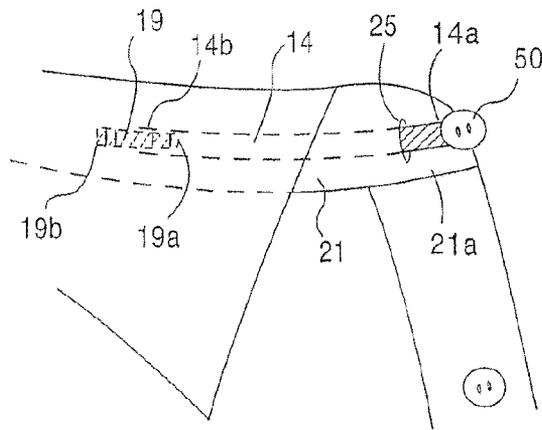


Fig.6

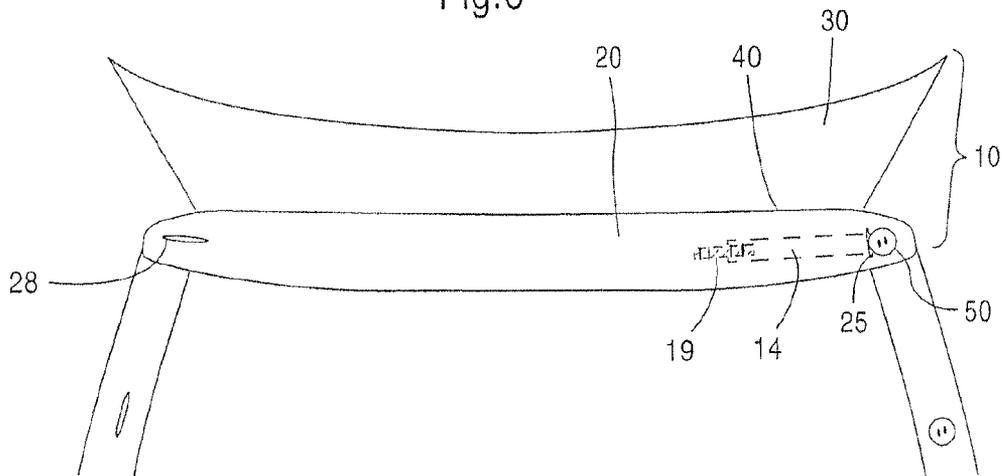

**FINISHED SLOT AND ADJUSTABLE SHIRT  
COLLAR AND METHOD OF  
MANUFACTURING SAME**

**Matter enclosed in heavy brackets [ ] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue.**

CROSS-REFERENCE TO RELATED  
APPLICATION

This is a continuation-in-part application of application Ser. No. 10/842,556, filed May 11, 2004 now abandoned.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a finished slot and an adjustable shirt collar and a method of manufacturing the same. More particularly, the present invention related to a finished slot that works in cooperation with an elastic strip that self-adjusts a circumference of the shirt collar to provide a comfortable fit while simultaneously providing the shirt collar with an opening that is more secure, better quality, and has a longer life.

2. Description of Related Art

There are occasions when people need to expand the collar of the shirt they are wearing to obtain a comfortable fit. Shirts with permanently attached collars, particularly dress shirts, are normally manufactured in standard collar sizes based on the circumference of the collar. Although standard collar sizes may initially provide a comfortable fit, many individuals who fall between standard collar sizes or experience a change in weight over time may experience discomfort when wearing the shirt. Moreover, it is well known that clothing, i.e., shirts, shrink after several washings, which also results in a change in the actual size of the shirt collar, whereupon, it becomes uncomfortable to wear the shirt. Therefore, an adjustable shirt collar becomes necessary to ensure that shirts may adjust to fit the wearer comfortably.

Various solutions to this problem have been offered in the art. One known solution offers collar adjustment using an adjustable shirt collar fastening device having an elastic strip secured between the lining and the ply of the collar by stitches. A button is attached at the end of the elastic strip, which is maneuverable so as to pass through a horizontal buttonhole in the collar. Additionally, a U-shaped metal cap is adapted to prevent the elastic strip from inadvertently entering or being drawn into or through the horizontal buttonhole. A finished fabric strip folds over the elastic strip and the button. Although this solution offers collar expansion, a wearer may desire to conceal the elastic strip if the top button is unbuttoned to provide a neater and arguably more professional appearance.

Another known solution is a shirt having a fixed unit, which contains a relatively short and resilient strap vertically disposed and bent back onto itself. A button is attached to the end of the strap by stitching. Additionally, two tabs of the collar shift together allowing the button to pass through a buttonhole to hold the tabs together. The collar extends when the strap is stretched outwardly through the opening of the inner tab and through the buttonhole. The strap is oriented orthogonally relative to the collar band. Therefore, to relieve discomfort, the collar is adjusted by stretching the strap outwardly through the horizontal buttonhole. Because such adjustment

is due to a force that pulls the button and the strap outward rather than the more natural side-to-side movement of the button and strap, the fit may still be uncomfortable as the button presses against the front center portion of a wearer's throat. Moreover, because the strap is attached orthogonally relative to a longitudinal axis of the buttonhole, any sideways movement of the strap results in the button loosening, or the alteration of the stitching holding the strap to the collar, or both.

Other solutions are disclosed by U.S. Pat. No. 912,958 to H. S. Hawks; U.S. Pat. No. 1,879,527 to J. Sansone; and U.S. Pat. No. 3,142,843 to S. Berger. Each patent describes a collar button structured to relieve pressure on the neck of the wearer without using an expanding strip.

Additionally, U.S. Pat. No. 6,212,686 to Krause et al., as well as U.S. Pat. Nos. 5,898,941 and 6,250,116 to Groshens disclose solutions using expandable fabric weaves, expandable fabric patterns, expandable fabric weaves and patterns, or stitching in the collar to provide the necessary expansion.

U.S. Pat. No. 5,692,240 to Steele discloses another solution wherein the stationary collar button is replaced with adjustable hook and loop fasteners adapted for removable attachment to one another. A third hook and loop fastener strip allows the covering strip to be retracted and attached for concealment. However, the solution taught by Steele requires several manufacturing steps that result in a substantial increase in manufacturing costs, which are passed along to consumers. Additionally, the hook and loop fasteners become less effective after multiple washings because the hook and loop fasteners ability to lockingly engage is impeded by the friction that occurs during the washing process. Furthermore, it is well known that the hook and loop fasteners inadvertently attach to other items that may cause a build up of threads or particles, which reduces the effectiveness or the aesthetic appearance of the fasteners.

U.S. Pat. No. 3,828,365 to Berger merely discloses an expandable buttonhole. Furthermore, U.S. Pat. No. 2,646,570 to E. Rinehart et al. discloses a shirt having an elastic cord covered with fabric. A loop at the end of the elastic cord extends across the collar opening to attach to one of several buttons under the collar on the opposite side of the collar.

In yet another example, U.S. Patent Application Publication No. 2005/0022287 to Neff et al. (Neff) teaches an expandable collar assembly **10** having parallel lines of stitching **32** and **34** that define a pocket between a collar band **16** and body **12** of the shirt. A slot **36** formed in a manner similar to a buttonhole is located in the pocket and an elongated strip of self fabric **42** extends through the slot **36** with a button **38** attached to one end of the elongated strip of fabric **42**. The other end of the elongated strip of fabric **42** is stitched to a square piece of elastic **45**. The other end of the square piece of elastic **45** is bar tacked **48** to the body **12** of the shirt or the collar band **16**.

Many of the solutions described above are susceptible to deterioration or create constrictive pressure on the throat of the wearer. Additionally, the solutions do not allow the wearer to conceal the apparatus when the collar is unbuttoned and left open. Furthermore, the solutions described above, in particular the teachings of Neff, suffer from the adjusting strip washing out and, because the slot **36** of Neff is formed like a buttonhole, the edges of the slot **36** fray due to the friction created by the self fabric **42** repeatedly rubbing against the edges of the slot **36**, as well as the shirt being constantly washed.

Therefore, there is a need for an expandable shirt collar that adjusts the fit of the collar without placing undesirable and unnecessary pressure on the throat of the wearer, while pro-

viding a finished slot that works in cooperation with an elastic strip that self-adjusts a circumference of the shirt collar. There is also a need for the finished slot to be sturdy, and have edges that are resilient to the friction that is created by a strip of fabric that constantly rubs against the edges to provide a better quality and longer lasting adjustable or expandable shirt collar. There is yet another need for the finished slot to provide a sturdy opening for the strip of fabric to pass through. There is a further need for an adjustable shirt collar that creates an appealing look and allows the wearer to conceal the apparatus of the expandable shirt collar.

#### SUMMARY OF THE INVENTION

Aspects of the present invention provide a self-adjusting shirt collar that provides a comfortable fit for the wearer.

One aspect of the present invention relates to a collar. The collar includes a neckband assembly, a flap, an extendable elastic strip, a fabric strip, a button, a horizontal buttonhole, and a finished fabric strip slot (hereinafter referred to simply as the finished slot). The elastic strip is secured to a neckband by stitching. The neckband has the finished slot secured near one end of the neckband. Moreover, the fabric strip is attached to a free end of the elastic strip and a button is secured to a free end of the fabric strip. A buttonhole is provided on an end of the neckband opposite the button end, such that the buttonhole is configured to receive the button upon extending the fabric strip outward through the finished slot. The fabric strip is covered and concealed when retracted inward through the finished slot and not in use.

In another aspect of the invention, the neckband assembly has an inner band and an outer band. The fabric strip extends from the outside of the outer band and through the finished slot, which allows the fabric strip to automatically be hidden when retracted. Also, the finished slot allows an operating length of the fabric strip to be adjusted, such as, for example, to increase the circumference of the collar.

In yet another aspect of the present invention, the finished slot is formed by folding a button end of the outer band back onto itself, i.e., onto an outer or first side thereof, to define a vertically extending folded edge. A pair of short stitches is sewn into the outer band parallel to the folded edge. One of the short stitches extends from a bottom edge of the outer band and extends upward while the other short stitch extends from a top edge of the outer band and extends downward, wherein free ends of the short stitches oppose each other across a predetermined distance that defines a region which forms the slot.

A cut is then made along the fold of the folded edge to form two flaps, i.e., first and second flaps, and an end piece of the outer band is folded back flat towards the inner or second side of the outer band. One of the flaps, i.e., the first flap, is then folded onto the second or inner side of the outer band such that the first and second flaps are flat. A pair of vertically extending stitches is then sewn onto the flaps, each vertically extending stitch extends from the bottom edge of the outer band to the top edge thereof on either side of the slot to secure the flaps to the outer band and define the slot therebetween. The slot is defined by cutting a hole sized to permit the fabric strip to pass therethrough, the hole being formed in the region between the opposing ends of the short stitches.

The resulting finished slot is stronger and more secure than conventional buttonhole type openings that are prevalent in collars, resistant to fraying with repeated use, and less inclined to wash out. Furthermore, the adjustable collar with the finished slot is more durable, better quality, and provides the shirt with an adjustable collar having a longer life.

It should be noted that in one embodiment, the top and bottom corners of each flap are cut to provide a clean edge. In yet another embodiment, a fusible interlining may be joined to the inner or second side of the outer band, wherein a slot is formed in the interlining corresponding to the slot formed in the outer band.

The extendable elastic and fabric strips are then attached to the inner band. As such, the fabric strip is able to slide through the finished slot unimpeded so as to not place any constricting pressure on the throat of the wearer. Moreover, the fabric strip does not place strain on the elastic strip or fabric strip stitching, which could eventually disengage the elastic strip or fabric strip, or both, from the collar. Moreover, because there is no interruption when maneuvering the fabric strip through the finished slot, the wearer does not have to aggressively pull the button or the fabric strip to button the collar. As a result, the button stitching is not susceptible to loosening. Finally, the button is attached to prevent the fabric strip from being drawn inadvertently back through the finished slot and away from the outer side of the outer band.

Additional advantages and novel features of the present invention will become apparent from the following description.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a partially transparent perspective view of a buttoned shirt with an expandable collar, in accordance with one aspect of the present invention;

FIGS. 2A-2C are sketches illustrating the process of forming a finished slot in an outer band of the expandable collar illustrated in FIG. 1;

FIG. 3 is an enlarged view of an open shirt collar with a retracted expandable elastic strip, in accordance with one aspect of the present invention;

FIG. 4 is an enlarged view of an open shirt collar with the extended expandable elastic strip illustrated in FIG. 3;

FIG. 5 is a fragmentary view of one end of the shirt collar illustrated in FIG. 1; and

FIG. 6 is a rear (or outside) view of the fully opened shirt collar, in accordance with one aspect of the present invention.

#### DETAILED DESCRIPTION OF THE PRESENT INVENTION

As shown in FIGS. 1-6, the present invention includes an adjustable shirt collar **10** having an elastic strip **19**, a fabric strip **14** attached to the elastic strip **19**, and a button **50** attached to an end of the fabric strip **14**. The present invention, as disclosed herein, allows for self-adjustment of the circumference of the shirt collar **10** to provide a comfortable fit to the wearer.

In particular, FIG. 1 illustrates a shirt **1** having the collar **10** sewn thereon. The collar **10** includes a multi-layered neckband assembly **20** and a multi-layered flap **30**, which may fold up or down over a crease **40** between the neckband assembly **20** and the flap **30**. It is within the scope of the invention to form the crease **40** between the neckband assembly **20** and the flap **30** by stitching the flap **30** to the neckband assembly **20**. Furthermore, if the collar **10** is manufactured as a single (or multi-layered) outer piece and inner piece of fabric, respectively, the crease **40** is formed over a plane between the neckband assembly **20** and the flap **30**.

Additionally, the neckband assembly **20**, as shown in FIGS. 1-4, includes an outer band **21** and inner band **22** with a finished fabric strip slot **25** defined at a first end **21a** of the outer band **21**. The finished slot **25** defines an opening that is

5

vertical relative to a buttonhole **28** defined at a second free end **21b** of the outer band **21**. See FIGS. **1-4** and **6**. The buttonhole **28** is horizontal and has a longitudinal axis extending in a direction substantially parallel relative to a longitudinal axis of the neckband assembly **20**. Furthermore, as shown in

FIGS. **1-5**, the finished slot **25** has a longitudinal axis extending orthogonally relative to the longitudinal axis of the horizontal buttonhole **28** and neckband assembly **20**.

FIGS. **2A-2C** are sketches illustrating the process in which the finished slot **25** is formed in the first end **21a** of the outer band **21**.

Referring to FIGS. **2A-2B**, the outer band **21** includes an outer or first surface **121** and an inner or second surface **221** on the opposite side of the band **21**. The outer surface **121** faces away from the wearer while the inner surface **221** faces toward the inner band **22** and the wearer. The first end **21a** of the outer band **21** is folded back onto the outer surface **121** thereof, to define a vertically extending folded edge **101** and expose the inner surface **221** of the outer band **21** at a region including the first end **21a**.

A pair of short stitches **102, 103** is sewn into the outer band **21** parallel to the folded edge **101**. A first short stitch **102** of the pair of short stitches extends from a bottom edge **21d** of the outer band **21** upward toward an upper edge **21c** of the outer band **21** while a second short stitch **103** extends from the upper edge **21c** of the outer band **21** downward toward a bottom edge **21d** of the outer band **21**. Free ends **102a** and **103a** of the short stitches **102** and **103**, respectively, oppose each other across a region **104** within which the finished slot **25** is to be formed. While the distance which the stitches **102** and **103** extend toward each other may vary depending on factors such as the height of the outer band **21**, it should be noted that the length of the region **104** must be sized or configured to permit the slot **25** to be formed therein such that the slot **25** permits the fabric strip **14** to pass therethrough yet prohibit the button **50** attached to the end thereof from also passing therethrough.

A vertical cut **105** is then made along the fold of the folded edge **101** from the bottom edge **21d** to the upper edge **21c** or vice versa to form two flaps, i.e., first flap **110** and second flap **120**, and the first end piece **21a** of the outer band **21** is folded back towards the inner or second side **221** of the outer band **21** to be flat. The first flap **110** is then folded over the cut **105** onto the second or inner side **221** of the outer band **21** such that the first flap **110** and the second flap **120** are flat relative to the second or inner side **221**.

Vertically extending stitches **113** and **123** are then sewn onto a corresponding flap **110** and **120**, respectively, wherein each vertically extending stitch **113** and **123** extends from the bottom edge **21d** of the outer band **21** to the top edge **21c** thereof. The vertically extending stitches **113** and **123** secure the flaps **110** and **120**, respectively, to the outer band **21**. The finished slot **25** is then formed, preferably by cutting or any other suitable manner, between the vertically extending stitches **113** and **123** and in the region **104** defined between the opposing ends **102a** and **103a** of the short stitches **102** and **103**. It should be noted that it is within the scope of the present invention for the free end **102a** of the short stitch **102** to abut a lower portion **25a** of the slot **25** while the free end **103a** of the short stitch **103** abuts the upper portion **25b** of the slot **25**. Therefore, the short stitches **102** and **103**, as well as the vertically extending stitches **113** and **123** help provide a finished slot **25** that is more secure, better looking, stronger, and less likely to wash out or fray with repeated passing of the fabric strip **14** therethrough.

It should be noted that while it has been described herein for the first end **21a** of the outer band **21**, and the flaps **110** and

6

**120** are stitched to the outer band **21**, it is within the scope of the present invention for the end **21a** and flaps **110** and **120** to be attached to the outer band by any known or later developed manner, such as, for example only, by using an adhesive.

It should be noted that in one embodiment, a top corner **110a** and **120a** and a bottom corner **110b** and **120b** of each flaps **110** and **120** are formed, preferably by cutting the flaps **110** and **120**, to provide a clean edge. See FIG. **2B**.

In yet another embodiment, as shown in FIG. **2C**, a fusible interlining **321** may be joined to the inner or second side **221** of the outer band **21**, wherein a slot **325** is formed in the interlining **321** which corresponds to or is aligned with the slot **25** formed in the outer band **21**.

Referring to FIG. **4**, the elastic strip **19**, is sewn using at least two bartacks to the underside of the outer band **21** prior to attaching the outer band **21** and inner band **22** together, along with the flap **30** to complete assembly of the adjustable shirt collar **10**. The fabric strip **14**, as shown in FIGS. **1-6** and particularly FIG. **5**, is inserted from the outside into finished slot **25** at the first free end **21a** of the outer band **21** until the button **50** contacts slot **25**. It should be noted that the free end **19a** of elastic strip **19** is sewn with at least two bartacks to the free end **14b** of the fabric strip **14** and the button **50** is sewn on the free end **14a** of the fabric strip **14** before the fabric strip **14** is passed through the slot **25**. The button **50** may also pass through the horizontal buttonhole **28** to close the shirt collar **10**. Moreover, the button **50** prevents the fabric strip **14** from inadvertently being drawn through the vertical finished slot **25**.

The fabric strip **14**, which is attached to the collar **10** by the elastic strip **19**, may be manufactured in any color, design or material, e.g., plaid, satin, or the same color and material as the wearer's tie, but particularly, in the same color and of the same material as the shirt **1**. The fabric strip **14** extends along the length of the collar **10** when the wearer grasps the button **50** and inserts the button **50** through the horizontal buttonhole **28** such that the second end **21b** overlaps the first end **21a** of the outer band **21**. See FIGS. **1** and **3-4**. The fabric strip **14** is hidden inside the outer band **21** and inner band **22** when the fabric strip **14** is retracted.

The elastic strip **19** and fabric strip **14**, when attached to the collar **10** through the vertical finished slot **25**, functions to expand the circumference of the neckband assembly **20**, as needed, when the fabric strip **14** is buttoned into the horizontal buttonhole **28**. By expanding the circumference of the neckband assembly **20**, the wearer may maximize the comfort of the shirt collar **10**.

Additionally, many modifications may be made to adapt the teachings of the expandable collar of this invention to particular situations or materials without departing from the scope thereof. For example, while the flaps **110** and **120** are discussed above as extending vertically from the bottom edge **21d** to the upper edge **21c** of the outer band **21**, it is envisioned that the flaps **110** and **120** extend a length corresponding to a height of the slot **25**. Therefore, this invention should not be limited to the particular embodiments disclosed herein, but includes all embodiments within the spirit and scope of the disclosure.

What is claimed is:

1. An adjustable collar of a shirt, the collar comprising: a neckband assembly, having a first end and a second end, extends along a circumference of the collar and comprises an outer band and an inner band, the outer band having an inner side facing the inner band;

7

an extendable elastic strip having a first end secured to an underside of the outer band *and which extends [through] toward* a finished slot defined in the first end of the outer band;

a fabric strip having a first end secured to a free end of the elastic strip;

a button secured to a free end of the fabric strip;

a buttonhole defined in the second end of the neckband assembly and configured to receive the button upon extension of the elastic and fabric strip assembly; and

a pair of flaps defined only by a first portion of the inner side of the outer band engaging a second portion of the inner side of the outer band,

wherein only the pair of flaps define the finished slot by abutting each other.

2. The adjustable collar according to claim 1, wherein the outer band further includes an outer side facing away from a direction in which the inner side faces.

3. The adjustable collar according to claim 2, wherein the flaps are formed on the inner side of the outer band.

4. The adjustable collar according to claim 3, wherein the flaps are affixed to the inner side of the outer band by fixing means.

5. The adjustable collar according to claim 4, wherein the fixing means include any one of stitching and an adhesive.

6. The adjustable collar according to claim 1, wherein each flap is affixed to the outer band by stitching extending in a direction parallel to a longitudinal axis of the finished slot.

7. The adjustable collar according to claim 1, wherein the flaps extend from a bottom edge of the outer band to an upper edge of the outer band.

8. The adjustable collar according to claim 1, wherein first stitching extends from an upper portion of the finished slot to

8

an upper edge of the outer band and second stitching extends from a bottom portion of the finished slot to a lower edge of the outer band.

9. The adjustable collar according to claim 1, wherein at least one of an upper corner and a lower corner of each flap is cut to provide each flap with at least five sides.

10. The adjustable collar according to claim 9, wherein the cut upper and lower corners are located remotest relative to the finished slot.

11. The adjustable collar according to claim 1, wherein a fusible interlining band is affixed to an inner side of the outer band.

12. The adjustable collar according to claim 11, wherein the fusible interlining band includes an interlining slot that is aligned with the finished slot of the outer band.

13. The adjustable collar according to claim 1, wherein the finished slot extends in a vertical direction that is orthogonal relative to a longitudinal axis of the elastic and fabric strip assembly.

14. The adjustable collar according to claim 1, wherein a diameter of the button is larger than a diameter of the finished slot, and wherein the button is prevented from passing through the finished slot.

15. The adjustable collar according to claim 1, wherein the first end of the elastic strip is secured to an inner side of the outer band by bar tacking.

16. The adjustable collar according to claim 1, wherein the first end of the fabric strip is secured to the free end of the elastic strip by bar tacking.

17. The adjustable collar according to claim 1, wherein the second end of the outer band overlaps the first end of the outer band portion of the neckband assembly when the button passes through the finished slot.

\* \* \* \* \*