PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

EP. 0047742

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification [3]: C22B 1/06	A1	(11) International Publication Number: WO 81/01420
		(43) International Publication Date: 28 May 1981 (28.05.81)

(21) International Application Number: PCT/FI80/00008

(22) International Filing Date: 20 November 1980 (20.11.80)

(31) Priority Application Number: 791684

(32) Priority Date: 22 November 1979 (22.11.79)

(33) Priority Country: FI

(71) Applicant; and
(72) Inventor: SAIKKONEN, Pekka, Juhani [FI/FI]; Alakartanontie 4 B 63, SF-02360 Espoo 36 (FI).

(74) Agent: OY KOLSTER AB; Lönnrotinkatu 19 B, PL 148, SF-00121 Helsinki 12 (FI).

(81) Designated States: AT (European patent), AU, BR, CF (OAPI patent), CG (OAPI patent), CH European patent), CM (OAPI patent), DE (European patent), FR (European patent), GA (OAPI patent), GB (European patent), HU, JP, NL (European patent), NO, SE (European patent), SN (OAPI patent), SU, TD (OAPI patent), TG (OAPI patent), US.

Published
With international search report
In English translation (filed in Finnish)

(54) Title: A PROCESS FOR RECOVERING NON-FERROUS METAL VALUES FROM ORES, CONCENTRATES, OXIDIC ROASTING PRODUCTS OR SLAGS

(57) Abstract

A process for recovering non-ferrous metal values from their ores, minerals, concentrates, oxidic roasting products, or slags by sulphating said starting material using a mixture comprising iron(III) sulphate and alkali metal- or ammonium sulphate as a reagent.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	**KP**	Democratic People's Republic of Korea
AU	Australia	**LI**	Liechtenstein
BR	Brazil	**LU**	Luxembourg
CF	Central African Republic	**MC**	Monaco
CG	Congo	**MG**	Madagascar
CH	Switzerland	**MW**	Malawi
CM	Cameroon	**NL**	Netherlands
DE	Germany, Federal Republic of	**NO**	Norway
DK	Denmark	**RO**	Romania
FI	Finland	**SE**	Sweden
FR	France	**SN**	Senegal
GA	Gabon	**SU**	Soviet Union
GB	United Kingdom	**TD**	Chad
HU	Hungary	**TG**	Togo
JP	Japan	**US**	United States of America

A process for recovering non-ferrous metal values from ores, concentrates, oxidic roasting products or slags

The present invention relates to a process for recovering non-ferrous metal values from ores, concentrates, oxidic roasting products, or slags by converting them into sulphates by using principally mixture of solid matters and molten salts as the sulphating agent. Said sulphating agent consists of alkali metal sulphate and iron (III) sulphate and one or more preferred non-ferrous metal sulphates.

The process described in this invention thus relates to a method that is widely used by the metallurgical industry for converting selectively particular non-ferrous metal values, which will be referred to as Me in the text, into their sulphates. These sulphates can then be separated from the tailings and in soluble hematite by a simple water leaching procedure. The non-ferrous values in the solution can thereafter be recovered by method known per se.

However, the known method, i.e. the sulphating roasting, involves some disadvantages which have often made it unfeasible for more extensive use. The main disadvantages have been difficulties in controlling reaction conditions, such as the SO_3 partial pressure and temperature, so that it is practically impossible to achieve the maximum yield of the wanted water-soluble metal sulphate and, simultaneously, the maximum conversion of iron to non-soluble hematite in a reasonable reaction time, and further on, to avoid the thermodynamically and, especially in higher temperatures, also kinetically favourable conversion reaction between hematite and said metal oxide into the ferrites. Another serious disadvantage is the forming of a sulphate layer on the reacting particle which, in certain cases, strongly affects the reaction rate.

BUREAU OMPI WIPO INTERNATIONAL

In general, it is presently believed that during the course of the roast, the metal value Me is converted first into the oxide form in the following manner:

(I) $MeS + 3/2\ O_2 \rightarrow MeO + SO_2$

(2) $SO_2 + 1/2\ O_2 \rightleftarrows SO_3$

(3) $MeO + SO_3 \rightleftarrows MeSO_4$

Thus in the reacting particle, there are simultaneously present the oxide of the wanted metal value MeO and the iron oxide Fe_2O_3. Thus, there are prerequisites for the ferrite formation, in other words for the reaction:

(4) $MeO + Fe_2O_3 \rightarrow MeFe_2O_4$

In general, it has been shown that all the sulphation reactions have occurred through the sulphate shell which has grown on the surface of the MeO particle during the course of the sulphation. It is through this shell that the reacting ions have to migrate before they can react further. The solid-state diffusion is, as well-known, a very slow phenomenon, especially when the migrating ionic species is large, such as an oxygen ion (see, for example, W. Jost and K. Hauffe: Diffusion. 2nd ed. Steinkopf Verlag, Darmstadt, 1972). On the other hand, the aforesaid formation reaction of ferrites is also a solid-state reaction when the oxides are diffusing into each other by counterdiffusion mechanism. The latter phenomenon is often considerably faster than the sulphation reaction. A commonly believed explanation for this is that in the ferrite formation reaction, only those ionic species with small dimensions (for example, metal ions) are migrating into each other in a relatively loosepacked oxygen lattice (see, for example, K.Hauffe: Reaktionen in und an der festen Stoffen,

BUREAU OMPI WIPO INTERNATIONAL

Springer Verlag, Berlin, 1955, p. 582 and H.Schmalzried: Solid State Reactions, Verlag Chemie, Weinheim, 1954, p. 90).

As the most important argument in favour of the previous review remains the experimental fact that from the competing reactions involving the Me-oxide, that is the reactions (3) and (4), reaction (4) occurs when there are thermodynamically favourable conditions, while the sulphation reaction (3) is normally very slow because it requires the diffusional migration of the reacting species through the growing sulphate shell.

It is well-known that, for example, the sulphation of nickel compounds is very difficult to perform because of the nonporous sulphate shell which does not offer any new reaction paths for the gas phase, for example, in the form of cracks or pores. It has been experimentally observed that the nonsulphated nickel has been mainly in the form of ferrite. Thus, the prior art of the sulphation can be described shortly:

When performing sulphating roasting with gaseous reagents (O_2, SO_2), it is impossible to avoid the formation of ferrites if one wants to operate under reaction conditions where iron and the wanted metal value Me are to be selectively partitioned.

Attempts have been made to eliminate these aforementioned disadvantages which characteristically occur in the gas phase sulphation by means of a very accurate control of the gas atmosphere and temperature, for example, with the aid of a fluid-bed reactor or, on the other hand, by using some additives.

Thus, the Finnish patent 31124 discloses that the yield of the metal values, such as Cu, Co, Ni and Zn, may be increased by sulphating roasting the concentrates with the addition of small amounts of inorganic chloride, e.g., NaCl or $CaCl_2$. Accordingly, in the U.S. Patent No. 3 442 403 gaseous HCl is used for the same purpose.

BUREAU OMPI WIPO INTERNATIONAL

Further, U.S. Pat. No. 2 813 016 discloses a process for sulphating roasting which utilizes sodium sulphate Na_2SO_4 as an additive. It is proposed that sodium sulphate reacts with gaseous SO_3 and forms Na-pyrosulphate $Na_2S_2O_7$ which is commonly known as a very effective liquid state sulphating agent:

(5) $$Na_2SO + SO_3 \rightleftarrows Na_2S_2O_7$$

The formation of pyrosulphate according to reaction (5) is also the basis of a process described in U.S. Patent No. 4 110 106 in which the reaction mixture consists of potassium and sodium sulphates. Pyrosulphate has long been known from literature as a sulphating agent (see, for example, Ingraham et al. Can Met Quart. 5 (1965) no 3 p. 237-244. Can Met Quart 7 (1968) no 4 p. 201-204 and 205-210). The promoting effect of Na_2SO_4 in the sulphating roasting has been discovered as early as 1905 by N.V. Hybinette (German pat. 200372).

The common factors for the above processes are that the reagent effective in sulphation is sulphur trioxide present in the gas phase and that the aim is to obtain selective sulphation, that is, reactions are performed under such reaction conditions that $Fe_2(SO_4)_3$ decomposes while yielding hematite Fe_2O_3. These reaction conditions are, according to the thermodynamics of the Fe-S-O system, dependent upon the partial pressure of the SO_3 gas and the temperature of the reacting system so that the temperature with the usually used SO_3 pressures is above 650-675°C (see figure 1). The process according to the present invention differs from the above in that the reagent used for sulphatation is principally the iron (III) sulphate which is added to the reaction mixture and in that the operation is carried out in such a temperature range that this reagent ($Fe_2(SO_4)_3$) forms a stable phase, either alone or together with a salt melt.

BUREAU OMPI WIPO INTERNATIONAL

On the basis of the foregoing, it can be claimed that there are at least two ways to influence the two competing reactions, i.e. the ferrite formation reaction (4) and the sulphate formation reaction (3). They can be used together or separately as follows:

a) by operating under conditions where Fe_2O_3 is not stable and thus the ferrite formation reaction is totally prevented, or

b) by assuring that the relative rate of the sulphatation reaction is promoted by removing the barring, sulphate shell when it is formed.

Conventional sulphating roasting with gaseous reagents in practice offers no possibility to operate either according to solution a) or b). The situation is quite different when utilizing the characteristics of the melt phase consisting of the ternary system of certain sulphates. $A_2SO_4 - Fe_2(SO_4)_3 - MeSO_4$ is a ternary system where A is an alkali metal ion (usually sodium or potassium) or the NH_4^+ ion.

First the fundamentals of the process according to the present invention will be discussed. In the text, reference is made to the drawings and tables as follows:

Figure 1 is a graph showing the stability diagram of the system $Fe_2(SO_4)_3 - Fe_2O_3$ with the temperature and the partial pressure of SO_3 in the gas atmosphere as variables. The diagram shows the equilibrium curves for iron(III)sulphate with activities of 1, 0.1, 0.01 and 0.001, respectively (curves 1-4). There is also shown an equilibrium curve for SO_3/SO_2 (maximum SO_3 content at a pressure of 1 bar) when the initial mixture contains pure O_2 and SO_2 in stoichiometric relation (curve 5) and when the initial mixture consists of technical air and SO_2 in stoichiometric relation, i.e. $SO_2:O_2 = 2:1$ (curve 6).

Figure 2 and the associated table 2 show the values of the molar Gibbs energy (known earlier as the

BUREAU OMPI WIPO INTERNATIONAL

free energy) with respect to temperature for the reaction

(6) $$MeO + SO_3 \rightarrow MeSO_4$$

calculated for one reacting SO_3 mole.

The technically most important known reactions for which reliable thermodynamical values are available are compiled in Fig. 2 and Table 2. Unfortunately, for some of the metals which this invention concerns, the available data about required thermodynamic values are insufficient to calculate similar curves as presented in Fig. 2. Thus, for example, it can be supposed that the appropriate curve for uranium is located between curves 14 and 16. Accordingly, the appropriate curve for cerium is located between curves 7 and 9. The equilibrium reactions connected with Fig. 2 are described in Table 2. The reactions of Table 2 and the respective ΔG^{o} values from Fig. 2 are to be combined, and thus it is easy to calculate the thermodynamic prerequisites for the reactions (8) under different temperatures.

In Table 3 a reaction schematic for the thermal decomposition of the mixture (Na, H_3O)-jarosite is shown. Figure 3 contains a phase diagram of the system Na_2SO_4-$Fe_2(SO_4)_3$ according to the measurements made by the author and according to P.I. Fedorov and N.I. Illina: Russ. J. of Inorg. Chem. 8 (1963) p. 1351.

The mechanism of the sulphation according to the present invention is as follows:

When heating in oxidizing conditions, e.g. in air, the mixture that contains some compound (usually sulphide) of the wanted metal and the Na-rich mixture of the binary partial system of the beforesaid ternary system (as an example, the system Na_2SO_4-$Fe_2(SO_4)_3$ can be into consideration) to 605°C, a small amount of the eutectic melt of the system Na_2SO_4-$Fe_2(SO_4)_3$ begins to form. In the beginning, the melt contains 17 mole per cent $Fe_2(SO_4)_3$.

BUREAU OMPI WIPO INTERNATIONAL

When it is heated to higher temperatures, the amount of the liquid phase in the mixture increases and it is able to dissolve the Me-oxide which is formed by the reaction with atmospheric oxygen (and it also dissolves the minor amount of Me-sulphate which is probably formed). If the starting material consists of the incongruently melting compound $NaFe(SO_4)_2$, which is also included in said binary system, it forms a melt phase at the temperature 680°C which contains about 40 percent $Fe_2(SO_4)_3$ and, at the same time, the pure $Fe_2(SO_4)_3$ precipitates. It has now an activity value of 1 and it shows a strong tendency to decompose in conditions according to Fig. 1, curve 1, if that tendency is not abscured by a sufficient SO_3-pressure of the surrounding atmosphere. On the other hand, the amount of $Fe_2(SO_4)_3$, which is already present in the liquid phase, remains essentially unaffected because of the favourable activity conditions.

At the same time as the amount of the third sulphate ($MeSO_4$) in the ternary $MeSO_4$-$Fe_2(SO_4)_3$-Na_2SO_4 mixture increases, the total amount of the liquid phase increases and thus also its ability to moisten the reaction mixture and to dissolve the formed reaction product MeO or $MeSO_4$ increases. If the reaction temperature is constant, the dissolving process is an autocatalytic one. It increases until the limiting factor is either the total amount of the dissolvable material or, in principle, the mixture becomes saturated with the dissolved salt $MeSO_4$ in which case the salt begins to precipitate.

It has been experimentally noticed that the formation of the liquid phase in the ternary $MeSO_4$-$Fe_2(SO_4)_3$-Na_2SO_4 system can also proceed as a reaction between solid materials below 605°C.

Although the text has been concerned only with ternary mixtures to illustrate the objects of the present invention, this should not in any way be construed as a limiting factor. Thus it is also an object of the present

BUREAU OMPI WIPO INTERNATIONAL

invention to extract metal values from complex concentrates containing several metals. It is also an object of the invention to use Na-K-Fe-sulphate as a starting material.

It should be particularly noted that the reactions of this type which are taking place in the melts of the ionic salts are extremely fast, because they are charge transfer reactions which are thus taking place between ionic constituents as follows:

(7)
$$3\ Me^{2+} + 3\ O^{2-} + 2\ Fe^{3+} + 3\ SO_4^{2-} \rightarrow$$
$$3\ Me^{2+} + 3SO_4^{2-} + Fe_2O_3 \downarrow$$

As a consequence of the reaction, the produced hematite (Fe_2O_3) precipitates out of the melt because of its low solubility, whereas the wanted metal value Me remains in the melt as an ionic species and is recoverable with different methods.

When performing sulphation with the process of this invention, particular care must be taken that the amount of the iron(III)sulphate in the reaction mixture is sufficient to obtain a full conversion with respect to the wanted metal oxide or oxides according to reaction 7.

Thus, the iron(III)sulphate present in the reaction mixture should not be allowed to decompose unduly, at least before all the metal value Me is in the sulphated form. Its amount should be optimized by selecting the temperature and SO_3 pressure of the surrounding gas atmosphere in the known and controlled manner so that there is always enough iron(III)sulphate available for use according to reaction 7.

It should be particularly noted that the SO_3 content of the gas atmosphere has in principle no other role in the reactions than to keep the iron(III)sulphate

BUREAU OMPI WIPO INTERNATIONAL

stable in higher temperatures as is advantageous.

As a natural starting material for the application of the present invention, various sulphidic ores and concentrates can be used which nearly always contain also iron. Minerals present in such ores are typically pyrite, pyrrhotite, galena, sphalerite, pentlandite, chalcopyrite, cubanite, bornite, covellite and millerite. Thus, by performing the oxidation needed for the preliminary treatment in the controlled conditions and at low temperature, it is possible to get as a reaction product, a part of the existing iron and the wanted metal already in the sulphate form because they have reacted with the SO_2 and SO_3 released in the oxidation, while the rest of the wanted metal oxidizes is oxidized into the corresponding oxide. It should be particularly noted that, when oxidizing sulphidic material, the reaction is highly exotermic and the heat evolved easily causes local overheating. Table 1 shows the ignition points of various sulphide minerals.

Table 1: The ignition points of some pure sulphide minerals (F.Habashi:Chalcopyrite, its Chemistry and Metallurgy, McGraw-Hill Inc, Chatmam, 1978, p. 45)

Ignition temperature ^{o}C

Particle size, mm	Pyrite (53,4%S)	Pyrrhotite (36.4%S)	Chalco-pyrite (34,5%S)	Sphalerite (32,9%S)	Galena (29,4%S)
0.10-0,15	422	460	364	637	720
0.15-0.20	423	465	375	644	730
0.20-0.30	424	471	380	646	730
0.30-0.50	426	475	385	646	735
0.50-1.00	426	480	395	646	740
1.00-2.00	428	482	410	646	750

With the aid of thermal analysis it has been noted that the oxidation and conversion to sulphates progress at

BUREAU OMPI WIPO INTERNATIONAL

temperatures that are a little higher (50 - 150°C) than the ignition temperatures. Under these conditions, a considerable part of the iron and the wanted metal value is in the sulphate form, which is preferable both from the point of view of a much easier formation of the ternary melt and a smaller consumption of the iron(III) sulphate.

When oxidizing for example chalcopyrite in air atmosphere, it has been noted (F.Habashi:Calcopyrite, its Chemistry and Metallyrgy, McGraw-Hill Inc., Chatmam 1978, p. 51) that the amount of water-soluble copper has been 40-60% and iron 10 - 15 % of the amount needed when operating at 500°C.

The described application of the process of this invention is not by any means considered to be limited only to sulphidic minerals or concentrates that contain iron. However, the application that is described does offer a convenient solution of the processing of iron-containing substances because the starting materials consist of reaction components such as the elements Fe, Me, S, and O, which are in a convenient form for the application of the process. Further, the appreciable heat of reaction when the sulphidic material oxidizes is a significant advantage for the heat economy of the process, and said heat can be used in other steps of the process.

When making a thermodynamic examination of the reaction (7) in component form (Fig. 2):

(8) $$3MeO + Fe_2(SO_4)_3 \rightarrow 3\ MeSO_4 + Fe_2O_3$$

it is observed that reaction (8) is thermodynamically favourable for most of the important metals. The most important exception is aluminium. Thus, referring to well-known thermodynamics and, on the other hand, to the remarkable higher speed of the ionic reactions in

BUREAU OMPI WIPO INTERNATIONAL

salt melts compared to the speed of solid state reactions, it can be supposed with good reason that the process is, with the exception of aluminium, applicable to the production of most of the metals of industrial significance when converting them from their oxide form to their sulphate form.

To what extent it is possible to use is sulphate form to extract a metal value Me by a simple water leaching procedure, depends in various cases on both the solubility of the metal sulphate in question, and also on the existing methods to remove the harmful substances, in this case especially iron, from the solution.

Recently, the method for the precipitation of iron(III) compounds as a jarosite compound from the mildly acidic solutions first described by Steinveit (Norwegian Patent No. 108047) has gained very wide use, especially in the zinc process industry. Another known method to precipitate iron is the so-called goethite process (Belgian Patent No. 724214, Australian Patent No. 424095).

There are several known jarosite compounds (Na, K and NH_4 jarosites) which are being used in industrial zinc processes. The jarosites form a series of compounds in which the alkali metal can be isomorphically substituted by another. Their chemical formula can be written in the general form:

$$A_x(H_3O)_{1-x}Fe_3(SO_4)_2(OH)_6$$

Thus, a part of the alkali-ions are isomorphically substituted by the H_3O^+ ion. This is the situation especially with sodium jarosite; usually at least 20% of the sodium has been substituted by the hydronium ion. On the contrary, in the case of potassium-jarosite, the amount of substitution is considerably less. The decomposition of the mixed jarosites proceeds as is described

BUREAU OMPI WIPO INTERNATIONAL

in Table 3. It is noted that, above the temperature 370°C, the aforementioned double sulphate with the general chemical formula $AFe(SO_4)_2$ is formed in the mixture. This kind of partly decomposed jarosite contains, in addition to said double sulphate, also different amounts of hematite Fe_2O_3 and ferric sulphate $Fe_2(SO_4)_3$, depending on the degree of the isomorphic substitution, and offers thus a particularly convenient starting material for the applications of the process of the present invention by forming, as described, the impure double sulphate $AFe(SO_4)_2$ where symbol A represents one of the following ions or a combination of them: Na, K, or NH_4. By using jarosite compounds as a starting material it is possible to reach the situation where the alkali- and iron sulphates present in the process can, to a large extent, be recirculated and, by this means, the environmental problems that are typical of the jarosite process can be decreased and the cost of reagents can be reduced. The amount of hematite that is formed in the reaction mixture can be filtered by simple mechanical filtration before the jarosite precipitation and it can thus form a valuable by-product or an object of further processing. It is often an advisable procedure to thermally decompose the iron(III) sulphate before dissolving it, either in another part of the reactor or in a separate reactor. The formation of ferrites can thus be avoided because the metal values already exist in the sulphate form and it is much easier to control the temperature because the reactions, in this case, are not exotermic.

The recovery of metals by first converting them into sulphates has been applied or suggested for application to the following metals: copper, cobolt, nickel, zinc, manganese, beryllium, uranium, thorium, cadmium, magnesium and to rare earth metals such as lanthanium, cerium etc. On the basis the thermodynamic examination, it can be stated that all of the aforementioned metals

BUREAU OMPI WIPO INTERNATIONAL

come into consideration when applying the process of the present invention. All of them also form a sulphate which dissolves sufficiently in water.

Thus, a natural starting material for the application of the process in question consists of the sulphides or oxides of the aforementioned metals or of materials which are easily converted into the sulphidic or oxidic form. Also the ferrites of different metals can successfully be handled according to the present invention. Further, it is directly applicable to some silicates, carbonates and phosphates, either as such or combined with oxidizing or sulphatizing treatment.

The invention will be further understood from the following examples which should not in any way be construed as limiting.

Example 1

To solve the usable operating conditions with different starting materials, a series of experiments were carried out with copper concentrate which contained copper as chalcopyrite. The analysis of the concentrate was 28.0 per cent Cu and 3.8 per cent Zn. The experiments were carried out with Na-H_3O-jarosite which contained 0.8 mol of Na, or with Na-K-jarosite which contained 0.43 mol of Na and 0.37 mol of K (per mole of the jarosite compound), or with a synthetically prepared compound $NaFe(SO_4)_2$ as the sulphate donating agent. The experiments were performed in a conventional laboratory furnace in open crucibles and in air atmosphere. The results were as follows:

BUREAU OMPI WIPO INTERNATIONAL

Temperature °C	Time min	Compound	Mixture ratio concentrate/ sulphate mg/mg	Yield/% water-soluble Cu	Zn
700	5	$NaFe(SO_4)_2$	200/400	67	
660	16	- " -	200/600	73	
620	37	- " -	100/600	100	95
620	37	Na-jarosite	100/800	100	
580	30	Na-jarosite	200/300	92	
560	60	Na-K-jarosite	200/350	99	97
560	37	$NaFe(SO_4)_2$	200/300	94	
600/560	8/52	- " -	200/150	96	
600/560	8/52	Na-jarosite	200/300	96	
600/560	8/52	- " -	500/500	98	97
520	60	Na-K-jarosite	200/300	92	

Example 2

The same concentrate was used as in example 1 except that the SO_2-content was increased and the O_2-content decreased by covering the crucibles with lids. The following results were noted:

Temperature °C	Time min	Compound	Mixture/ratio	Yield/% water-soluble Cu
650	30	$NaFe(SO_4)_2$	200/300	63
650	30	- " -	200/300	57

An experiment was also performed where 200 mg of the concentrate together with 300 mg of $NaFe(SO_4)_2$ were closed in an autoclave. It turned out that, after a reaction period of 25 minutes, the material still was present mainly as a sulphide. Thus, it can be concluded that a sufficient availability of oxygen is one of the main requirements when performing sulphatation according to the present method.

BUREAU OMPI WIPO INTERNATIONAL

Example 3

A similar treatment as described in Examples 1 and 2 was carried out with several Co-concentrates containing between 18 and 20 mole per cent Co. The following results were obtained:

Temperature °C	Time min	Compound	Mixture ratio	Yield/% water-soluble Co
600/560	60	Na-jarosite	200/300	94
580	30	Na-jarosite	200/300	91

Example 4

A similar treatment as described in Examples 1 and 2 was performed with Cu_2O and CoO in normal air atmosphere and by using the compound $Na_3Fe(SO_4)_2$ which is included in the Na_2SO_4-$Fe_2(SO_4)_3$-system. The following results were obtained:

Temperature °C	Time min	Compounds	Mixture ratio	Yield/% water-solubles
Cu				
630/560	20/40	$Na_3Fe(SO_4)_2$	100/1000	100
Co				
630/560	20/40	$Na_3Fe(SO_4)_2$	100/1000	93

In other words, sulphation can be performed in the melt without any atmospheric sulphuric trioxide, as has been stated.

Example 5

A melt was produced from K-Na- and Cu-sulphates with the molar ratios 1:1:1. 200 mg of Fe_2O_3 was added at 600°C to this melt, and the mixture was treated for

BUREAU OMPI WIPO INTERNATIONAL

one hour. The amount of water-soluble iron which had reacted to form the sulphate was 0.6 mg. Thus, Fe_2O_3 is only very slightly soluble in the melt conditions in question.

Example 6

A similar treatment as described in Examples 1, 2 and 5 was performed on the dumped slag of the slag concentration plant of a copper smelter. The analysis of the slag was 0.45 per cent Cu, 3.5 per cent Zn, 1.3 per cent Mg and 0.82 per cent Ca. The compounds were present mostly as silicates. The treatment was performed at 630°C in air atmosphere, and the reaction time was one hour. The silicate-sulphate ratio in the mixture was 1:1. The following results were obtained:

Temperature °C	Time min	Compound	Yield (water-solubles %) Cu	Zn	Mg	Ca
630	60	$NaFe(SO_4)_2$	89	58	55	46
630	60	$Na_3Fe(SO_4)_3$	78	71	52	41

It can be stated that the present method is applicable also to the siliceous slag which is a difficult material to treat economically with other methods, and that the present method is applicable also to low metal concentrations of the starting material.

Example 7

A similar treatment as described in Examples 1, 2 5 and 6 was performed on a Na_2SO_4-$FeSO_4$-mixture (molar ratio 1:1) and the copper concentrate of Example 1. The temperature was 600°C, and the reaction time was one hour. The ratio of Cu-concentrate to sulphate was 200 mg/400 mg. The yield of the water-soluble copper was 93 per cent.

BUREAU OMPI WIPO INTERNATIONAL

WHAT I CLAIM IS:

1. A process for recovering non-ferrous metals such as copper, cobolt, nickel, zinc, manganese, beryllium, uranium, thorium, cadmium, magnesium and the rare earth metals, from their ores, concentrates, oxidic roasting products, like ferrites and slags, by converting said metal values to sulphates with the aid of thermal treatment under oxidizing conditions in the temperature range of 400-800°C, preferably 600-700°C, c h a r a c t e r i z e d by forming a reaction mixture of the starting material containing at least one of the metal values stated above, i.e. the ore, concentrate, oxidic roasted product or slag, and of iron(III) sulphate and either alkali metal or ammonium sulphate, or a compound containing said sulphates, or a mixture of them in which the molar ratio of iron(III) sulphate is at least 0.1, preferably about 0.5, and said alkali metal is selected from the group consisting of sodium, potassium, litium or a mixture of these, and the total amount of said iron (III) sulphate is at least the stoichiometric amount needed to react with the metal value Me according to the reaction (8):

$$3\ MeO + Fe_2(SO_4)_3 \rightarrow 3\ MeSO_4 + Fe_2O_3 \quad ,$$

and by selecting the reaction conditions, e.g. the temperature and the partial pressure of SO_3 in the gas atmosphere, so that the thermal decomposition of said iron(III) sulphate is substantially prevented.

2. The process of claim 1 c h a r a c t e r i z e d by that said reaction mixture comprises the ores, concentrates, roasted oxidic products or slags of said metal values and a jarosite-type compound $A[Fe_3(OH)_6(SO_4)_2]$ where A is selected from the group consisting of sodium potassium, ammonium or a mixture of these.

BUREAU OMPI WIPO INTERNATIONAL

3. The process of claim 2 c h a c t e r i z e d by that said reaction mixture comprises the ore, concentrate, roasted oxidic product or slag and the impure compound. $AFe(SO_4)_2$ where A is selected from the group consisting of sodium, potassium, ammonium or a mixture of these and said impure compound is prepared with thermal treatment of said jarosite compounds.

4. The process of claims 1, 2 and 3 c h a r a c t e r i z e d by that said reaction mixture is treated in the temperature range of 600-800°C in the SO_3-gas atmosphere of 0.03-0.3 bar in such a controlled manner that the iron(III) sulphate in the reaction mixture does not substantially decompose thermally.

5. The process as claimed in any of the preceding claims c h a r a c t e r i z e d by that the water-soluble iron is precipitated as a jarosite- or goethite-type compound.

6. The process as claimed in any of the preceding claims c h a r a c t e r i z e d by that the access of the iron into the solution is prevented by converting it into hematite by means of controlling the SO_3 content of the gas atmosphere as well as the temperature in another part of the reactor or in another reactor, after the iron (III) sulphate has first been used as set forth.

7. The process of claims 1, 2 and 3 combined with the known method of sulphating roasting c h a r a c t e r i z e d by that the amount of the iron(III) sulphate in said reaction mixture is smaller than the stoichiometric amount according to the reaction (8):

$$3\ MeO + Fe_2(SO_4)_3 \rightarrow 3\ MeSO_4 + Fe_2O_3$$

and the conversion is completed with the aid of the gaseous sulphur trioxide present in the gas atmosphere.

BUREAU OMPI WIPO INTERNATIONAL

8. The process of claims 1, 4, 6 and 7 c h a r a c t e r i z e d by that the starting material of said reaction mixture comprises, instead of iron(III) sulphate, iron(II) sulphate which is converted into iron(III) sulphate under oxidizing conditions.

9. The process of claim 1 for the recovery of copper from copper ores, concentrates, roasted oxidic products or slags with thermal treatment in the temperature range of 490 to 700°C by forming a reaction mixture of said compound of copper and of iron(III) sulphate and sodium sulphate or of a compound containing said sulphates or a mixture of them in which the molar ratio of iron (III) sulphate is between 0.15 and 0.5 and the amount of iron(III) sulphate is at least the stoichiometric amount needed to convert copper.

BUREAU OMPI WIPO INTERNATIONAL

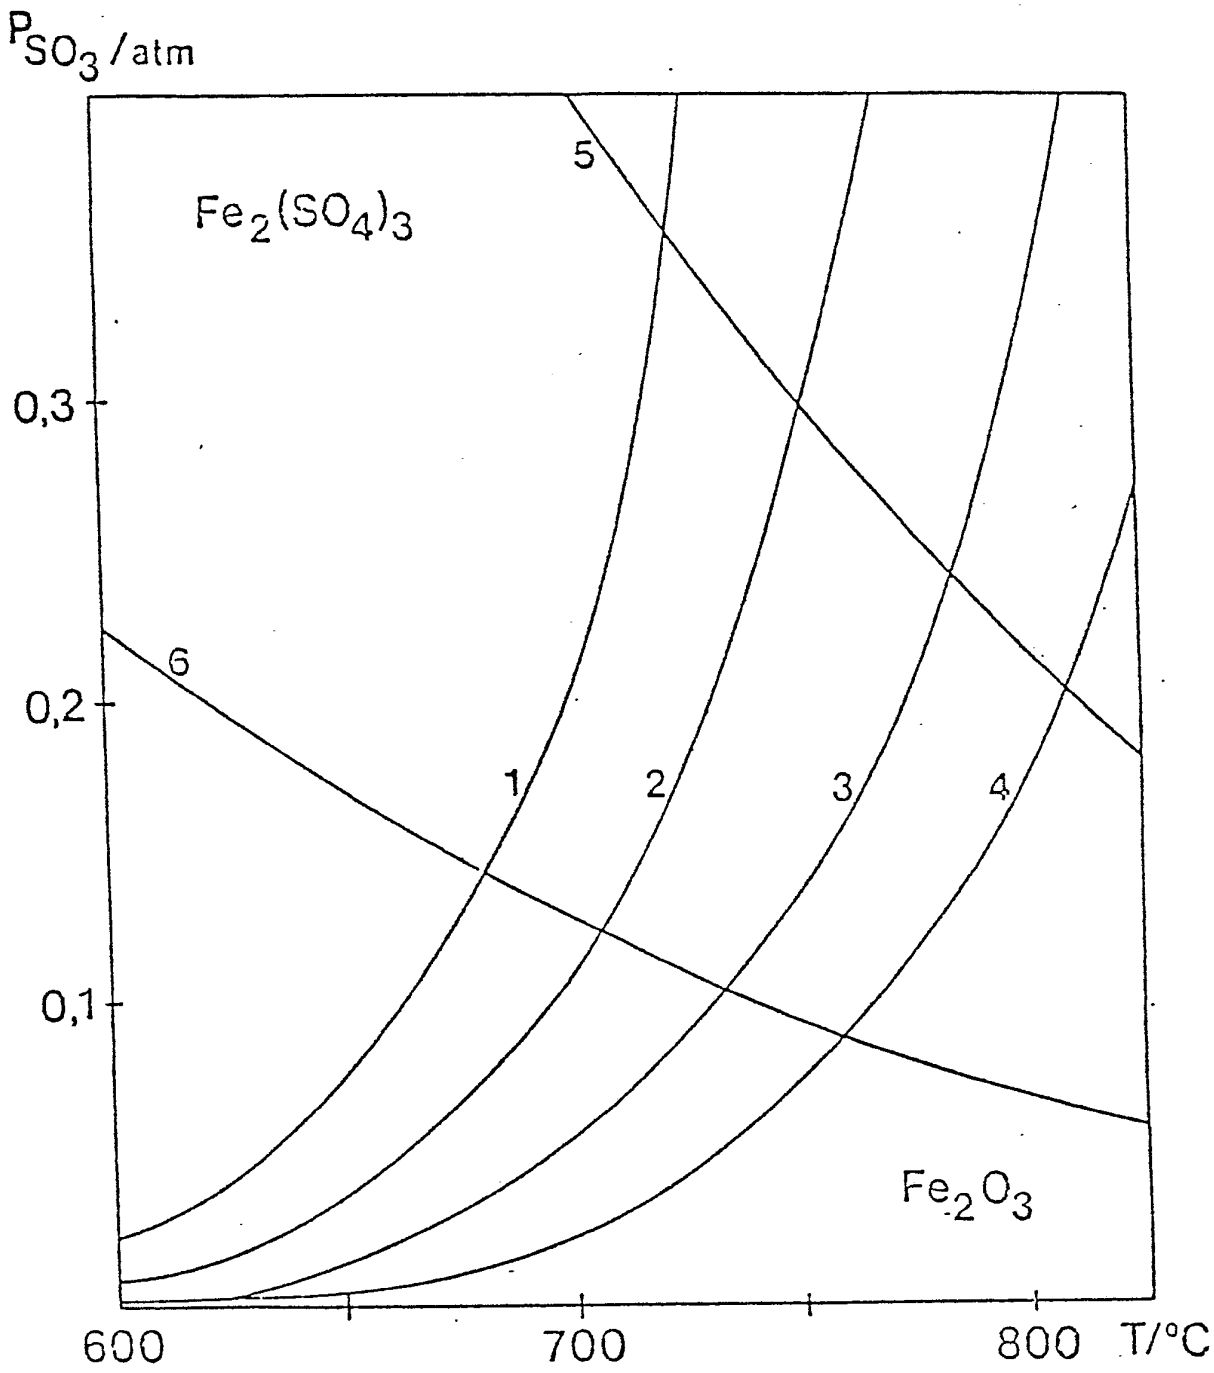


Figure 1: Equilibrium curves for the system $Fe_2(SO_4)_3$ - Fe_2O_3

BUREAU OMPI WIPO INTERNATIONAL

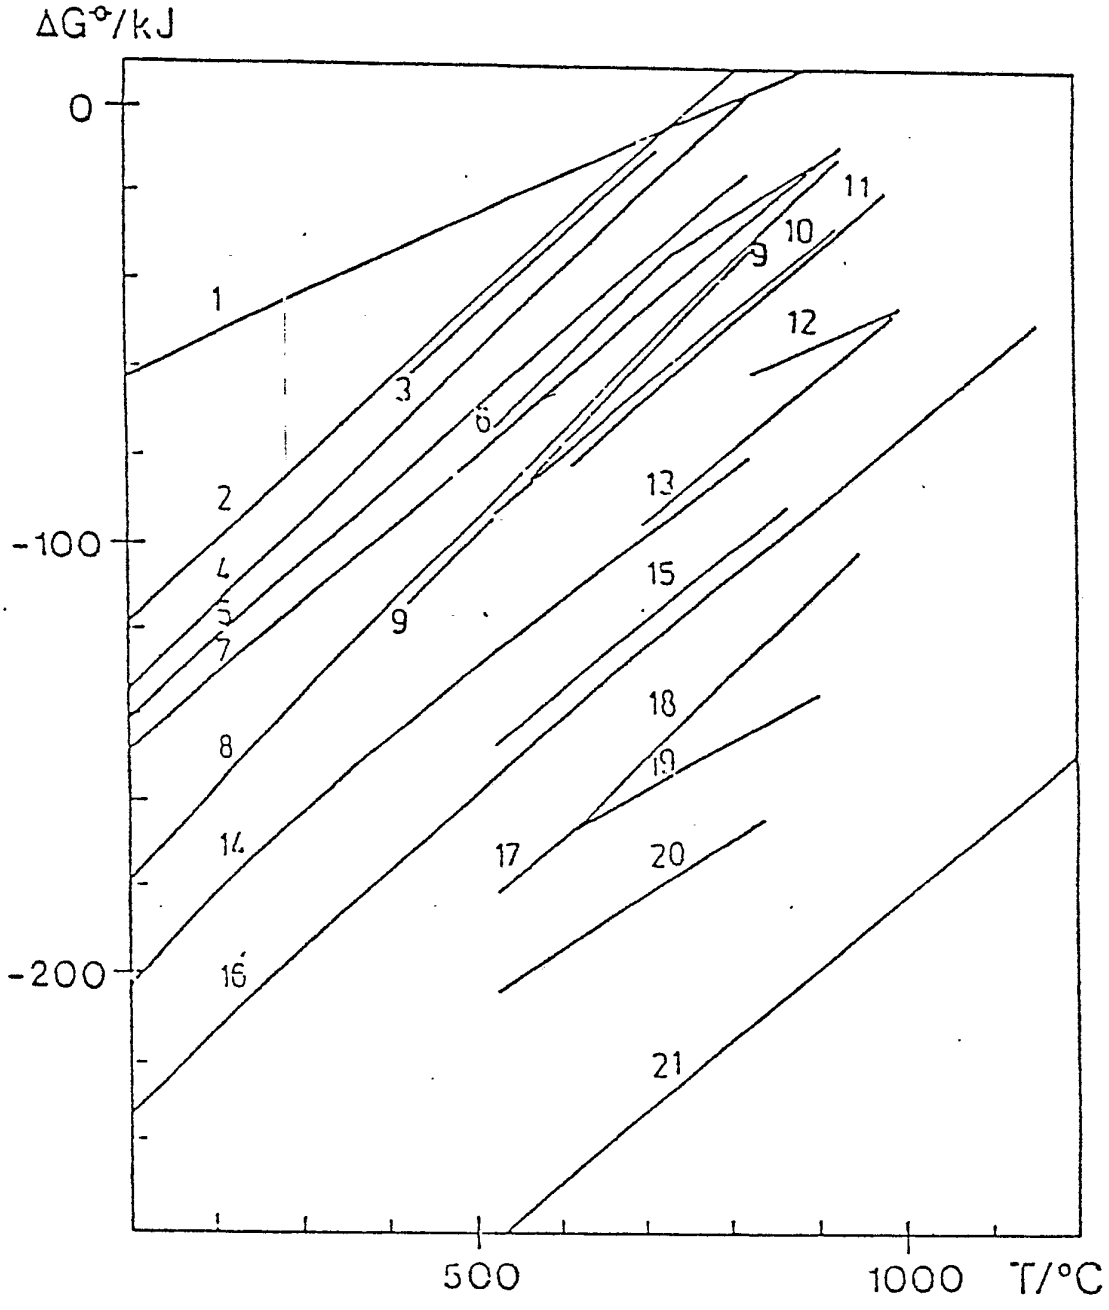


Figure 2: ΔG^{o}-values for the reaction

$MeO + SO_3 \rightarrow MeSO_4$

(cf. also table 2)

BUREAU OMPI WIPO INTERNATIONAL

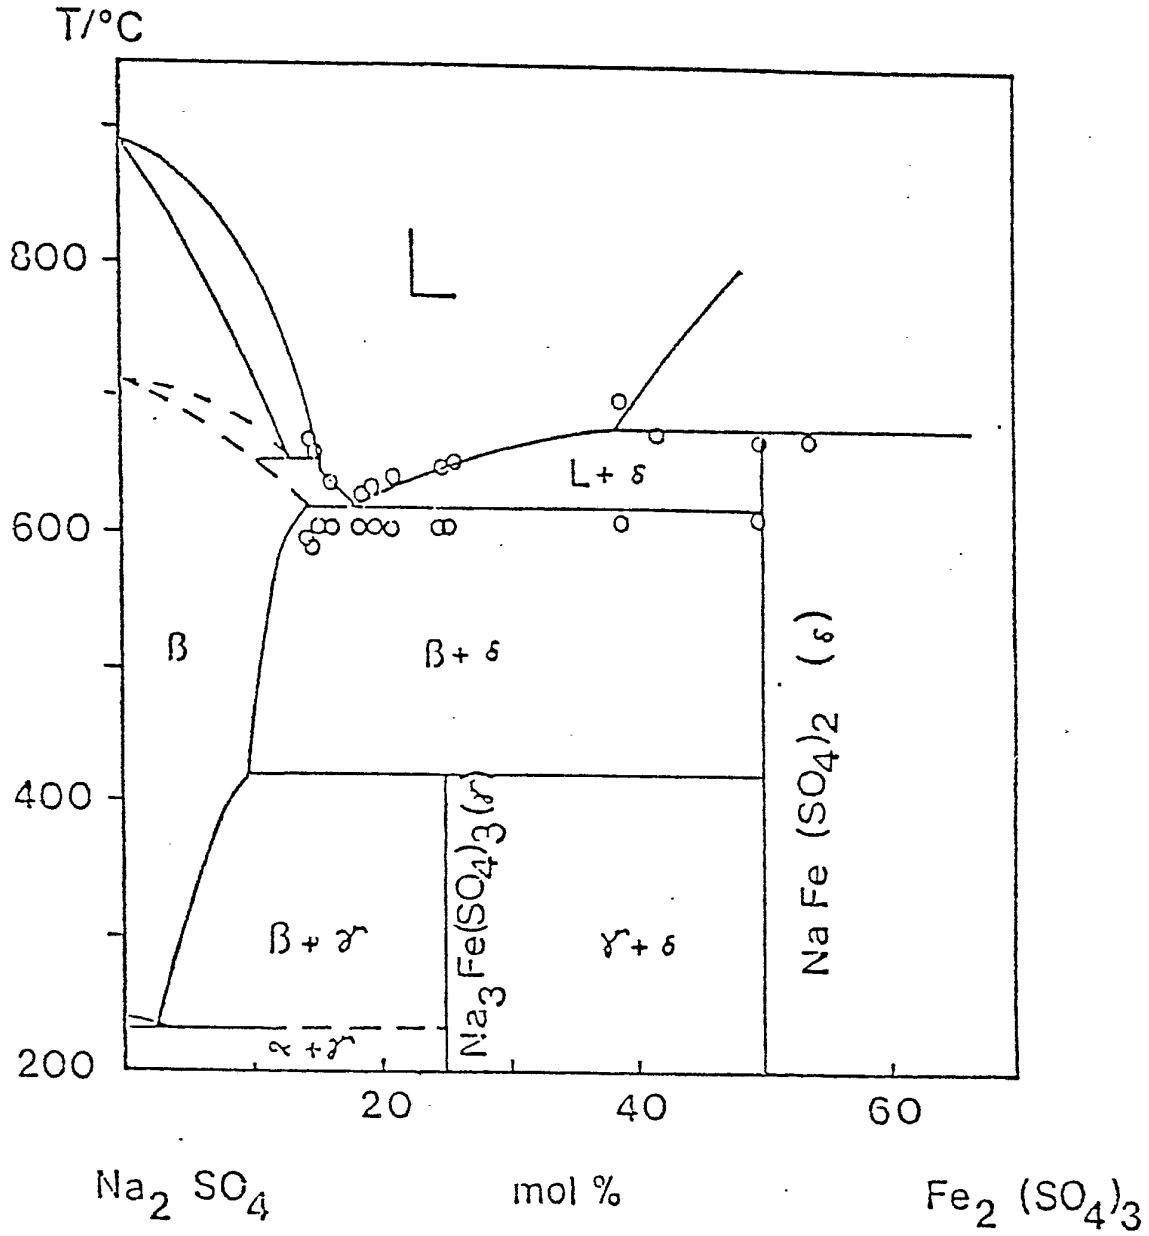


Figure 3: System $NaSO_4$ - $Fe_2(SO_4)_3$

BUREAU OMPI WIPO INTERNATIONAL

Table 2: (cf also figure 2)
Equilibrium reactions of different metal sulphates as in figure 2

1 $SO_2 + 1/2\ O_2 = SO_3$
2 $1/3\ Al_2O_3 + SO_3 = 1/3\ Al_2(SO_4)_3$
3 $1/3\ Fe_2O_3 + SO_3 = 1/3\ Fe_2(SO_4)_3$
4 $BeO + SO_3 = BeSO_4$
5 $CuO \cdot CuSO_4 + SO_3 = 2\ CuSO_4$
6 $ZnO \cdot 2\ ZnSO_4 + SO_3 = 3\ ZnSO_3(\beta)$
7 $2\ CuO + SO_3 = CuO \cdot CuSO_4$
8 $NiO + SO_3 = NiSO_4$
9 $1/2\ ThO_2 + SO_3 = 1/2\ Th(SO_4)_2$
10 $3/2\ ZnO + SO_3 = 1/2\ (ZnO \cdot 2\ ZnSO_4)$
11 $CoO + SO_3 = CoSO_4$
12 $1/2\ (CdSO_4 \cdot 2\ CdO) + SO_3 = 3/2\ CdSO_4$
13 $1/2\ (La_2O_3 \cdot SO_3) + SO_3 = 1/2\ La_2(SO_4)_3$
14 $MnO + SO_3 = MnSO_4$
15 $PbSO_4 \cdot PbO + SO_3 = 2\ PbSO_4$
16 $MgO + SO_3 = MgSO_4$
17 $3/2\ (PbSO_4 \cdot 4\ PbO) + SO_3 = 5/3\ (PbSO_4 \cdot 2\ PbO)$
18 $2\ (PbSO_4 \cdot 2\ PbO) + SO_3 = 3\ (PbSO_4 \cdot PbO)$
19 $3/2\ (PbSO_4 \cdot 4\ PbO) + SO_3 = 5/2\ (PbSO_4 : 2\ PbO)$
20 $5\ PbO + SO_3 = PbSO_4 \cdot 4\ PbO$
21 $CaO + SO_3 = CaSO_4$

BUREAU OMPI WIPO INTERNATIONAL

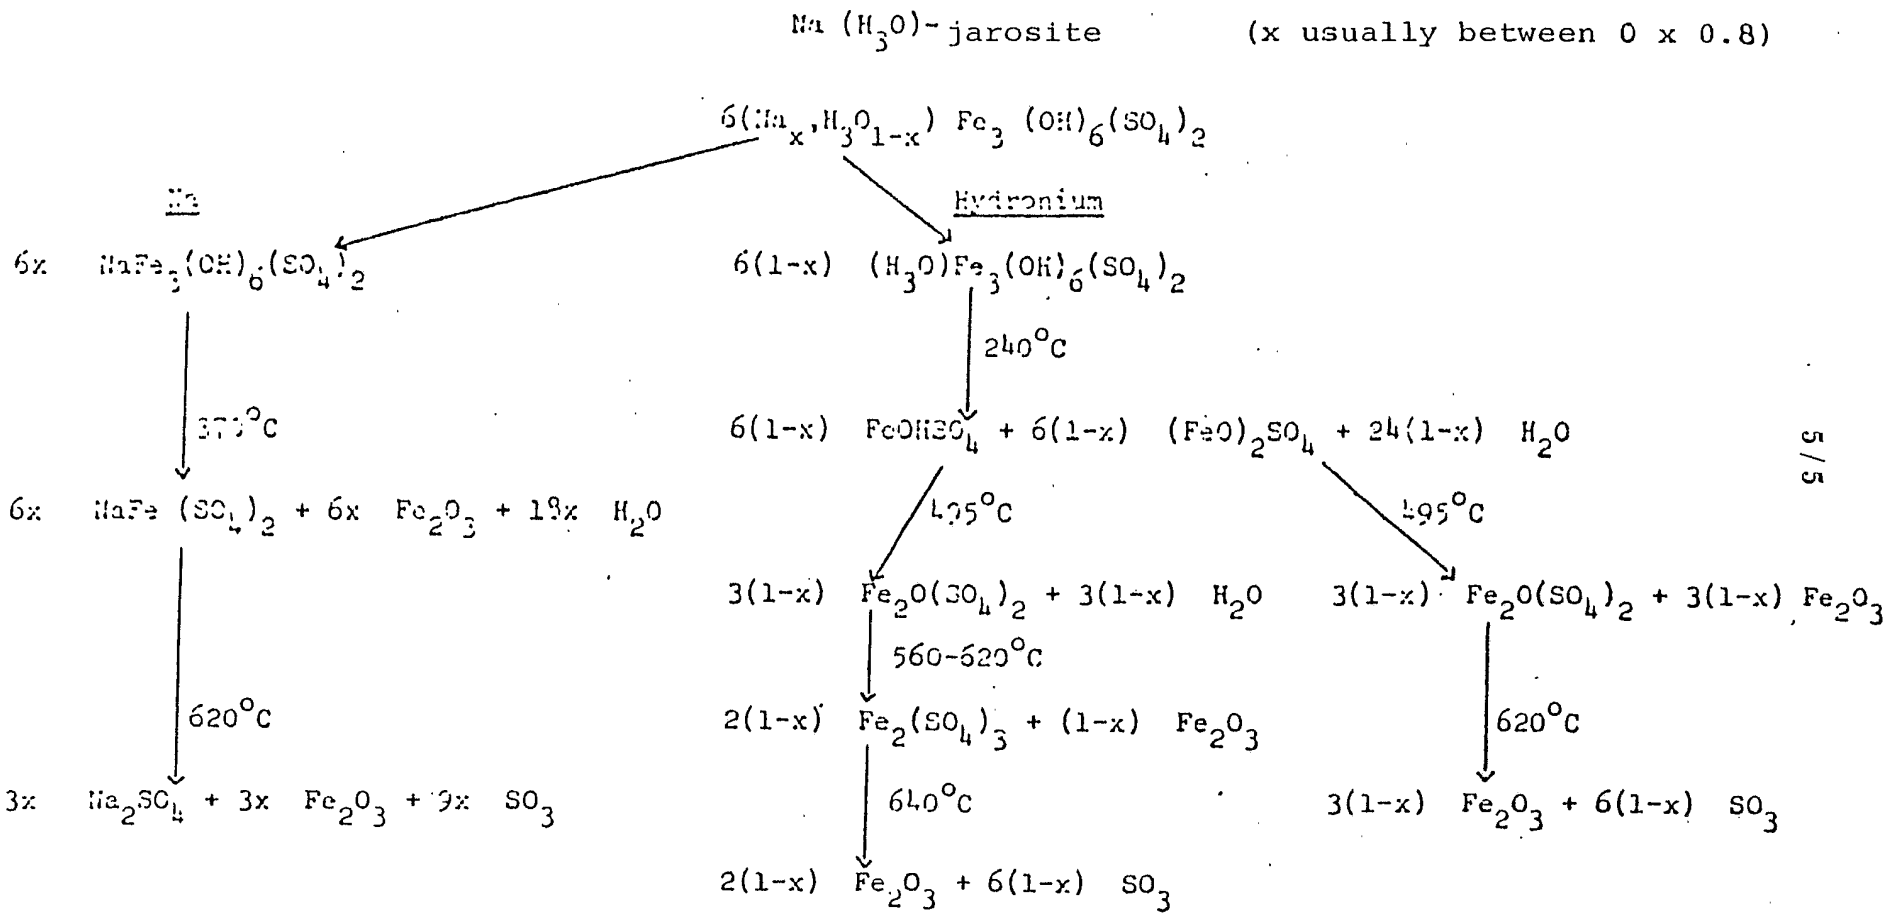


Table 3: Thermal decomposition of the jarosites

BUREAU OMPI WIPO INTERNATIONAL

INTERNATIONAL SEARCH REPORT

International Application No PCT/FI80/00008

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) [3]

According to International Patent Classification (IPC) or to both National Classification and IPC 3

C 22 B 1/06

II. FIELDS SEARCHED

Minimum Documentation Searched [4]

Classification System	Classification Symbols
IPC 3	C 22 B 1/00, 02, 06, 10, 7/00, 15/00
US Cl	75:1, 2, 6-9, 72, 115, 116

Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched [5]

SE,NO,DK,FI classes as above

III. DOCUMENTS CONSIDERED TO BE RELEVANT [14]

Category *	Citation of Document, [16] with indication, where appropriate, of the relevant passages [17]	Relevant to Claim No. [18]
A	SE, C, 79 249 published 1930, August 20, E A Ashcroft. See page 3, right, lines 1-6	1
A	SE, C, 88 463 published 1937, February 9, I Hunyady	1
X	SE, B, 322 632 published 1970, April 13, Boliden Aktiebolag, See page 4 lines 22-41 and page 5 lines 1-5	1
X	NO, B, 130 323 published 1974, August 12, Outokumpu Oy	1-9
A	GB, A, 996 472 published 1965, June 30, Yawata Iron & Steel Co. See step (c)	1
A	FR, A5,760 273 published 1934, February 20, Metallgesellschaft Aktiengesellschaft	1
A	US, A, 719 132 published 1903, January 27, W Payne et al.	1
A	US, A, 2 813 016 published 1957, November 12, P G Thornhill	1
A	US, A, 4 110 106 published 1978, August 29, Frankiewicz	1

* Special categories of cited documents: [15]

"A" document defining the general state of the art

"E" earlier document but published on or after the international filing date

"L" document cited for special reason other than those referred to in the other categories

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but on or after the priority date claimed

"T" later document published on or after the international filing date or priority date and not in conflict with the application, but cited to understand the principle or theory underlying the invention

"X" document of particular relevance

IV. CERTIFICATION

Date of the Actual Completion of the International Search [2]	Date of Mailing of this International Search Report [2]
1981-02-25	1981 -02- 27
International Searching Authority [1]	**Signature of Authorized Officer [10]**
Swedish Patent Office	Mårten Hulthén

Form PCT/ISA/210 (second sheet) (October 1977)