

(51) International Patent Classification:
H04R 1/10 (2006.01)(21) International Application Number:
PCT/US2014/049750(22) International Filing Date:
5 August 2014 (05.08.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
14/011,171 27 August 2013 (27.08.2013) US(71) Applicant: **BOSE CORPORATION** [US/US]; The Mountain, MS 3B1, Framingham, MA 01701-9168 (US).(72) Inventors: **BRIGGS, Drew, Stone**; c/o Bose Corporation, The Mountain, MS 3B1, Framingham, MA 01701-9168 (US). **TAYLOR, Tristan, Edward**; c/o Bose Corporation, The Mountain, MS 3B1, Framingham, MA 01701-9168 (US).(74) Agent: **HILL, Misha, K.**; Bose Corporation, The Mountain, MS 3B1, Framingham, MA 01701-9168 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ASSISTING CONVERSATION WHILE LISTENING TO AUDIO

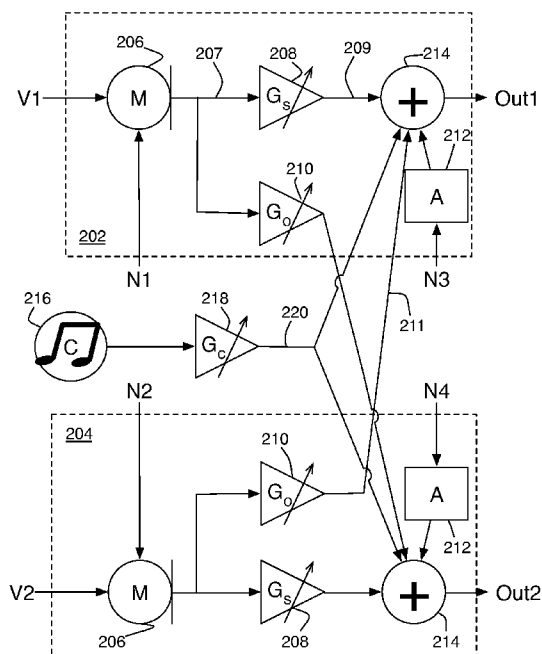


Fig. 3

(57) Abstract: A portable system for enhancing communication between users in proximity to each other while listening to a common audio source includes headsets with an electroacoustic transducer for providing sound to a respective user's ear, and a voice microphone for detecting sound of the respective user's voice and providing a microphone input signal, and an electronic device integral to the first headset and in communication with the second headset. The electronic device generates a side-tone signal based on the microphone input signal from the first headset, generates a voice output signal based on the microphone input signal from the first headset, receives a content input signal, combines the side-tone signal with the content input signal and a far-end voice signal associated with the second headset to generate a combined output signal, and provides the combined output signal to the first headset for output by the first headset's transducer.



Published:

— *with international search report (Art. 21(3))*

ASSISTING CONVERSATION WHILE LISTENING TO AUDIO

BACKGROUND

This disclosure relates to assisting conversation while listening to music, and in particular, to allowing two or more headset users near each other to listen to music, or some other audio source, while at the same time being able to speak with ease and hear each other with ease, to carry on a conversation naturally over the audio content.

Carrying on a conversation while listening to some other audio source, such as discussing a musical performance while simultaneously listening to that performance, can be very difficult. In particular, the person speaking has trouble hearing their own voice, and must raise it above what may be a comfortable level just to hear themselves, let alone for the other person to hear them over the music. The speaker may also have difficulty gauging how loudly to speak to allow the other person to hear them. Likewise, the person listening must strain to hear the person speaking, and to pick out what was said. Even with raised voices, intelligibility and listening ease suffer. Additionally, speaking loudly can disturb others nearby, and reduce privacy.

Various solutions have been attempted to reduce these problems in other contexts, such as carrying on a conversation in a noisy environment. Hearing aids intended for those with hearing loss often have directional modes which attempt to amplify the voice of a person speaking to the user while rejecting unwanted noise, but they suffer from poor signal-to-noise ratio due to limitations of the microphone being located at the ear of the listener. Also, hearing aids provide only a listening benefit, and do not address the discomfort of straining to speak loudly in noise, let alone in coordination with shared audio sources. Other communication systems, such as noise-canceling, intercom-connected headsets for use by pilots, may be quite effective for their application, but are tethered to the dashboard intercom, and are not suitable for use by typical consumers in social or mobile environments or, even in an aircraft environment, i.e., by commercial passengers.

SUMMARY

In general, in one aspect, a portable system for enhancing communication between at least two users in proximity to each other while listening to a common audio source includes first and second headsets, each headset including an electroacoustic transducer for providing sound to a respective user's ear, and a voice microphone for detecting sound of the respective user's voice and providing a microphone input signal, and a first electronic device integral to the first headset and in communication with the second headset. The first electronic device generates a first side-tone signal based on the microphone input signal from the first headset, generates a first voice output signal based on the microphone input signal from the first headset, receives a content input signal, combines the first side-tone signal with the content input signal and a first far-end voice signal associated with the second headset to generate a first combined output signal, and provides the first combined output signal to the first headset for output by the first headset's electroacoustic transducer.

Implementations may include one or more of the following, in any combination. The first electronic device may scale the first side-tone signal to control the level at which the user speaks. The first electronic device may scale the first side-tone signal based in part on a detected level of ambient noise, such that the user speaks at a level unlikely to be audible over the ambient noise without assistance. The first electronic device may scale the first side-tone signal based in part on a detected level of ambient noise, such that the user speaks at a level likely to be masked by the ambient noise. The first electronic device may scale the first side-tone signal such that the user speaks at a level unlikely to be audible without assistance at a distance from the user of more than a meter.

The first electronic device may be coupled directly to the second headset, and the first electronic device may generate a second side-tone signal based on the microphone input signal from the second headset, generate the first far-end voice signal based on the microphone input signal from the second headset, combine the

second side-tone signal with the content input signal and the first voice output signal to generate a second combined output signal, and provide the second combined output signal to the second headset for output by the second headset's electroacoustic transducer. The first electronic device may include the content input signal in the first and second combined output signals by scaling the content input signal to be sufficiently lower in level than the first and second side-tone signals and first and second far-end voice output signals such that the side-tone signals and far-end voice signals remain intelligible over the content signal. The step of scaling the content input signal may be performed only when one of the microphone input signals from at least one of the first or second headsets is above a threshold. A second electronic device may be integral to the second headset, the first electronic device in communication with the second headset through the second electronic device, and the second electronic device may generate a second side-tone signal based on the microphone input signal from the second headset, generate a second voice output signal based on the microphone input signal from the second headset, provide the second voice output signal to the first electronic device as the first far-end voice signal, receive the first voice output signal from the first electronic device as a second far-end voice signal, receive the content input signal, combine the second side-tone signal with the content input signal and the second far-end voice signal to generate a second combined output signal, and provide the second combined output signal to the second headset for output by the second headset's electroacoustic transducer.

The first electronic device and the second electronic device may include the content input signal in the respective first and second combined output signals by each scaling the content input signal to be sufficiently lower in level than the first and second side-tone signals and first and second far-end voice output signals such that the side-tone signals and far-end voice signals remain intelligible over the content signal. The step of scaling the content input signal may be performed by both the first electronic device and the second electronic device whenever the microphone input signal from either one of the first or second headsets may be above a

threshold. The first and second headsets may each include a noise cancellation circuit including a noise cancellation microphone for providing anti-noise signals to the respective electroacoustic transducer based on the noise cancellation microphone's output, and the first electronic device may provide the first combined output signal to the first headset for output by the first headset's electroacoustic transducer in combination with the anti-noise signals provided by the first headsets's noise cancellation circuit. The first and second headsets may each include passive noise reducing structures. Generating the first side-tone signal may include applying a frequency-dependent gain to the microphone input signal from the first headset. Generating the first side-tone signal may include filtering the microphone input signal from the first headset and applying a gain to the filtered signal. The first electronic device may include a source of the content input signal. The content input signal may be received wirelessly.

In general, in one aspect, a headset includes an electroacoustic transducer for providing sound to a user's ear, a voice microphone for detecting sound of the user's voice and providing a microphone input signal, and an electronic device that generates a side-tone signal based on the microphone input signal from the headset, generates a voice output signal based on the microphone input signal from the headset, receives a content input signal, receives a far-end voice signal associated with another headset, combines the side-tone signal with the content input signal and the far-end voice signal to generate a combined output signal, outputs the combined output signal to the electroacoustic transducer, and outputs the voice output signal to the other headset.

Implementations may include one or more of the following, in any combination. The electronic device may scale the side-tone signal to control the level at which the user speaks. The electronic device may scale the side-tone signal based in part on a detected level of ambient noise, such that the user speaks at a level unlikely to be audible over the ambient noise without assistance. The electronic device may scale the side-tone signal based in part on a detected level of ambient noise, such that the

user speaks at a level likely to be masked by the ambient noise. The electronic device may scale side-tone signal such that the user speaks at a level unlikely to be audible without assistance at a distance from the user of more than a meter. The headset may include a source of the content input signal, and may provide the content input signal to the other headset. The electronic device may provide the content input signal to the other headset by combining the content input signal with the voice output signal. The electronic device may provide the content input signal to the other headset separately from outputting the voice output signal.

Advantages include allowing users to discuss shared audio content, such as music, a movie, or other content without straining to hear to be heard over the content or over other background noise. Privacy is improved because users don't have to speak so loudly to be heard that other can also hear them over the background noise. Users are also enabled to discuss shared audio content in a quiet environment without bothering others or compromising privacy, as they can speak softly without straining to hear each other over the shared content.

All examples and features mentioned above can be combined in any technically possible way. Other features and advantages will be apparent from the description and the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1 and 2 show configurations of headsets and electronic devices used in conversations.

Figure 3 shows a circuit for implementing the devices for figures 1 and 2.

DESCRIPTION

The system described here allows two or more users to listen to a common audio source, such as recorded or streamed music or the audio from a movie, to name some examples, while carrying on a conversation. While the intent is that the conversation be about the music, users are likely, of course, to discuss anything they feel like. The goal of the system is to allow the users to carry on their conversation

without having to strain to speak, to hear each other or the music, and to be understood. We refer to music, but of course any audio content could be used. U.S. Patent Application no _____, by Kathy Krisch and Steve Isabelle, titled "Assisting Conversation," attorney docket number N-13-133-US, was filed simultaneously and is incorporated here by reference in its entirety. That application describes a portable system for assisting conversation in general by managing filters and gains applied to both a side-tone signal and one or more of an outgoing voice signal and an incoming far-end voice signal for each of two or more headset users. Figures 1 and 2 are reproduced from that application and show two users of headsets 102 and 104 conversing. In figure 1, the two headsets are connected to a common electronic device 106, while in figure 2, each headset is connected to its own associated electronic device 108 or 110. In general, the electronic devices may be integral to the headsets, either embedded in the ear buds or in-line with a cable. Alternatively, the electronic devices may be separate devices, such as mobile phones. Each headset includes a microphone 105, which may be in the cable, as shown, integrated into one or both earbuds, or on a boom supported from one ear.

[0001] Figure 3 shows an additional feature of this application added to the system of the Krisch application. Each of the combined electronic and acoustic systems 202, 204 includes a voice microphone 206, side-tone gain stage 208, a voice output gain stage 210, an attenuation block 212, and a summing node 214. The voice microphones detect the voice of their users as voice audio inputs V1 and V2, and provide a microphone input signal 207. The microphones 206 also detect ambient noise N1 and N2 and pass that on to the gain stages, filtered according to the microphone's noise rejection capabilities. The microphones are more sensitive to the voice input than to ambient noise, by a noise rejection ratio M, thus the microphone input signals are represented as $V1+N1/M$ and $V2+N2/M$. Within those signals, $N1/M$ and $N2/M$ represent unwanted background noise. Different ambient noise signals N1 and N2 are shown entering the two systems, but depending on the distance between the users and the acoustic environment, the noises may be effectively the same. Ambient noises N3 and N4 at the users ears, which may also be

the same as N1 or N2, are attenuated by the attenuation block 212 in each circuit, which represents the combined passive and active noise reduction capability, if any, of the headsets. The residual noise is shown entering the output summation node, though in actual implementation, the electronic signals are first summed and output by the output transducer, and the output of the transducer is acoustically combined with the residual noise within the user's ear canal. That is, the output node 214 represents the output transducer in combination with its acoustic environment. Out1 and Out2 represent the total audio output of the system, including the attenuated ambient noise.

[0002] The side-tone gain stage 208 applies a filter and gain to the microphone input signal to change the shape and level of the voice signal to optimize it for use as a side-tone signal 209. When a person cannot hear his own voice, such as when listening to other sounds, he will tend to speak more loudly. This has the effect of straining the speaker's voice. On the other hand, if a person is wearing noise isolating or noise canceling headphones, he will tend to speak at a comfortable, quieter level, but also will suffer from the occlusion effect, which inhibits natural, comfortable speaking. The occlusion effect is when ear canal resonances and bone conduction result in distortion and low-frequency amplification, and causes a person's voice to sound unnatural to themselves. A side-tone signal is a signal played back to the ear of the speaker, so that he can hear his own voice. If the side-tone signal is appropriately scaled, the speaker will intuitively control the level of his voice to a comfortable level, and be able to speak naturally. The side-tone filter within the gain stage 208 shapes the voice signal to compensate for the way the occlusion effect changes the sound of a speaker's voice when his ear is plugged, so that in addition to being at the appropriate level, the side-tone signal sounds, to the user, like his actual voice sounds when not wearing a headset. We represent the side tone filter as part of frequency-dependent side tone gain G_s .

[0003] The microphone input signal 207 is also equalized and scaled by the voice output gain stage 210, applying a frequency-dependent voice output gain G_0 that

incorporates a voice output filter. The voice output filter and gain are selected to make the voice signal from one headset's microphone audible and intelligible to the user of the second headset, when played back in the second headset. The filtered and scaled voice output signals 211 are each delivered to the other headset, where they are combined with the filtered and scaled side-tone signals 209 within each headset and the residual ambient noise to produce a combined audio output Out1 or Out2. When discussing one headset, we may refer to the voice output signal 211 from the other headset, played back by the headset under consideration, as the far-end voice signal. In some examples, the incoming far-end voice signal may be filtered and amplified within each headset, in place of or in addition to filtering and amplifying the voice output signal.

[0004] To allow the users of the headsets to hear and discuss a common audio signal, a side-channel provides additional audio content C to the headsets. A gain stage 218 applies a frequency-dependent gain G_c to the content C from the content source 216, providing a content input signal 220 and adding an additional term $G_c C$ to each of the audio outputs. As with the other gain stages, gain G_c may specifically be frequency-dependent, or the input path may include a filter to shape the audio signal C in combination with applying a flat gain. The content may be received or generated by one of the headsets and transmitted to the other headset, or it may be independently received at both headsets. If the content is received at one headset and transmitted to the other, the gain G_c may be applied at the transmitting headset for both headsets, or it may be applied to the received content signal at each headset, allowing the variation and customization shown in the Krisch application. The gain(s) G_c are designed in consideration of the voice signals and voice gains to allow the content to be heard at a level that does not mask the voice signals, both far-end and side-tone, such that the voices can be heard over the audio content. Providing a single content input signal to both headsets allows the two users to listen to the same content, while also being able to speak with each other. This can allow, for example, two users to share a single piece of music, and discuss it amongst themselves, with the various gains allowing them to hear themselves and each other

over the music. The gains may be adjusted automatically, such that the music is attenuated to avoid masking voice when either of the users is speaking, but is returned to a normal listening level when neither is speaking. Figure 3 shows the content source 216 external to both electronic circuits 202 and 204. In some examples, the content source may be integrated into one of the circuits, or in the electronic device housing one of the circuits, and the content input signal 220 is provided to the other circuit via an output from the first electronic device coupled to an input of the second electronic device housing the second circuit.

[0005] In some examples, it may be desirable for the user to speak softly, relying on the communication system to deliver his voice to a conversation partner at an appropriate level. In this situation, the side-tone signal may be amplified, so that the user hears his voice at a normal speaking level, despite speaking softly. For a fully private conversation in a quiet environment, the side-tone level may be set such that the user's voice can be detected by the microphone, but is unlikely to be audible by an unassisted person more than a meter away. The precise level used will also be based on the level of the audio input, discussed below, so that the combined effect of the audio level and the side-tone level lead to the desired spoken voice level. In a noisy environment, the user may need to speak at a louder level to be detected by the microphone, so the side-tone signal is again appropriately scaled so that the combination of side-tone level and audio content level lead the user to speaking at a level that provides sufficient signal to the conversation system, but without causing the user to strain to be heard over the background noise. This has the added advantage of the user not having to speak so loudly that other nearby users can also hear the conversation over the background noise, as the background noise will mask a speaking level that can still be detected by the microphone.

For conversation enhancement, the Krisch application assumes that the headsets are attenuating, at least passively if not actively. In contrast, for music sharing, it may be desirable that the headsets be non-attenuating, or open. Open headsets provide minimal passive attenuation of ambient sounds. In a quiet environment, this

is believed by some to improve the quality of music playback. When the present invention is employed with open headsets, changes may be made to the various filters and gains. In particular, a user may not need a side-tone signal at all, as his own voice can travel to his ear naturally, and the ear canal is not blocked, so there is no occlusion effect. The masking effect of the audio content C is still present however, so some amount of side tone may be desired to allow the user to speak at an appropriate level over the audio content. The side-tone may also still be useful for controlling the level of the user's voice relative to any background noise. The voice output / far-end voice signal gain is also modified, to account for the different acoustics of the open headset. Overall, the goal remains the same – to allow the users to hear each other, without straining to speak or to hear, while still hearing the audio content at an enjoyable level.

In either case, for attenuating or open headsets, the content gain G_c is selected to make the audio content C loud enough to be enjoyed by both users, while not so loud that the other gains need to be raised to uncomfortable levels to allow conversation. This will generally be a lower level than would be used for simple audio playback. In some examples, the gain G_c is switched between two levels, one for conversation and the other for listening, automatically, triggered by the users talking. Thus, the content will be “ducked,” but not completely muted, when the users are speaking, and will return to its normal level after they stop. Generally, it would be desirable that the ducking be stated very quickly, but the gain be raised back to the listening level more gradually, so that it is not constantly jumping up and down at every lull in the conversation.

Another application of the system described here is to provide a conversation channel amongst participants in a silent disco. In a silent disco, a large number of participants listen to a distributed audio signal over personal wireless listening devices, such as wireless headsets or headphones connected to mobile phones. The system described herein may use the silent disco audio feed as the audio content

source 216, while allowign a subset of the participants to connect to each other for conversation in parallel with the shared music.

Embodiments of the systems and methods described above comprise computer components and computer-implemented steps that will be apparent to those skilled in the art. For example, it should be understood by one of skill in the art that the computer-implemented steps may be stored as computer-executable instructions on a computer-readable medium such as, for example, floppy disks, hard disks, optical disks, Flash ROMS, nonvolatile ROM, and RAM. Furthermore, it should be understood by one of skill in the art that the computer-executable instructions may be executed on a variety of processors such as, for example, microprocessors, digital signal processors, gate arrays, etc. For ease of exposition, not every step or element of the systems and methods described above is described herein as part of a computer system, but those skilled in the art will recognize that each step or element may have a corresponding computer system or software component. Such computer system and/or software components are therefore enabled by describing their corresponding steps or elements (that is, their functionality), and are within the scope of the disclosure.

A number of implementations have been described. Nevertheless, it will be understood that additional modifications may be made without departing from the scope of the inventive concepts described herein, and, accordingly, other embodiments are within the scope of the following claims.

WHAT IS CLAIMED IS:

1. A portable system for enhancing communication between at least two users in proximity to each other while listening to a common audio source, comprising:
first and second headsets, each headset comprising:
an electroacoustic transducer for providing sound to a respective user's ear, and
a voice microphone for detecting sound of the respective user's voice and providing a microphone input signal; and
a first electronic device integral to the first headset and in communication with the second headset, configured to:
generate a first side-tone signal based on the microphone input signal from the first headset,
generate a first voice output signal based on the microphone input signal from the first headset,
receive a content input signal,
combine the first side-tone signal with the content input signal and a first far-end voice signal associated with the second headset to generate a first combined output signal, and
provide the first combined output signal to the first headset for output by the first headset's electroacoustic transducer.
2. The system of claim 1 wherein the first electronic device scales the first side-tone signal to control the level at which the user speaks.
3. The system of claim 2 wherein the first electronic device scales the first side-tone signal based in part on a detected level of ambient noise, such that the user speaks at a level unlikely to be audible over the ambient noise without assistance.

4. The system of claim 2 wherein the first electronic device scales the first side-tone signal based in part on a detected level of ambient noise, such that the user speaks at a level likely to be masked by the ambient noise.
5. The system of claim 2 wherein the first electronic device scales the first side-tone signal such that the user speaks at a level unlikely to be audible without assistance at a distance from the user of more than a meter.
6. The system of claim 1 wherein the first electronic device is coupled directly to the second headset, and the first electronic device is further configured to:
 - generate a second side-tone signal based on the microphone input signal from the second headset,
 - generate the first far-end voice signal based on the microphone input signal from the second headset,
 - combine the second side-tone signal with the content input signal and the first voice output signal to generate a second combined output signal, and
 - provide the second combined output signal to the second headset for output by the second headset's electroacoustic transducer.
7. The system of claim 6 wherein the first electronic device includes the content input signal in the first and second combined output signals by scaling the content input signal to be sufficiently lower in level than the first and second side-tone signals and first and second far-end voice output signals such that the side-tone signals and far-end voice signals remain intelligible over the content signal.
8. The system of claim 7 wherein the step of scaling the content input signal is performed only when one of the microphone input signals from at least one of the first or second headsets is above a threshold.

9. The system of claim 1 further comprising a second electronic device integral to the second headset,
wherein the first electronic device is in communication with the second headset through the second electronic device, and
the second electronic device is configured to:
generate a second side-tone signal based on the microphone input signal from the second headset,
generate a second voice output signal based on the microphone input signal from the second headset,
provide the second voice output signal to the first electronic device as the first far-end voice signal,
receive the first voice output signal from the first electronic device as a second far-end voice signal,
receive the content input signal,
combine the second side-tone signal with the content input signal and the second far-end voice signal to generate a second combined output signal,
and
provide the second combined output signal to the second headset for output by the second headset's electroacoustic transducer.
10. The system of claim 9 wherein the first electronic device and the second electronic device include the content input signal in the respective first and second combined output signals by each scaling the content input signal to be sufficiently lower in level than the first and second side-tone signals and first and second far-end voice output signals such that the side-tone signals and far-end voice signals remain intelligible over the content signal.
11. The system of claim 10 wherein the step of scaling the content input signal is performed by both the first electronic device and the second electronic

device whenever the microphone input signal from either one of the first or second headsets is above a threshold.



12. The system of claim 1, wherein the first and second headsets each include a noise cancellation circuit including a noise cancellation microphone for providing anti-noise signals to the respective electroacoustic transducer based on the noise cancellation microphone's output, and the first electronic device is configured to provide the first combined output signal to the first headset for output by the first headset's electroacoustic transducer in combination with the anti-noise signals provided by the first headsets's noise cancellation circuit.
13. The system of claim 1, wherein the first and second headsets each include passive noise reducing structures.
14. The system of claim 1 wherein generating the first side-tone signal includes applying a frequency-dependent gain to the microphone input signal from the first headset.
15. The system of claim 1 wherein generating the first side-tone signal includes filtering the microphone input signal from the first headset and applying a gain to the filtered signal.
16. The system of claim 1 wherein the first electronic device further includes a source of the content input signal.
17. The system of claim 1 wherein the content input signal is received wirelessly.
18. A headset comprising:
an electroacoustic transducer for providing sound to a user's ear;
a voice microphone for detecting sound of the user's voice and providing a microphone input signal; and

an electronic device, configured to:

generate a side-tone signal based on the microphone input signal from the headset,
generate a voice output signal based on the microphone input signal from the headset,
receive a content input signal,
receive a far-end voice signal associated with another headset,
combine the side-tone signal with the content input signal and the far-end voice signal to generate a combined output signal,
output the combined output signal to the electroacoustic transducer,
and
output the voice output signal to the other headset.

19. The headset of claim 18 wherein the electronic device scales the side-tone signal to control the level at which the user speaks.
20. The headset of claim 19 wherein the electronic device scales the side-tone signal based in part on a detected level of ambient noise, such that the user speaks at a level unlikely to be audible over the ambient noise without assistance.
21. The headset of claim 19 wherein the electronic device scales the side-tone signal based in part on a detected level of ambient noise, such that the user speaks at a level likely to be masked by the ambient noise.
22. The headset of claim 19 wherein the electronic device scales the side-tone signal such that the user speaks at a level unlikely to be audible without assistance at a distance from the user of more than a meter.
23. The headset of claim 18 further comprising a source of the content input signal, and wherein the electronic device is configured to provide the content input signal to the other headset.

24. The headset of claim 23 wherein the electronic device provides the content input signal to the other headset by combining the content input signal with the voice output signal.
25. The headset of claim 23 wherein the electronic device provides the content input signal to the other headset separately from outputting the voice output signal.

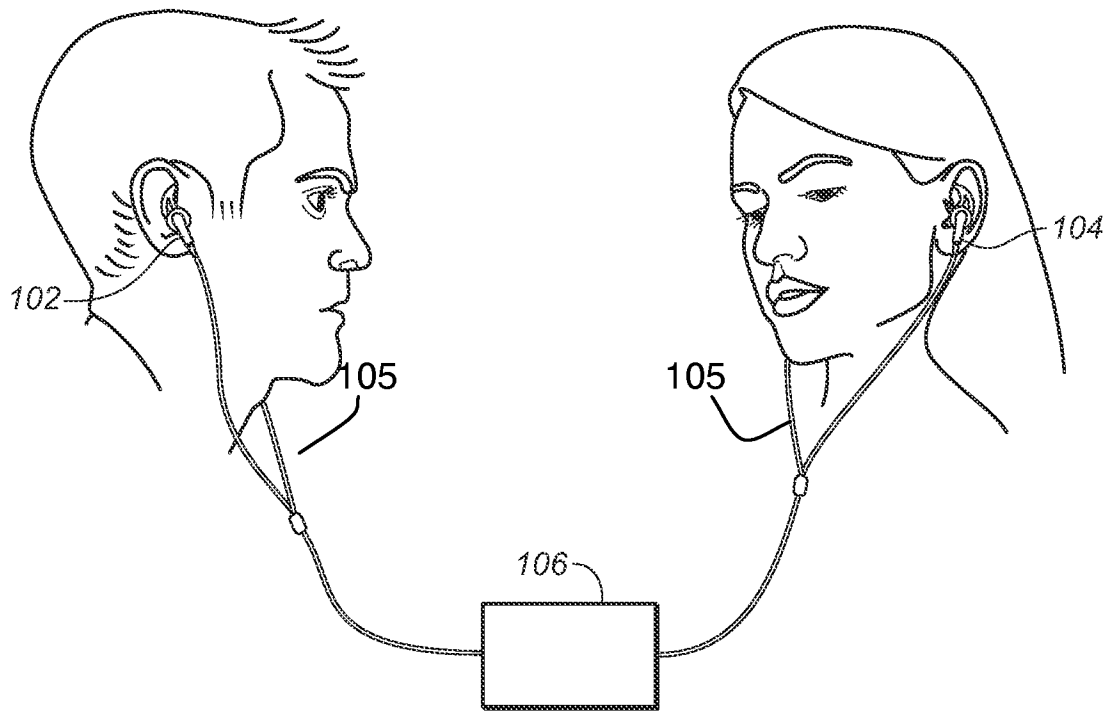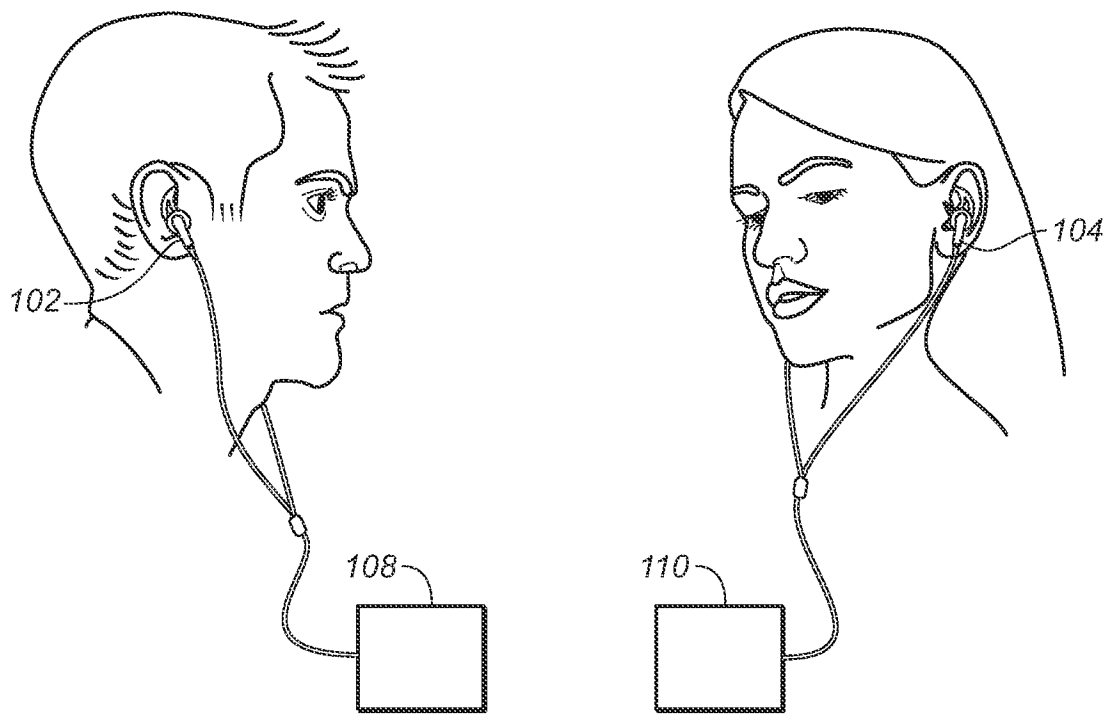**FIG. 1****FIG. 2**

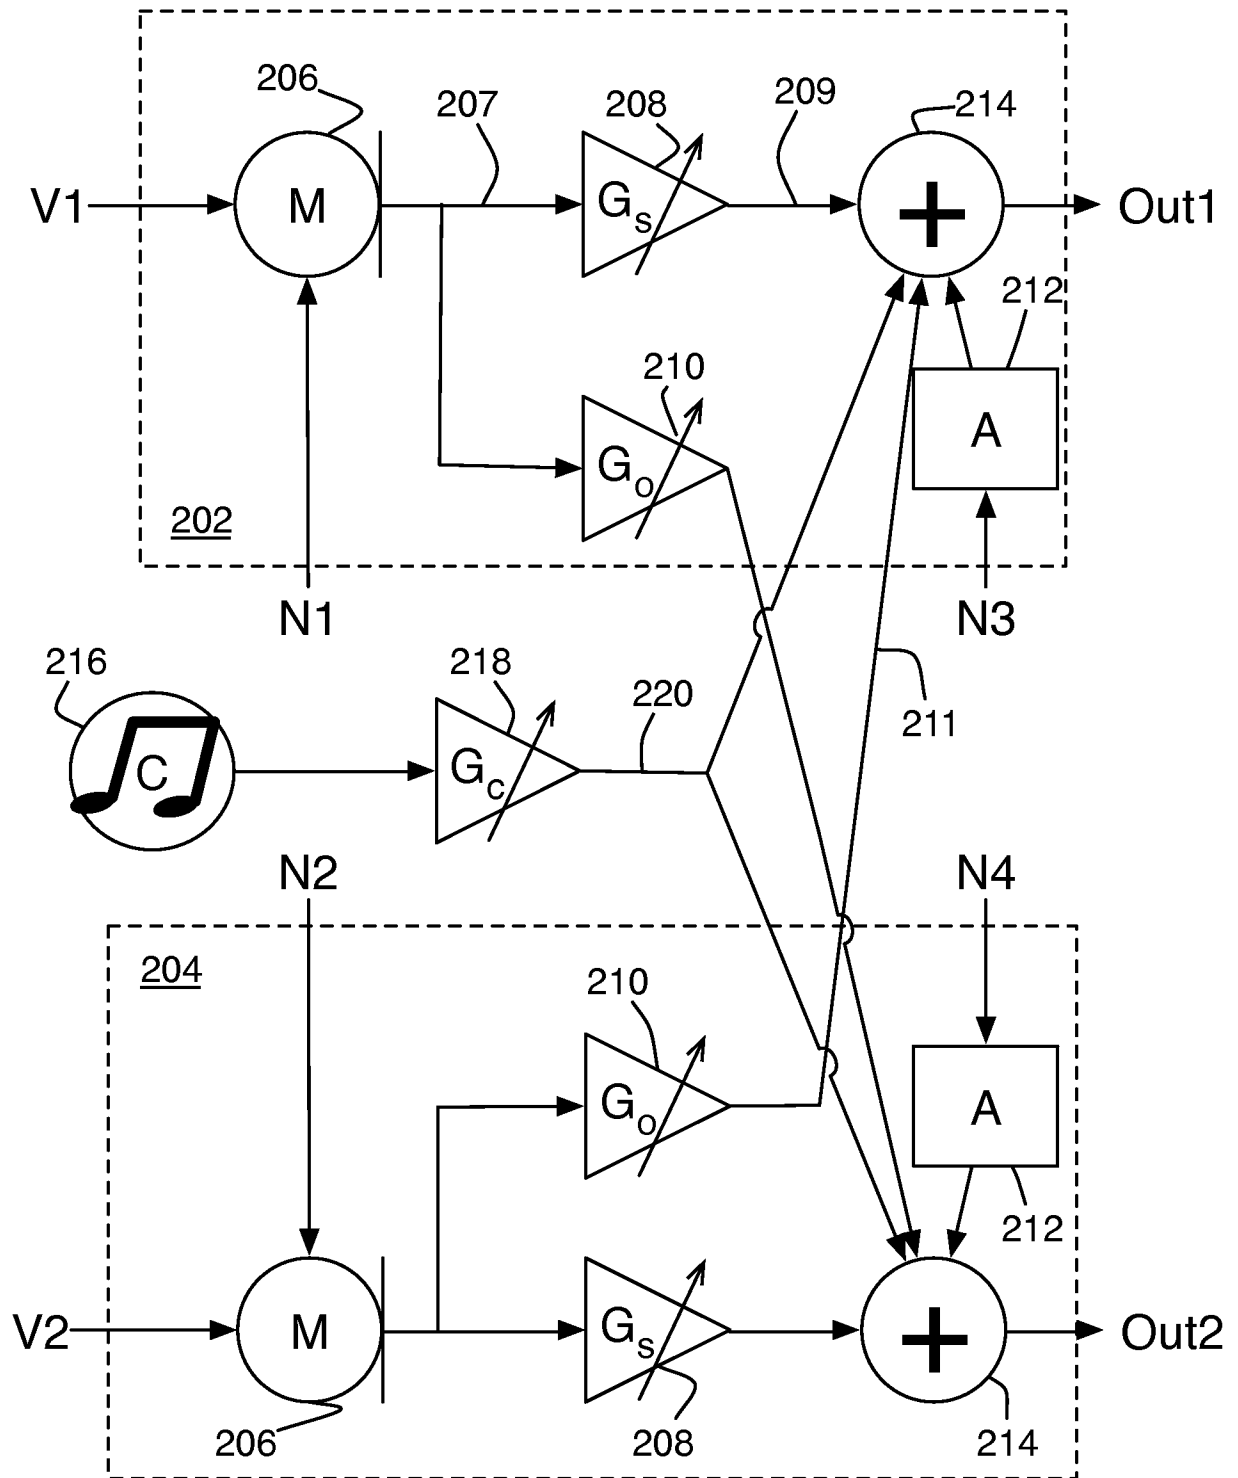


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2014/049750

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04R1/10
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04R H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	JP S57 124960 A (CLARION CO LTD) 4 August 1982 (1982-08-04) abstract; figure 1	1,6-18, 23-25 2-5, 19-22
X Y	----- WO 01/03413 A2 (TELIT MOBILE TERMINALS SPA [IT]; GIACHIN PAOLO [IT]) 11 January 2001 (2001-01-11) abstract; claims 1,2; figure 1	1,6-18, 23-25 2-5, 19-22
A	----- US 2010/150383 A1 (SAMPAT KUNTAL [US]) 17 June 2010 (2010-06-17) paragraph [0028] - paragraph [0066]; figures 1-3 ----- -/--	1-25



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

16 October 2014

Date of mailing of the international search report

27/10/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Righetti, Marco

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2014/049750

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 8 363 820 B1 (GRAHAM JOHN S [US]) 29 January 2013 (2013-01-29) column 2, line 63 - column 4, line 24; claim 1; figure 1 -----	2-5, 19-22

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2014/049750

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP S57124960	A	04-08-1982	NONE	

WO 0103413	A2	11-01-2001	AU 5981700 A	22-01-2001
			IT MI990433 U1	02-01-2001
			WO 0103413 A2	11-01-2001

US 2010150383	A1	17-06-2010	CN 102227917 A	26-10-2011
			EP 2377330 A1	19-10-2011
			JP 2012511869 A	24-05-2012
			KR 20110099725 A	08-09-2011
			TW 201043048 A	01-12-2010
			US 2010150383 A1	17-06-2010
			WO 2010068351 A1	17-06-2010

US 8363820	B1	29-01-2013	NONE	
