United States Patent [19]

McVey et al.

[11] **3,879,625**

[45] **Apr. 22, 1975**

[54] **ZIRCONIA REFLECTOR COATING ON QUARTZ LAMP ENVELOPE**

[75] Inventors: **Charles I. McVey**, Shaker Hts.; **O. Manuel Uy**, Cleveland, both of Ohio

[73] Assignee: **General Electric Company**, Schenectady, N.Y.

[22] Filed: **Oct. 9, 1973**

[21] Appl. No.: **404,178**

[52] **U.S. Cl.** **313/27**; 106/52; 117/94; 313/113

[51] **Int. Cl.** **H01j 7/24**

[58] **Field of Search** ..... 117/106, 94, 124 A, 159, 117/211; 313/17, 113, 27, 116; 106/52

[56] **References Cited**

UNITED STATES PATENTS

2,568,459	9/1951	Noel	313/221
3,374,377	3/1968	Cook	313/17
3,533,827	10/1970	Rimback	117/106 R


Primary Examiner—John Kominski


Attorney, Agent, or Firm—Ernest W. Legree; Lawrence R. Kempton; Frank L. Neuhauser

[57] **ABSTRACT**

The adherence of an optically reflective coating of zirconium oxide on a fused silica discharge tube surface is improved severalfold by an intermediate adhesion layer consisting of very fine aluminum oxide and boric oxide powders. The adhesion layer is first applied and dried, the zirconium oxide coating is applied, and the quartz tube is then lehred at a temperature greater than 460°C., the melting point of boric oxide. The improved coating strength permits the use of a thicker layer of zirconium oxide for higher optical and thermal reflection.

4 Claims, 1 Drawing Figure

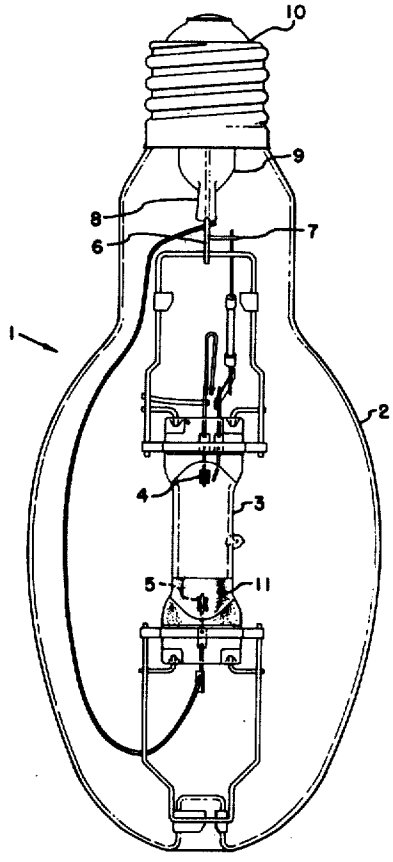

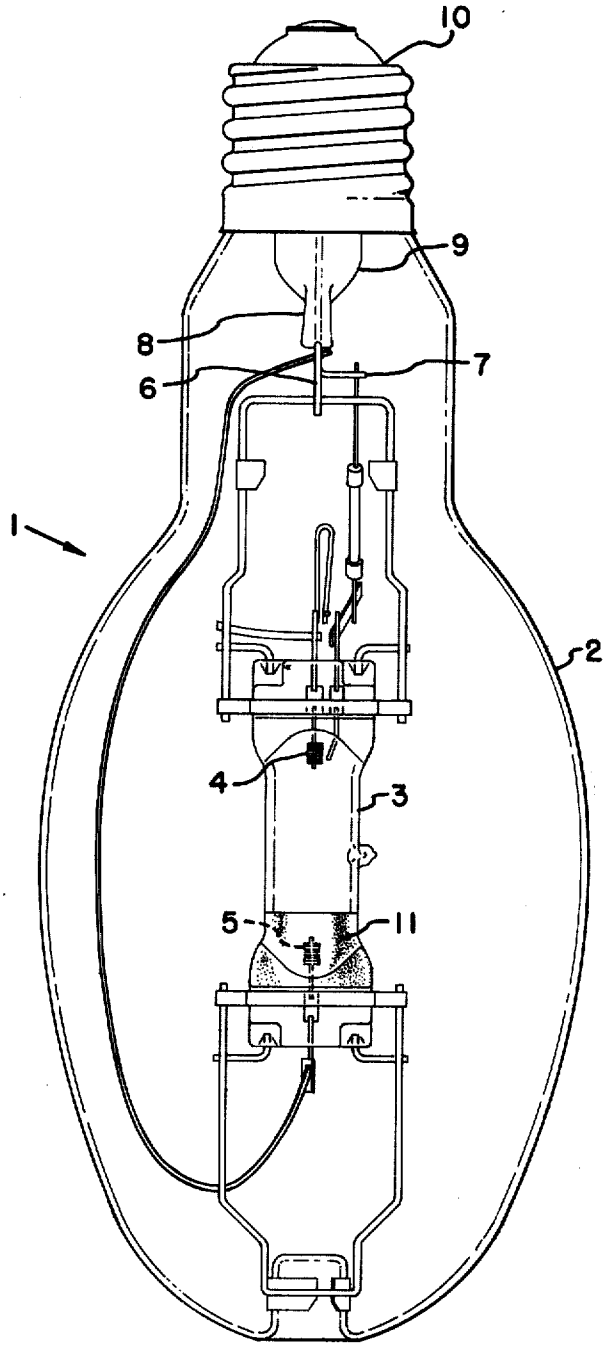
10
9
8
7
6
1
2
4
3
5
11

ZIRCONIA REFLECTOR COATING ON QUARTZ LAMP ENVELOPE

BACKGROUND OF THE INVENTION

The invention relates to heat and light-reflective coatings on fused silica lamp envelopes operating at high temperatures and is particularly concerned with improving the coating strength and adherence.

High intensity metal halide lamps such as disclosed in U.S. Pat. No. 3,234,421 - Reiling, are widely used for commercial, industiral, and outdoor lighting. In appearance these lamps resemble a conventional high pressure mercury vapor lamp comprising a quartz arc tube mounted within a glass outer jacket provided with a screw base at one end. Thermionic eletrodes are mounted in the ends of the arc tube which contains a quantity of mercury and metal halides along with an inert gas for starting purposes. One commercially available lamp contains mercury, sodium iodide, thallium iodide and indium iodide, whereas another contains mercury, sodium iodide, scandium iodide and thorium iodide.

The portions of the arc chamber behind the electrodes, that is the ends of the arc tube, are the coolest regions in normal operation of such lamps. In the absence of special measures to raise the temperature of the ends, too much of the metal halide such as sodium iodide may remain condensed on the envelope wall behind the electrodes. To prevent this and cause the lamp to achieve its proper efficiency, heat and light reflective coatings are generally applied to the ends of the arc tube, sometimes to the lower end only in vertically operated lamps. A coating which has been widely used is described in U.S. Pat. No. 3,374,377 — Cook, "Metal Vapor Lamp Coating," issued Mar. 19, 1968 and consists essentially of zirconium oxide ZrO_2.

While a zirconium oxide coating has been quite satisfactory in respect of reflectivity and avoidance of darkening or release of deleterious gases into the inter-envelope space, it is quite fragile and will not withstand abrasion. Bumping of lamps during handling and even the mere heating and cooling from intermittent operation may cause the coating to flake off. This contributes to nonuniformity in color from lamp to lamp and creates an appearance defect. Also the coating is limited in thickness, and thicker coatings having greater reflectivity are desirable.

SUMMARY OF THE INVENTION

The object of the invention is to improve the adherence and coating strength of an optically reflective coating of zirconium oxide on a fused silica discharge tube. By fused silica it is intended to include quartz and quartz-like glasses, such as those comprising 96 percent silica and up, some of which are sold under the trademark Vycor.

In accordance with our invention, adherence of the zirconium oxide coating is improved severalfold by an intermediate adhesion layer consisting of very fine aluminum oxide and boric oxide powders which are heated to a sufficient temperature, greater than 460°C., the melting point of boric oxide, to react the boric oxide chemically with the silica surface, the fine aluminum oxide, and the ZrO_2 reflector powder.

It is convenient to apply the adhesion layer by dipping the fused silica tube into a suspension of the aluminum oxide and boric oxide powders and allowing the coating to dry. The zirconium oxide coating is then applied and the quartz tube is lehred at a temperature greater than 460°C. The improved coating strength prevents flaking off and permits the use of a thicker layer of zirconium oxide for higher optical and thermal reflection than previously possible.

DESCRIPTION OF DRAWING

The single FIGURE of the drawing is a side view of a metal halide lamp in which the arc tube is provided with an improved zirconium oxide reflector coating embodying the invention.

DETAILED DESCRIPTION

The difficulty in achieving reliable adherence of ZrO_2 to fused silica arc tubes appears to be due at least in part to the mismatch in thermal expansion and the tremendous temperature range involved. The coefficient of thermal expansion of quartz is 0.56×10^{-6} cm/cm/°C while that of ZrO_2 is 7.5×10^{-6} cm/cm/°C, about 12 times greater. The arc tube wall temperature at the hottest coated spot, located slightly above the tip of the electrode, may be as high as 925°C. Thus in a lamp operating outdoors, the interface between the quartz and the ZrO_2 coating may pass through a temperature swing of close to 1000°C.

Aluminum oxide has a coefficient of thermal expansion of 8.0×10^{-6} cm/cm/°C and is almost a perfect match for ZrO_2. The boric oxide B_2O_3 melts at 460°C and heating above that temperature permits reaction between B_2O_3 and SiO_2 and between B_2O_3 and Al_2O_3. We believe our invention thus provides an Al_2O_3 intermediate adhesion layer firmly attached to the fused silica. At the interfaces between the Al_2O_3 particles and the ZrO_2 particles, the rates of thermal expansion substantially match, resulting in a much stronger bond. However the improved adherence and thicker coatings achieved by our invention are facts irrespectively of the validity of the foregoing explanation.

The intermediate adhesion layer according to the invention may conveniently be applied as a wet coating by dipping the quartz arc tube or envelope into a suspension of the aluminum oxide and boric oxide powders in an organic vehicle. Table I below lists representative formulations which were tested and studied to determine and optimize the permissible range with regard to Al_2O_3 to B_2O_3 ratio, the liquid to solid ratio and the ratio of high volatile to low volatile components in the organic liquid vehicle.

TABLE I

Formula	Methanol	Cellosolve	Al_2O_3	B_2O_3
1	60 cc	20 cc	8.37 gm	5.32 gm
2	60	20	4.78	3.04
3	60	12	7.40	4.71
4	60	12	4.23	2.70
5	60	20	12.56	2.67
6	60	20	7.17	1.52
7	60	12	11.09	2.35
8	60	12	6.32	1.34
9	60	16.26	6.50	2.91

The Al_2O_3 used was very fine submicron size alumina such as is commercially available under the trademark "ALON C". The B_2O_3 used was in the hydrated form of boric acid HBO_2 and the weight given above is the B_2O_3 equivalent. Substantially all water present in the boric oxide and aluminum oxide is removed in subse-

quent heating of the quartz tube. For the highly volatile organic component, methanol of high purity (electronic grade) was used and for the nonvolatile component ethylene glycol monoethyl ether acetate commonly referred to as cellosolve acetate was used. The ingredients for each formulation were measured as indicated, placed in a ⅓ liter porcelain ball mill contataining alumina pebbles, and intimately mixed by rolling for several hours.

The formulas were tested on the quartz arc tubes of metal halide lamps of conventional construction as illustrated in the drawing. The lamp **1** comprises an outer glass envelope **2** containing a quartz arc tube **3.** The arc tube contains electrodes **4, 5** set in opposite ends and has sealed therein a filling comprising mercury, sodium iodide, thallium iodide, indium iodide, and an inert starting gas such as argon. The electrodes are connected to inleads **6, 7** sealed through press **8** of stem **9** of outer envelope **2.** The inleads are connected externally to the contact surfaces of screw base **10** attached to the neck end of the envelope.

The illustrated lamp is intended for base-up operation and the reflective coating **11** has been applied to the lower end of the arc tube only. In a lamp intended for base-down operation, the coating would be applied to the opposite end of the arc tube. The outer envelope **2** may be evacuated as a heat conservation measure, or it may be filled with an inactive gas. The illustrated lamp corresponds to a 400-watt size wherein the outer envelope is generally evacuated; in larger sizes an inactive gas, generally nitrogen, is provided in the interenvelope space.

A zirconium oxide suspension suitable for spraying was prepared by milling 870 grams of zirconium oxide in 870 cc of ethyl cellulose binder with 12 cc of surfactant for several hours until the average particle diameter measured 0.8 to 0.85 micron. The ethyl cellulose binder consisting of 2.9 percent solids by weight is made by the following formula:

ethyl cellulose	—	29 grams
di butyl phthalate	—	44 grams
xylol (xylene)	—	914 grams
butanol (butyl alcohol)	—	13 grams

The foregoing ingredients are rolled in a glass jug until the ethyl cellulose goes into solution.

The formulations in Table 1 were tested by dipping the end of the arc tube into a suspension of the adhesion mix and allowing to air dry. The arc tube was then wrapped with suitable masking paper exposing the portion **11** desired to be coated. The arc tube is heated to about 180°C. and clamped in a fixture which rotated slowly before a spray gun. The previously prepared zirconium oxide suspension is sprayed during several revolutions of the arc tube. The arc tube is then taken from the fixture, the masking paper is removed, and excess material is brushed off. The arc tube is then baked in air for about 10 minutes at 600°C.

Coating strength and adherence of the zirconium oxide coating were then measured following the scratchadhesion test designation F32-68 of the American Society for Testing and Materials. In this test a needle is drawn across the coated area in a manner forming two intersecting scratches. The test specimen is then blown with compressed air to dislodge any loosened coating and microscopically examined to appraise the degree of coating removal. In Table 2 below, "coating strength" is the weight in grams that must be applied to the needle or stylus to cut through the coating with only superficial scratching of the underlying base; "adherence" is inversely proportional to the extent of chipping and raggedness at the intersection of the scratches, and is measured on a scale from 0 to 4 by comparison with observational standards.

TABLE 2

Test Variables	Coating Strength (grams)	Adherence (Scale of 0 to 4)
Zirconia without adhesion mix	25	2.0
Zirconia with adhesion mix	70	4.0

Table 2 shows the results using formula 8 of Table 1 which is that preferred. The coating strength using the adhesion mix according to the invention has risen from 25 to 70, and the adherence has moved up from 2 to 4.

The quantity of B_2O_3 applied in the intermediate adhesion layer should be from 0.05 to 0.5 mg/cm² and the quantity of Al_2O_3 from 0.5 to 1.5 mg/cm². A preferred formulation is about 0.1 mg. of B_2O_3 and 0.3 mg. of Al_2O_3 per cm².

The intermediate adhesion layer according to the invention achieves a threefold increase in coating strength and makes practical the application of thicker ZrO_2 reflector coats which are desirable in metal halide lamps for greater color uniformity. Prior to the invention, ZrO_2 coatings heavier than 5 mg/cm² had insufficient adherence and would flake off. With the invention, coating weights from 5 up to 30 mg/cm² will adhere, and a preferred coating weight is now about 15 mg/cm².

What we claim as new and desire to secure by Letters Patent of the U.S. is:

1. A fused silica envelope having an optically reflective coating of finely divided ZrO_2 adherent thereto and an intermediate adhesion layer consisting of very fine aluminum oxide and boric oxide heat-reacted with the silica surface, said coating of zirconium being heat-reacted with said intermediate layer.

2. A fused silica envelope as in claim **1** wherein the weight of B_2O_3 in said intermediate layer is from 0.05 to 0.5 mg/cm² and the weight of Al_2O_3 is from 0.05 to 1.5 mg/cm².

3. A fused silica envelope as in claim **2** wherein the weight of ZrO_2 in said coating is from 5 to 30 mg/cm².

4. A fused silica envelope as in claim **1** wherein the weight of B_2O_3 in said intermediate layer is about 0.1 mg/cm² and that of Al_2O_3 is about 0.3 mg/cm², and the weight of ZrO_2 in said coating is from 5 to 30 mg/cm².

* * * * *