

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
21 December 2007 (21.12.2007)

PCT

(10) International Publication Number
WO 2007/146352 A2

- (51) International Patent Classification: **Not classified**
- (21) International Application Number:
PCT/US2007/013911
- (22) International Filing Date: 14 June 2007 (14.06.2007)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/813,434 14 June 2006 (14.06.2006) US
11/581,504 16 October 2006 (16.10.2006) US
- (71) Applicants (for all designated States except US): **INFRAMAT CORPORATION** [US/US]; 74 Batterson Park Road, Framington, CT 06032 (US). **UNIVERSITY OF HOUSTON** [US/US]; 4800 Calhoun Street, E. Building, Room 316, Houston, TX 77204-2015 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **CHEN, Huimin** [CN/US]; 39 Emerald Trail, Amherst, NY 14221 (US). **CLIFFORD, Dennis, A.** [US/US]; 5803 Hummingbird Street, Houston, TX 77053 (US).
- (74) Agent: **HENDERSON, Michelle, L.**; Cantor Colburn LLP, 1180 Peachtree Street, Atlanta, GA 30309 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHODS OF MAKING WATER TREATMENT COMPOSITIONS

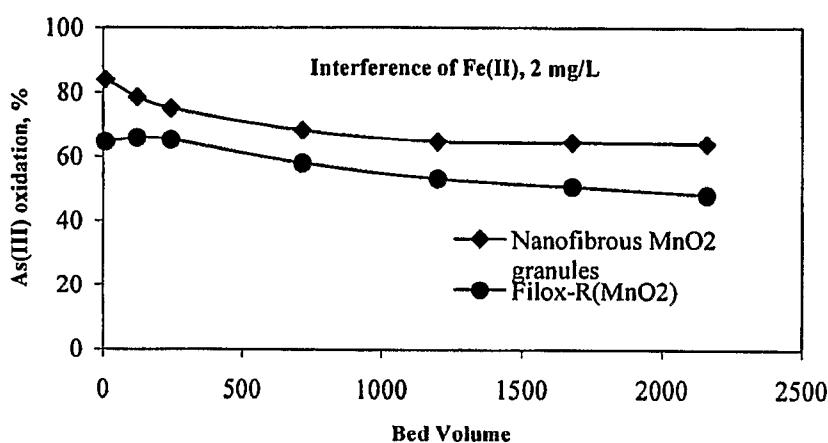

(57) Abstract: Methods of making unique water treatment compositions are provided. In one embodiment, a method of making a doped metal oxide or hydroxide for treating water comprises: disposing a metal precursor solution and a dopant precursor solution in a reaction vessel comprising water to form a slurry; and precipitating the doped metal oxide or hydroxide from the slurry.

METHODS OF MAKING WATER TREATMENT COMPOSITIONS

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application claims the benefit of United States Provisional Patent Application No. 60/813,434 filed June 14, 2006; and this application is also a continuation-in-part of, and claims priority to, United States Patent Application No. 11/581,504 filed October 16, 2006, which claims the benefit of United States Provisional Patent Application No. 60/726,924 filed October 14, 2005, all of which are incorporated by reference herein in their entirety.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH

[0002] The United States Government has certain rights to this disclosure pursuant to Air Force Flight Test Center Contract Nos. F04611-03-M-1007 and FA9300-04-C-0033.

BACKGROUND

[0003] The present disclosure generally relates to water treatment. More particularly, the present disclosure relates to methods of making water treatment compositions.

[0004] Wastewater and natural waters (e.g., surface water or groundwater) may contain a variety of dissolved inorganic substances from natural and anthropogenic sources. Regulatory limits have been set for a number of these substances in drinking water and for discharges to natural waters in order to protect the public health and environmental quality. In many locations, the regulatory limits for many of these substances are set at very low levels, e.g., about 2 to about 50 micrograms per liter ($\mu\text{g/L}$).

[0005] Current water treatment processes, such as granular iron media adsorption, modified coagulation/filtration, reverse osmosis hyperfiltration, anion exchange, activated alumina adsorption, modified lime softening, electrodialysis

reversal, and oxidation/filtration, are cost-effective for use in large municipal water treatment facilities. However, as the regulated levels of these contaminants are reduced even further, many of these processes are rendered inadequate. Furthermore, these water treatment processes are not always cost-effective for use in small water treatment systems (e.g., those that serve communities of 25 to 10,000 people) and point-of-use or point-of-entry systems (e.g., for use in private wells).

[0006] A need therefore remains for improved water treatment compositions and methods for making such compositions.

BRIEF SUMMARY

[0007] Methods of making unique water treatment compositions are disclosed. In one embodiment, a method of making a doped metal oxide or hydroxide for treating water comprises: disposing a metal precursor solution and a dopant precursor solution in a reaction vessel comprising water to form a slurry; and precipitating the doped metal oxide or hydroxide from the slurry.

[0008] In another embodiment, a method of making a nanostructured doped metal oxide or hydroxide for treating water comprises: disposing a metal salt solution and a dopant precursor solution in a reaction vessel comprising water to form a slurry; heating the slurry; precipitating the nanostructured doped metal oxide or hydroxide from the slurry; washing the nanostructured doped metal oxide or hydroxide; and drying the nanostructured doped metal oxide or hydroxide.

[0009] In yet another embodiment, a method of forming a nanocomposite water treatment composition comprises: forming a slurry comprising an oxidizing component and an absorbing or adsorbing (absorbing/adsorbing) component, wherein one or both of the oxidizing component and the absorbing/adsorbing component is nanostructured; and spray drying the slurry to form nanocomposite granules.

[0010] In an additional embodiment, a method of forming a water filtration media comprises: combining a nanocomposite of an oxidizing component and an absorbing component with a porous substrate such as activated carbon, alumina, or

silica gel, wherein one or both of the oxidizing component and the absorbing component is nanostructured. Also disclosed is a water filtration media made by the foregoing method.

[0011] The above described and other features are exemplified by the following detailed description and attachments.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] Referring now to the figures, which are exemplary embodiments and wherein like elements are numbered alike:

[0013] Figure 1 schematically illustrates the transformation of MnO_2 nanoparticle agglomerates into a mass of interconnected nanofibers, starting with (a) a nanoparticle, then (b) nucleation of embryonic nanofibers, followed by (c) transformed long fibers, (d) fiber bundles, and finally (e) a fully developed bird's-nest superstructure, which is also shown in (f) a scanning electron microscope (SEM) image;

[0014] Figure 2 illustrates powder X-ray diffraction patterns for two different samples of MnO_2 ;

[0015] Figure 3 graphically illustrates the effect of synthesis temperature on mesopore size distribution of MnO_2 ;

[0016] Figure 4 illustrates high resolution scanning electron microscope (HR-SEM) images of MnO_2 synthesized at (a) room temperature and (b) 70°C ;

[0017] Figure 5 illustrates (a) an optical microscope image of reconstituted MnO_2 particles having a particle size greater than 150 micrometers as well as (b) and (c) SEM images of reconstituted nanofibrous MnO_2 particles;

[0018] Figure 6 graphically illustrates the As(III) oxidation in low dissolved oxygen challenge water at a pH of about 7.5 with Fe(II) as an interfering reductant;

[0019] Figure 7 graphically illustrates the As(III) oxidation in low dissolved oxygen challenge water at a pH of about 7.5 with Mn(II) as an interfering reductant;

[0020] Figure 8 graphically illustrates the As(III) oxidation in low dissolved oxygen challenge water at a pH of about 7.5 with sulfide as an interfering reductant;

[0021] Figure 9 graphically illustrates that MnO₂ also possesses significant adsorption capacity for As(V);

[0022] Figure 10 graphically illustrates an adsorption isotherm for Pb(II) on MnO₂;

[0023] Figure 11 is a SEM image of a nanostructured Fe₂O₃ sample;

[0024] Figure 12 is a SEM image of a nanostructured Mn-doped Fe₂O₃ sample;

[0025] Figure 13 is a SEM image of a nanostructured La-doped Fe₂O₃ sample;

[0026] Figure 14 graphically illustrates As(V) adsorption isotherms for a composite Fe₂O₃-MnO₂ media at various pHs;

[0027] Figure 15 graphically illustrates the breakthrough curves of total arsenic, As(III), and As(V) using a composite Fe₂O₃-MnO₂ media at a pH of about 7.5;

[0028] Figure 16 graphically illustrates the breakthrough curves of As(V) for a composite Fe₂O₃-MnO₂ media and GFH at a pH of about 6.5;

[0029] Figure 17 graphically illustrates the breakthrough curves of As(V) for a composite Fe₂O₃-MnO₂ media and GFH at a pH of about 7.5;

[0030] Figure 18 graphically illustrates the breakthrough curves of As(V) for a composite Fe₂O₃-MnO₂ media and GFH at a pH of about 8.5;

[0031] Figure 19 graphically illustrates the breakthrough curves of As(III) and As(V) for a composite Fe₂O₃-MnO₂ media at a pH of about 7.5;

[0032] Figure 20 graphically illustrates the breakthrough curves of As(V) for a composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ media, Fe_2O_3 , and GFH at a pH of about 7.5;

[0033] Figure 21 graphically illustrates Pb(II) adsorption isotherms for a composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ media at various pHs;

[0034] Figure 22 graphically illustrates the breakthrough curve of Pb(II) for a composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ media at a pH of about 7.5;

[0035] Figure 23 illustrates powder X-ray diffraction patterns for an as-synthesized sample of Ti(OH)_4 and a heat treated sample of Ti(OH)_4 ;

[0036] Figure 24 illustrates a powder X-ray diffraction pattern for an as-synthesized sample of Zr(OH)_4 ;

[0037] Figure 25 is a SEM image of a nanostructured Zr(OH)_4 sample;

[0038] Figure 26 is a SEM image of a nanostructured Mn-doped Zr(OH)_4 sample;

[0039] Figure 27 is a SEM image of a nanostructured Mn-doped Ti(OH)_4 sample;

[0040] Figure 28 graphically illustrates As(V) adsorption isotherms for a Mn-doped Zr-based adsorbent at various pH values;

[0041] Figure 29 graphically illustrates As(V) adsorption isotherms for a Mn-doped Ti-based adsorbent at various pH values;

[0042] Figure 30 graphically illustrates As(V) adsorption isotherms for a commercially available adsorbent, Granular Ferric Oxide (GFO), at various pH values; and

[0043] Figure 31 graphically illustrates the breakthrough curves of As(V) for a Mn-doped Ti-based adsorbent and GFO at a pH of about 7.5.

DETAILED DESCRIPTION

[0044] Water treatment compositions and methods of making and using the same are described. The water treatment compositions are composite materials comprising both an oxidizing component and an absorbing or adsorbing (absorbing/adsorbing) component. The oxidizing component has the ability to oxidize another substance by removing electrons from the other substance. Absorption refers to a phenomenon in which atoms, molecules, or ions enter a bulk phase, e.g., a gas, liquid, or solid phase. Adsorption refers to a phenomenon in which atoms, molecules, or ions are taken up by the surface rather than the volume of a material. Thus, an absorbing component has the ability to absorb atoms, molecules, or ions into its bulk volume, and an adsorbing component has the ability to adsorb atoms, molecules, or ions into its surface.

[0045] Examples of suitable oxidizing components include but are not limited to oxides, hydroxides, or oxyhydroxides of manganese, silver, or titanium, and combinations comprising at least one of the foregoing materials. Examples of suitable absorbing/adsorbing components include but are not limited to oxides, hydroxides, or oxyhydroxides of iron, titanium, zirconium, aluminum, manganese, and combinations comprising at least one of the foregoing materials. The oxidizing component can be doped. In addition, or in the alternative, the absorbing/adsorbing component can be doped. It is desirable for the oxidizing component and the absorbing/adsorbing component to have different nominal compositions. Thus, the oxidizing component and the absorbing/adsorbing component can have overlapping elements or constituents while having different overall compositions.

[0046] In an exemplary embodiment, the oxidizing component is a manganese oxide such as MnO_2 , an iron-doped manganese oxide, or a combination comprising at least one of the foregoing; and the absorbing/adsorbing component is an iron oxide such as Fe_2O_3 , a Mn- or La-doped iron oxide, a zirconium hydroxide, a Mn- or Fe-doped zirconium hydroxide, a titanium hydroxide, a Mn- or Fe-doped titanium hydroxide, or a combination comprising at least one of the foregoing.

[0047] One or both of the oxidizing component and the absorbing/adsorbing component can be nanostructured and thus can be combined to form a so-called “nanocomposite” material. The term “nanostructured”, as used herein, refers to particles having an average longest grain dimension of less than about 250 nanometers (nm). For example, the particles can have an average longest grain dimension of about 1 nm to about 100 nm, specifically about 1 nm to about 10 nm. In an exemplary embodiment, the nanocomposite includes granules or agglomerates of particles having an average longest dimension of at least one micrometer (micron), specifically about 1 micron to about 200 microns. The water treatment compositions can comprise, for example, greater than about 60 volume % by total volume of the composition of such granules or agglomerates, specifically greater than about 90 volume %.

[0048] The oxidizing or absorbing/adsorbing component, e.g., a nanostructured metal oxide or a metal hydroxide, can be doped using the following process. First, a metal precursor solution and a dopant precursor solution can be dispersed in water to form a slurry. Examples of suitable metal precursors include but are not limited to an iron salt, a manganese salt, a zirconium oxy salt, a titanium oxy salt, and combinations comprising at least one of the foregoing salts. Examples of suitable dopant precursors include but are not limited to, a lanthanum salt, a manganese salt, or a combination comprising at least one of the foregoing salts. Subsequently, the slurry can be heated at a temperature of about 30°C to about 200 °C. Further, a base such as an alkaline hydroxide can be added to the slurry to increase its pH. The alkaline hydroxide could be, for example, sodium hydroxide, ammonium hydroxide, or a combination comprising at least one of the foregoing hydroxides. As a result of this heating of the slurry, the doped metal oxide or hydroxide precipitates out of the slurry. The precipitate can then be washed and filtered prior to or during the washing. It can further be dried by subjecting it to a temperature of about 100°C to about 300°C.

[0049] A nanocomposite can be formed by a process that includes dispersion of the as-synthesized powders (i.e., doped or undoped metal oxides or hydroxides) in

a liquid medium, adding a binder, spray drying to form beads, and post heat treating to remove unwanted species. In aqueous liquid mediums, the binder can include, for example, an emulsion of commercially available polyvinyl alcohol (PVA), polyvinylpyrrolidone (PVP), carboxymethyl cellulose (CMC), or other water-soluble polymers, preferably suspended in de-ionized water. In this case, the amount of binder present can be about 0.5 wt.% to about 5 wt.% based on the total weight of the slurry.

[0050] After formation of the slurry including a nanostructured material, the slurry is spray-dried in hot air to form larger granules or agglomerated nanoparticles. While many suitable non-reactive gases or mixtures thereof can be used, nitrogen or argon is preferred. The temperature at which the slurry is spray-dried can be, for example, about 150°C to about 350°C, specifically about 150°C to about 250°C. The agglomerates can further be optionally subjected to a high temperature heat treatment to remove the binder, for example, at a temperature of about 350°C to about 500°C.

[0051] Desirably, the water treatment compositions are highly porous overall, allowing the water being treated to penetrate easily therethrough and contaminants to be absorbed/adsorbed during treatment. To achieve a high porosity in the water treatment compositions in accordance with an exemplary embodiment, one or both of the oxidizing component and the absorbing/adsorbing component can be transformed from nanoparticle agglomerates to a random, interconnected open-weave assembly of “nanofibers”, often referred to as a “bird’s nest” structure, as shown in Figure 1. A detailed description of this transformation can be found in U.S. Patent No. 6,162,530 to Xiao et al., which is incorporated by reference herein. As used herein, the term “nanofiber” refers to a fiber having a diameter of less than about 250 nm, specifically less than about 50 nm, and more specifically about 5 to about 10 nm. The nanofibers can have an aspect ratio (length/diameter ratio) of greater than about 10, and they can be spaced about 0.5 to about 200 nm apart from each other, more specifically about 5 to about 50 nm apart from each other. The porosity of the water treatment compositions can be, for example, greater than about 60 volume %, specifically greater than about 80 volume %. Another approach to achieving high porosity in the

water treatment compositions is to use the above described doping technique to dope the metal oxide or hydroxide during material synthesis.


[0052] In one exemplary embodiment, the water treatment compositions can be disposed on a porous substrate such as activated carbon, alumina, or silica gel. One exemplary method for loading the water treatment composition on a porous substrate can be by a wet recipient impregnation process. Alternatively, the water treatment compositions can be incorporated into a water filtration device such as a carbon block filtration cartridge containing activated carbon for removing chlorine and organic matter, making the water less distasteful to consumers. For example, a carbon block filtration cartridge can be formed by combining a nanocomposite of an oxidizing component and an absorbing component with an activated carbon powder and a binder for binding the nanocomposite granules to the activated carbon powder. The resulting mixture is then formed into the shape of the filtration cartridge, for example, by compression molding.

[0053] The water treatment compositions are useful for removing contaminants from water. Examples of specific contaminants include but are not limited to arsenic, lead, chromium, mercury, and combinations comprising at least one of the foregoing contaminants. A method for using any of the water treatment compositions disclosed herein generally includes contacting water with the water treatment composition and at least partially removing a contaminant from the water. In one exemplary embodiment, at least partially removing the contaminant includes oxidizing the contaminant and absorbing/adsorbing the oxidized contaminant. The adsorption of a contaminant onto the water treatment compositions generally occurs by ligand exchange. Advantageously, because these contaminants strongly bond to the water treatment media, the media, once exhausted, can be disposed of as a non-hazardous waste in landfills.

[0054] The disclosure is further illustrated by the following non-limiting examples.

EXAMPLE 1: Manganese Dioxide Nanofiber Synthesis and Characterization

[0055] MnO_2 was synthesized by oxidizing manganese sulfate (MnSO_4) with potassium permanganate (KMnO_4) under acidic conditions according to reaction (1).



[0056] The reaction time and temperature were adjusted to control the crystallinity, morphology, and catalytic activity of the material. A schematic illustration showing the gradual transformation of MnO_2 nanoparticle agglomerates into a mass of interconnected nanofibers is shown in Figure 1. These transformations can be controlled by adjusting time and/or temperature of the reaction. It is believed that the MnO_2 is more active in the nucleation and growth stages than during the other stages.

[0057] Powder X-ray diffraction (XRD) patterns of the MnO_2 were obtained on a Bruker D5005 or D8 diffractometer equipped with a 2.2 kilowatt (kW) copper X-ray tube. The equipment was run at 40 kilovolts (kv) and 20 milliAmpere (mA) by step-scanning with increments of 5 degrees per minute ($^\circ/\text{min}$). XRD analysis (as shown in Figure 2) revealed that the synthesis temperature had a great influence on the crystallinity. The MnO_2 material synthesized at 70 degrees Celsius ($^\circ\text{C}$) possessed better crystallinity than the one synthesized at room temperature (about 23°C). The peak associated with the $\langle 020 \rangle$ direction was narrower than all other peaks, indicating that the crystallites were elongated along the $\langle 020 \rangle$ direction. In addition, the broadness of this peak is associated with the length of fiber. Specifically, the broader the peak, the shorter the fiber. It is apparent that the $\langle 020 \rangle$ peak of MnO_2 synthesized at room temperature was much broader compared with that synthesized at 70°C , suggesting that the MnO_2 synthesized at room temperature had a shorter fiber length.

[0058] Specific surface area (SSA), total pore volume, micropore volume, and mesopore size distribution of the as-synthesized MnO_2 nanofibers were analyzed on a NOVA4200e surface area and pore size analyzer sold by QuantaChrome Instruments

using the BET method. SSA and pore analyses of MnO₂ samples are listed in Table 1. Pores are classified by diameter as micropores (< 20 Angstroms (Å)), mesopores (20 to 500 Å) and macropores (> 0 Å). The MnO₂ synthesized at room temperature possessed a higher SSA than the MnO₂ synthesized at 70°C, although its total pore volume was lower. This suggested that it had a smaller particle size, contained micropores, or both. The results shown in Table 1 confirmed that MnO₂ synthesized at room temperature contained micropores, which contributed about 75 square meters per gram (m²/g) of its 259 m²/g SSA. Mesopore size distributions of these two materials are shown in Figure 3.

Table 1. BET surface area and pore analyses

MnO ₂	SSA (m ² /g)	Total Pore Volume (cc/g)	Micropore Volume (cc/g)	Micropore Area (m ² /g)	Mesopore size distribution
Room Temp	259	0.29	0.04	75	Peak at 18 Å
70°C	190	0.39	0	0	Peaks at 20 and 93 Å.

[0059] The MnO₂ synthesized at room temperature exhibited a singular pore size distribution with a pore radius peak of about 17 Å. In contrast, the MnO₂ synthesized at 70°C exhibited a bimodal pore size distribution with pore radii peaks at about 20 Å and about 93 Å, respectively. The 93 Å peak was much broader than the 20 Å peak; it covered a pore radius of about 50 Å to about 300 Å. Most pores in this range were interparticle voids that formed among particles. Theoretically, both micropores and mesopores are accessible for arsenic species in the water, because the radius of arsenic ions, such as AsO₄³⁻ with $r = 0.47\text{Å}$ and H₃AsO₃ with $r = 0.69\text{Å}$, are much smaller than the sizes of the observed micropores and mesopores.

[0060] High resolution scanning electron microscope (HR-SEM) images were acquired at 10 kilo-electron Volts (KeV) using a JEOL 890 inlens SEM. HR-SEM images of MnO₂ are shown in Figure 4. The MnO₂ synthesized at room temperature appeared to have a spiked ball morphology, while the MnO₂ synthesized at 70°C exhibited a nanofiber morphology. Based on Figure 1, the MnO₂ synthesized at room temperature appeared to still be in the growing stage. This is consistent with the XRD results that the MnO₂ synthesized at room temperature had a shorter fiber length.

[0061] It was also observed that interparticle voids formed among MnO_2 spikes were about 50 Å to about 300 Å in width. This is consistent with pore size distribution results.

[0062] Spray drying technology was used to reconstitute the MnO_2 nanofibres to obtain particle sizes of about 250 microns. The process included the following steps:

- (1) Dispersion of as-synthesized MnO_2 nanofibers into deionized water
- (2) Addition of a PVA binder, about 2 wt. %
- (3) Spray drying to form agglomerates
- (4) Post heat treatment to removal unwanted species

The spray drying process was performed using a 16 ft. industrial spray drier. This equipment is capable of processing 100 lbs. of materials per hour. The size, shape, and density of the reconstituted powders are a function of slurry feeding rate, drying temperature, powder outlet temperature, and atomization gas rate. After spray drying, the powders were sieved.

[0063] Optical and scanning electronic microscope images of the reconstituted MnO_2 particles are shown in Figure 5. The optical microscope image in Figure 5(a) shows that the reconstituted MnO_2 particles were substantially spherical with diameters of greater than or equal to about 150 microns. The SEM image of the reconstituted nanofibrous MnO_2 particles in Figure 5(b) shows that each sphere comprises hundreds of agglomerated particles having a size range from submicrons to a few microns. An increase in magnification, as shown in the SEM image of 5(c), shows that each agglomerate comprises a plurality of spiked balls of MnO_2 , with macropores among the bundles and mesopores among the spikes.

EXAMPLE 2: Evaluation of MnO_2 for Water Treatment

[0064] In this example, the MnO_2 nanofibers synthesized according to Example 1 were evaluated for their efficiencies in oxidizing As(III) to As(V) in comparison with a commercially available product. The comparisons were made

using rapid small scale column tests (RSSCTs) under a variety of experimental conditions. Using adsorption isotherm tests, MnO_2 nanofibers were also evaluated for their performance in removing As(V) and Pb(II) from drinking water.

[0065] For all evaluation experiments, a so-called “challenge water” of the composition described in Table 2 was used. It has the same anionic composition as the National Sanitation Foundation (NSF) International Standard 53 Challenge Water used for evaluation of point-of-use devices for arsenic removal. Its calcium and magnesium concentrations were lowered to give the water greater long-term stability, as the NSF water is stable only for about 24 to about 48 hours, whereas the isotherm tests described herein were conducted for greater than or equal to about 48 hours. The following reagent grade salts were used to prepare the challenge water: NaNO_3 , NaHCO_3 , $\text{Na}_2\text{HPO}_4 \cdot \text{H}_2\text{O}$, NaF , $\text{Na}_2\text{SiO}_3 \cdot 9\text{H}_2\text{O}$, $\text{MgSO}_4 \cdot 7\text{H}_2\text{O}$, and $\text{CaCl}_2 \cdot 2\text{H}_2\text{O}$. Interfering Fe^{2+} ions in As(III) oxidation tests were introduced from ferrous ammonium sulfate (EM Science). Mn^{2+} and S^{2-} were prepared from $\text{MnSO}_4 \cdot \text{H}_2\text{O}$, and $\text{Na}_2\text{S} \cdot 9\text{H}_2\text{O}$, respectively.

Table 2. Composition of the Challenge Water

Cations	meq/L	mg/L	Anions	meq/L	mg/L
Na^+	3.604	82.9	HCO_3^-	2.0	122.0
Ca^{2+}	0.36	7.21	SO_4^{2-}	1.0	48.0
Mg^{2+}	0.26	3.16	Cl^-	0.36	12.8
			$\text{NO}_3^- \cdot \text{N}$	0.143	2.0
			F^-	0.053	1.0
			$\text{PO}_4^{3-} \cdot \text{P}$	0.0013	0.04
			Silicate as SiO_2	0.66	20.0
Total	4.224	93.27		4.224	205.8

Estimated total dissolved solids (TDS) by evaporation = 287 mg/L.

meq/L = milliequivalents per liter

mg/L = milligrams per liter

[0066] Both low and high levels of dissolved oxygen (DO) were used in the challenge water during As(III) oxidation tests. Low-DO, i.e., less than about 80 parts per billion (ppb) O_2 , challenge water was prepared by sparging the challenge water with N_2 for 1.5 hours. High-DO challenge water was prepared by sparging water with

air for 15 minutes to a dissolved oxygen saturation concentration of approximately 8.3 mg/L. As(III) was spiked into the challenge water, and then freshly prepared Fe^{2+} , Mn^{2+} , or S^{2-} solutions were spiked. During the experiments, the pH of the challenge water was adjusted to a range of about 6.5 to 8.5 by using dilute HCl and NaOH solutions.

[0067] For the As(III) oxidation tests, RSSCTs were used to evaluate MnO_2 nanofibers for their efficiency in oxidizing As(III) to As(V). The tests were conducted under a variety of experimental conditions including variable pH, empty bed contact time (EBCT), low/high dissolved oxygen (DO), and the absence or presence of interfering reductants (Fe^{2+} , Mn^{2+} , or S^{2-}).

[0068] It is noted here that MnO_2 nanofibers were not directly used in the column test, because of their small particle size (about 10 μm), which would have given an extremely high pressure drop in a packed bed. To achieve reasonable RSSCT flow rates, the MnO_2 nanofibers were granulized by the spray-drying technique described in Example 1 to form larger, but porous particles. Granulized, porous MnO_2 particles (having diameters of about 125 to about 180 microns (μm)) were loaded into a 1 centimeter inner diameter glass column with total volume of 1.0 mL. The column was then backwashed with deionized water to remove fines.

[0069] The As(III) oxidation tests were conducted by pumping the Low-DO challenge water containing As(III) through the column at a controlled flow rate. To speciate the effluent, 10-mL samples of the effluent from the RSSCT were collected and preserved with EDTA-HAc. As(III) concentration in the effluent was analyzed by hydride-generation atomic absorption spectrophotometry (HG-AAS).

[0070] For the As(V) and Pb(II) adsorption isotherm tests, a 2-day wet-slurry isotherm procedure was used for adsorption isotherm tests. First, adsorbents were screened with a set of 200 and 325 mesh sieves. Powder that was trapped between these two sieves, i.e., having a particle size between about 45 to about 75 μm , was used to make a suspension with a powder content of 1.00 g/L. The suspension was vigorously stirred to keep powders suspended. Predetermined aliquots of the

vigorously stirred suspension were pipetted into 150-mL bottles to yield appropriate adsorbent concentrations for the equilibrium adsorption tests. Then, 100-mL aliquots of As(V) or Pb(II) spiked synthetic water was added to each bottle. Adsorbent media dosages that were tested were: 0, 0.25, 0.5, 1, 2, and 5 mg MnO₂ in every 100 mL As(V) or Pb(II) spiked synthetic water. The dosed bottles and the blank (no adsorbent) were placed in a covered wooden box and rotated at 15 revolutions per minute (rpm) for 2 days at ambient temperature (about 23°C) to reach adsorption equilibration. It was determined that a reasonable approach to equilibrium was reached in 48 hours. After the equilibration, a 10-mL water sample was collected from each bottle and microfiltered with a 0.2 µm filter disc to remove all suspended particles (adsorbent media). The water samples were preserved with concentrated HNO₃ prior to analysis. The acid concentration in the water sample was about 1% (v/v). For As(V) adsorption isotherm tests, the challenge water was spiked with 200 µg/L As(V). Arsenic concentrations in the preserved water samples were also measured by HGAAS. The mass of arsenic adsorbed onto the media was determined from the difference in soluble arsenic concentrations in the equilibrated samples and the blank (no adsorbent). For Pb(II) adsorption isotherm tests, the challenge water was spiked with 500 µg/L Pb(II), and the Pb(II) concentrations in the preserved water samples were measured by inductively coupled plasma mass spectrometry (ICP-MS). The mass of lead adsorbed onto the media was determined from the difference in soluble lead concentrations in the equilibrated samples and the blank (no adsorbent).

[0071] The arsenic analysis was performed using a Perkin-Elmer (Model Zeeman 5000) atomic absorption spectrometer (AAS) coupled with a Perkin-Elmer FIAS-100 unit for hydride generation for the determinations of As(III) and As(total). The arsenic lamp was an electrodeless discharge lamp (EDL) operated at 8 Watts (W) from an external power supply. To determine total arsenic, water samples were treated with L-cysteine in a 2 moles per liter (Molar) HCl solution to reduce As(V) to As(III) which was determined by the HGAAS. For the determination of As(III) in the presence of As(V), the carrier HCl solution was replaced by a 2 Molar (M) citric/citrate buffer solution at a pH of about 5.0. Arsine (AsH₃) was generated using 0.2 wt.% sodium tetrahydroborate in 0.05 wt.% NaOH. Under these conditions,

As(V) was not converted to AsH₃ and did not interfere in the determination of As(III). As(V) was calculated from the difference between As(total) and As(III). The detection limit (DL) was 0.04 µg/L for As(total) and 0.096 µg/L for As(III).

[0072] Short-term As(III) oxidation tests at high-DO were conducted to compare the efficiency of a commercially available MnO₂ known as FILOX-R with that of nanoporous MnO₂ by oxidizing As(III) to As(V) at three different EBCTs (2.0, 1.0, and 0.50 minutes) and at two pHs (8.3 and 6.5). Both FILOX-R and nanofibrous MnO₂ granules completely oxidized As(III) to As(V). No distinguishable performance was observed under these test conditions.

[0073] In the short-term, low-DO experiments, the EBCT was further reduced to about 0.125 minutes to differentiate the oxidizing efficiencies of both media. Table 3 compares the performances of FILOX-R and granulated nanofibrous MnO₂ media at different EBCTs for low-DO challenge water without any interfering reductant at pH 8.3 and 7.5. Up to about 0.25 minutes EBCT there was no significant difference in oxidizing performance between the two media, but there was a clear difference in the As(III) oxidation rate at an EBCT of 0.125 minutes. Granulated nanofibrous MnO₂ media was more effective than FILOX-R for rapid oxidation of As(III) to As(V). Both media showed better performance at a higher pH than at a lower pH; at both pH's the oxidizing efficiency of granulated nanofibrous MnO₂ media was better than FILOX-R.

[0074] Based on the short-term experiments at low and high-DO, it could be concluded that DO had no significant effect on oxidizing efficiency up to EBCT 0.5 minutes for both media.

Table 3. As(III) oxidation performance of FILOX-R and Inframmat media at low-DO

Challenge Water pH	EBCT	Percent oxidation of As(III)	
		FILOX-R	MnO ₂ Granules
8.3	0.5	100	100
	0.25	98	100
	0.125	79	94
7.5	0.125	71	75

[0075] Long term experiments with interfering reductants were carried out. To study the effects of the interfering reductants, except sulfide, on the oxidation performance, a run length of more than 2100 bed volumes (BV) was considered. In the presence of sulfide, arsenic sulfides along with many water-soluble thioarsenite species are formed, and accurate differentiation between As(III) and As(V) cannot be made. The availability of the free As(III) decreased with time. So, in the presence of sulfide, only short-term experiments were conducted to observe the effects of sulfide on oxidizing efficiency of the granulated nanoporous material and FILOX-R.

[0076] When 2.0 mg/L Fe(II), as an interfering reductant, was present in the feed, As(III) oxidation was reduced for a short period of time for nanofibrous MnO₂ granules, and then the efficiency decreased slowly to about 1200 BV. After about 1200 BV, the oxidative ability was substantially constant. With FILOX-R, initially up to about 240 BV, Fe(II) had no effect on As(III) oxidation, but after about 240 BV, the oxidative efficiency decreased gradually up to about 2160 BV. These results, which are shown in Figure 6 for a pH of about 7.5 and an EBCT of 0.125 minutes, clearly indicated that nanofibrous MnO₂ outperformed FILOX-R in the presence of Fe(II).

[0077] The effect of 0.2 mg/L Mn(II) as an interfering reductant on both media's As(III) oxidation efficiency was studied at a pH of about 7.5 and an EBCT of 0.125 minutes. The results are shown in Figure 7. As indicated by Figure 7, initially up to about 120 BV, the oxidation efficiencies of the nanofibrous MnO₂ granules and FILOX-R increased slightly and then decreased slightly with increasing BV treated. The experimental results indicate a slight advantage for nanofibrous MnO₂ compared with FILOX-R.

[0078] When both As(III) and sulfide are present in anoxic water insoluble sulfides and soluble sulfide, complexes are formed. It has previously been determined that under anoxic conditions in the presence of sulfide, As(III) forms insoluble As₂S₃ and soluble thioarsenite species, depending on the pH of the solution and the concentrations of As(III) and S²⁻. Therefore, in waters containing sulfide and As(III), colloidal and anionic forms of As(III) are expected, which render the current

As(III)/(V) speciation methods inapplicable. Oxidation of As(III) to As(V) cannot be accurately determined in these waters using the EDTA-HAc preservation speciation method that was used for the As(III) oxidation studies in the absence of sulfide. Thus, the differential-pH hydride generation speciation method was employed to overcome the analytical problem with As(III/V) preservation-speciation in the presence of sulfide.

[0079] The oxidation efficiencies of the nanoporous MnO₂ and FILOX-R were calculated at specified time intervals and compared in Figure 8 for 2.0 mg/L sulfide, a pH of about 7.5, and an EBCT of about 0.125 minutes. The results indicated that in both cases the oxidation efficiencies decreased with increasing BV. The results also indicated that in the presence of sulfide, FILOX-R slightly outperformed the nanofibrous MnO₂ granules.

[0080] The ability of MnO₂ to adsorb As(V) from the challenge water was evaluated using batch isotherm tests. As(V) adsorption isotherms of MnO₂ are shown in Figure 9 for both the nanoporous MnO₂ and a commercially available iron-based arsenic adsorbent, GFH. As can be seen from the data of Figure 9, more arsenic was removed when a higher dosage of the adsorbent was added, resulting in a lower residual (equilibrium) arsenic concentration. Adsorption capacity was calculated by dividing arsenic concentration difference before and after adsorption equilibrium by the amount of adsorbent added. After developing the isotherms, the data were fitted to the Freundlich equation (2):

$$q_e = KC_e^{1/n}, \text{ where} \quad (2)$$

K = Freundlich constant indicative of adsorption capacity of adsorbent (L/μg);

C_e = Equilibrium concentration (μg/L);

q_e = Mass of arsenic adsorbed per mass of the adsorbent (mg/g); and

n = Experimental constant indicative of adsorption intensity of the adsorbent

[0081] The As(V) adsorption capacity of MnO₂ was substantial, although not as high as GFH. MnO₂ was a good oxidant for As(III) to As(V) but was not expected

to have good As(V) adsorption capacity. The unusually high As(V) adsorption capacity that was found for the MnO₂ nanofibers is believed to be related to its high surface area.

[0082] Finally, the ability of MnO₂ to adsorb Pb(II) from the challenge water was evaluated using batch isotherms tests. The Pb(II) adsorption isotherm for nanofibrous MnO₂ is shown in Figure 10. This material possessed a much higher adsorption capacity for Pb(II) (90 µg/g at 50 µg/L Pb(II)) compared to As(V) (4.5 µg/g at 50 mg/L As(V)). The fact that MnO₂-based media adsorbs more Pb(II) than As(V) is expected because of the low point of zero charge (PZC) of MnO₂. The PZC of MnO₂ is near a pH of 3.0. When MnO₂ was soaked in an aqueous solution, it developed a negatively charged surface, which beneficially adsorbs positively charged species in water, such as Pb(II).

[0083] From the experiments in this example, it was concluded that the nanofibrous MnO₂ not only possessed a high efficiency in converting As(III) to As(V), but also a relatively high adsorption capacity for As(V) and Pb(II).

EXAMPLE 3: Iron Oxide Synthesis and Characterization

[0084] Fe₂O₃ was synthesized by preheating 100 mL water in a beaker to about 90 °C. A 6M NaOH solution and 100 mL of a 2M Fe(NO₃)₃ solution were co-precipitated into the hot water while it was continuously heated and stirred. The pH of the precipitate was controlled at about 7.5. The precipitate was continuously refluxed at about 90 °C for 6 hours. The precipitate was then filtered, washed with water, and dried in an oven at about 100 °C. The dried material was ground into a powder for further testing.

[0085] The SSA and pore analysis of this material was conducted using the BET method as described in Example 1. The SSA of this material was about 154 m²/g, and the total pore volume was about 0.21 cm³/g. XRD analysis revealed that this material possessed the α-Fe₂O₃ structure. The PZC of this material was at a pH of about 8.4. Figure 11 is a SEM image, which shows agglomerates of about 100 to about 1000 nm, comprising Fe₂O₃ particles having an average size of about 20 nm.

EXAMPLE 4: Doped Iron Oxide and Doped Manganese Oxide Synthesis and Characterization

[0086] A Mn-doped Fe_2O_3 was made following the process of Example 3 except that 8.73 g $\text{MnSO}_4 \cdot \text{H}_2\text{O}$ was dissolved into 30 mL water and was mixed with 100 mL of the 2M $\text{Fe}(\text{NO}_3)_3$ solution before the precipitation was conducted. Doping dramatically changed the material's properties. The SSA of this material was about $259 \text{ m}^2/\text{g}$ and the total pore volume was about $0.48 \text{ cm}^3/\text{g}$. XRD analysis revealed that this material had the structure of a ferrihydrate. The PZC of this material was at a pH of about 7.1. Figure 12 is a SEM image, which shows smaller agglomerates, comprising the Mn-doped Fe_2O_3 particles having an average size of about 20 nm. The smaller agglomerate size is in agreement with the higher total pore volume.

[0087] A La-doped Fe_2O_3 was made following the process of Example 3 except that LaCl_3 was dissolved in water and was mixed with 100 mL of the 2M $\text{Fe}(\text{NO}_3)_3$ solution before the precipitation was conducted. The SSA of this material was about $174 \text{ m}^2/\text{g}$ and the total pore volume was about $0.41 \text{ cm}^3/\text{g}$. XRD analysis revealed that this material had the structure of hematite. The PZC of this material was at a pH of about 8.8. Figure 12 is a SEM image, which shows smaller agglomerates, comprising Fe_2O_3 particles having an average size of about 20 nm. Figure 13 is a SEM image of the La-doped Fe_2O_3 . Similar to the Mn-doped Fe_2O_3 sample, the agglomerates are significantly smaller than those of the undoped Fe_2O_3 sample. The average particle size is about 20 nm.

[0088] A Fe-doped MnO_2 was made following the process of Example 1, with the exception that $\text{Fe}(\text{NO}_3)_3$ was used as a precursor and was added simultaneously into a beaker containing hot water with the MnSO_4 and the KMnO_4 . The SSA of this material was about $503 \text{ m}^2/\text{g}$ and the total pore volume was about $0.44 \text{ cm}^3/\text{g}$. XRD analysis revealed that doping reduced the crystallinity of the MnO_2 structure. The PZC of this material was at a pH greater than 3.0, which is the PZC pH for the undoped MnO_2 of Example 1.

EXAMPLE 5: Iron- and Manganese-based Nanocomposite Water Treatment Media

[0089] Various composites were prepared using the iron oxides and manganese oxides (both undoped and doped) described herein. The general procedure included dispersing about 1600 g of an iron oxide composition (doped or undoped) in 1L water. Next, about 400 g of a nanofibrous manganese oxide composition (doped or undoped) were added into the iron oxide suspension and mixed using a high power mechanical stirrer. About 2 wt. % of a binder by weight of the total slurry was added and mixed. The slurry was spray dried to form nanocomposite granules having a particle size up to 425 μm . Most of the particles were in the size range of 75 to 150 μm . Table 4 lists physical characteristics of the nanocomposite granules. The nanocomposite granules contained 80 wt.% of Fe_2O_3 and 20 wt.% of MnO_2 based on the total weight of the granule.

Table 4. Physical characteristics of the Fe_2O_3 - MnO_2 nanocomposite granules

Sample	SSA (m^2/g)	Porosity (%)	Tap Density (g/ml)	Point of Zero Charge (PZC)
Fe_2O_3 - MnO_2 granule	242	67	0.51	6.48

As can be seen from the data in Table 4, the Fe_2O_3 - MnO_2 granules possessed a very high surface area and are highly porous. These properties are beneficial to the media's adsorption capacity and kinetics.

[0090] RSSCTs were carried out on a variety of samples. The first experiment studied the oxidation and adsorption efficiency of As(III) using composite Fe_2O_3 - MnO_2 (Sample No. 072105-B) media at a pH of 7.5. The second experiment determined the breakthrough of As(V) using Fe_2O_3 - MnO_2 (072105-B) media at pHs of 6.5, 7.5, and 8.5, and this was then compared with the As(V) breakthrough of the commercially available benchmark, GFH. The third experiment determined the breakthrough of As(V) using Mn-doped Fe_2O_3 (072105-A) media at a pH of 7.5.

[0091] For these RSSCTs, a 1 cm inner diameter glass column containing 4 cm^3 of the media (60X40 mesh), which was carefully loaded into the column, was used. Similar glass columns were prepared for GFH. A peristaltic pump

was used to pump the feed solution through the columns at a flow rate of about 8 mL/min (EBCT of about 0.5 min). Arsenic-containing challenge water was analyzed for total arsenic or As(III) in the effluent and feed solutions. All samples were preserved with concentrated HNO_3 (1 mL/L) or EDTA-acetic acid (1.34 mM EDTA and 87 mM acetic acid) when speciated. RSSCTs were conducted at different pHs using As(V) and As(III). Table 5 presents the experimental conditions for the RSSCTs.

Table 5. Experimental conditions for RSSCTs for arsenic.

Expt. no	pH	As in feed soln	EBCT (min)	Media
1	7.5	As(III)	0.5	$\text{Fe}_2\text{O}_3\text{-MnO}_2$ (072105-B)
2	6.5	As(V)	0.5	$\text{Fe}_2\text{O}_3\text{-MnO}_2$ (072105-B) and GFH
3	7.5	As(V)	0.5	$\text{Fe}_2\text{O}_3\text{-MnO}_2$ (072105-B) and GFH
4	8.5	As(V)	0.5	$\text{Fe}_2\text{O}_3\text{-MnO}_2$ (072105-B) and GFH
5	6.5	As(V)	0.5	GFH
6	7.5	As(V)	0.5	GFH
7	8.5	As(V)	0.5	GFH
8	7.5	As(V)	0.5	Fe_2O_3 (072105-A)

[0092] RSSCTs were conducted to study the oxidation of As(III) and adsorption of arsenic using the composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ (072105-B) media at a pH of about 7.5 at an EBCT of about 0.5 minutes. The arsenic breakthrough curves of the RSSCTs are shown in Figure 15, which indicates that at a pH of 7.5, the composite material significantly oxidized As(III). As(III) concentrations in the effluent were measured after preservation with EDTA-HA, followed by differential pH HG-AAS. At about 25,000 BV the concentration of As(III) in the effluent was about 5 $\mu\text{g/L}$. The difference between As(Tot) and As(III) was also measured in the effluent. The As(Tot) and As(V) breakthroughs at 10 $\mu\text{g/L}$ using the composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ media at a pH of about 7.5 were about 14500 and about 15300 BV, respectively. From this study, it was concluded that the composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ media was very efficient for As(III) oxidation and As(V) adsorption. In Example 2, it was shown that the MnO_2 media efficiently oxidized As(III). This composite material contained the MnO_2 of

Example 2, which efficiently oxidized As(III) and Fe_2O_3 and efficiently adsorbed As(V).

[0093] Next, RSSCTs were conducted using composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ (072105-B) media and GFH at three different pHs at an EBCT of 0.5 min (Experiments 2-7 in Table 4). Fifty parts per billion ($\mu\text{g/L}$) As(V) was used in all experiments to evaluate the effectiveness of the composite media and the GFH. The As(V) adsorption isotherms for the composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ (072105-B) media at pHs of about 6.5, about 7.5, and about 8.5 are shown in Figure 14. The arsenic breakthrough curves of the column runs are shown in Figures 16, 17, and 18, for pHs of about 6.5, about 7.5, and about 8.5, respectively. The data indicated that the arsenic breakthrough curves were pH dependent, and at all three pHs, the composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ material significantly outperformed the GFH at 10 $\mu\text{g/L}$ As(V) breakthrough. At a pH of about 6.5, both media performed better than at the higher pHs. The As(V) breakthroughs at pHs of about 6.5, about 7.5, and about 8.5 for the composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ media were about 25300, about 16200, and about 9900 BV, respectively. In contrast, for GFH, the As(V) breakthrough values at 10 $\mu\text{g/L}$ were about 15800, about 10800, and about 6400 BV, respectively. From this data, it was concluded that the composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ (072105-B) media performed significantly better than the commercially available GFH media.

[0094] It has been documented that As(V) is more efficiently removed than As(III). Thus, it is important to compare the arsenic removal efficiency of the composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ (072105-B) media for a pure As(V) feed compared with a pure As(III) feed. Figure 19 illustrates the breakthrough curves at a pH of about 7.5 with an EBCT of about 0.5 minutes for both As(III) and As(V). Figure 19 indicates that the composite material was almost equally efficient in removing As(III) and As(V). This means that when pure As(III) was fed into the column, the composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ media was doing an excellent job of oxidizing As(III) to As(V) prior to adsorption of the As(V). An advantageous feature of the composite media was that there was no need for a pre-oxidation step when arsenic was present as As(III) in the water. Advantageously, this will result in a reduction in the amount of byproducts that are generated during the pretreatment process.

[0095] The Fe-based media produced in Examples 3 and 4 were also used to study the removal efficiency of arsenic. RSSCTs were conducted using an Fe-based media (072105-A) at a pH of about 7.5 at an EBCT of about 0.5 minutes and compared with the composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ media (070521-B) and GFH. The results are shown in Figure 20, which indicate that Fe-based media (072105-A) alone performed significantly better than the GFH. Furthermore, the Fe-based media alone also performed similar to the composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ media (070521-B).

[0096] Finally, Pb(II) adsorption isotherms and breakthrough curves were obtained for the composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ media. 500 $\mu\text{g/L}$ Pb^{2+} spiked NSF 53 challenge water was used. The 2-day isotherms at pHs of about 6.5, about 7.5, and about 8.5 are shown in Figure 21. The data indicates that the media possessed high Pb(II) adsorption capacities. The maximum adsorption capacity was obtained at a pH of about 8.5 and the minimum was at a pH of about 6.5. pH-dependant adsorption of Pb(II) was expected because Pb(II) is a cationic species in water and it can exchange for protons on the surface of the media. The breakthrough of Pb(II) using the composite $\text{Fe}_2\text{O}_3\text{-MnO}_2$ (072105-B) media at a pH of about 7.5 was conducted with 200 ppb Pb(II) spiked NSF 53 challenge water. The results are shown in Figure 22. No sign of breakthrough was shown even after about 60,000 BV run length, indicating that this media was highly effective in removing Pb(II) from water.

EXAMPLE 6: Fabrication of Carbon Block Filtration Cartridge

[0097] $\text{Fe}_2\text{O}_3\text{-MnO}_2$ composite granules were reprocessed into carbon block filtration cartridges for filtering water using a compression molding process. Each carbon block media contained 65 wt.% of activated carbon, 15 wt.% of the composite granules, and 20 wt.% of binder based on the total weight of the cartridge. A finely powdered activated carbon powder and the composite granules were been bonded together to form a totally uniform, solid profile to ensure multiple adsorption functions and kinetic efficiency. The cartridge is designed for flow in a radial, outside to inside direction, resulting in low pressure drop, high flow rate and increased dirt holding capacity.

EXAMPLE 7: Zirconium Hydroxide and Titanium Hydroxide Synthesis and Characterization

[0098] Zirconium hydroxide, titanium hydroxide, and their doped forms were synthesized via co-precipitation of appropriate salt precursors with caustic solution similar to what was described above in Examples 1, 3, and 4. The salts used for the synthesis of zirconium hydroxide and titanium hydroxide were ZrOCl_2 and TiOSO_4 , respectively. Dopants were introduced from corresponding salt precursors that were homogeneously mixed with ZrOCl_2 or TiOSO_4 solutions. To achieve steady and controllable reaction conditions, the precursors were added simultaneously into vigorously stirred water. The flow rates of both solutions were adjusted so that the pH of the produced hydroxide slurry was at a target value throughout the reaction. The hydroxides were then filtered and washed thoroughly with deionized water to remove unwanted byproducts and finally dried overnight in an oven at 120°C.

[0099] The SSA and total pore volume data for zirconium hydroxide, titanium hydroxide, and their doped forms are listed in Table 6. Doped hydroxides have a significantly higher surface area than their undoped counterparts. Titanium-based media exhibited a significantly greater SSA than the zirconium-based media. The total pore volume of titanium-based materials is also higher than that of zirconium-based materials, which suggested that titanium-based media were more porous than zirconium-based media.

Table 6. BET, SSA, and Pore Analysis Results

Sample ID.	Material Description	SSA (m ² /g)	Pore Volume (cm ³ /g)	Micropore Volume (cm ³ /g)	Surface Area From Micropores (m ² /g)
I-1052-050304	Zirconium hydroxide	71	0.06	0.02	47
I-1052-92804	Mn-doped zirconium hydroxide	197	0.20	0.06	92
120904	Fe-doped zirconium hydroxide	197	0.16	0.06	130
I-1052-80504	Titanium hydroxide	306	0.19	0.12	238
I-1052-092404A	Mn-doped titanium hydroxide	447	0.47	0.1	178
120204A	Fe-doped titanium hydroxide	370	0.36	0.04	76

[0100] The data revealed that undoped Ti(OH)₄ possesses a considerable amount of micropores (greater than about 60%), which contribute approximately 78% of its total surface area. Doping with manganese significantly increased the total pore volume of Ti(OH)₄, while the micropore volume decreased slightly from about 0.12 cm³/g to about 0.10 cm³/g. This suggested that the doping created a significant amount of mesopores, resulting in a higher SSA. Compared to Ti(OH)₄, Zr(OH)₄ is less porous; but, like Ti(OH)₄, the porosity is significantly increased when doped. To summarize, doping has shown to be effective in increasing pore volume of these materials.

[0101] The PZCs of zirconium hydroxide and titanium hydroxide powders were found to be at pHs of about 8.08 and about 8.15, respectively. Doping with Mn slightly increased the PZCs of these materials to pHs of about 8.50 and about 8.24, respectively. When these materials were in contact with aqueous solutions that had pHs lower than their PZC, the surfaces of these materials developed a positive charge and encouraged the adsorption of negatively charged species in water, such as H₂AsO₄⁻, HAsO₄²⁻, and AsO₄³⁻. The pH of drinking water is around 7.5. Thus, these two materials are expected to be able to quickly adsorb H₂AsO₄⁻ and HAsO₄²⁻ from drinking water.

[0102] XRD analysis on these samples revealed that the as-synthesized titanium hydroxide is amorphous but transforms into the anatase structure type of TiO_2 after a 600 °C heat treatment for about 2 hours. The powder XRD patterns are shown in Figure 23. Similarly, the as-synthesized zirconium hydroxide is amorphous, as shown in the XRD pattern in Figure 24.

[0103] SEM images of undoped zirconium hydroxide, Mn-doped zirconium hydroxide, and Mn-doped titanium hydroxide are shown in Figures 25, 26, and 27, respectively. For easy comparison, the images are shown at the same magnification. Figure 25 indicates that the zirconium hydroxide particles have an average size of about 20 nm, which agglomerate, forming mesopores and macropores between particles. The agglomeration in the Mn-doped zirconium hydroxide, shown in Figure 26, appeared to be to a lesser extent compared with the undoped sample, resulting in a higher total pore volume. No changes in particle size were observed for this sample. Finally, the Mn-doped titanium hydroxide had an average particle size of about 10 nm. These agglomerates, as shown in Figure 27, do not appear to be as porous as was indicated by pore analysis results. This is due to the material having a significant amount of micropores that are smaller than about 2 nm, which are not visible in the SEM image.

EXAMPLE 8: Evaluation of Titanium- and Zirconium-based Components

[0104] In this example, adsorption isotherm tests were used as screening tests to identify the titanium-based and zirconium-based media that possessed the highest As(V) adsorption capacity from each group. The selected media were further evaluated for As(V) adsorption performance under various pHs and influence of competing ions. Finally, rapid small scale column tests were conducted to compare As(V) breakthrough of the selected media and compared with the commercially available benchmark, GFO.

[0105] The particle size of the as-synthesized powders was about 10 micrometers in diameter, which was not directly applicable for column tests. The

nanoscale powders were reconstituted into porous spherical particles with an average particle size of approximately 200 micrometers in diameter.

[0106] Six different materials, including nanoporous $\text{Zr}(\text{OH})_4(\text{s})$ and $\text{Ti}(\text{OH})_4(\text{s})$ and their doped forms, were screened using two-day isotherm tests in 200 $\mu\text{g/L}$ As(V) spiked NSF Challenge Water at a pH of 7.5, as described above in Examples 2 and 5. Dosages of materials in the 2-day isotherms tests and the results are listed in Tables 7 and 8 for the zirconium samples and the titanium samples, respectively.

Table 7. Dosage of Zr-based materials in 2-day isotherms tests and the results

dosage (mg/L)	Sample ID	Ce	qe	Sample ID	Ce	qe	Sample ID	Ce	qe
0	Z-A-0	189.58	0.00	Z-B-0	192.04	0.00	Z-C-0	200.47	0.00
10	Z-A-1	143.10	4.65	Z-B-1	183.94	0.81	Z-C-1	179.33	2.11
20	Z-A-2	83.24	5.32	Z-B-2	170.92	1.06	Z-C-2	153.89	2.33
40	Z-A-4	48.13	3.54	Z-B-4	138.79	1.33	Z-C-4	110.61	2.25
80	Z-A-8	9.40	2.25	Z-B-8	110.29	1.02	Z-C-8	51.51	1.86
100	Z-A-10	6.76	1.83	Z-B-10	88.24	1.04	Z-C-10	36.05	1.64

Sample ID: Z = Zirconium compound; A = Mn-doped, B = undoped, and C = Fe-doped; and the number indicates dosage.

Table 8. Dosages of Ti-based materials in 2-day isotherms tests and the results

dosage (mg/L)	Sample ID	Ce	qe	Sample ID	Ce	qe	Sample ID	Ce	qe
0	T-A-0	194.94	0	T-B-0	196.55	0.00	T-C-0	200.58	0.00
10	T-A-1	180.88	1.40	T-B-1	190.12	0.64	T-C-1	191.93	0.86
20	T-A-2	163.21	1.59	T-B-2	179.28	0.86	T-C-2	175.35	1.26
40	T-A-4	112.13	2.07	T-B-4	143.53	1.33	T-C-4	145.80	1.37
80	T-A-8	60.66	1.68	T-B-8	113.48	1.04	T-C-8	93.98	1.33
100	T-A-10	40.44	1.54	T-B-10	87.98	1.09	T-C-10	83.71	1.17

Sample ID: T = Titanium compound; A = Mn-doped, B = undoped, and C = Fe-doped; and the number indicates dosage.

[0107] From the As(V) adsorption isotherms of zirconium-based media, it was clear that the Mn-doped zirconium sample possessed the highest adsorption capacity, followed by the Fe-doped media. Undoped media had the lowest adsorption capacities. Like their zirconium counterparts, the Mn-doped titanium-based media outperformed Fe-doped and undoped titanium-based media. Thus, Mn-doped Zr-

based and Mn-doped Ti-based media were selected for further evaluation under pH variations and the influence of competing ions.

[0108] The ability of these media to adsorb arsenic (V) from the challenge water was evaluated using batch isotherm tests. After developing the isotherms, the data were fitted to the Freundlich equation (2), shown above. The As(V) adsorption isotherm experiments were carried out using common background ions in the solution at three different pHs.

[0109] Figure 28 gives the 2-day As(V) adsorption isotherms of the Zr-based material. Figure 29 shows the As(V) adsorption capacity of Ti-based material at pHs of about 6.5, about 7.5 and about 8.5. For comparison, the 2-day As(V) adsorption isotherms of GFO at the three different pH's are shown in Figure 30. As indicated by the data, the As(V) adsorption capacities of the three materials were highest at a pH of about 6.5, with progressively less adsorption of arsenic at a pH of about 7.5 and about 8.5. Irrespective of pH, the GFO exhibited the highest As(V) adsorption capacity among the adsorbents. The Zr-based material exhibited a higher capacity than the Ti-based material at all pHs.

[0110] Batch isotherm tests with the NSF challenge water were conducted on the Mn-doped Zr- and Ti-based media at different pH's, with varying concentrations of competing ions, including silica (5 and 20 mg/L) and phosphate (0 and 40 $\mu\text{g/L}$).

[0111] First, two-day adsorption isotherms were performed with the challenge water containing 40 $\mu\text{g/L}$ of phosphate (P). These results were compared with challenge water without phosphate ($P = 0 \mu\text{g/L}$). For the GFO, phosphate did not have a significant impact on the As(V) adsorption capacity of GFO. Though slightly better adsorption capacities were obtained in the absence of phosphate, it was not significant enough to say that, in the presence of silicate and other background ions, phosphate ions compete with the As(V) for adsorption sites at the tested concentration. The Mn-doped Zr- and Ti-based media followed similar trends. That is, there was no significant difference in adsorption between the presence and absence of phosphate in the challenge water containing silicate and other background ions.

The summary of the experimental results are presented in Table 8, from which it was concluded that the presence of phosphate did not reduce the adsorption capacities of the adsorbents.

Table 8. Comparison of As(V) removal capacities of media at $C_e = 50 \mu\text{g/L}$

	pH = 6.5		pH = 7.5		pH = 8.5	
Media	P = 0 $\mu\text{g/L}$	P = 40 $\mu\text{g/L}$	P = 0 $\mu\text{g/L}$	P = 40 $\mu\text{g/L}$	P = 0 $\mu\text{g/L}$	P = 40 $\mu\text{g/L}$
GFO	9.32	8.35	8.7	7.22	6.35	5.59
Zr-based	6.86	7.1	3.95	4.12	3.08	2.3
Ti-based	2.37	2.19	1.9	1.67	1.61	1.43

[0112] Next, experiments were performed using the challenge water with the standard concentration of silica (about 20.0 mg/L) and with low silica (about 5.0 mg/L) concentrations to study the effect of silica on adsorption capacities of the GFO, Zr-based and Ti-based media at pHs of about 6.5 to about 8.5. The data is summarized in Table 9. Each of the materials performed better (i.e., adsorbed more As(V)) at the lower concentration of silica. At the higher concentration of silica, the silica competed with As(V) ions for sites on the adsorbents. At a pH of about 6.5 and a silica concentration of about 5.0 mg/L, the Zr-based media exhibited a slightly higher As(V) adsorption capacity than the GFO. The presence of silica greatly reduced the adsorption capacity of the Zr-based material. Under all other conditions, the As(V) adsorption capacity of the Zr-based media was much greater than that of Ti-based media.

Table 9. Comparison of As(V) removal capacities (in $\mu\text{g As(V)/mg}$) at $C_e = 50 \mu\text{g/L}$ with silica at 5 and 20.0 mg/L

	pH 6.5		pH 7.5		pH 8.5	
Media	Si = 5.0 mg/L	Si = 20.0 mg/L	Si = 5.0 mg/L	Si = 20.0 mg/L	Si = 5.0 mg/L	Si = 20.0 mg/L
GFO	9.79	8.35	8.1	7.22	7.2	5.59
Zr-based	10.1	7.1	7.09	4.12	5.2	2.3
Ti-based	3.46	2.19	2.57	1.67	2.29	1.43

[0113] RSSCTs were carried out to determine the relative breakthroughs of As(V) for the Zr-based media and the benchmark media, GFO at a pH of about 7.5. The RSSCTs were conducted as described above in Examples 2 and 5. As(V) breakthrough curves for the GFO and the Zr-based media are shown in Figure 31. The Zr-based media reached about 10 mg/L MCL at about 6,000 BV throughput, whereas the GFO reached only about 40% of the MCL after about 16,000 BV.

[0114] As used herein, the terms “a” and “an” do not denote a limitation of quantity, but rather denote the presence of at least one of the referenced items. Moreover, the endpoints of all ranges directed to the same component or property are inclusive of the endpoint and independently combinable (e.g., “up to about 25 wt.%, or, more specifically, about 5 wt.% to about 20 wt.%,” is inclusive of the endpoints and all intermediate values of the ranges of “about 5 wt.% to about 25 wt.%,” etc.). Reference throughout the specification to “one embodiment”, “another embodiment”, “an embodiment”, and so forth means that a particular element (e.g., feature, structure, and/or characteristic) described in connection with the embodiment is included in at least one embodiment described herein, and may or may not be present in other embodiments. In addition, it is to be understood that the described elements may be combined in any suitable manner in the various embodiments. Unless defined otherwise, technical and scientific terms used herein have the same meaning as is commonly understood by one of skill in the art to which this invention belongs.

[0115] While the disclosure has been described with reference to exemplary embodiments, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the disclosure. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the disclosure without departing from the essential scope thereof. Therefore, it is intended that the disclosure not be limited to the particular embodiment disclosed as the best mode contemplated for carrying out this disclosure, but that the disclosure will include all embodiments falling within the scope of the appended claims.

CLAIMS:

1. A method of making a doped metal oxide or hydroxide for treating water, comprising:

disposing a metal precursor solution and a dopant precursor solution in a reaction vessel comprising water to form a slurry; and

precipitating the doped metal oxide or hydroxide from the slurry.

2. The method of Claim 1, wherein the doped metal oxide or hydroxide comprises doped iron oxide or hydroxide, doped titanium oxide or hydroxide, doped zirconium oxide or hydroxide, doped manganese oxide or hydroxide, doped silver oxide or hydroxide, or doped aluminum oxide or hydroxide.

3. The method of Claim 2, further comprising adding an alkaline hydroxide to the slurry to adjust a pH of the slurry.

4. The method of Claim 1, wherein a porosity of the doped metal oxide or hydroxide is greater than about 60 volume %.

5. The method of Claim 1, further comprising heating the slurry at a temperature of about 30 degrees Celsius to about 200 degrees Celsius.

6. The method of Claim 1, further comprising filtering the doped metal oxide or hydroxide after said precipitating.

7. The method of Claim 1, further comprising washing the doped metal oxide or hydroxide after said precipitating.

8. The method of Claim 7, further comprising drying the metal oxide or hydroxide after said washing.

9. The method of Claim 8, wherein a temperature of the drying is about 100 degrees Celsius to about 300 degrees Celsius.

10. The method of Claim 1, wherein the metal precursor comprises an iron salt, an aluminum salt, a manganese salt, a zirconium oxy salt, a titanium oxy salt, or a combination comprising at least one of the foregoing precursors.

11. The method of Claim 1, wherein the dopant precursor comprises a lanthanum salt, a manganese salt, or a combination comprising at least one of the foregoing.

12. The method of Claim 1, wherein the doped metal oxide or hydroxide is nanostructured.

13. A method of making a nanostructured doped metal oxide or hydroxide for treating water, comprising:

disposing an metal salt solution and a dopant precursor solution in a reaction vessel comprising water to form a slurry;

heating the slurry;

precipitating the nanostructured doped metal oxide or hydroxide from the slurry;

washing the nanostructured doped metal oxide or hydroxide; and

drying the nanostructured doped metal oxide or hydroxide.

14. The method of Claim 13, wherein the doped metal oxide or hydroxide comprises doped iron oxide or hydroxide, doped titanium oxide or hydroxide, doped zirconium oxide or hydroxide, doped aluminum oxide or hydroxide, doped manganese oxide or hydroxide.

15. The method of Claim 13, further comprising adding an alkaline hydroxide to the slurry to adjust a pH of the slurry.

16. The method of Claim 13, wherein a temperature of the heating is about 30 degrees Celsius to about 200 degrees Celsius.

17. The method of Claim 13, wherein a porosity of the doped metal oxide or hydroxide is greater than about 60 volume %.

18. The method of Claim 13, wherein a temperature of the drying is about 100 degrees Celsius to about 300 degrees Celsius.

19. The method of Claim 13, wherein the dopant precursor solution comprises a lanthanum salt, a manganese salt, or a combination comprising at least one of the foregoing.

20. A method of forming a nanocomposite water treatment composition, comprising:

forming a slurry comprising an oxidizing component and an absorbing or adsorbing (absorbing/adsorbing) component, wherein one or both of the oxidizing component and the absorbing/adsorbing component is nanostructured; and

spray drying the slurry to form nanocomposite granules.

21. The method of claim 20, wherein the oxidizing component comprises a manganese-containing composition, silver-containing composition, or titanium-containing composition, or a combination comprising at least one of the foregoing materials.

22. The method of Claim 20, wherein the oxidizing component comprises an oxide, a hydroxide, an oxyhydroxide, or a combination comprising at least one of the foregoing materials.

23. The method of Claim 20, wherein the absorbing/adsorbing component comprises a titanium-containing composition, a zirconium-containing composition, an aluminum-containing composition, an iron-containing composition, a manganese-containing composition, or a combination comprising at least one of the foregoing materials.

24. The method of Claim 20, wherein the absorbing/adsorbing component comprises an oxide, a hydroxide, an oxyhydroxide, or a combination comprising at least one of the foregoing materials.

25. The method of Claim 20, wherein one or both of the absorbing/adsorbing component and the oxidizing component is doped according to the method of Claim 1.

26. The method of Claim 20, further comprising adding a binder to the slurry.

27. The method of Claim 20, further comprising heat treating the nanocomposite granules.

28. The method of Claim 20, wherein one or both of the oxidizing component or the absorbing/adsorbing component in the slurry is nanostructured.

29. A method of forming a water filtration media, comprising: combining a nanocomposite of an oxidizing component and an absorbing component with a porous substrate, wherein one or both of the oxidizing component and the absorbing component is nanostructured.

30. The method of Claim 29, further comprising combining a binder with the nanocomposite and the porous substrate to bond the two together.

31. The method of Claim 29, wherein the porous substrate comprises activated carbon, alumina, or silica gel.

32. The method of Claim 29, wherein the porous substrate comprises activated carbon powder, and further comprising compression molding a resulting mixture of the nanocomposite and the activated carbon powder into a water filtration cartridge.

33. A water filtration media made by the method of Claim 29.

34. A water filtration cartridge made by the method of Claim 32.

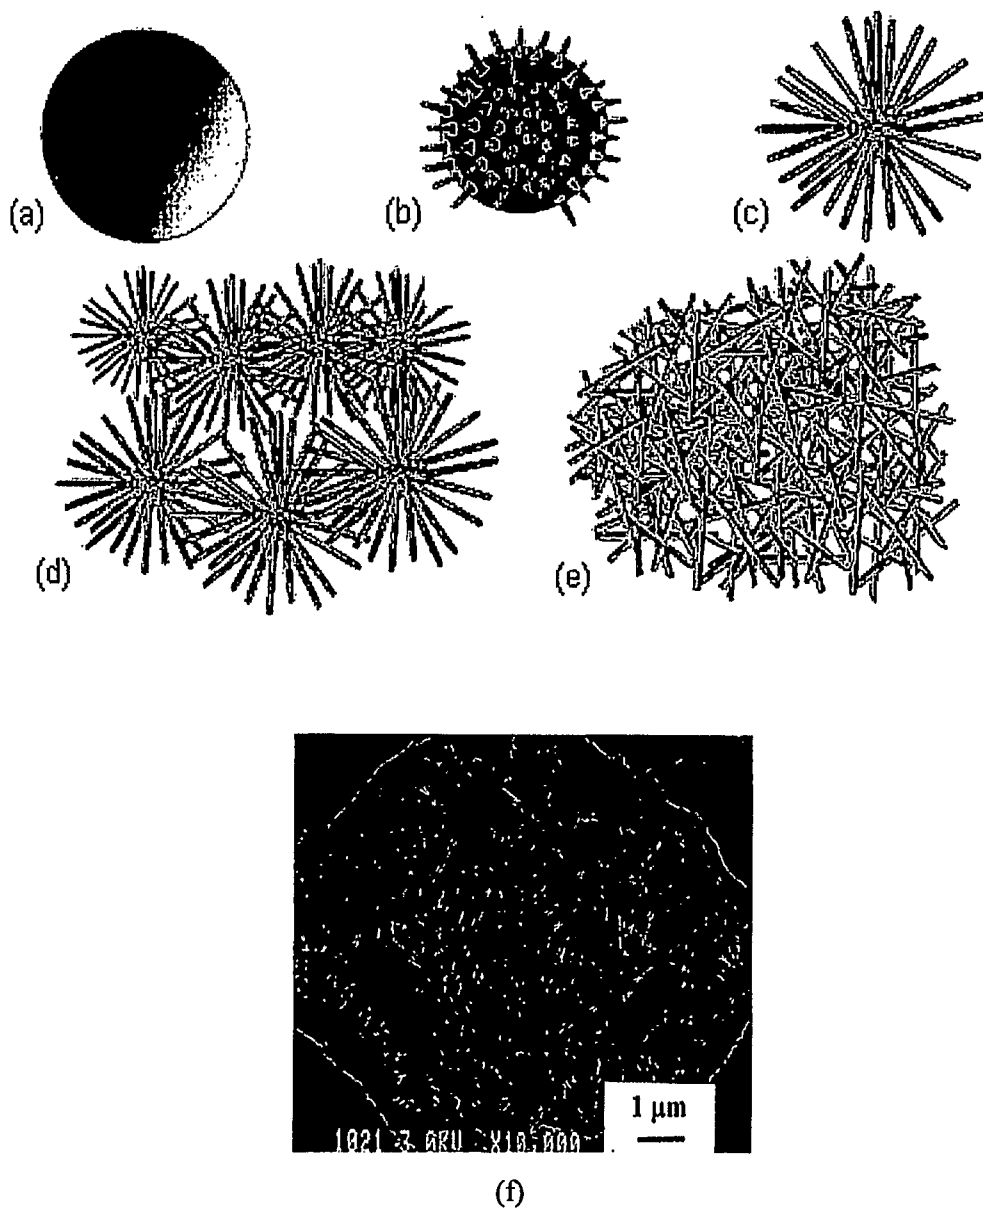


Figure 1

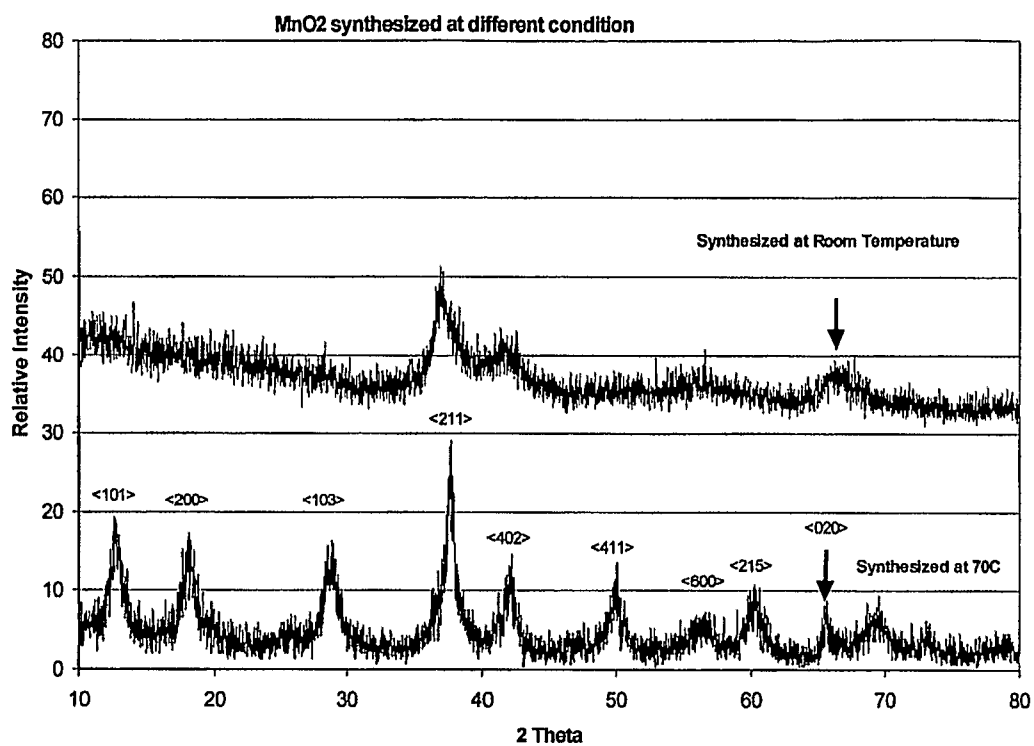


Figure 2



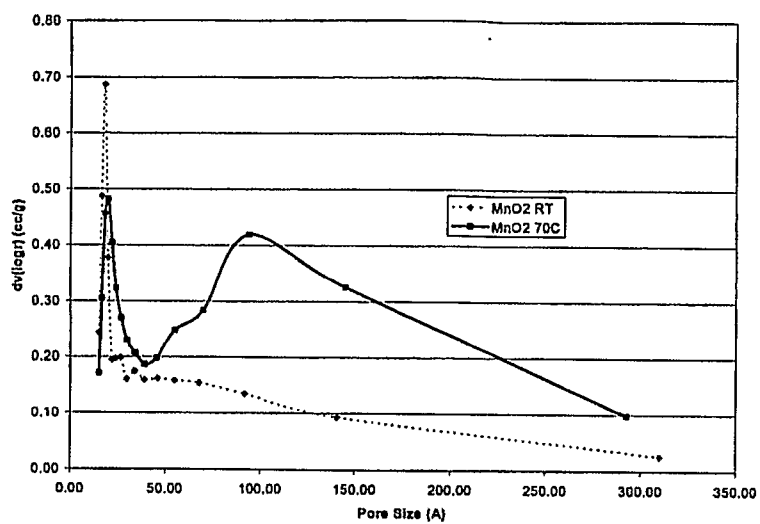


Figure 3

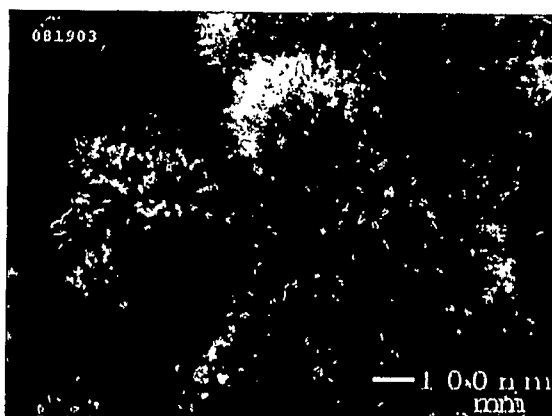

(a)

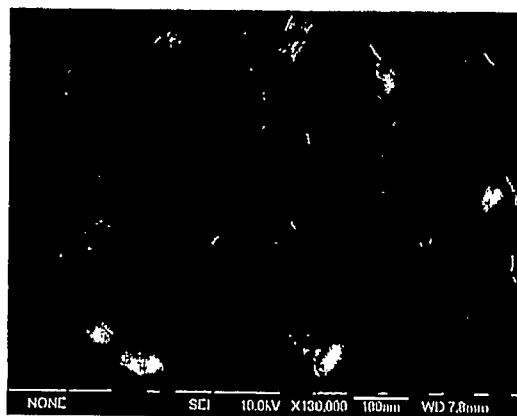

(b)

Figure 4

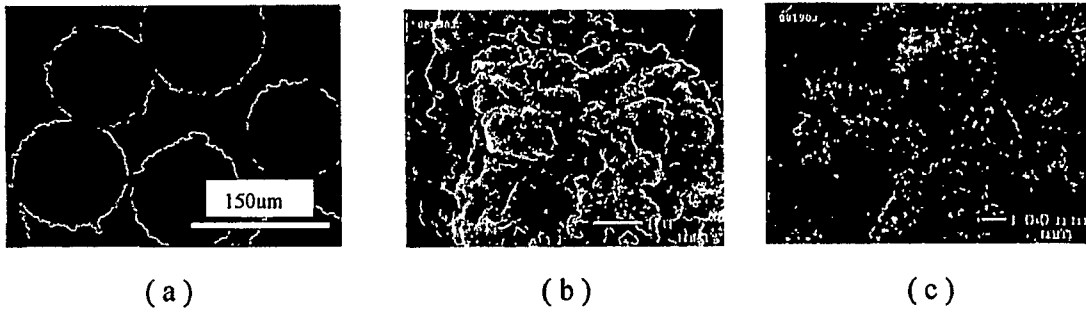


Figure 5

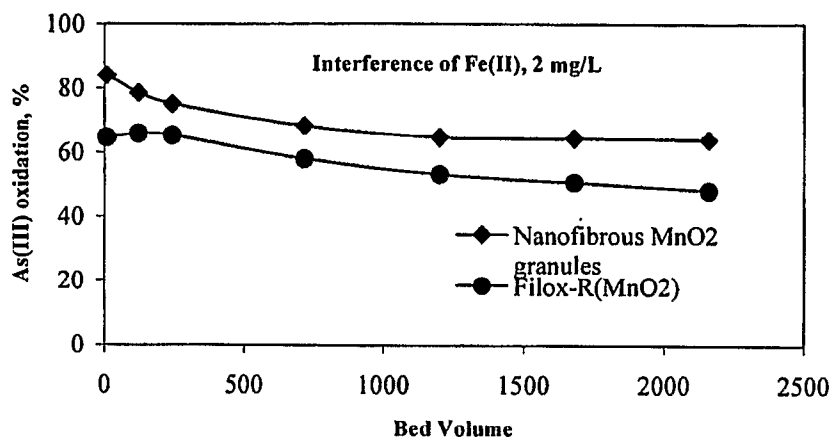


Figure 6

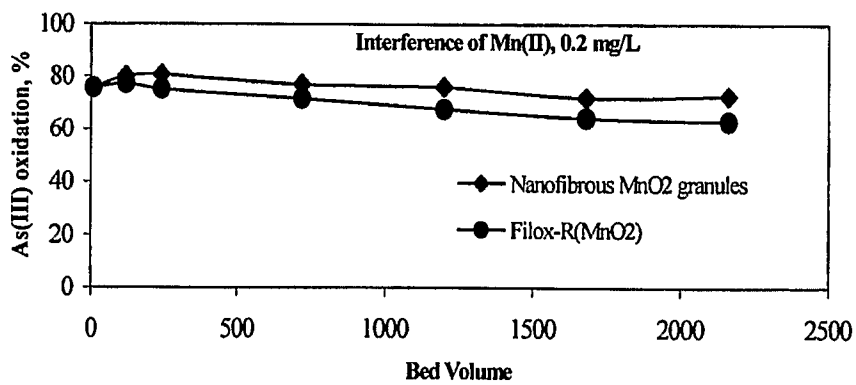


Figure 7

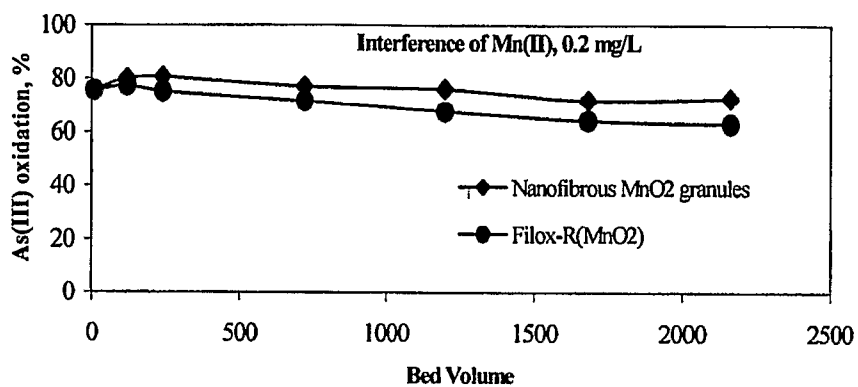


Figure 8

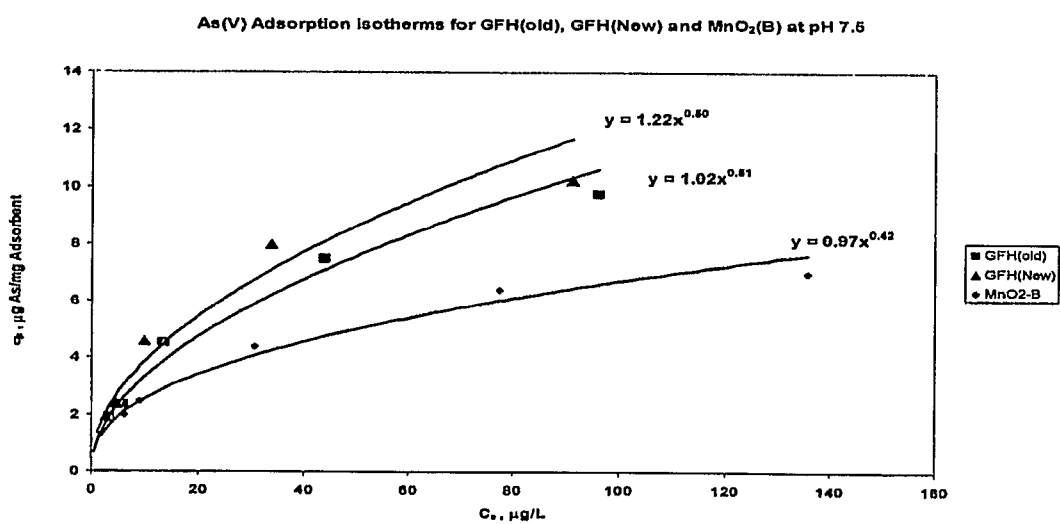


Figure 9

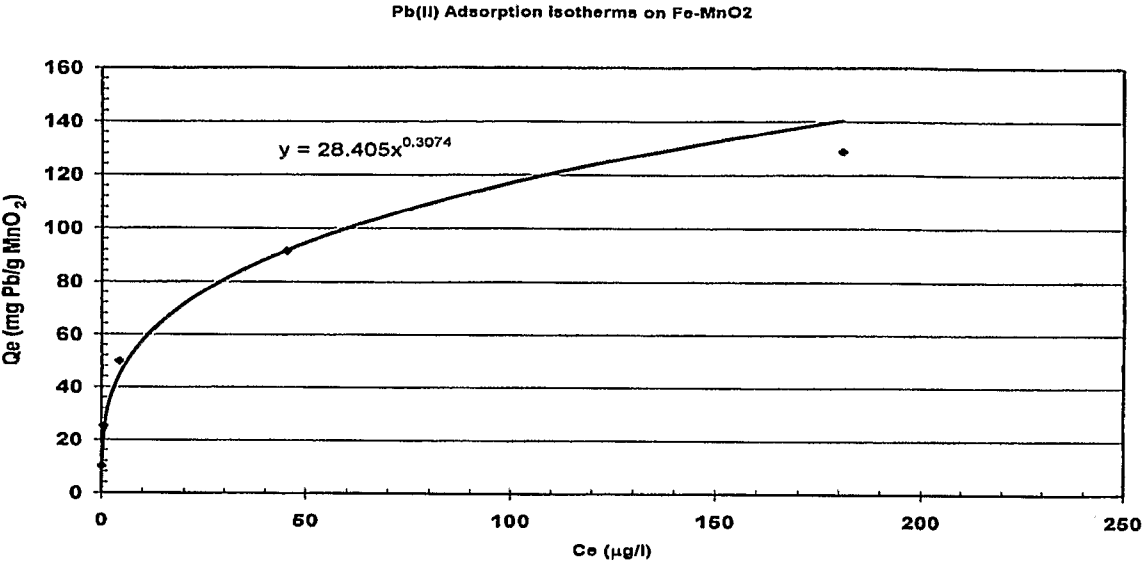


Figure 10

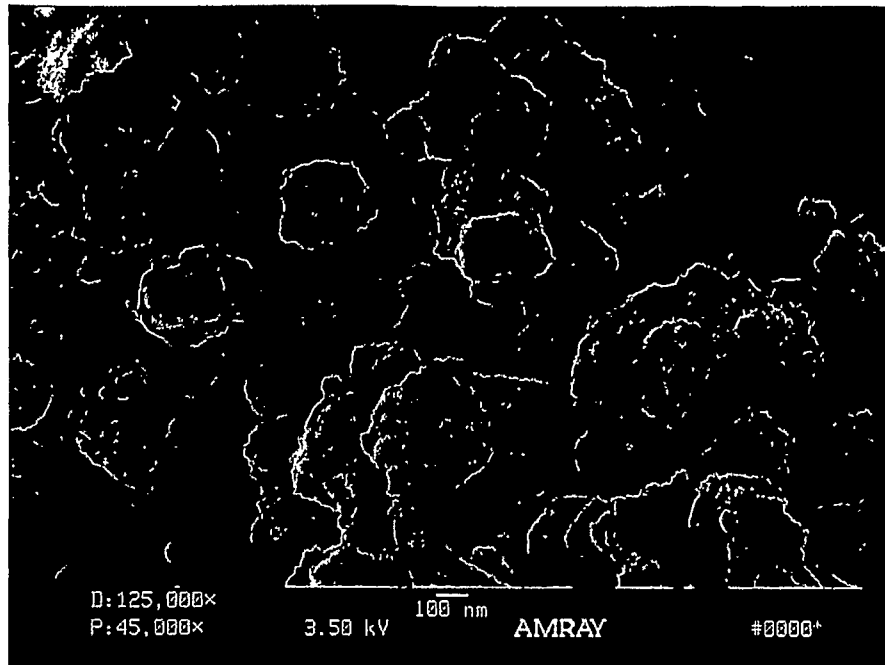


Figure 11

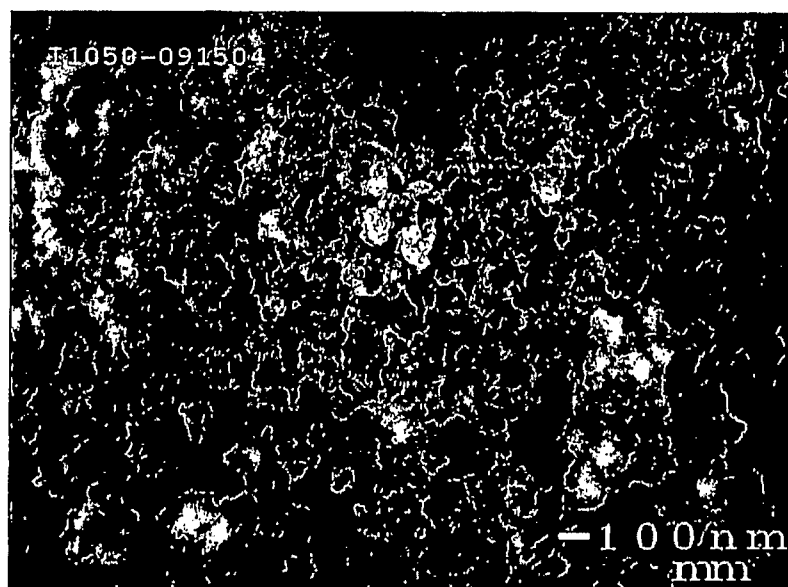


Figure 12

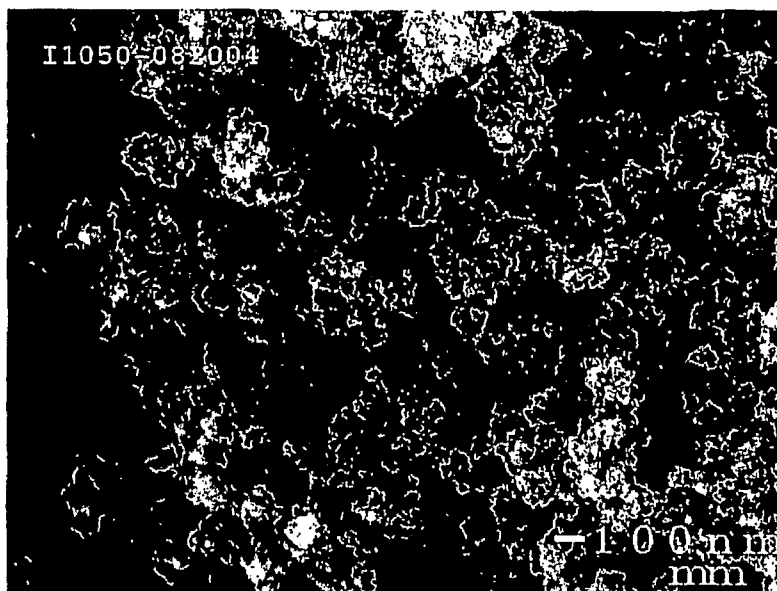


Figure 13

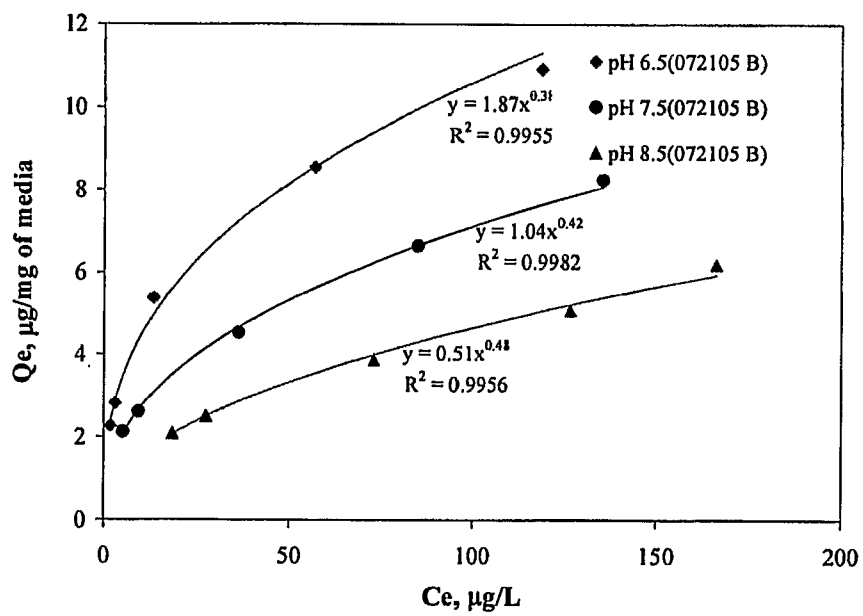


Figure 14

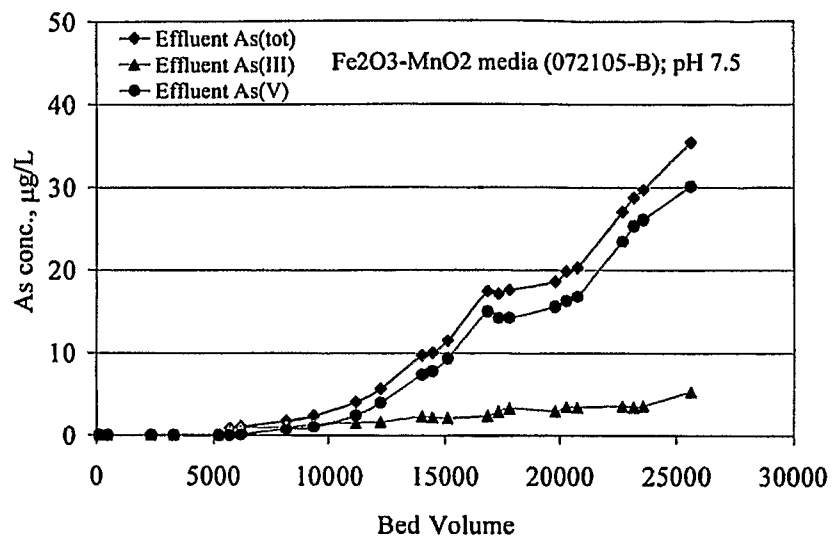


Figure 15

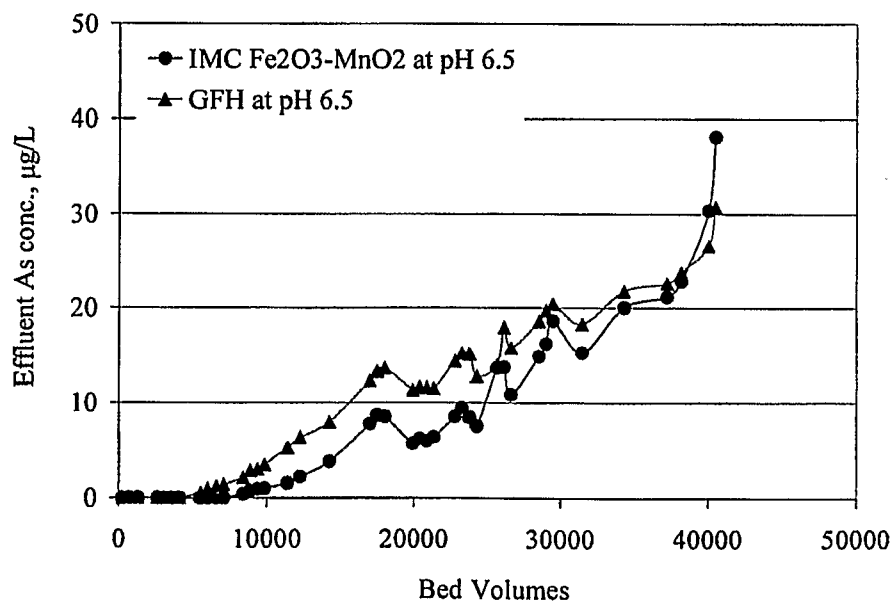


Figure 16

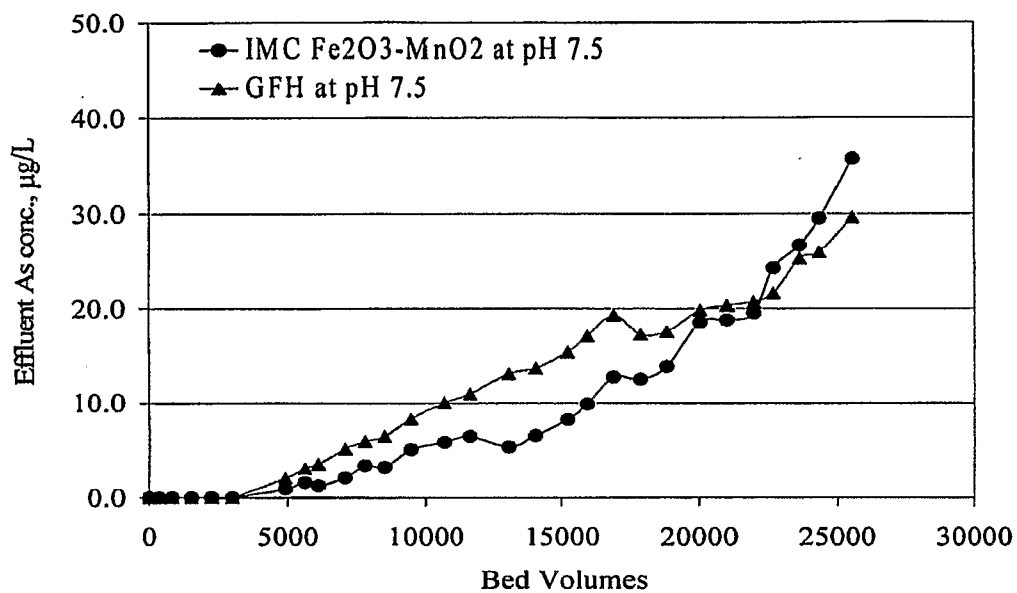


Figure 17

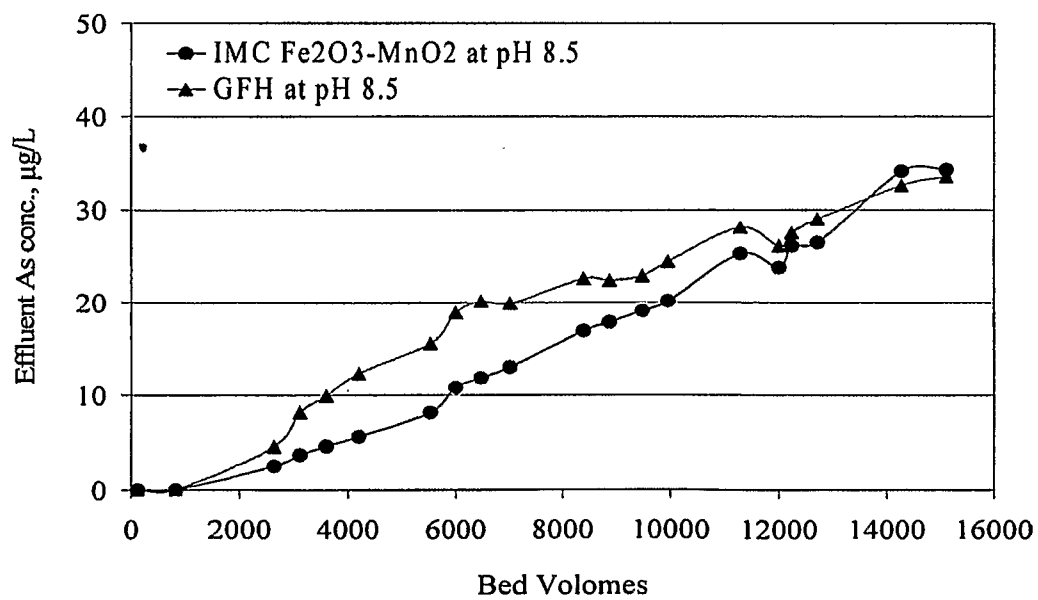


Figure 18

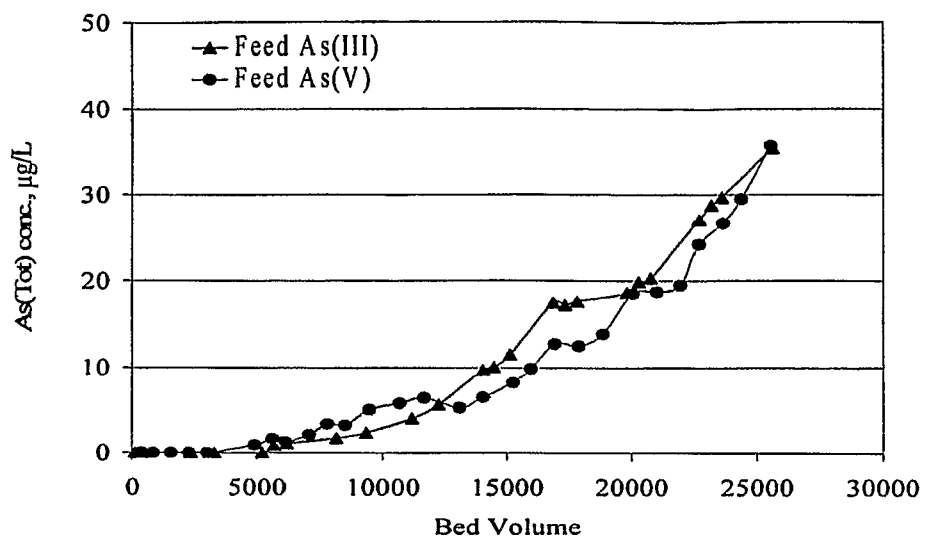


Figure 19

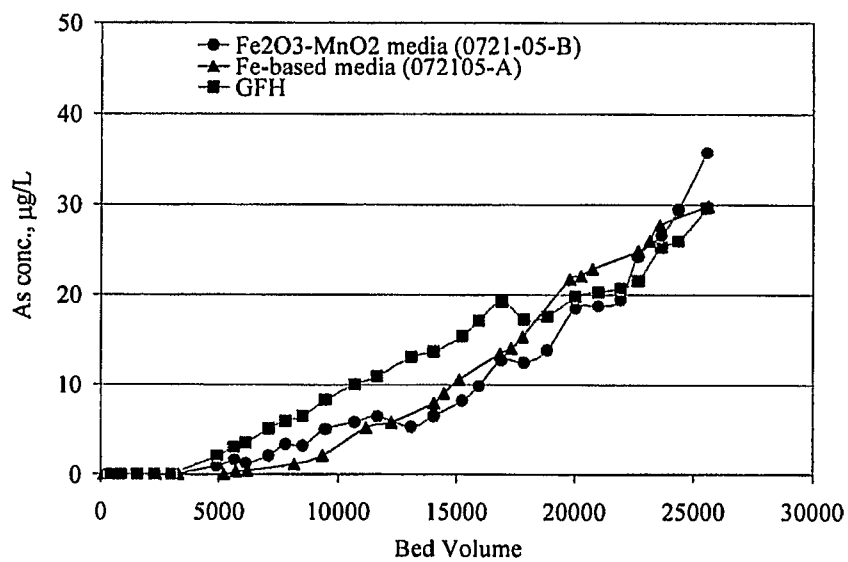


Figure 20

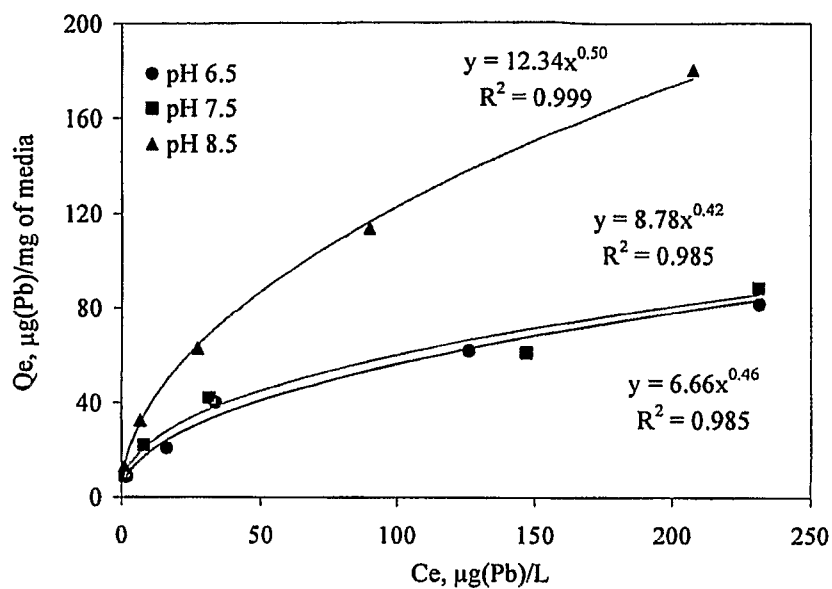


Figure 21

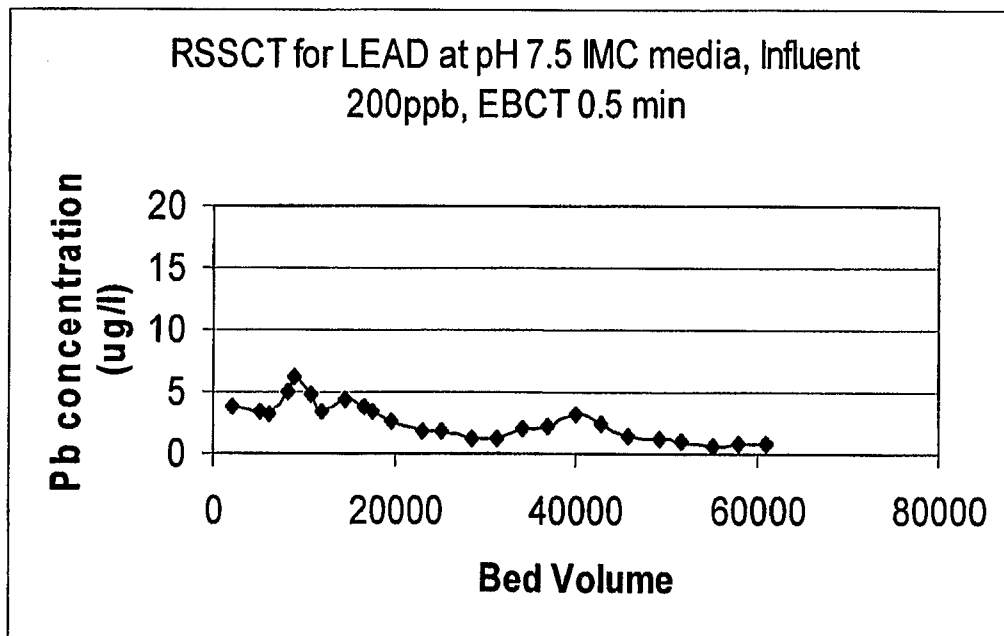


Figure 22

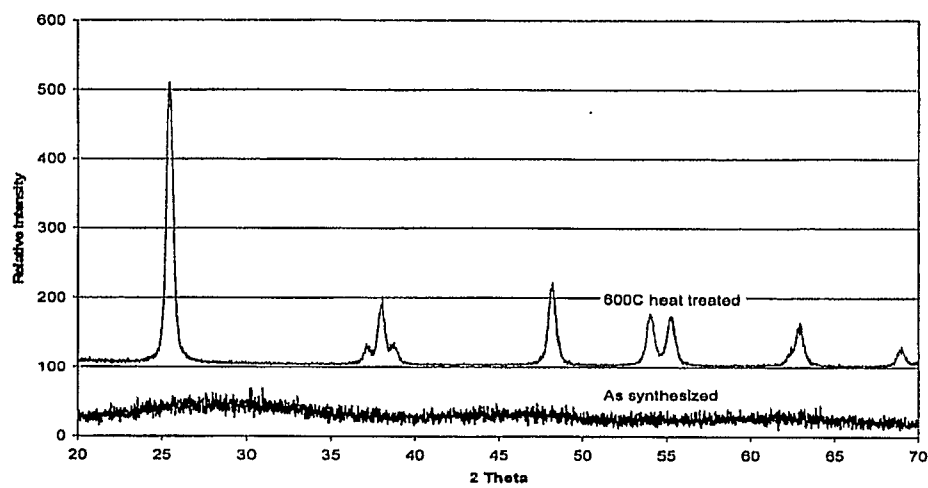


Figure 23

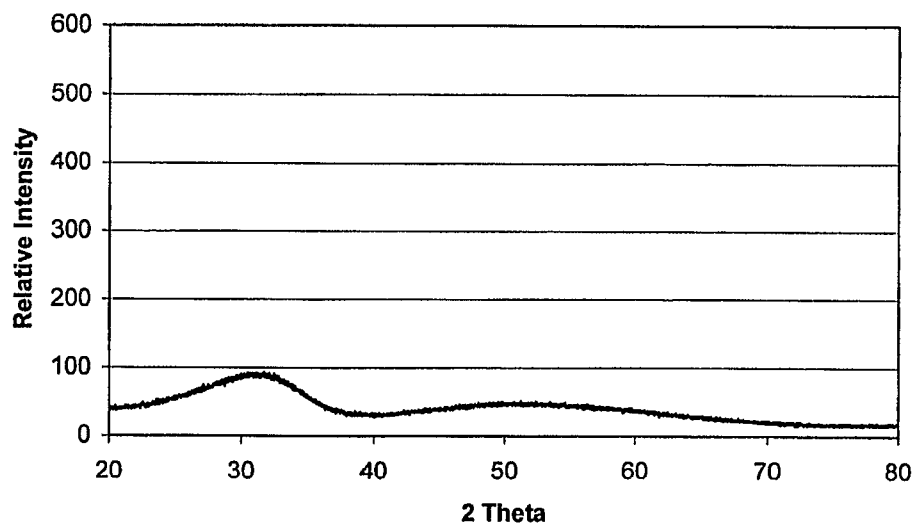


Figure 24

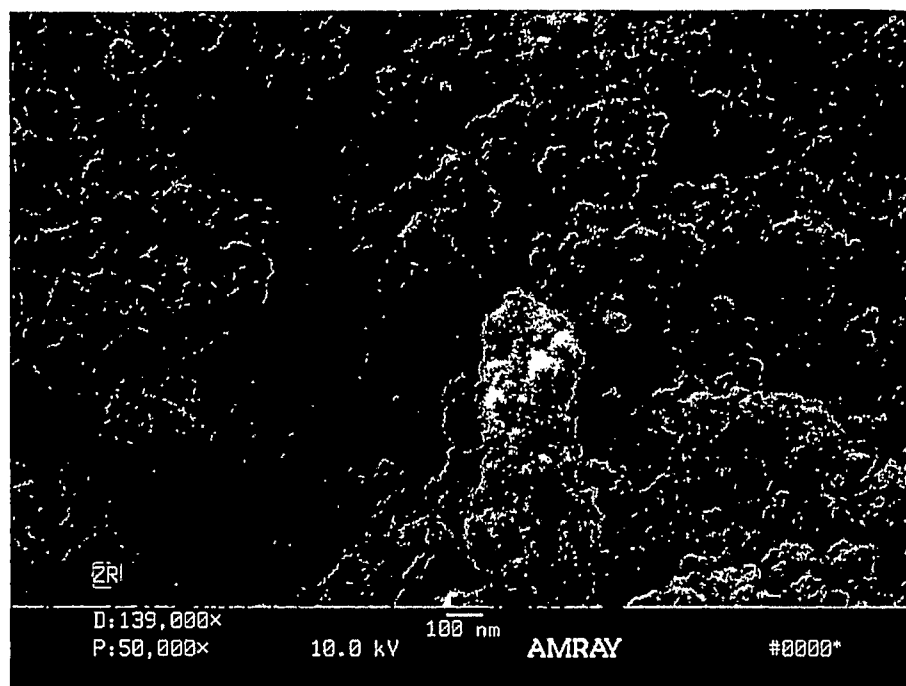


Figure 25

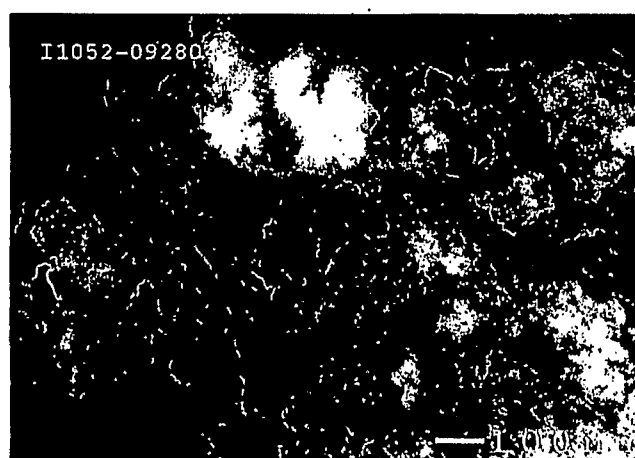


Figure 26

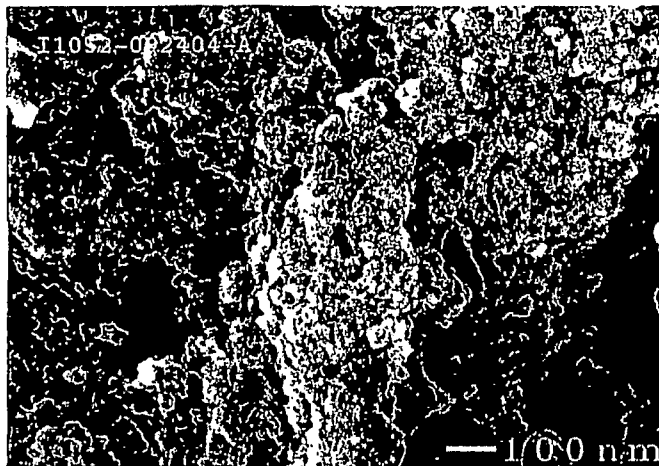


Figure 27

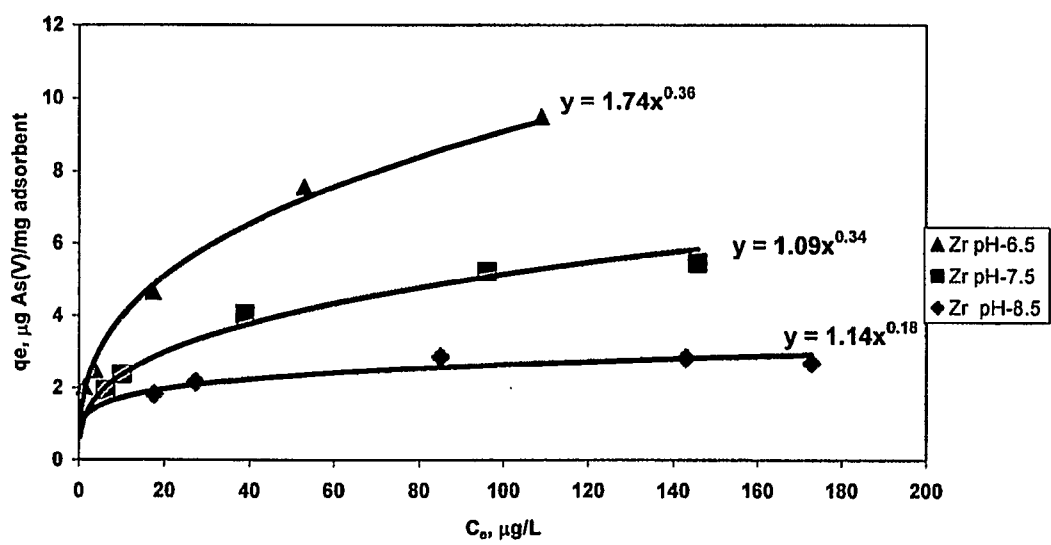


Figure 28

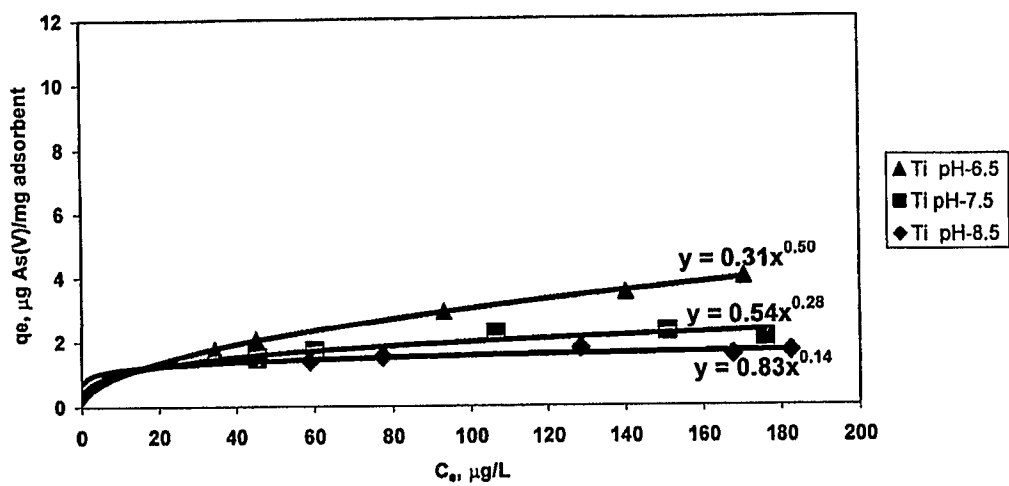


Figure 29

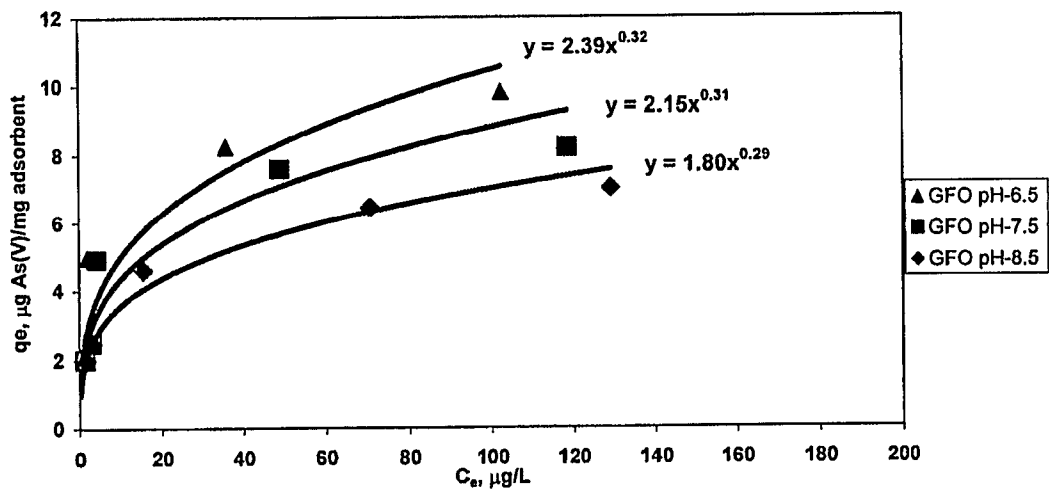


Figure 30

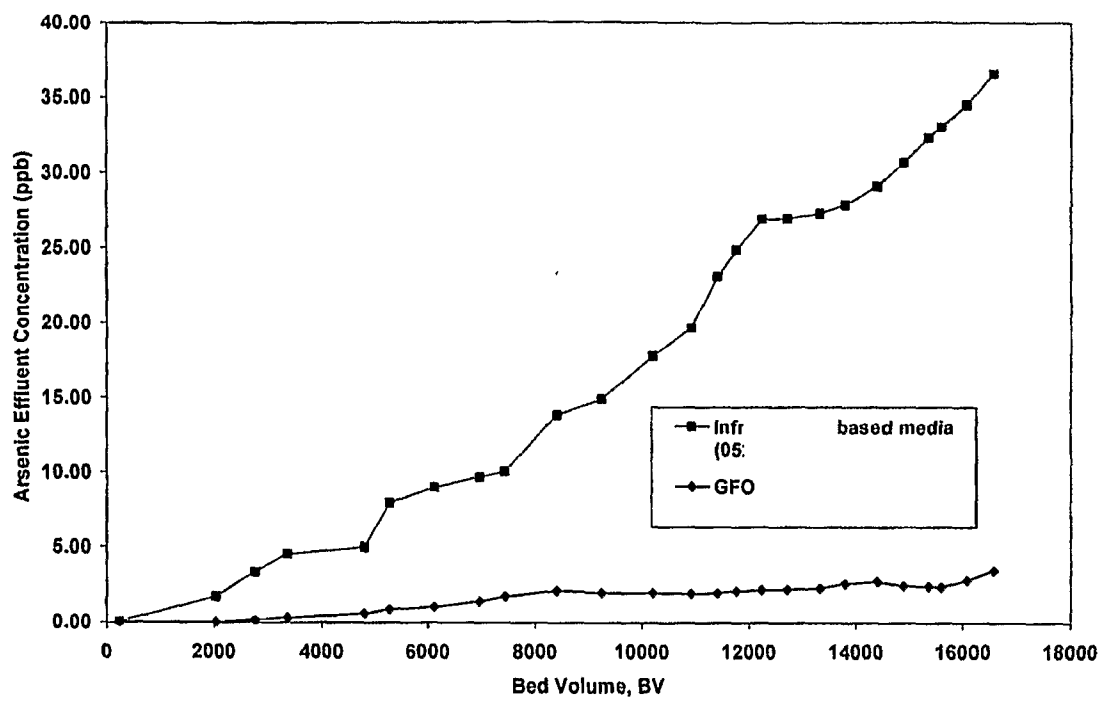


Figure 31