



(51) International Patent Classification:

G09G 3/3233 (2016.01)

(21) International Application Number:

PCT/EP2019/071432

(22) International Filing Date:

09 August 2019 (09.08.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/717,205 10 August 2018 (10.08.2018) US

62/799,261 31 January 2019 (31.01.2019) US

(71) Applicant: AMS AG [AT/AT]; Schloss Premstaetten, Tobelbader Str. 30, 8141 Premstaetten (AT).

(72) Inventors: HEGDE, Pradeep; c/o AMS AG, Schloss Premstaetten, Tobelbader Str. 30, 8141 Premstaetten (AT).

KELLY, George Richard; c/o AMS AG, Schloss Premstaetten, Tobelbader Str. 30, 8141 Premstaetten (AT).

(74) Agent: IQBAL, Mash-Hud et al.; Marks & Clerk LLP, 62-68 Hills Road, Cambridge CB2 1LA (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: AMBIENT LIGHT SENSOR SYSTEM

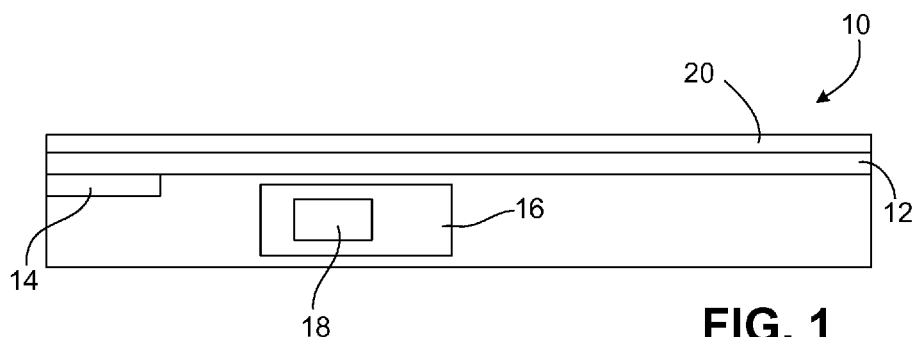


FIG. 1

(57) Abstract: An apparatus includes a display screen, an ambient light sensor disposed behind the display screen, and an electronic control unit operable to control a brightness of the display screen based on a duty cycle of a PWM signal. The electronic control unit is operable to sample an output of the ambient light sensor, identify a pair of consecutive samples of the ambient light sensor output that represent a greatest difference in magnitudes of their values, and to estimate a brightness of the display screen based on the difference.

AMBIENT LIGHT SENSOR SYSTEM

FIELD OF THE DISCLOSURE

[0001] This disclosure relates to ambient light sensing systems.

5

BACKGROUND

[0002] A recent trend in smartphone industrial design is to maximize the screen area by reducing the bezel width and decluttering the remaining bezel area by removing apertures for optical sensors and other holes for microphones, speakers and/or fingerprint reading devices. On the other hand, there also is a trend to increase the number of optical sensors for added functionality. For example, ambient light sensors (ALSs) can be provided to facilitate adjustment of the display screen brightness to the surrounding lighting environment so as to make the display appear sharp and readable while also reducing the display's overall energy consumption.

15

[0003] A further trend in the smartphone market is the adoption of organic light emitting displays (OLEDs). This trend creates an opportunity to move the ALS from the smartphone's bezel to a position under the OLED. OLEDs are generally opaque primarily as a result of a protective film on their backside. This film can be removed in a very small area to allow ambient light to pass through the remaining layers of the OLED to reach the ALS. However, even with the film removed, the OLED is not very optically transmissive, thus requiring a very sensitive sensor to make ambient light detection possible. There is a further complication which makes ambient light detection through an OLED technically challenging. An ALS sensor will detect not only ambient light (e.g., background light, sunlight, etc.) passing through the display, but will also detect the light generated by the display itself. As a result, the display brightness, as driven by the ALS, will fluctuate with changes in the brightness of the pixels directly above the sensor. Such fluctuations are undesirable.

20

25

SUMMARY

[0004] This disclosure describes portable computing devices and other apparatus that include an ambient light sensor system. The techniques described in this disclosure can be particularly advantageous for situations in which the ambient light sensor is disposed behind a display screen of a host device such that ambient light detected by the sensor passes through the light emitting display before being detected by the sensor.

[0005] For example, in one aspect, the disclosure describes an apparatus that includes a display screen, an ambient light sensor disposed behind the display screen, and an electronic control unit operable to control a brightness of the display screen based on a duty cycle of a PWM signal. The electronic control unit is operable to sample an output of the ambient light sensor, identify a pair of consecutive samples of the ambient light sensor output that represent a greatest difference in magnitudes of their values, and to estimate a brightness of the display screen based on the difference.

[0006] Some implementations include one or more of the following features. For example, in some instances, the electronic control unit is operable to subtract the estimated brightness of the display screen from a signal output by the ambient light sensor so as to obtain an ambient light value, where the signal output by the ambient light sensor represents a combined amount of light including ambient light and light generated by the display screen. The electronic control unit is operable to control the brightness of the display screen based, at least in part, on the ambient light value.

[0007] In some instances, the electronic control unit is operable to sample the output of the ambient light sensor at a sampling rate in a range of 1-5 kHz. In some cases, the duty cycle of the PWM signal is less than 20%.

[0008] In some implementations, the electronic control unit is operable to convert the difference in the magnitudes of the identified pair of consecutive samples to a corresponding display screen brightness. For example, in some cases, the electronic

control unit is operable to access a look-up table to obtain a display screen brightness that corresponds to the difference in the magnitudes of the identified pair of consecutive samples.

5 [0009] The present disclosure also describes a method that includes sampling an output of an ambient light sensor disposed behind a display screen having a brightness controllable by a duty cycle of a PWM signal, identifying a pair of consecutive samples of the ambient light sensor output that represent a greatest difference in magnitudes of their values, and estimating a brightness of the display screen based on the difference.

10

[0010] Other aspects, features and advantages will be readily apparent from the following detailed description, the accompanying drawings and the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

15 [0011] FIG. 1 illustrates various features of a host device that includes an ambient light sensor behind a display screen.

[0012] FIG. 2 shows an example of a drive circuit for an organic light emitting display.

[0013] FIGS. 3A, 3B and 3C are illustrating examples of sensor output signals.

20 [0014] FIG. 4 is a flow chart showing an example of a technique for determining display screen brightness.

DETAILED DESCRIPTION

[0015] As shown in FIG. 1, a host device 10 such as a portable computing device (e.g., a smartphone, personal digital assistant (PDA), laptop or wearable) includes an OLED-type or other display screen 12, which can be disposed directly under a front glass 20. An ambient light sensor (ALS) 14 is disposed directly under a portion of the display screen 12 and is operable to sense ambient light (e.g., sunlight or other background light). The ALS 14 also may sense light generated by the display screen 12 itself. The ALS 14 can comprise one or more photodiodes or other light sensing elements, each of which is sensitive to a respective wavelength, or range of wavelengths, that may differ from one another. An electronic control unit (ECU) 16 is operable to receive, process and analyze

signals from the ALS 14 and to control brightness of the display screen 12. The ECU 16 can be, for example, a processor for the sensor hub or some other processor in the portable computing device 10.

5 [0016] Overall brightness of the OLED can be controlled, for example, either by applying PWM modulation of each pixel with a transistor in series with the pixel or by the adjusting the overall range of current that can drive each pixel. FIG. 2 shows an example of an OLED drive circuit for a single OLED pixel. The current that drives each pixel, and therefore the brightness of each pixel, is controlled by a first transistor TFT1
10 depending on the charge stored on the capacitor C1. Before each pixel is turned on, the capacitor C1 is charged to the appropriate level, VDATA, by setting the voltage SCAN1 to low. Once the voltage SCAN2 becomes high, a second transistor TFT2 turns on and allows current to flow through the OLED pixel as modulated by the first transistor TFT1. The voltage SCAN2 also is used to apply the PWM modulation to reduce the overall
15 display brightness by applying a square waveform at a multiple of the periodic display frame rate (e.g., a multiple of 60 Hz). The duty cycle of the square wave sets the display brightness.

[0017] The inventors of the present application determined that the first derivative of the
20 output of the ALS 14 can provide an estimate of the display screen brightness. In particular, the difference between consecutive high and low magnitude values in the signal output by the ALS 14 is approximately proportional to the brightness of the display screen 12 regardless of the presence of ambient light. The difference thus can be used to estimate the display screen brightness. This can be understood by reference to FIGS. 3A
25 – 3C, discussed below.

[0018] As shown in FIG. 3A, when no ambient light is present, the ALS 14 measures only the light from the display screen 12, which is controlled by a PWM pulse. The ALS output amplitude signal in this case is indicated by 30. On the other hand, when there is
30 ambient light present, the ALS 14 measures a linear sum of the ambient light and light from the display screen 12. The ALS output amplitude signal in this case is indicated by

32. As indicated by FIG. 3B, the height of the pulse in the ALS output signal depends on the brightness of the display screen 12. For example, if the brightness of the display screen 12, based on the applied PWM pulse, is relatively low, then the height of the pulse of the ALS output signal (i.e., the different in amplitude between the high and low values) will be relatively small. In this case, the ALS output amplitude signal is indicated by 34. On the other hand, if the brightness of the display screen 12, based on the applied PWM pulse, is relatively high, then the height of the pulse of the ALS output signal will be relatively large. In this case, the ALS output amplitude signal is indicated by 36. Thus, as indicated by FIG. 3C, assuming the amplitude of the ambient light remains about the same during the relevant measurement period, the height of the pulse (i.e., the difference between consecutive high and low magnitude values) 38A or 38B in the signal output by the ALS 14 is approximately proportional to the brightness of the display screen 12 regardless of the presence of ambient light. Measuring the height of the pulse in the signal output by the ALS 14 allows the system to isolate the amplitude of the display screen light.

[0019] FIG. 4 illustrates an example of a process using the foregoing technique. As indicated by 50, as a PWM signal is applied to the display screen 12, the ECU 16 samples the output of the ALS 14. The sampling rate should be sufficiently high, and a statistically significant number of samples should be accumulated, to make it likely that at least one sample is acquired by the ECU 16 while the PWM signal is low (i.e., during a blank off period when the display screen is off) and at least one sample while the PWM signal is high (i.e., during a blanking on period when the display screen is on). For example, in some instances, the sampling rate is in the range of 1-5 kHz (e.g., 2 kHz), and at least 64 samples (e.g., 128 samples) are acquired.

[0020] Next, as indicated by 52, the ECU 16 analyzes the samples and identifies the pair of consecutive samples that represent the greatest difference in the magnitude of their values. The identified pair of samples is assumed to represent a transition in the PWM pulse (i.e., from a high value that causes the display screen to be on to a low value that cause the display screen to be off, or vice-versa). In some cases, the ECU 16 may

identify more than one pair of consecutive samples that have relatively large differences in the magnitude of the values of the samples. In such cases, the ECU 16 can calculate an average of the difference values.

5 [0021] As indicated by 54, the ECU 16 uses the difference in the magnitudes for the identified pair of consecutive samples to estimate the brightness of the display screen 12. This can be accomplished, for example, by accessing a look-up table 18 stored in memory or by using an algorithm to convert the difference to a corresponding brightness. In either case, experimental data can be obtained in advance to generate the data for the
10 look-up table or to generate an algorithm (e.g., an equation) for converting the difference in the magnitudes for the identified pair of consecutive samples to a display screen brightness.

[0022] Next, as indicated by 56, the ECU 16 can subtract the estimated value of the
15 display screen brightness from the total light values output by the ALS 14. This calculated difference provides an estimate of the magnitude of the ambient light, which the ECU 16 can use to adjust the display screen brightness so as to make the display appear sharp and readable while also reducing the display's overall energy consumption (see 58 in FIG. 4). Thus, the display screen brightness can be adjusted more accurately in
20 some cases based on the surrounding lighting environment.

[0023] The techniques described here can be particularly advantageous, for example, when the duty cycle drops below about 20%. In such instances, sampling the duty cycle off time can be difficult because the blanking off time is small. If the integration time for
25 capturing the sample is reduced significantly, then the measured sample alone may be less reliable. On the other hand, the present techniques can avoid such issues by using a fast sampling time, which results in a lower integration time. Although the individual samples may be noisy, the difference between the samples still can be used more reliably to estimate the contribution of screen brightness to the total measured brightness of the
30 ALS 14.

[0024] Various aspects of the subject matter and the functional operations described in this specification can be implemented in digital electronic circuitry, or in computer software, firmware, or hardware, including the structures disclosed in this specification and their structural equivalents, or in combinations of one or more of them. Thus, aspects of the subject matter described in this specification can be implemented as one or more computer program products, i.e., one or more modules of computer program instructions encoded on a computer readable medium for execution by, or to control the operation of, data processing apparatus. The computer readable medium can be a machine-readable storage device, a machine-readable storage substrate, a memory device, a composition of matter effecting a machine-readable propagated signal, or a combination of one or more of them. The apparatus can include, in addition to hardware, code that creates an execution environment for the computer program in question, e.g., code that constitutes processor firmware.

[0025] A computer program (also known as a program, software, software application, script, or code) can be written in any form of programming language, including compiled or interpreted languages, and it can be deployed in any form, including as a stand-alone program or as a module, component, subroutine, or other unit suitable for use in a computing environment. A computer program does not necessarily correspond to a file in a file system. A program can be stored in a portion of a file that holds other programs or data (e.g., one or more scripts stored in a markup language document), in a single file dedicated to the program in question, or in multiple coordinated files (e.g., files that store one or more modules, sub programs, or portions of code). A computer program can be deployed to be executed on one computer or on multiple computers that are located at one site or distributed across multiple sites and interconnected by a communication network.

[0026] The processes and logic flows described in this specification can be performed by one or more programmable processors executing one or more computer programs to perform functions by operating on input data and generating output. The processes and logic flows can also be performed by, and apparatus can also be implemented as, special

purpose logic circuitry, e.g., an FPGA (field programmable gate array) or an ASIC (application specific integrated circuit).

[0027] Processors suitable for the execution of a computer program include, by way of example, both general and special purpose microprocessors, and any one or more processors of any kind of digital computer. Generally, a processor will receive instructions and data from a read only memory or a random access memory or both. The essential elements of a computer are a processor for performing instructions and one or more memory devices for storing instructions and data. Computer readable media suitable for storing computer program instructions and data include all forms of non volatile memory, media and memory devices, including by way of example semiconductor memory devices, e.g., EPROM, EEPROM, and flash memory devices; magnetic disks, e.g., internal hard disks or removable disks; magneto optical disks; and CD ROM and DVD-ROM disks. The processor and the memory can be supplemented by, or incorporated in, special purpose logic circuitry.

[0028] While this specification contains many specifics, these should not be construed as limitations on the scope of the invention or of what may be claimed, but rather as descriptions of features specific to particular embodiments of the invention. Certain features that are described in this specification in the context of separate embodiments can also be implemented in combination in a single embodiment. Conversely, various features that are described in the context of a single embodiment can also be implemented in multiple embodiments separately or in any suitable sub-combination. Moreover, although features may be described above as acting in certain combinations and even initially claimed as such, one or more features from a claimed combination can in some cases be excised from the combination, and the claimed combination may be directed to a sub-combination or variation of a sub-combination.

[0029] Similarly, while operations are depicted in the drawings in a particular order, this should not be understood as requiring that such operations be performed in the particular order shown or in sequential order, or that all illustrated operations be performed, to

achieve desirable results. In certain circumstances, multitasking and parallel processing may be advantageous.

[0030] A number of implementations have been described. Nevertheless, various
5 modifications may be made without departing from the spirit and scope of the invention.
Accordingly, other implementations are within the scope of the claims.

What is claimed is:

1. An apparatus comprising:

a display screen;

5 an ambient light sensor disposed behind the display screen;

an electronic control unit operable to control a brightness of the display screen based on a duty cycle of a PWM signal,

wherein the electronic control unit is operable to sample an output of the ambient light sensor, identify a pair of consecutive samples of the ambient light sensor output that represent a greatest difference in magnitudes of their values, and to estimate a brightness of the display screen based on the difference.

2. The apparatus of claim 1 wherein the electronic control unit is operable to subtract the estimated brightness of the display screen from a signal output by the ambient light

15 sensor so as to obtain an ambient light value, wherein the signal output by the ambient light sensor represents a combined amount of light including ambient light and light generated by the display screen, and wherein the electronic control unit is operable to control the brightness of the display screen based, at least in part, on the ambient light value.

20

3. The apparatus of any one of claims 1-2 wherein the electronic control unit is operable to sample the output of the ambient light sensor at a sampling rate in a range of 1-5 kHz.

4. The apparatus of any one of claims 1-3 wherein the electronic control unit is operable to access a look-up table to obtain a display screen brightness that corresponds to the difference in the magnitudes of the identified pair of consecutive samples.

25

5. The apparatus of any one of claims 1-3 wherein the electronic control unit is operable to convert the difference in the magnitudes of the identified pair of consecutive samples to a corresponding display screen brightness.

30

6. The apparatus of any one of claims 1-5 wherein the duty cycle of the PWM signal is less than 20%.

7. A method comprising:

5 sampling an output of an ambient light sensor disposed behind a display screen having a brightness controllable by a duty cycle of a PWM signal;

 identifying a pair of consecutive samples of the ambient light sensor output that represent a greatest difference in magnitudes of their values; and

 estimating a brightness of the display screen based on the difference.

10

8. The method of claim 7 including:

 subtracting the estimated brightness of the display screen from a signal output by the ambient light sensor so as to obtain an ambient light value, wherein the signal output by the ambient light sensor represents a combined amount of light including ambient

15 light and light generated by the display screen, and

 controlling the brightness of the display screen based, at least in part, on the ambient light value.

20 9. The method of any one of claims 7-8 wherein the output of the ambient light sensor is sampled at a rate in a range of 1-5 kHz.

 10. The method of any one of claims 7-9 including accessing a look-up table to obtain a display screen brightness that corresponds to the difference in the magnitudes of the identified pair of consecutive samples.

25

 11. The method of any one of claims 7-9 including converting the difference in the magnitudes of the identified pair of consecutive samples to a corresponding display screen brightness.

30 12. The method of claim 7 including:



calculating an ambient light level based at least in part on the estimated brightness of the display screen; and

controlling the duty cycle of the PWM signal so as to adjust the brightness of the display screen based on the calculated ambient light level.

5

13. The method of any one of claims 7-12 wherein the duty cycle of the PWM signal is less than 20%.

10

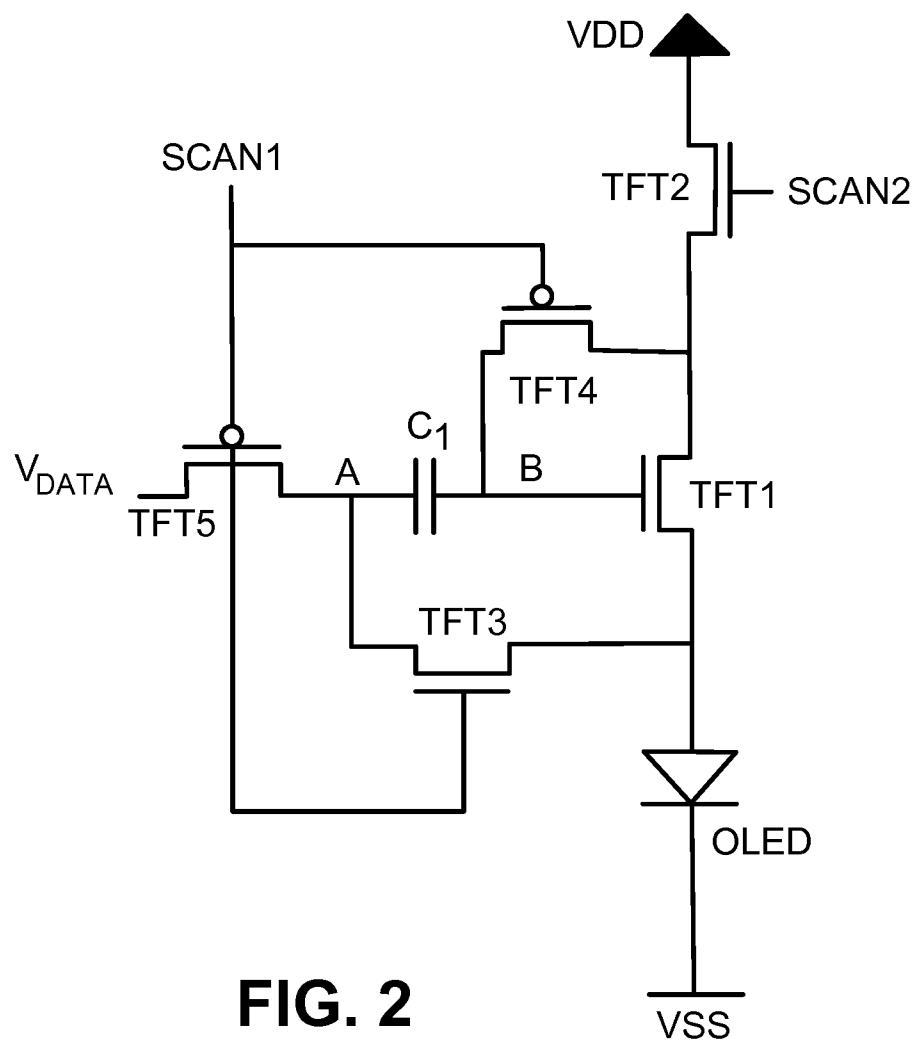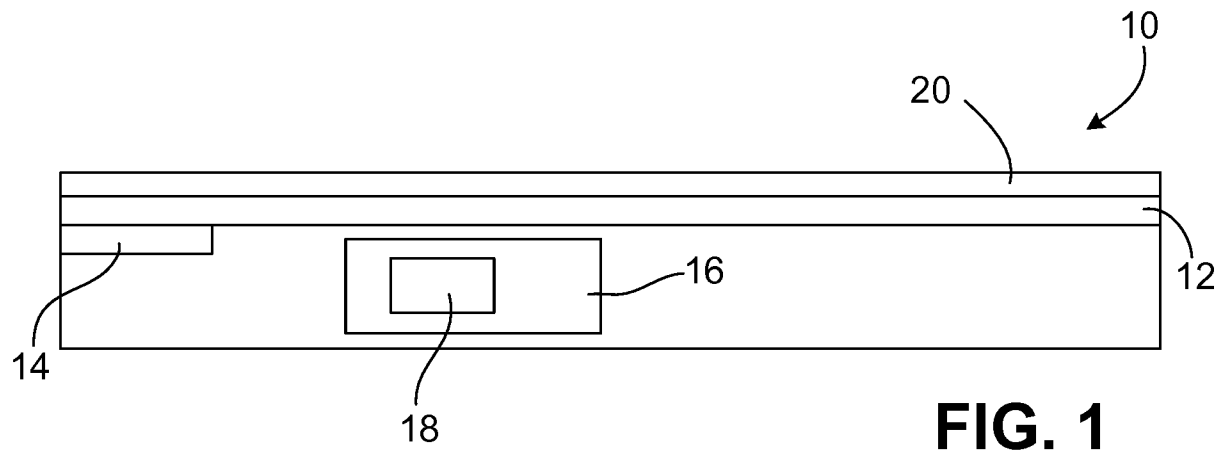

2/3

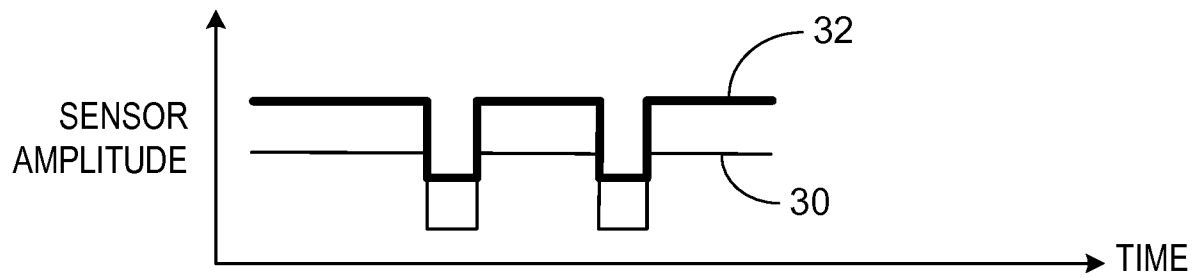


FIG. 3A

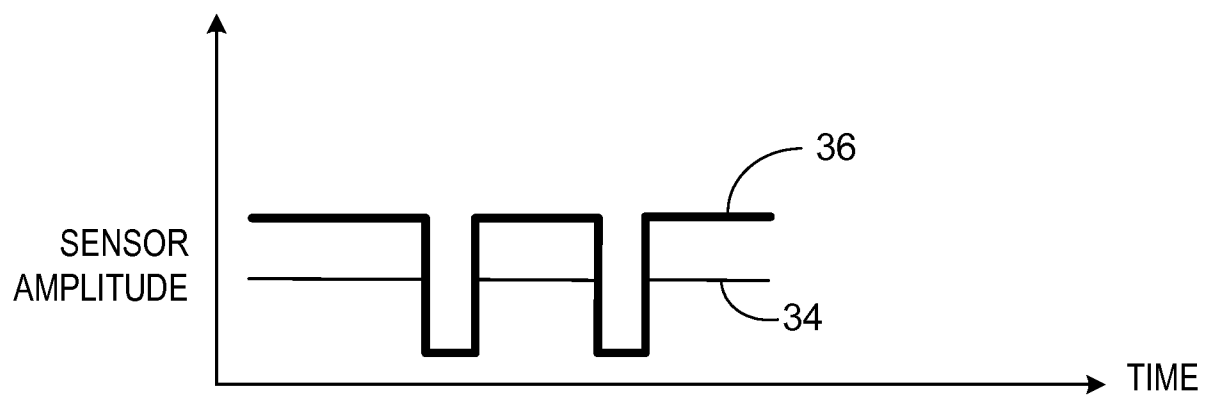


FIG. 3B

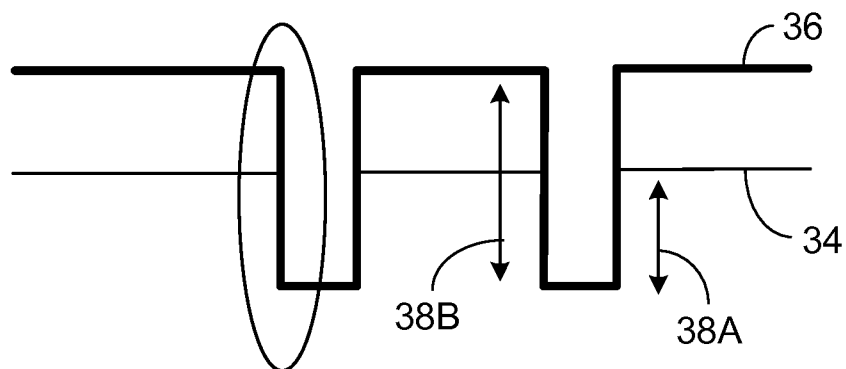
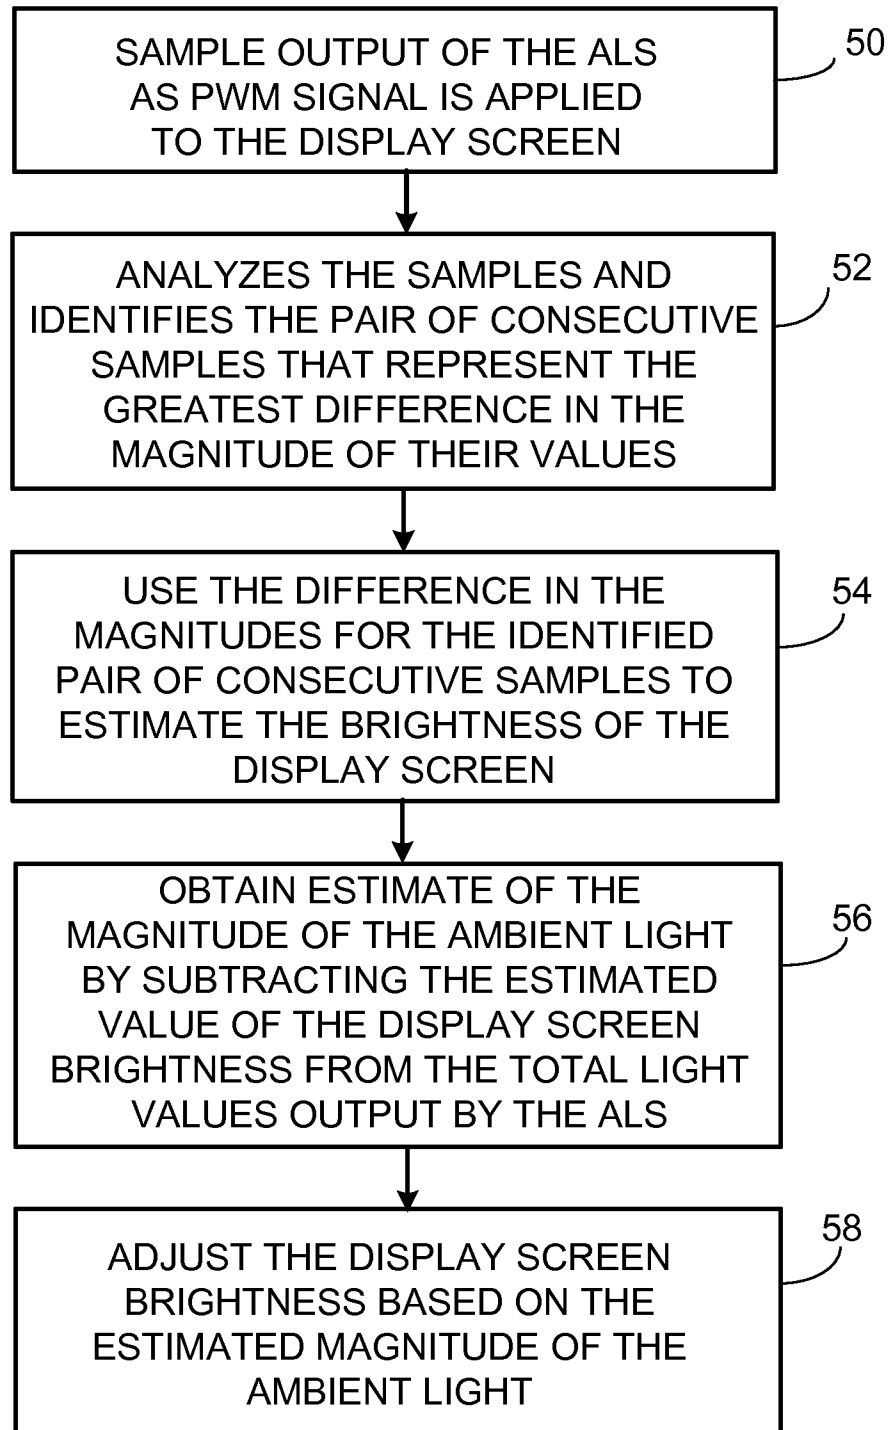


FIG. 3C

3/3

**FIG. 4**

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/071432

A. CLASSIFICATION OF SUBJECT MATTER
INV. G09G3/3233
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G09G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 9 622 326 B1 (DEVYVER MICHAEL SERGE [US] ET AL) 11 April 2017 (2017-04-11) the whole document	1-13
X	US 2008/284716 A1 (EDWARDS MARTIN J [GB] ET AL) 20 November 2008 (2008-11-20) paragraphs [0001] - [0007], [0015] - [0023], [0040] - [0043], [0046] - [0051]	1,2,5,7,8,11



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 October 2019

Date of mailing of the international search report

11/10/2019

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Taron, Laurent

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2019/071432

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 9622326	B1	11-04-2017	NONE

US 2008284716	A1	20-11-2008	CN 101331532 A 24-12-2008
			EP 1964089 A2 03-09-2008
			JP 2009519486 A 14-05-2009
			KR 20080075862 A 19-08-2008
			TW 200731182 A 16-08-2007
			US 2008284716 A1 20-11-2008
			WO 2007069107 A2 21-06-2007
