

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 October 2005 (13.10.2005)


PCT

(10) International Publication Number
WO 2005/095109 A1

- (51) International Patent Classification⁷: **B41F 21/08**, B65H 29/04, B41F 11/02
- (21) International Application Number: PCT/IB2005/000787
- (22) International Filing Date: 23 March 2005 (23.03.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 04007631.7 30 March 2004 (30.03.2004) EP
- (74) Agents: **GROSFILLIER, Philippe** et al.; C/O BUGNION S.A., Case Postale 375, CH-1211 Genève 12 (CH).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (71) Applicant (for all designated States except US): **KBA-GIORI S.A.** [CH/CH]; 4, Rue de la Paix, CH-1003 Lausanne (CH).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **SCHAEDE, Johannes Georg** [DE/DE]; Max-Heim-Strasse 8, 97074 WURZBURG (DE).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PRINTING PROCESS AND MACHINE

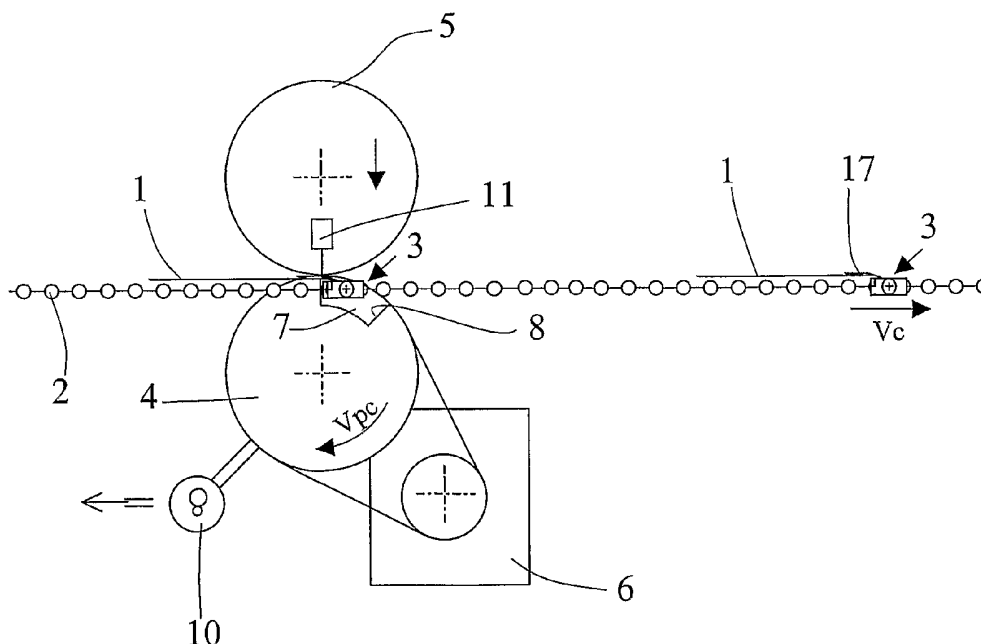

(57) Abstract: The machine comprises at least a printing cylinder (4), an inking cylinder (5) and a chain gripper transporting system (2,3) with grippers (17). The printing cylinder (4) comprises at least one transversal pit (7) for receiving said chain gripper system (3) such that the inking cylinder (5) inks the planar object (1) while said object (1) is held by said chain gripper system (3).



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Printing process and machine

The present invention concerns a printing process for sheets of documents, such as securities, banknotes, checks,
5 ID and passports.

The present invention also concerns a printing machine suitable for carrying out the process according to the invention.

10

Printing processes and machines are known per se in the prior art. For example, US patent 4,574,696, the content of which is incorporated by reference in the present application, discloses a rotary printing press for the
15 simultaneous multicolour printing on both sides of a web or sheet. The advantage of this machine consists in that it permits exploiting simultaneously two totally different methods for printing in a single pass an offset image on one side and an "Orlof" image on the other side, thus
20 offering the user for the first time the possibility of printing notably safety backgrounds on both sides of a bank note through two different methods; this increases the safety against forgery and in addition makes printing operations more economical because the user is not
25 compelled to use two separate machines.

Another printing machine is known for example from US patent 4,640,189, the content of which is incorporated by reference in the present application. This printing machine
30 can print on both sides of a paper web either an image with juxtaposed colors by means of a typographic plate inked respectively by a collecting cylinder inked in turn by selective inking cylinders the number of which corresponds

to the number of colors, or an image with superposed colors and designs by means of the plate cylinders substituted for the selective color inking cylinders and provided with printing plates inking a corresponding offset cylinder and
5 of which the number corresponds to the number of colors and designs, or an image of each of the above-mentioned type. For this purpose, the machine comprises a first pair of blanket cylinders operating either as collecting cylinders each adapted to ink a cylinder carrying said typographic
10 plate of which the image is transferred via an intermediate cylinder to another blanket cylinder of a second pair on the paper, or as offset cylinders contacting said other blanket cylinder, or operating one as collecting cylinder and the other as an offset cylinder. In all cases, the
15 paper passes between the blanket cylinders of the second pair.

Another printing technique so called silk-screen printing is also known in the art. For example, US patent 6,109,172,
20 the content of which is incorporated by reference in the present application, discloses a silk-screen printing machine with a printing cylinder engaging two stencil cylinders for printing at least two non-overlapping areas in different colors using the one printing cylinder.

25

Document DE 197 03 312 discloses a printing machine in which the sheets are held by a chain gripper system while being printed. However, in this document, the speed of rotation of the printing cylinder is maintained constant.

30

The idea of the present invention is to propose a printing system that needs less space to be implemented and also

that is more efficient and quicker than the known printing systems.

It is therefore an aim of the present invention to improve
5 the known processes and machines.

It is another aim of the present invention to provide a printing machine that can be built as a modular unit.

10 It is a further aim of the present invention to provide a printing process and machine that are faster than the known one.

To this effect, the invention is defined by the features of
15 the claims.

The invention will be best understood by the description of an exemplary embodiment and of the accompanying drawings in which
20

Figures 1 to 4 show in succession the preparation steps for the printing of a sheet while carried by a chain conveyor according to the present invention.

25 Figure 5 show a top view of a printing cylinder according to the present invention.

As shown in figure 1, a sheet 1 is transported by a chain conveyor 2 with a chain gripper system 3, as is well known
30 in the art of printing machines. As schematically disclosed in this figure 1, the chain conveyor 2 also passes between two cylinders, a printing cylinder 4 and a screen cylinder 5, both cylinders being used for the printing operation.

The screen printing technique per se is known in the art, and reference is for example made to US 6,109,172 for the sake of completeness. As represented, the printing cylinder is driven by an independent motor 6 which is able to vary
5 the rotational speed V_{pc} of the printing cylinder. The printing cylinder 4 comprises at least one cylinder pit 7 with a leading edge 9 and a trailing edge 8 of the printing cylinder 4, said pit being intended to receive the chain gripper system 3 of the chain conveyor 2. The printing
10 cylinder 4 is also subjected to vacuum air to maintain the sheet on the printing cylinder 4 during the printing operation. The suction air (vacuum) is created by a vacuum system with at least an aspiration pump 10 which is connected to ducts in the printing cylinder 4 to apply the
15 suction air to the sheet 1 being printed.

In addition, the screen cylinder 5 is moved away from the printing cylinder 4 when not in printing operation, with the doctor blade 11 being lifted to avoid damaging the
20 screen, as represented.

In figure 2, the gripper 17 of the chain gripper system 3 is entering the pit 7 of the printing cylinder 4. For avoiding a collision of the front side of the gripper 17
25 with trailing edge 8 of the cylinder 4, the speed of the printing cylinder V_{pc} is adjusted by regulating means acting on the motor 6, known per se in the art, such that the front side of the gripper is coordinated with the trailing edge 8 of the cylinder 4. During this operation,
30 the screen cylinder 5 and the doctor blade 11 preferably remain shifted away from the printing cylinder 4, for example lifted to avoid a collision with the chain gripper system 3.

In figure 3, the chain gripper system 3 is now in the pit 7 of the printing cylinder 4 and the speed of the cylinder V_{pc} is increased relatively to the speed of the chain gripper system V_c in order for the back side of the chain gripper system 3 to attain the leading edge 9 of the cylinder 4. This is necessary to start the printing operation with a minimal white margin on the sheet 1. During the phase represented in figure 3, the doctor blade 11 and the screen cylinder start going into position (i.e. downwards as represented in figure 3) to be able to carry out the printing operation.

In figure 4, the beginning of the printing operation is shown. As represented, the screen cylinder 5 is brought into contact with the printing cylinder 4 and the doctor blade 11 is applied against the screen to carry out the printing operation per se on the sheet 1. The screen printing technique is known as such in the art of printing. During the entire printing step, the sheet is held by the chain gripper system 3 of the chain conveyor 2, and the sheet is further maintained against the printing cylinder 4 at the printing nip between cylinders 4 and 5 by the application of vacuum air through the surface of the printing cylinder 4. This technique is also known per se in the art. Preferably, the printing speed, that is the speed of rotation of both cylinders 4, 5 is slightly higher than the speed of the chain conveyor 2 to avoid production of misprints due to a speed difference between the chain gripper system 2 and the cylinders 4, 5 and maintain the proper relative position of gripper 17 and pit 7.

In order to carry out the displacement movements of screen cylinder 5 and blade 11, it is possible to use numerous means such as excentrical systems, or pneumatically activated means, all well known in the art.

5

The printing cylinder may also comprise more than one pit, for example two or three pits which would then correspond to successive chain grippers systems 3 on the chain conveyor 2. The principle indicated above would then be
10 applicable to such configurations for each successive sheet.

A printing cylinder according the present invention is represented in top view in figure 5. The cylinder 4
15 comprises a pit 7 along its entire transversal length and is supported by an axis 12 held by bearings 13. The chain conveyor 2 comprises two parallel running chains 14, 15, running perpendicularly to the axis 12, said chains supporting the gripper system 16 per se and being situated
20 on both sides of the cylinder 4. The chain gripper system 3 comprises several grippers 17 mounted on a chain gripper system 3 attached to the chains 14, 15 and said grippers 17 hold the sheet 1 to be printed. As such, the chain gripper system 3 is known in the art of sheet transporting devices
25 for printing machines.

The printing cylinder 4, as mentioned above, is linked to a vacuum system, schematically represented in figure 1 by pump 10 linked to series of holes 18 (see figure 5) to
30 maintain the sheet 1 pressed against the cylinder 4 during the printing operation and allowing the cylinder 4 to drive the sheet 1 being printed at the cylinder speed V_{pc} .

This vacuum system is synchronized such that vacuum is applied to the sheet being printed only in the zone in which the printing is carried out. Accordingly, each row of holes parallel to the axis of the cylinder is subjected to vacuum in turn, depending on the position of the cylinder 4.

The process according to the present invention is particularly advantageous to carry out a recto-verso silk-screen printing.

Depending on the configuration of the machine, it can be useful to add a drying unit to dry the printed sheets. The drying unit maybe an UV drying unit or other equivalent. Such a drying unit is particularly useful when carrying out a recto-verso printing of the sheets.

Claims

1. Process for printing successive sheets of documents, such as securities, banknotes, checks, ID and passports, in
5 which said sheets are transported by a chain gripper system comprising successive grippers attached to two parallel chains and a printing unit, wherein the successive sheets are printed in said printing unit while being held by the chain gripper system and wherein the chain gripper system
10 has a chain speed V_c , the printing cylinder has a printing cylinder speed V_{pc} , wherein both speeds are synchronized such that a gripper enters said printing cylinder pit at the trailing edge of said cylinder, wherein said speeds are then relatively modified such that said gripper arrives at
15 a leading end of said cylinder when said screen cylinder starts to deposit ink on the sheet being printed.
2. A process as claimed in claim 1, wherein the printing unit comprises a printing cylinder and a silk-screen
20 cylinder, said printing cylinder comprising at least a cylinder pit for receiving a gripper of said chain gripper system.
3. A process as claimed in claim 2, wherein said relative
25 modification of speed comprises an increase of the printing cylinder speed V_{pc} .
4. A process as claimed in one of claims 1 to 3, wherein
30 the speed of the printing cylinder and of the inking cylinder is slightly higher than the chain speed V_c during the printing operation.

5. A process as claimed in one of claims 2 to 4, wherein the inking cylinder is shifted away from the printing cylinder to allow the cylinder pit to receive the gripper and the inking cylinder is shifted towards the printing cylinder to allow the printing operation.

6. A process as claimed in one of claims 1 to 5, wherein during the printing operation, the sheet is maintained against the printing cylinder by vacuum.

10

7. A printing machine for planar objects (1) such as sheets, securities, banknotes, checks, ID and passports and other similar documents, for carrying out the process of one of claims 1 to 6, comprising at least a printing cylinder (4), an inking cylinder (5) and a chain gripper transporting system (2,3,14,15,16) with grippers (17), wherein the printing cylinder (4) comprises at least one transversal pit (7) for receiving said chain gripper system (3) such that the inking cylinder (5) inks the planar object (1) while said object (1) is held by said chain gripper system (3), wherein said printing cylinder (4) is driven by an independent motor (6) in order to be able to vary the relative speed of the cylinder (4) and of the chain gripper transporting system (2,3,14,15,16).

25

8. A machine according to claim 7, wherein said inking cylinder (5) is shiftable towards and away from the printing cylinder (4) by shifting means to allow the chain gripper system (3) to enter in said pit (7) before printing.

30

9. A machine according to one of claims 7 or 8, further comprising an aspiration system (10,18) for applying vacuum to the printing cylinder (4).

5 10. A machine according to one of claims 7 to 9, further comprising at least one drying unit.

Fig.1

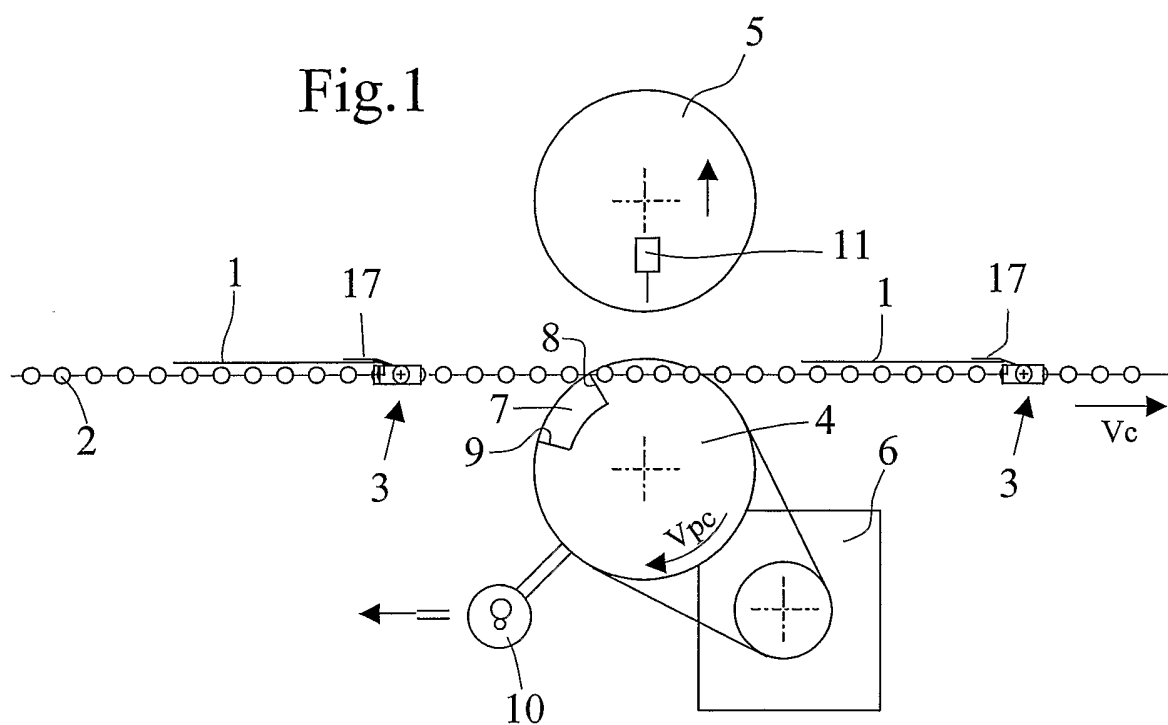


Fig.2

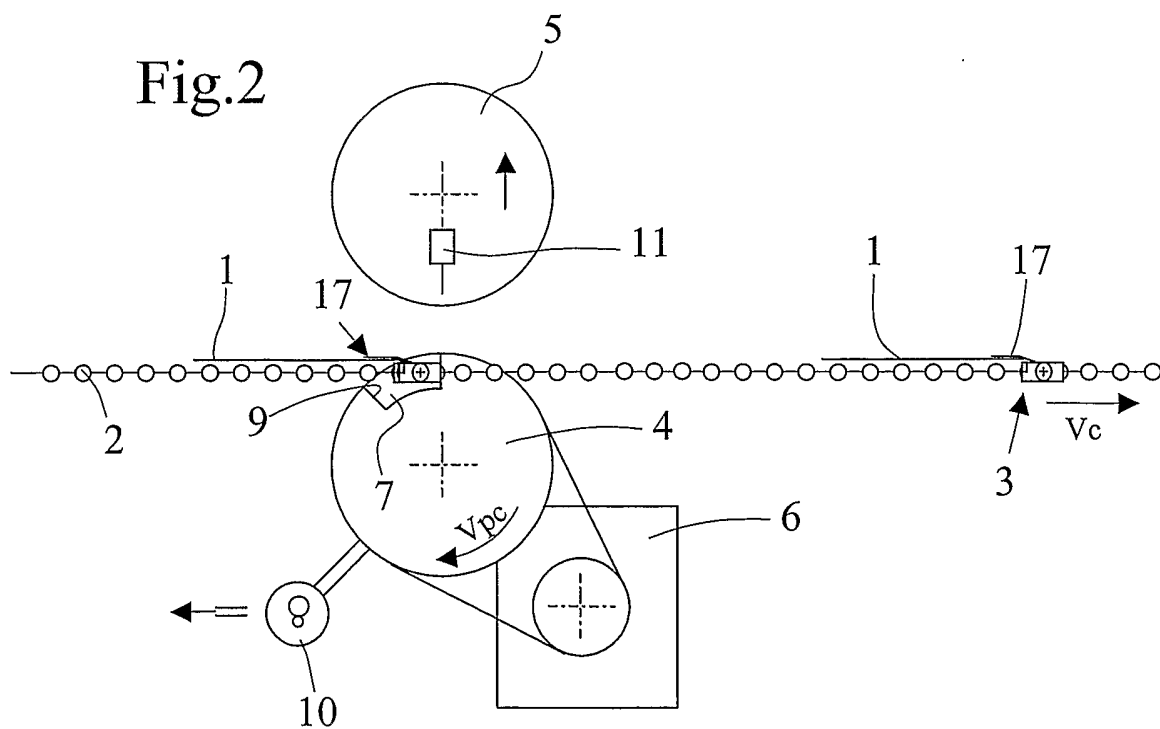


Fig.3

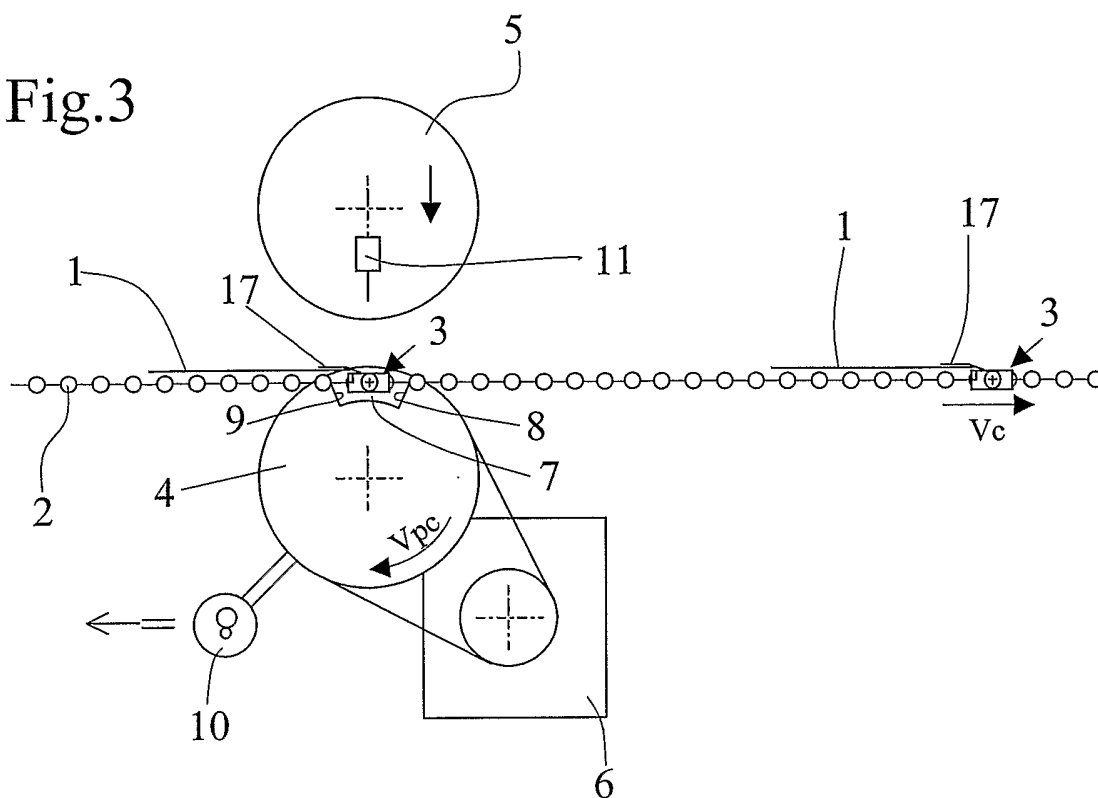


Fig.4


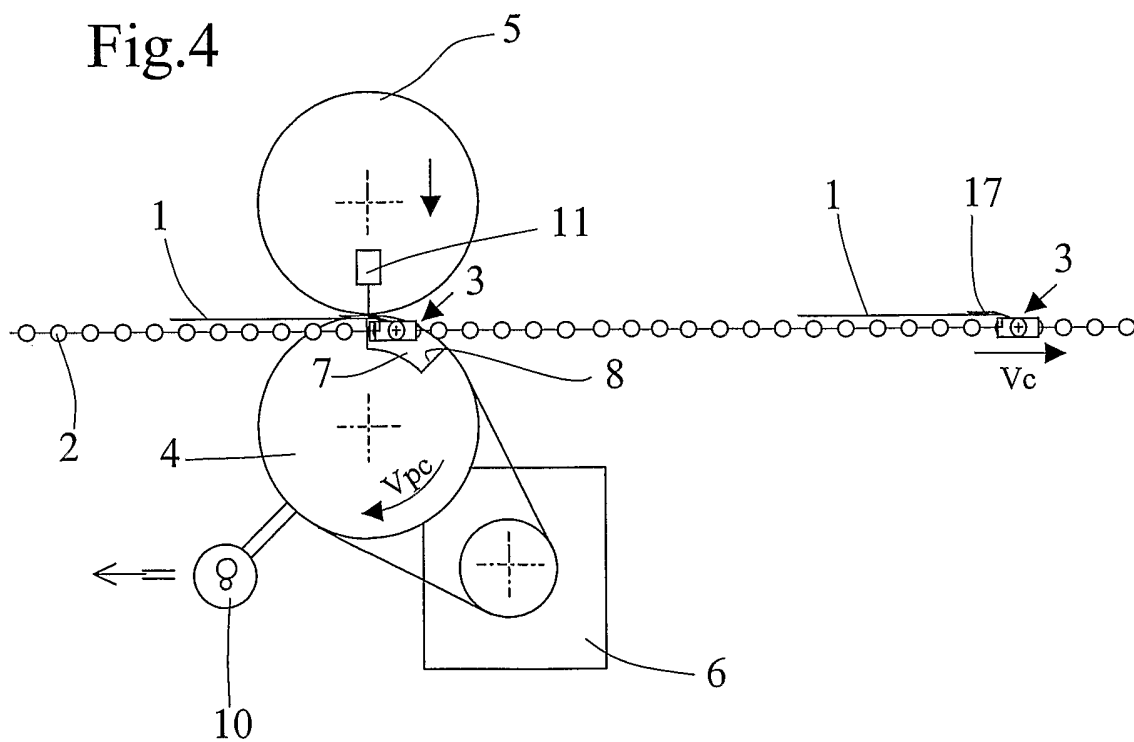


Fig.5

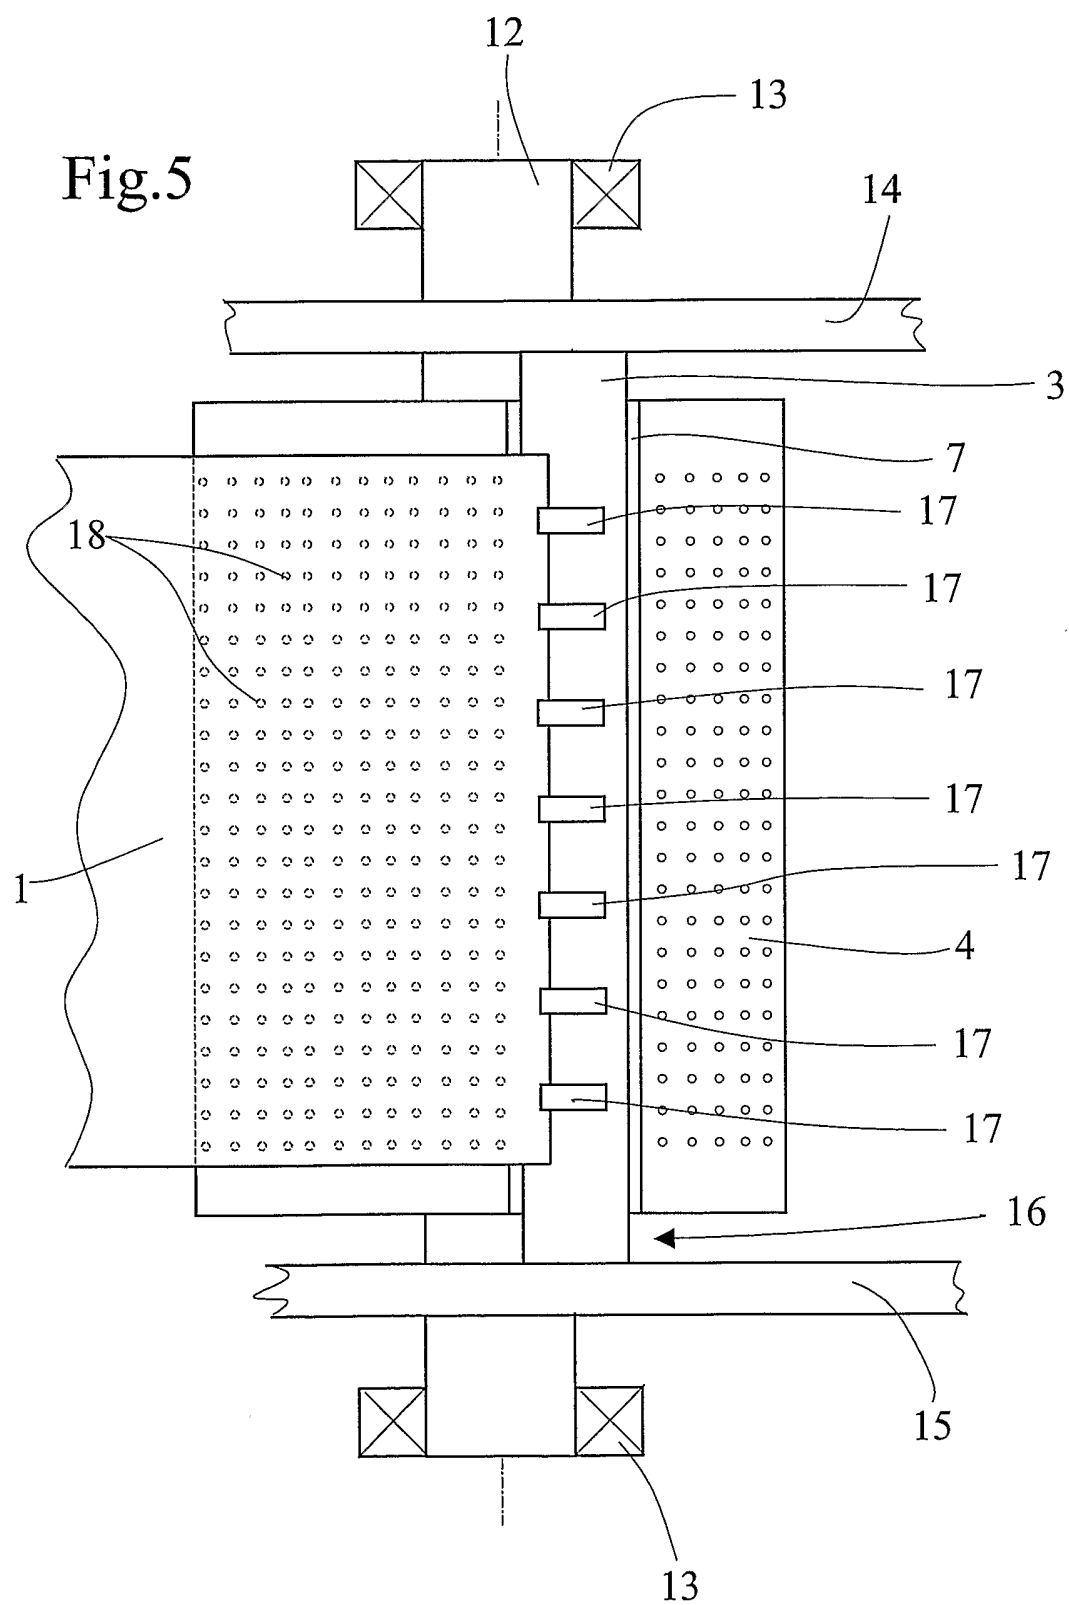

INTERNATIONAL SEARCH REPORT

PCT/IB2005/000787

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B41F21/08 B65H29/04 B41F11/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B41F B65H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 197 03 312 A (RK SIEBDRUCKTECHNIK GMBH ; SPS SCREEN PRINTING SYSTEMS GM (DE)) 6 August 1998 (1998-08-06) cited in the application	7,10
A	column 4, line 17 - line 58; figure 1	1-6,8,9
A	WO 98/53996 A (STORK X CEL BV ; DEN HEUVEL HUIBERT JOHAN VAN (NL)) 3 December 1998 (1998-12-03) page 6, line 7 - line 26 page 10, line 17 - line 35 page 12, line 6 - line 12; figure 1	1-10
A	GB 2 314 834 A (CRABTREE GATESHEAD LTD) 14 January 1998 (1998-01-14) page 5, line 19 - page 8, line 14; figures 1,2	1-10
	----- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

° Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

15 June 2005

Date of mailing of the international search report

28/06/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

D'Incecco, R

INTERNATIONAL SEARCH REPORT

PCT/IB2005/000787

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2002/063382 A1 (FRANK HENDRIK ET AL) 30 May 2002 (2002-05-30) paragraph '0071! - paragraph '0074!; figures 10,11 -----	1-10
A	GB 2 277 903 A (DERITEND ENG LTD) 16 November 1994 (1994-11-16) abstract -----	1,7
A	US 5 477 780 A (KELLER JAMES J) 26 December 1995 (1995-12-26) column 6, line 4 - column 7, line 22; figures 1-4 -----	1,7

INTERNATIONAL SEARCH REPORT

PCT/IB2005/000787

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
DE 19703312	A	06-08-1998	DE	19703312 A1	06-08-1998
			WO	9833649 A1	06-08-1998
WO 9853996	A	03-12-1998	NL	1006150 C2	01-12-1998
			AU	7790598 A	30-12-1998
			WO	9853996 A1	03-12-1998
GB 2314834	A	14-01-1998	NONE		
US 2002063382	A1	30-05-2002	DE	10155033 A1	01-08-2002
			JP	2002179283 A	26-06-2002
GB 2277903	A	16-11-1994	AU	6541494 A	12-12-1994
			WO	9426519 A2	24-11-1994
US 5477780	A	26-12-1995	US	5289768 A	01-03-1994
			US	5193458 A	16-03-1993
			AU	703059 B2	11-03-1999
			AU	2092295 A	18-09-1995
			CA	2184698 A1	08-09-1995
			EP	0754122 A1	22-01-1997
			EP	0949076 A1	13-10-1999
			WO	9523700 A1	08-09-1995
			US	5590598 A	07-01-1997
			US	5794531 A	18-08-1998
			AU	664439 B2	16-11-1995
			AU	3807893 A	24-01-1994
			CA	2116353 A1	06-01-1994
			DE	69320800 D1	08-10-1998
			DE	69320800 T2	20-05-1999
			EP	0634975 A1	25-01-1995
			WO	9400299 A1	06-01-1994