



(51) International Patent Classification:

H01M 4/136 (2010.01) *H01M 10/054* (2010.01)
H01M 4/1397 (2010.01) *H01M 10/0566* (2010.01)
H01M 4/36 (2006.01) *H01M 10/058* (2010.01)
H01M 4/58 (2010.01)

(21) International Application Number:

PCT/JP2014/002143

(22) International Filing Date:

15 April 2014 (15.04.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/872,673 29 April 2013 (29.04.2013) US

(71) Applicant: SHARP KABUSHIKI KAISHA [JP/JP]; 22-22, Nagaike-cho, Abeno-ku, Osaka-shi, Osaka, 5458522 (JP).

(72) Inventors: LU, Yuhao. LEE, Jong-Jan. EVANS, David.

(74) Agent: HARAKENZO WORLD PATENT & TRADE-MARK; Daiwa Minamimorimachi Building, 2-6, Tenjin-bashi 2-chome Kita, Kita-ku, Osaka-shi, Osaka, 5300041 (JP).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

[Continued on next page]

(54) Title: PROTECTED TRANSITION METAL HEXACYANOFERRATE BATTERY ELECTRODE

FIG. 2B

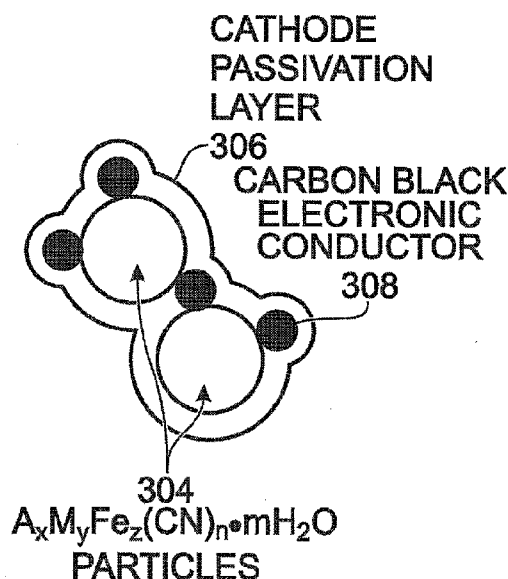

(57) Abstract: A protected transition metal hexacyanoferrate (TMHCF) battery cathode is presented, made from $A_x M_y Fe_z (CN)_n \cdot m H_2 O$ particles, where the A cations are either alkali or alkaline-earth cations, and M is a transition metal. In one aspect the cathode passivation layer may be materials such as oxides, simple salts, carbonaceous materials, or polymers that form a film overlying the $A_x M_y Fe_z (CN)_n \cdot m H_2 O$ particles. In another aspect, the cathode passivation layer is a material such as oxygen, nitrogen, sulfur, fluorine, chlorine, or iodine that interacts with the $A_x M_y Fe_z (CN)_n \cdot m H_2 O$ particles, to cure defects in the $A_x M_y Fe_z (CN)_n \cdot m H_2 O$ crystal lattice structure. Also presented are TMHCF battery synthesis methods.



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of
the earlier application (Rule 4.17(iii))*

Published:

— *with international search report (Art. 21(3))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii))*

Description

Title of Invention: PROTECTED TRANSITION METAL HEXA-CYANOFERRATE BATTERY ELECTRODE

Technical Field

[0001] This invention generally relates to electrochemical cells and, more particularly, to a protected transition-metal hexacyanoferrate (TMHCF) cathode battery and associated fabrication processes.

Background Art

[0002] A battery is an electrochemical cell through which chemical energy and electric energy can be converted back and forth. The energy density of a battery is determined by its voltage and charge capacity. Lithium has the most negative potential of -3.04 V vs. H_2/H^+ , and has the highest gravimetric capacity of 3860 milliamp-hours per gram (mAh/g). Due to their high energy densities, lithium-ion batteries have led the portable electronics revolution. However, the high cost of lithium metal renders doubtful the commercialization of lithium batteries as large scale energy storage devices. Further, the demand for lithium and its reserve as a mineral have raised the need to build other types metal-ion batteries as an alternative.

[0003] Lithium-ion (Li-ion) batteries employ lithium storage compounds as the positive (cathode) and negative (anode) electrode materials. As a battery is cycled, lithium ions (Li^+) are exchanged between the positive and negative electrodes. Li-ion batteries have been referred to as rocking chair batteries because the lithium ions "rock" back and forth between the positive and negative electrodes as the cells are charged and discharged. The positive electrode (cathode) material is typically a metal oxide with a layered structure, such as lithium cobalt oxide ($LiCoO_2$), or a material having a tunneled structure, such as lithium manganese oxide ($LiMn_2O_4$), on an aluminum current collector. The negative electrode (anode) material is typically a graphitic carbon, also a layered material, on a copper current collector. In the charge-discharge process, lithium ions are inserted into, or extracted from interstitial spaces of the active materials.

[0004] Similar to the lithium-ion batteries, metal-ion batteries use the metal-ion host compounds as their electrode materials in which metal-ions can move easily and reversibly. As for a Li^+ -ion, it has one of the smallest radii of all metal ions and is compatible with the interstitial spaces of many materials, such as the layered $LiCoO_2$, olivine-structured $LiFePO_4$, spinel-structured $LiMn_2O_4$, and so on. Other metal ions, such as Na^+ , K^+ , Mg^{2+} , Al^{3+} , Zn^{2+} , etc., with large sizes, severely distort Li-based intercalation compounds and ruin their structures in several charge/discharge cycles.

Therefore, new materials with large interstitial spaces would have to be used to host such metal-ions in a metal-ion battery.

[0005] Fig. 1 is a diagram depicting the crystal structure of a transition-metal hexacyanoferrate (TMHCF) in the form of $A_xM_1M_2(CN)_6$ (prior art). TMHCFs with large interstitial spaces have been investigated as cathode materials for rechargeable lithium-ion batteries [NPL1,2], sodium-ion batteries [NPL3,4], and potassium-ion batteries [NPL5]. With an aqueous electrolyte containing the proper alkali-ions or ammonium-ions, copper and nickel hexacyanoferrates ((Cu,Ni)-HCFs) exhibited a very good cycling life that 83% capacity was retained after 40,000 cycles at a charge/discharge current of 17C [NPL6-8]. However, the materials demonstrated low capacities and energy densities because: (1) just one sodium-ion can be inserted/extracted into/from each Cu-HCF or Ni-HCF molecule, and (2) these TMHCFs electrodes must be operated below 1.23 V due to the water electrochemical window. To correct these shortcomings, manganese hexacyanoferrate (Mn-HCF) and iron hexacyanoferrate (Fe-HCF) were used as cathode materials in non-aqueous electrolyte [NPL9, 10]. Assembled with a sodium-metal anode, the Mn-HCF and Fe-HCF electrodes cycled between 2.0V and 4.2 V and delivered capacities of about 110 mAh/g.

[0006] However, some TMHCFs electrodes with high capacities exhibited rapid capacity degradation with cycling, when they were used in rechargeable batteries with non-aqueous electrolyte. For example, the capacity of Fe-HCF electrodes in lithium-ion batteries decreased from 110 mAh/g to 80 mAh/g after 10 cycles [NPL2]. A Cu-HCF electrode with Li^+ -ion electrolyte delivered 120 mAh/g during the first discharge, but its capacity decreased to 40 mAh/g after 10 cycles [NPL11]. On one hand, the capacity fading can be attributed to many factors related to the TMHCFs themselves, such as their phase changes during charge/discharge, interstitial water, and metal-ions dissolution from TMHCFs to the electrolyte. On the other hand, the interaction between TMHCFs electrodes and electrolytes also affect their performance. The side reactions of electrolytes on the surfaces of Cu-HCFs electrodes induced the redox-inactive Fe(II) ions and affected their electronic structures [NPL12]. To improve the cycling life of Cu-HCFs, a core (Cu-HCF)-shell (Ni-HCF) electrode materials was prepared and evaluated in Li-ion batteries [NPL12]. After 50 cycles the core-shell electrode had about 65% capacity left, which was much better than Cu-HCF electrode (about 20% capacity retention).

[0007] It is worth noting that the actual capacities of TMHCFs electrodes are far smaller than their theoretical values. For instance, the theoretical capacity for Mn-HCF is 170 mAh/g, but the capacity was just reported ~120 mAh/g, as it was tested in a sodium-ion battery. It was believed that structures of TMHCFs determined their performance. Buser et al. [NPL13] investigated the crystal structure of Prussian blue (PB) Fe_4

$[\text{Fe}(\text{CN})_6]_3 \cdot x\text{H}_2\text{O}$ and found that the $\text{Fe}(\text{CN})_6$ positions were only partly occupied. The vacancies led to much water entering the PB interstitial space and even associating with $\text{Fe}(\text{III})$ in the lattice [NPL14]. In consideration of charge neutralization and interstitial space, the vacancies and water reduced the concentration of mobile ions in the interstitial space of TMHCFs. As an example, Matsuda, et al. [NPL9] preferred to use $\text{A}_{4x-2}\text{M}_\text{A}[\text{M}_\text{B}(\text{CN})_6]_x \cdot z\text{H}_2\text{O}$ to replace the nominal formula, $\text{A}_2\text{M}_\text{A}\text{M}_\text{B}(\text{CN})_6$ because of the vacancies. Furthermore, the vacancies result in dense defects on the surface of TMHCFs. Without interstitial ions and water support, the surface easily collapses. The surface degradation can be aggravated when the interstitial ions near the surface are extracted out during electrochemical reactions. In a battery, this degradation leads to a poor capacity retention. As noted above, a Cu-HCF electrode with Li^+ -ion electrolyte delivered 120 mAh/g during the first discharge, but its capacity decreased to 40 mAh/g after 10 cycles [NPL11]. By coating with Ni-HCF, the surface of Cu-HCF was modified and its stability was improved. However, undercoordinated transition metals (UTM) on the surface retarded charge transfer between the TMHCF electrode and the electrolyte due to electric repulsion between UTM and mobile ions, resulting in poor electrochemical performance. Park et al. [NPL15] noted that the surface effect on a LiFePO_4 electrode, with undercoordinated $\text{Fe}^{2+}/\text{Fe}^{3+}$ at the surface, created a barrier for Li^+ transport across the electrolyte/electrode interface.

Citation List

Non Patent Literature

- [0008] NPL 1: V.D. Neff, Some performance characteristics of a Prussian Blue battery, *Journal of Electrochemical Society*, 132 (1985) 1382-1384.
- NPL 2: N. Imanishi, T. Morikawa, J. Kondo, Y. Takeda, O. Yamamoto, N. Kinugasa, T. Yamagishi, Lithium intercalation behavior into iron cyanide complex as positive electrode of lithium secondary battery, *Journal of Power Sources*, 79 (1999) 215-219.
- NPL 3: Y. Lu, L. Wang, J. Cheng, J.B. Goodenough, Prussian blue: a new framework for sodium batteries, *Chemistry Communication*, 48(2012)6544-6546.
- NPL 4: L. Wang, Y. Lu, J. Liu, M. Xu, J. Cheng, D. Zhang, J.B. Goodenough, A superior low-cost cathode for a Na-ion battery, *Angew. Chem. Int. Ed.*, 52(2013)1964-1967.
- NPL 5: A. Eftekhari, Potassium secondary cell based on Prussian blue cathode, *J. Power Sources*, 126 (2004) 221-228.
- NPL 6: C.D. Wessells, R.A. Huggins, Y. Cui, Copper hexacyanoferrate battery electrodes with long cycle life and high power, *Nature Communication*, 2(2011) 550.
- NPL 7: C.D. Wessells, S.V. Peddada, R. A. Huggins, Y. Cui, Nickel hexacyanoferrate nanoparticle electrodes for aqueous sodium and potassium ion batteries. *Nano Letters*,

11(2011) 5421-5425.

NPL 8: C.D. Wessells, S.V. Peddada, M.T. McDowell, R.A. Huggins, Y. Cui, The effect of insertion species on nanostructured open framework hexacyanoferrate battery electrode, J. Electrochem. Soc., 159(2012) A98-A103.

NPL 9: T.Matsuda, M. Takachi, Y. Moritomo, A sodium manganese ferrocyanide thin film for Na-ion batteries, Chemical Communications, DOI: 10.1039/C3CC38839E.

NPL 10: S.-H. Yu, M. Shokouhimehr, T. Hyeon, Y.-E. Sung, Iron hexacyanoferrate nanoparticles as cathode materials for lithium and sodium rechargeable batteries, ECS Electrochemistry Letters, 2(2013)A39-A41.

NPL 11: D. Asakura, C.H. Li, Y. Mizuno, M. Okubo, H. Zhou, D.R. Talham, Bimetallic cyanide-bridged coordination polymers as lithium ion cathode materials : core@shell nanoparticles with enhanced Cyclability, J. Am. Chem. Soc., 135(2013)2793-2799.

NPL 12: M. Okubo, D. Asakura, Y. Mizuno, T. Kudo, H. Zhou, A. Okazawa, N. Kojima, K. Ikeda, T. Mizokawa, I. Honma, Ion-induced transformation of magnetism in a bimetallic CuFe Prussian blue analogue, Angew, Chem, Int. Ed., 50(2011)6269-6273.

NPL 13: H.J. Buser, D. Schwarzenbach, W. Petter, A. Ludi, the crystal structure of Prussian blue: $\text{Fe}_4[\text{Fe}(\text{CN})_6]_3 \cdot x\text{H}_2\text{O}$, Inorganic Chemistry, 16(1977) 2704-2710.

NPL 14: F. Herren, P. Fischer, A. Ludi, W. Halg, Neutron diffraction study of Prussian blue, $\text{Fe}_4[\text{Fe}(\text{CN})_6]_3 \cdot x\text{H}_2\text{O}$. Location of water molecules and long-range magnetic order, Inorg. Chem. 1980, 19, 956-959

NPL 15: K.-S. Park, P. Xiao, S.-Y. Kim, A. Dylla, Y.-M. Choi, G. Henkelman, K.J. Stevenson, J.B. Goodenough, Enhanced charge-transfer kinetics by anion surface modification of LiFePO_4 , Chem. Mater. 24(2012)3212-3218.

Summary of Invention

Technical Problem

[0009] It would be advantageous if a TMHCF cathode could be treated or modified in such a manner as to support the lattice structure through multiple cycles of charge and discharge.

Solution to Problem

[0010] According to the one aspect of the present invention, a protected transition metal hexacyanoferrate (TMHCF) battery cathode comprising; a metal current collector; $\text{A}_x\text{M}_y\text{Fe}_z(\text{CN})_n \cdot m\text{H}_2\text{O}$ particles having a crystal lattice structure overlying the current collector; where A cations are selected from a group consisting of alkali and alkaline-earth cations; where M is a transition metal; where x is in a range of 0 to 2; where y is in a range of 0 to 2; where z is in a range of 0.1 to 2; where n is in a range of 1 to 6;

where m is in a range of 0 to 7; and, a cathode passivation layer.

[0011] According to the another aspect of the present invention, a transition metal hexacyanoferrate (TMHCF) battery with a protected cathode, the battery comprising: a cathode comprising: a metal current collector; $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles having a crystal lattice structure overlying the current collector; where A cations are selected from a group consisting of alkali and alkaline-earth cations; where M is a transition metal; where x is in a range of 0 to 2; where y is in a range of 0 to 2; where z is in a range of 0.1 to 2; where n is in a range of 1 to 6; where m is in a range of 0 to 7; a cathode passivation layer; an anode selected from a group consisting of an A' metal, an A' metal containing composite, and a material that can host A' atoms, where A' cations are selected from the group consisting of alkali and alkaline-earth cations; and, an electrolyte.

[0012] According to the another aspect of the present invention, a method for synthesizing a transition metal hexacyanoferrate (TMHCF) battery material, the method comprising: synthesizing a $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder including particles having a crystal lattice structure; where A cations are selected from a group consisting of alkali and alkaline-earth cations; where M is a transition metal; where x is in a range of 0 to 2; where y is in a range of 0 to 2; where z is in a range of 0.1 to 2; where n is in a range of 1 to 6; where m is in a range of 0 to 7; mixing the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with a conducting carbon and an organic binder in an organic solution, creating a mixture; forming the mixture on a metal current collector, creating a cathode; and, forming a cathode passivation layer overlying the cathode.

[0013] According to the another aspect of the present invention, a method for synthesizing a transition metal hexacyanoferrate (TMHCF) battery material, the method comprising: synthesizing a $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder including particles having a crystal lattice structure; where A cations are selected from a group consisting of alkali and alkaline-earth cations; where M is a transition metal; where x is in a range of 0 to 2; where y is in a range of 0 to 2; where z is in a range of 0.1 to 2; where n is in a range of 1 to 6; where m is in a range of 0 to 7; treating the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with a passivation material; mixing passivation-treated $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with a conducting carbon and an organic binder in an organic solution, creating a mixture; and, forming the mixture on a metal current collector, to create a protected cathode.

Brief Description of Drawings

[0014] [fig.1] Fig. 1 is a diagram depicting the crystal structure of a transition-metal hexacyanoferrate (TMHCF) in the form of $A_xM_1M_2(CN)_6$ (prior art).

[fig.2A] Fig. 2A is a diagram depicting a protected TMHCF battery cathode.

[fig.2B] Fig. 2B depicts $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles in detail.

[fig.3]Fig. 3 is detailed depictions representing the cathode passivation layer of Figs. 2A and 2B.

[fig.4]Fig. 4 is detailed depictions representing the cathode passivation layer of Figs. 2A and 2B.

[fig.5]Fig. 5 is a partial cross-sectional view of a TMHCF battery with a protected cathode.

[fig.6A]Fig. 6A is a graph depicting the performance of a $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode without a SiO_2 coating.

[fig.6B]Fig. 6B is a graph depicting the performance of a $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode without a SiO_2 coating.

[fig.7]Fig. 7 is a graph depicting the performance of a $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode with a SiO_2 coating.

[fig.8]Fig. 8 is a graph comparing the effects of the SiO_2 layer on the capacity and capacity retention of a $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode, with and without the SiO_2 layer.

[fig.9]Fig. 9 is a graph comparing the performance of Mn-HCF, with and without cathode passivation layer oxygen modification.

[fig.10]Fig. 10 is a flowchart illustrating a method for synthesizing a TMHCF battery material.

[fig.11]Fig. 11 is a flowchart illustrating another method for synthesizing a TMHCF battery material.

Description of Embodiments

[0015] Disclosed herein is a process to treat the surfaces of transition metal hexacyanoferrate (TMHCF) cathodes with simple materials to help maintain the lattice structure, promoting higher capacities and extended life cycling. The treatments can be carried out on the TMHCF powder during fabrication, or on the finished electrodes. In one aspect, stable passivation layers are coated on the surfaces of the TMHCF powder or electrodes. The compounds may be, but are not limited to, oxides, salts, and polymers. For example, Al_2O_3 , ZrO_2 , NaAlO_2 , $\text{Na}_4\text{Fe}(\text{CN})_6$, $\text{Na}_3\text{Fe}(\text{CN})_6$, polypyrrole, or polyaniline may be used. As an alternative to a coating material, the surfaces of the TMHCFs may be modified to form very stable structure, by reducing lattice defects and undercoordinated transition metal ions. For example, non-metal elements and organic groups, e.g., oxygen, nitrogen, sulfur, fluorine, chlorine, or iodine, may be introduced to the TMHCF surfaces. This surface modification stabilizes the surface structure of the TMHCFs and reduces the barrier for the charge transfer across the electrode/electrolyte interface.

[0016] Accordingly, a protected TMHCF battery cathode is presented. The TMHCF cathode is made from a metal current collector, with $\text{A}_x\text{M}_y\text{Fe}_z(\text{CN})_n \cdot m\text{H}_2\text{O}$ particles having a

crystal lattice structure overlying the current collector. The A cations are either alkali or alkaline-earth cations, and M is a transition metal; where x is in the range of 0 to 2; where y is in the range of 0 to 2; where z is in the range of 0.1 to 2; where n is in the range of 1 to 6; and, where m is in the range of 0 to 7.

[0017] The TMHCF cathode also includes a cathode passivation layer.

[0018] In one aspect the cathode passivation layer may be materials such as oxides, simple salts, carbonaceous materials, or polymers that form a film overlying the $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles. In another aspect, the cathode passivation layer is a material such as oxygen, nitrogen, sulfur, fluorine, chlorine, or iodine that interacts with the $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles, to cure defects in the $A_xM_yFe_z(CN)_n \cdot mH_2O$ crystal lattice structure.

[0019] A method is also presented for synthesizing a TMHCF battery material. Initially, the method synthesizes a $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder including particles having a crystal lattice structure. In one aspect the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder is mixed with a conducting carbon and an organic binder in an organic solution, creating a mixture. The mixture is formed on a metal current collector, creating a cathode, and then a cathode passivation layer, as described above, is formed overlying the cathode. The cathode passivation layer may be formed using one of the following processes, for example: physical vapor deposition (PVD), chemical vapor deposition (CVD), ball milling, atomic layer deposition (ALD), gas exposure, electrodeposition, sol-gel, or solution dip. As an alternative, the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder is treated with a passivation material, and the passivation-treated $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder is mixed with the conducting carbon and organic binder in an organic solution.

[0020] Additional details of the above-described TMHCF cathode, the above-described fabrication processes, and a TMHCF battery with a protected cathode are presented below.

[0021] Fig. 2A is a diagram depicting a protected TMHCF battery cathode, and Fig. 2B depicts $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles in detail. The TMHCF battery cathode 300 comprises a metal current collector 302. $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles 304 having a crystal lattice structure overlie the current collector 302. The A cations are either alkali or alkaline-earth cations (e.g., sodium (Na), potassium (K), calcium (Ca), or magnesium (Mg)), and M is a transition metal: where x is in the range of 0 to 2; where y is in the range of 0 to 2; where z is in the range of 0.1 to 2; where n is in the range of 1 to 6; where m is in the range of 0 to 7.

[0022] The TMHCF cathode 300 further comprises a cathode passivation layer 306. As can be more clearly seen in Fig. 2B, the $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles 304 are typically formed with a carbon black electronic conductor 308.

[0023] Figs. 3 and 4 are detailed depictions representing the cathode passivation layer of

Figs. 2A and 2B. In Fig. 3 the cathode passivation layer 306 includes materials such as oxides, simple salts, carbonaceous materials, or polymers, and the cathode passivation layer 306 is a film overlying the $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles 304. More explicitly, the cathode passivation layer materials may be aluminum oxide (Al_2O_3), magnesium oxide (MgO), silicon dioxide (SiO_2), zinc oxide (ZnO), lithium aluminum oxide ($LiAlO_2$), zirconium oxide (ZrO_2), sodium aluminum oxide ($NaAlO_2$), sodium ferricyanide ($Na_3Fe(CN)_6$), sodium ferrocyanide ($Na_4Fe(CN)_6$), potassium ferricyanide ($K_3Fe(CN)_6$), potassium ferrocyanide ($K_4Fe(CN)_6$), aluminum phosphate ($AlPO_4$), aluminum fluoride (AlF_3), polypyrrole, or polyaniline.

- [0024] In Fig. 4 the cathode passivation layer 306 includes a material such as oxygen, nitrogen, sulfur, fluorine, chlorine, or iodine, and the cathode passivation layer 306 interacts with the $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles 304, to cure defects 310 (shown in Fig. 3) in the $A_xM_yFe_z(CN)_n \cdot mH_2O$ crystal lattice structure. The cured defects are represented by the letter "G".
- [0025] Fig. 5 is a partial cross-sectional view of a TMHCF battery with a protected cathode. The battery 500 comprises a cathode 300. As shown in Fig. 2A, the cathode 300 comprises a metal current collector 302 and $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles having a crystal lattice structure overlying the current collector 302.
- [0026] The A cations are either alkali or alkaline-earth cations, and M is a transition metal: where x is in the range of 0 to 2; where y is in the range of 0 to 2; where z is in the range of 0.1 to 2; where n is in the range of 1 to 6; and, where m is in the range of 0 to 7. The cathode 300 further comprises a cathode passivation layer 306.
- [0027] Returning to Fig. 5, the battery 500 further comprises an anode 502 made from an A^+ metal, an A^+ metal containing composite, or a material that can host A^+ atoms, where the A^+ cations are either alkali or alkaline-earth cations. The battery 500 also comprises an electrolyte 504 filling unoccupied around each cathode 300 and anode 502, and a separator 506 between each anode 502 and cathode 300. In one aspect, the electrolyte 504 is an organic solvent containing A-atom salts, A^+ -atom salts, or a combination of A and A^+ -atom salts. In another aspect, A is Na, Ca, Mg, or K. Likewise, A^+ may be K, Ca, Mg, or Na.
- [0028] Additional details of the cathode 300 have been presented above in the explanation of Figs. 2A, 2B, 3, and 4, and are not repeated here in the interest of brevity.
- [0029] When TMHCFs electrodes are used in rechargeable batteries, it is inevitable that they interact with electrolyte. During charge/discharge, ions must transfer between electrode and electrolyte to realize energy storage and conversion. In general, the surfaces of electrodes are different from their bulk form, and include many defects on the surfaces and have large surface areas exhibiting high surface energy. The existence of defects makes the surfaces of conventional TMHCF electrodes readily degrade.


During charge/discharge this degradation results in large capacity fading. High surface energy reduces energy barriers for many reactions and results in unpredictable side reactions. Ultimately, the surface defects cause unstable performance, low capacities, low coulombic efficiencies, and short cycling lives prevalent in conventional TMHCF electrodes.

- [0030] To solve these problems, stable layers can be coated on the TMHCF electrodes. The layers may, for example, be comprised of oxides, simple salts and polymer that can be, but are not limited to, Al_2O_3 , MgO , ZnO , SiO_2 , NaAlO_2 , LiAlO_2 , $\text{Na}_4\text{Fe}(\text{CN})_6$, $\text{Na}_3\text{Fe}(\text{CN})_6$, polypyrrole, and polyaniline. These cathode passivation layers can: (1) sustain and stabilize the surfaces of TMHCFs; (2) prevent the TMHCFs from contacting electrolyte; (3) eliminate side reactions from occurring at the TMHCF surfaces; and, (4) improve the capacities and cycling lives of TMHCF electrodes.
- [0031] The cathode passivation layers can be obtained by treating the TMHCFs powder during TMHCF powder fabrication, or by treating the TMHCF electrodes after TMHCF powder fabrication. To form cathode passivation layers on TMHCF powder, the powder may be dispersed into an aqueous or non-aqueous solution containing precursors for the surface layer coating. After reactions with the precursors, the TMHCF powder coating is formed. The thickness of the coating layers may be from 1 nanometer (nm) to 500 nm. For example, to obtain NaAlO_2 -coated $\text{Na}_2\text{MnFe}(\text{CN})_6$ powder, the synthesized $\text{Na}_2\text{MnFe}(\text{CN})_6$ powder may be dispersed into a water solution containing Al^{3+} -ions. After strong stirring, Al^{3+} -ions are absorbed onto the surfaces of $\text{Na}_2\text{MnFe}(\text{CN})_6$ powder. After a NaOH solution drip, NaAlO_2 gel forms on the surface of $\text{Na}_2\text{MnFe}(\text{CN})_6$ powder. After washing and drying, the NaAlO_2 -coated $\text{Na}_2\text{MnFe}(\text{CN})_6$ powder is combined with binder and carbon black to make an electrode.
- [0032] As an alternative to the solution method presented above, the layers can be coated on the TMHCF powder with a ball milling method, physical vapor deposition (PVD), or atomic layer deposition (ALD). For example, an Al_2O_3 layer can be formed on the surface of TMHCF powder using the ALD method.
- [0033] The coating process can be also carried out after TMHCF electrode fabrication. The synthesized TMHCF powder is combined with a binder and conducting materials to make an electrode. The electrode can be a self-standing film or pasted on a current collector. Due to the porous structure of a TMHCF electrode, precursors for the surface layer coating can easily go inside of the electrodes. After reactions, the surface layers cover the electrode surface. The detailed processes are similar to those used to form layers on TMHCF powder. For example, a SiO_2 layer can be deposited on a $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode using a PVD method. However, a solution-based atomic layer deposition or solution-based deposition may be more effective for covering the electrode inner surfaces. Similar solution-based processes have been presented in the parent ap-


plication entitled, Carbon-Sulfur Composite Cathode Passivation and Method for Making Same, invented by Jong-Jan Lee, Serial No. 13/793,559, filed March 11, 2013.

[0034] For example, a thin dielectric cathode passivation layer can be deposited by a liquid solution low-cost dip coating process. First, a metal alkoxide solution is prepared for use as a precursor. Then, the porous cathode is dipped in the metal alkoxide solution for a period of time (e.g. 30 seconds). Since the electrode is very porous, the solution wets the cathode electrode uniformly. However, no deposition occurs at this time. After taking the cathode electrode out of the metal alkoxide solution and dipping into water, the metal alkoxide undergoes hydrolysis and condensation processes (Equations, 1 and 2) and eventually an M-O-M compound is condensed and deposited uniformly inside the porous cathode. The condensation process in Equation 2 shows an oxo bridge (-O-) formation. The processes continues, so that a M-O-M-O-M- type linkage occurs. The thickness of the metal oxide layer depends on the precursor concentration. A thicker layer can be obtained with multiple layer depositions.

[0035] Hydrolysis:



[0036] Condensation:



[0037] R represents a proton or other ligand. If R is an alkyl, then OR is an alkoxy group and ROH is an alcohol.

[0038] After deposition, the film can be air dried, dried in a vacuum, or heated to ~100 degrees centigrade in a vacuum. After drying, the deposited film is in an amorphous phase, and it is not necessary to crystallize the metal-oxide film. The film is permeable to an electrolyte, porous enough to permit ion diffusion (Na^+), but dense enough to block the dissolution of the metal cyanide anion.

[0039] Beside these processes, cathode passivation layers can be also formed on the electrode surfaces during charge/discharge cycles. Precursors are added to the electrode or electrolyte. During charge/discharge, the precursors decompose or react with the electrode to form layers on TMHCF electrodes. For example, $\text{Na}_4\text{Fe(CN)}_6$ may be added into $\text{Na}_2\text{MnFe(CN)}_6$ electrode and electrolyte. During charge/discharge, Fe(CN)_6^{4-} -ions capture Mn^{2+} -ions moving out from $\text{Na}_2\text{MnFe(CN)}_6$ electrode, which forms layers to coat the surface of the electrode. Further, the addition of Fe(CN)_6^{4-} -ions reduces the vacancies of Fe(CN)_6 on the TMHCF surfaces. The coated $\text{Na}_2\text{MnFe(CN)}_6$ cathode demonstrates higher capacity and better capacity retention than a pure $\text{Na}_2\text{MnFe(CN)}_6$ electrode.

[0040] As another alternative, either the TMHCF powder or electrodes can be heated in air

to form layers of MO_x and FeO_y on their surface.

- [0041] An example is presented herein of a SiO_2 -coated $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode. In this case, the $\text{Na}_2\text{MnFe}(\text{CN})_6$ powder was mixed with carbon black and polytetrafluoroethylene (PTFE) to make self-standing electrodes for a sodium-ion battery. Silicon oxide layers with different thicknesses were deposited on the electrodes using a PVD technique.
- [0042] Figs. 6A and 6B are graphs depicting the performance of a $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode without a SiO_2 coating. As shown in Fig. 6A, when charged at high current levels, large voltage fluctuation appeared on the charge-time curves. The problem was attributed to sodium-dendrite formation. During the charge process, sodium-ions were electroplated on the sodium-metal anode. The sodium electroplating dendrites created a shortcut (leaking current) between the anode and cathode. In addition, the abnormal behavior took place just during the charge process. During discharge, the sodium dendrites dissolved into the organic electrolyte, and discharge capacity was normal with cycling as shown in Fig. 6B.
- [0043] Fig. 7 is a graph depicting the performance of a $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode with a SiO_2 coating. After coating with a 100 angstrom SiO_2 layer, the $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode was evaluated in a sodium-ion battery. Fig. 7 depicts charge capacity changes with cycling. Unlike the $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode without SiO_2 coating (Fig. 8), the coated electrode demonstrated a stable performance at a high charge/discharge current. No abnormal charge capacity was observed on the electrode.
- [0044] Fig. 8 is a graph comparing the effects of the SiO_2 layer on the capacity and capacity retention of a $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode, with and without the SiO_2 layer. During the first discharge, the SiO_2 -coated $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode delivered a capacity of 149 mAh/g that was 7 mAh/g higher than that of the $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode without SiO_2 coating. At the 104th cycle, the capacity of the SiO_2 -coated $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode was 115 mAh/g, and the capacity of the $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode without SiO_2 coating was 102 mAh/g. The SiO_2 coating increased the capacity and capacity retention of $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode. During the SiO_2 -coating process, the SiO_2 vapor penetrated the surface of $\text{Na}_2\text{MnFe}(\text{CN})_6$ electrode and modified the particle surface of $\text{Na}_2\text{MnFe}(\text{CN})_6$ particles inside the electrode, which improved the electrode performance.
- [0045] Besides coating the cathode with a protective film, the cathode passivation layer may act to modify the surface of a TMHCF electrode in a rechargeable battery. During the growth of TMHCF crystals, the $\text{Fe}(\text{CN})_6$ positions cannot be totally occupied, creating vacancies. On the crystal surface, the case becomes more complicated. $\text{Fe}(\text{CN})_6$ vacancies, transition metal (M^{n+}) defects, and undercoordinated metal ions appear on the surface. Vacancies and defects weaken the strength of the crystal structure near the surface. The extraction of mobile ions near the surface can reduce the strength even

further. It is possible that the crystal structure may start to collapse from the surface. As an electrode in rechargeable batteries, conventional TMHCF cathodes demonstrate a rapid capacity fading because of their unstable surface. In addition, undercoordinated metal ions can impede the charge transfer between the electrode and electrolyte because undercoordinated metal ions with positive charges repulse the positive charged mobile ions approaching to the surface of the TMHCF electrode.

[0046] To solve these problems, the surface of TMHCF cathodes can be modified with non-metal elements and organic groups. The non-metal elements can be, but are not limited to, oxygen, nitrogen, sulfur, fluorine, chlorine, and iodine. These elements and organic groups interact with metal ions near surface to stabilize the structure of the TMHCF cathode. For example, these elements and organic groups go to vacancies near the surface to coordinate with metal ions, which supports and strengthens the framework of the TMHCF. The elements and organic groups also can connect with the undercoordinated metal ions on the surface to reduce their repulsion with mobile ions. The surface modification can be carried out with solutions or in gas environments.

[0047] An example is presented herein with oxygen modifying the surface of manganese HCF (Mn-HCF), $\text{Na}_2\text{MnFe}(\text{CN})_6$. The Mn-HCF was heated in an oven with air/oxygen. After time, oxygen interacted with the metal ions on the Mn-HCF surface and formed Mn-O and Fe-O bonds. The bond formation stabilized the surface of Mn-HCF, which then showed a better capacity retention. The oxygen modification was carried out in a chamber typically used for PVD / CVD processes, with free oxygen radicals. Nitrogen and sulfur modification can be performed using similar methods with different element sources.

[0048] Before oxygen modifying, the particle size of the Mn-HCF was 50 ~100 nm, but the size increased to 150~200 nm after the oxygen modification. The structure of the two materials was investigated with X-ray diffraction (XRD). Their XRD patterns showed no difference, indicating that the oxygen modification occurred on the surface, forming a cathode passivation layer, and did not change the Mn-HCF structure.

[0049] Fig. 9 is a graph comparing the performance of Mn-HCF, with and without cathode passivation layer oxygen modification. The graph depicts the electrochemical behavior in cells with a counter electrode of sodium-metal. Saturated NaClO_4 ethylene carbonate (EC)/diethylene carbonate (DEC) was used as the electrolyte. The oxygen modification oxidized metal ions on the Mn-HCF surface, which reduced the sodium content in the Mn-HCF electrode because of the charge neutralization. So the capacity of Sample 2 (with the oxygen-modified cathode passivation layer) was smaller than that of Sample 1 (with no oxygen modification). However, it was observed that oxygen modification stabilized the surface structure of Mn-HCF and showed a better capacity retention. After 100 cycles, 84% capacity was left in the oxygen surface-modified Mn-HCF, but

only 72% capacity was remained in Mn-HCF without surface modification.

- [0050] Fig. 10 is a flowchart illustrating a method for synthesizing a TMHCF battery material. Although the method is depicted as a sequence of numbered steps for clarity, the numbering does not necessarily dictate the order of the steps. It should be understood that some of these steps may be skipped, performed in parallel, or performed without the requirement of maintaining a strict order of sequence. Generally however, the method follows the numeric order of the depicted steps. The method starts at Step 1000.
- [0051] Step 1002 synthesizes a $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder including particles having a crystal lattice structure. As noted above, the A cations may be alkali or alkaline-earth cations such as Na, Ca, Mg, or K. M is a transition metal, and: x is in the range of 0 to 2; y is in the range of 0 to 2; z is in the range of 0.1 to 2; n is in the range of 1 to 6; and, m is in the range of 0 to 7.
- [0052] Step 1004 mixes the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with a conducting carbon and an organic binder in an organic solution, creating a mixture. Step 1006 forms the mixture on a metal current collector, creating a cathode. Typically, the mixture is in the form of a paste that is pliable and easily dried. Step 1008 forms a cathode passivation layer overlying the cathode.
- [0053] In one aspect, forming the cathode passivation layer in Step 1008 includes forming the cathode passivation layer with materials such as oxides, simple salts, carbonaceous materials, and polymers, so that the cathode passivation layer is formed as a film overlying the $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles. More particularly, the cathode passivation layer may be a material such as aluminum oxide (Al_2O_3), magnesium oxide (MgO), silicon dioxide (SiO_2), zinc oxide (ZnO), lithium aluminum oxide ($LiAlO_2$), zirconium oxide (ZrO_2), sodium aluminum oxide ($NaAlO_2$), sodium ferricyanide ($Na_3Fe(CN)_6$), sodium ferrocyanide ($Na_4Fe(CN)_6$), potassium ferricyanide ($K_3Fe(CN)_6$), potassium ferrocyanide ($K_4Fe(CN)_6$), aluminum phosphate ($AlPO_4$), aluminum fluoride (AlF_3), polypyrrole, or polyaniline. However, this is not an exhaustive list of materials.
- [0054] Step 1008 may form the cathode passivation layer using one of the following processes: PVD, CVD, ball milling, ALD, gas exposure, electrodeposition, sol-gel, or solution dip. In another aspect, Step 1008 may be performed with the following substeps. Step 1008a adds passivation precursors to an electrolyte. Step 1008b exposes the cathode to the electrolyte, and Step 1008c performs cycles of cathode charge and discharge.
- [0055] In a different aspect, forming the cathode passivation layer in Step 1008 includes forming the cathode passivation layer with a material such as oxygen, nitrogen, sulfur, fluorine, chlorine, or iodine, so that the cathode passivation layer interacts with the $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles, to cure defects in the $A_xM_yFe_z(CN)_n \cdot mH_2O$ crystal lattice

structure.

- [0056] Fig. 11 is a flowchart illustrating another method for synthesizing a TMHCF battery material. The method begins at Step 1100. Step 1102 synthesizes a $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder including particles having a crystal lattice structure. The A cations may be alkali or alkaline-earth cations such as Na, Ca, Mg, or K. M is a transition metal, and: x is in the range of 0 to 2; y is in the range of 0 to 2; z is in the range of 0.1 to 2; n is in the range of 1 to 6; and, m is in the range of 0 to 7.
- [0057] Step 1104 treats the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with a passivation material. Step 1106 mixes passivation-treated $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with a conducting carbon and an organic binder in an organic solution, creating a mixture. Step 1108 forms the mixture on a metal current collector, to create a protected cathode.
- [0058] Treating the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with the passivation material in Step 1104 may include using one of the following processes: PVD, CVD, ball milling, ALD, electrodeposition, sol-gel, gas exposure, or solution processing. With respect to the solution process method for treating the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with the passivation material, the following substeps may be used. Step 1104a adds the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder to a solution including passivation precursors. For example, the solution may be an aqueous or non-aqueous solution. Step 1104b strongly stirs the solution. Step 1104c dries the solution to form a precipitate of passivation-treated $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder.
- [0059] In one aspect, Step 1104 treats the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with passivation materials such as oxides, simple salts, carbonaceous materials, and polymers, wherein the passivation material forms a film overlying the $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles. More particularly, these materials may be Al_2O_3 , MgO , SiO_2 , ZnO , $LiAlO_2$, ZrO_2 , $NaAlO_2$, $Na_3Fe(CN)_6$, $Na_4Fe(CN)_6$, $K_3Fe(CN)_6$, $K_4Fe(CN)_6$, $AlPO_4$, AlF_3 , polypyrrole, or polyaniline.
- [0060] In another aspect, Step 1104 treats the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with a passivation material such as oxygen, nitrogen, sulfur, fluorine, chlorine, or iodine, wherein the passivation material interacts with the $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles, to cure defects in the $A_xM_yFe_z(CN)_n \cdot mH_2O$ crystal lattice structure.
- [0061] All applications described below are incorporated herein by reference: (1) TRANSITION METAL HEXACYANOFERRATE BATTERY CATHODE WITH SINGLE PLATEAU CHARGE/DISCHARGE CURVE, invented by Yuhao Lu et al., Serial No. 13/752,930, filed January 29, 2013. (2) SUPERCAPACITOR WITH HEXACYANOMETALLATE CATHODE, ACTIVATED CARBON ANODE, AND AQUEOUS ELECTROLYTE, invented by Yuhao Lu et al., Serial No. 13/603,322, filed September 4, 2012. (3) IMPROVEMENT OF ELECTRON TRANSPORT IN HEXACYANOMETALLATE ELECTRODE FOR ELECTROCHEMICAL AP-

PLICATIONS, invented by Yuhao Lu et al., Serial No. 13/523,694, filed June 14, 2012. (4) ALKALI AND ALKALINE-EARTH ION BATTERIES WITH HEXA-CYANOMETALLATE CATHODE AND NON-METAL ANODE, invented by Yuhao Lu et al., Serial No. 13/449,195, filed April 17, 2012. (5) Electrode Forming Process for Metal-Ion Battery with Hexacyanometallate Electrode, invented by Yuhao Lu et al., Serial No. 13/432,993, filed March 28, 2012. (6) Carbon-Sulfur Composite Cathode Passivation and Method for Making Same, invented by Jong-Jan Lee, Serial No. 13/793,559, filed March 11, 2013.

Industrial Applicability

[0062] A protected TMHCF cathode, a battery with a protected TMHCF cathode, and TMHCF fabrication processes have been provided. Examples of particular materials and process steps have been presented to illustrate the invention. However, the invention is not limited to merely these examples. Other variations and embodiments of the invention will occur to those skilled in the art.

Claims

- [Claim 1] A protected transition metal hexacyanoferrate (TMHCF) battery cathode comprising:
 a metal current collector;
 $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles having a crystal lattice structure overlying the current collector;
 where A cations are selected from a group consisting of alkali and alkaline-earth cations;
 where M is a transition metal;
 where x is in a range of 0 to 2;
 where y is in a range of 0 to 2;
 where z is in a range of 0.1 to 2;
 where n is in a range of 1 to 6;
 where m is in a range of 0 to 7; and,
 a cathode passivation layer.
- [Claim 2] The TMHCF battery cathode of claim 1 wherein the cathode passivation layer includes materials selected from a group consisting of oxides, simple salts, carbonaceous materials, and polymers; and, wherein the cathode passivation layer is a film overlying the $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles.
- [Claim 3] The TMHCF battery cathode of claim 2 wherein the cathode passivation layer includes a material selected from a group consisting of aluminum oxide (Al_2O_3), magnesium oxide (MgO), silicon dioxide (SiO_2), zinc oxide (ZnO), lithium aluminum oxide ($LiAlO_2$), zirconium oxide (ZrO_2), sodium aluminum oxide ($NaAlO_2$), sodium ferricyanide ($Na_3Fe(CN)_6$), sodium ferrocyanide ($Na_4Fe(CN)_6$), potassium ferricyanide ($K_3Fe(CN)_6$), potassium ferrocyanide ($K_4Fe(CN)_6$), aluminum phosphate ($AlPO_4$), aluminum fluoride (AlF_3), polypyrrole, and polyaniline.
- [Claim 4] The TMHCF battery cathode of claim 1 wherein the A cations are selected from a group consisting of sodium (Na), calcium (Ca), magnesium (Mg), and potassium (K).
- [Claim 5] The TMHCF battery cathode of claim 1 wherein the cathode passivation layer includes a material selected from a group consisting of oxygen, nitrogen, sulfur, fluorine, chlorine, and iodine; and, wherein the cathode passivation layer interacts with the $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles, to cure defects in the $A_xM_yFe_z(CN)_n \cdot mH_2O$ crystal

lattice structure.

- [Claim 6] A transition metal hexacyanoferrate (TMHCF) battery with a protected cathode, the battery comprising:
 a cathode comprising:
 a metal current collector;
 $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles having a crystal lattice structure overlying the current collector;
 where A cations are selected from a group consisting of alkali and alkaline-earth cations;
 where M is a transition metal;
 where x is in a range of 0 to 2;
 where y is in a range of 0 to 2;
 where z is in a range of 0.1 to 2;
 where n is in a range of 1 to 6;
 where m is in a range of 0 to 7;
 a cathode passivation layer;
 an anode selected from a group consisting of an A` metal, an A` metal containing composite, and a material that can host A` atoms, where A` cations are selected from the group consisting of alkali and alkaline-earth cations; and,
 an electrolyte.
- [Claim 7] The TMHCF battery of claim 6 wherein the cathode passivation layer includes materials selected from a group consisting of oxides, simple salts, carbonaceous materials, and polymers; and,
 wherein the cathode passivation layer is a film overlying the $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles.
- [Claim 8] The TMHCF battery of claim 7 wherein the cathode passivation layer includes a material selected from a group consisting of aluminum oxide (Al_2O_3), magnesium oxide (MgO), silicon dioxide (SiO_2), zinc oxide (ZnO), lithium aluminum oxide ($LiAlO_2$), zirconium oxide (ZrO_2), sodium aluminum oxide ($NaAlO_2$), sodium ferricyanide ($Na_3Fe(CN)_6$), sodium ferrocyanide ($Na_4Fe(CN)_6$), potassium ferricyanide ($K_3Fe(CN)_6$), potassium ferrocyanide ($K_4Fe(CN)_6$), aluminum phosphate ($AlPO_4$), aluminum fluoride (AlF_3), polypyrrole, and polyaniline.
- [Claim 9] The TMHCF battery of claim 6 wherein the electrolyte is an organic solvent containing a material selected from a group consisting of A-atom salts, A`-atom salts, and a combination of the above-mentioned salts.

- [Claim 10] The TMHCF battery of claim 6 wherein A is selected from a group consisting of sodium (Na), calcium (Ca), magnesium (Mg), and potassium (K); and, wherein A` is selected from a group consisting of Na, Ca, Mg, and potassium K.
- [Claim 11] The TMHCF battery of claim 6 wherein the cathode passivation layer includes a material selected from a group consisting of oxygen, nitrogen, sulfur, fluorine, chlorine, and iodine; and, wherein the cathode passivation layer interacts with the $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles, to cure defects in the $A_xM_yFe_z(CN)_n \cdot mH_2O$ crystal lattice structure.
- [Claim 12] A method for synthesizing a transition metal hexacyanoferrate (TMHCF) battery material, the method comprising:
 synthesizing a $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder including particles having a crystal lattice structure;
 where A cations are selected from a group consisting of alkali and alkaline-earth cations;
 where M is a transition metal;
 where x is in a range of 0 to 2;
 where y is in a range of 0 to 2;
 where z is in a range of 0.1 to 2;
 where n is in a range of 1 to 6;
 where m is in a range of 0 to 7;
 mixing the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with a conducting carbon and an organic binder in an organic solution, creating a mixture;
 forming the mixture on a metal current collector, creating a cathode;
 and,
 forming a cathode passivation layer overlying the cathode.
- [Claim 13] The method of claim 12 wherein forming the cathode passivation layer includes forming the cathode passivation layer with materials selected from a group consisting of oxides, simple salts, carbonaceous materials, and polymers; and, wherein the cathode passivation layer is a film overlying the $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles.
- [Claim 14] The method of claim 13 wherein forming the cathode passivation layer includes forming the cathode passivation layer with a material selected from a group consisting of aluminum oxide (Al_2O_3), magnesium oxide (MgO), silicon dioxide (SiO_2), zinc oxide (ZnO), lithium aluminum

oxide (LiAlO_2), zirconium oxide (ZrO_2), sodium aluminum oxide (NaAlO_2), sodium ferricyanide ($\text{Na}_3\text{Fe}(\text{CN})_6$), sodium ferrocyanide ($\text{Na}_4\text{Fe}(\text{CN})_6$), potassium ferricyanide ($\text{K}_3\text{Fe}(\text{CN})_6$), potassium ferrocyanide ($\text{K}_4\text{Fe}(\text{CN})_6$), aluminum phosphate (AlPO_4), aluminum fluoride (AlF_3), polypyrrole, and polyaniline.

[Claim 15] The method of claim 12 wherein forming the cathode passivation layer includes forming the cathode passivation layer using a process selected from a group consisting of physical vapor deposition (PVD), chemical vapor deposition (CVD), ball milling, atomic layer deposition (ALD), gas exposure, electrodeposition, sol-gel, and solution dip.

[Claim 16] The method of claim 12 wherein forming the cathode passivation layer includes:

adding passivation precursors to an electrolyte;
exposing the cathode to the electrolyte; and,
performing cycles of cathode charge and discharge.

[Claim 17] The method of claim 12 wherein synthesizing the $\text{A}_x\text{M}_y\text{Fe}_z(\text{CN})_n \cdot m\text{H}_2\text{O}$ powder includes A being selected from a group consisting of sodium (Na), calcium (Ca), magnesium (Mg), and potassium (K).

[Claim 18] The method of claim 12 wherein forming the cathode passivation layer includes forming the cathode passivation layer with a material selected from a group consisting of oxygen, nitrogen, sulfur, fluorine, chlorine, and iodine; and,
wherein the cathode passivation layer interacts with the $\text{A}_x\text{M}_y\text{Fe}_z(\text{CN})_n \cdot m\text{H}_2\text{O}$ particles, to cure defects in the $\text{A}_x\text{M}_y\text{Fe}_z(\text{CN})_n \cdot m\text{H}_2\text{O}$ crystal lattice structure.

[Claim 19] A method for synthesizing a transition metal hexacyanoferrate (TMHCF) battery material, the method comprising:
synthesizing a $\text{A}_x\text{M}_y\text{Fe}_z(\text{CN})_n \cdot m\text{H}_2\text{O}$ powder including particles having a crystal lattice structure;
where A cations are selected from a group consisting of alkali and alkaline-earth cations;
where M is a transition metal;
where x is in a range of 0 to 2;
where y is in a range of 0 to 2;
where z is in a range of 0.1 to 2;
where n is in a range of 1 to 6;
where m is in a range of 0 to 7;
treating the $\text{A}_x\text{M}_y\text{Fe}_z(\text{CN})_n \cdot m\text{H}_2\text{O}$ powder with a passivation material;

mixing passivation-treated $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with a conducting carbon and an organic binder in an organic solution, creating a mixture; and,
forming the mixture on a metal current collector, to create a protected cathode.


- [Claim 20] The method of claim 19 wherein treating the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with the passivation material includes treating a process selected from a group consisting of physical vapor deposition (PVD), chemical vapor deposition (CVD), ball milling, atomic layer deposition (ALD), electrodeposition, sol-gel, gas exposure, and solution processing.
- [Claim 21] The method of claim 20 wherein using the solution process to treat the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with the passivation material includes: adding the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder to a solution including passivation precursors; and,
strongly stirring the solution; and,
drying the solution to form a precipitate of passivation-treated $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder.
- [Claim 22] The method of claim 21 wherein adding the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder in the solution includes the solution being a material selected from a group consisting of aqueous and non-aqueous solutions.
- [Claim 23] The method of claim 19 wherein treating the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with the passivation material includes the passivation material being materials selected from a group consisting of oxides, simple salts, carbonaceous materials, and polymers, wherein the passivation material forms a film overlying the $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles.
- [Claim 24] The method of claim 23 wherein treating the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with the passivation material includes the passivation material being selected from a group consisting of aluminum oxide (Al_2O_3), magnesium oxide (MgO), silicon dioxide (SiO_2), zinc oxide (ZnO), lithium aluminum oxide ($LiAlO_2$), zirconium oxide (ZrO_2), sodium aluminum oxide ($NaAlO_2$), sodium ferricyanide ($Na_3Fe(CN)_6$), sodium ferrocyanide ($Na_4Fe(CN)_6$), potassium ferricyanide ($K_3Fe(CN)_6$), potassium ferrocyanide ($K_4Fe(CN)_6$), aluminum phosphate ($AlPO_4$), aluminum fluoride (AlF_3), polypyrrole, and polyaniline.
- [Claim 25] The method of claim 19 wherein synthesizing the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder includes A being selected from a group consisting of sodium (Na), calcium (Ca), magnesium (Mg), and potassium (K).

[Claim 26]

The method of claim 19 wherein treating the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder with the passivation material includes treating the $A_xM_yFe_z(CN)_n \cdot mH_2O$ powder to a passivation material selected from a group consisting of oxygen, nitrogen, sulfur, fluorine, chlorine, and iodine, wherein the passivation material interacts with the $A_xM_yFe_z(CN)_n \cdot mH_2O$ particles, to cure defects in the $A_xM_yFe_z(CN)_n \cdot mH_2O$ crystal lattice structure.


[Fig. 1]

FIG. 1

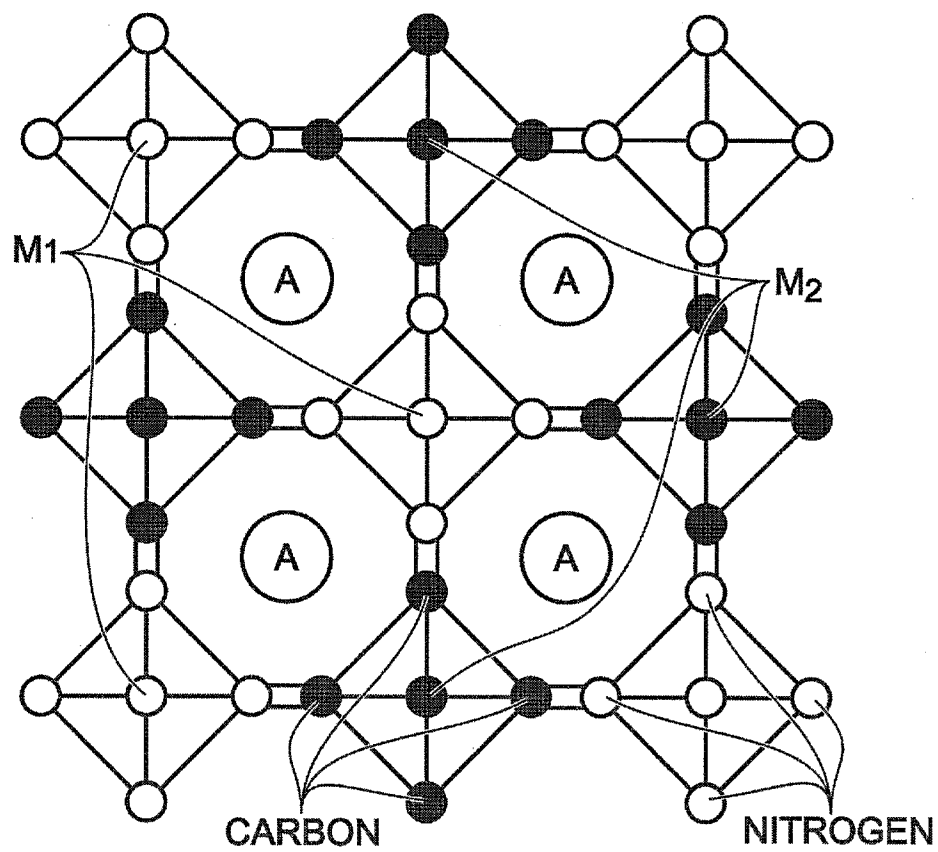


[Fig. 2A]

FIG. 2A

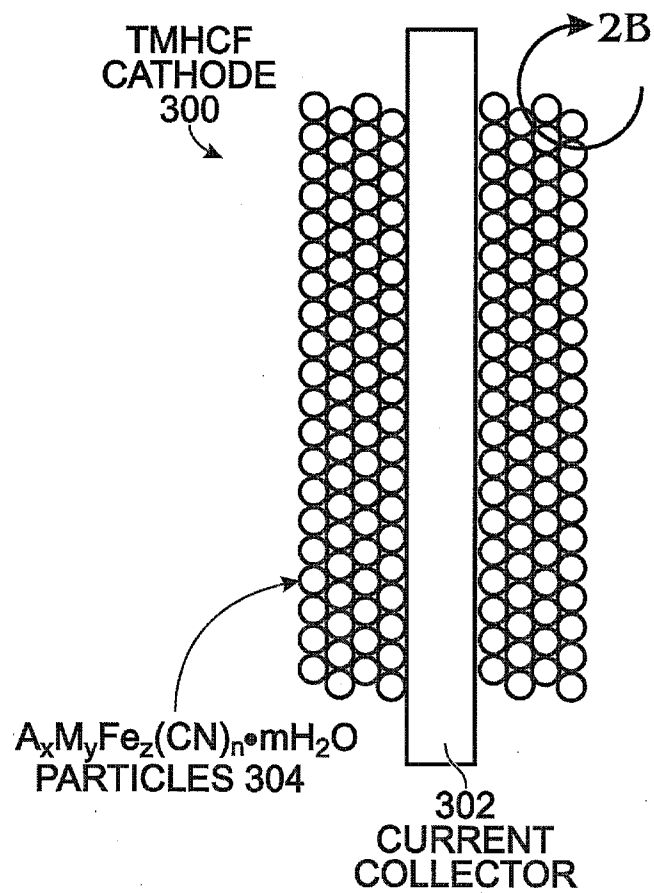


[Fig. 2B]

FIG. 2B

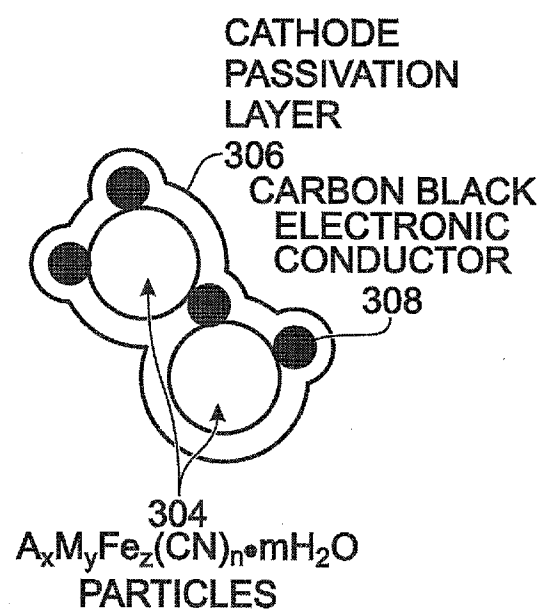


[Fig. 3]

FIG. 3

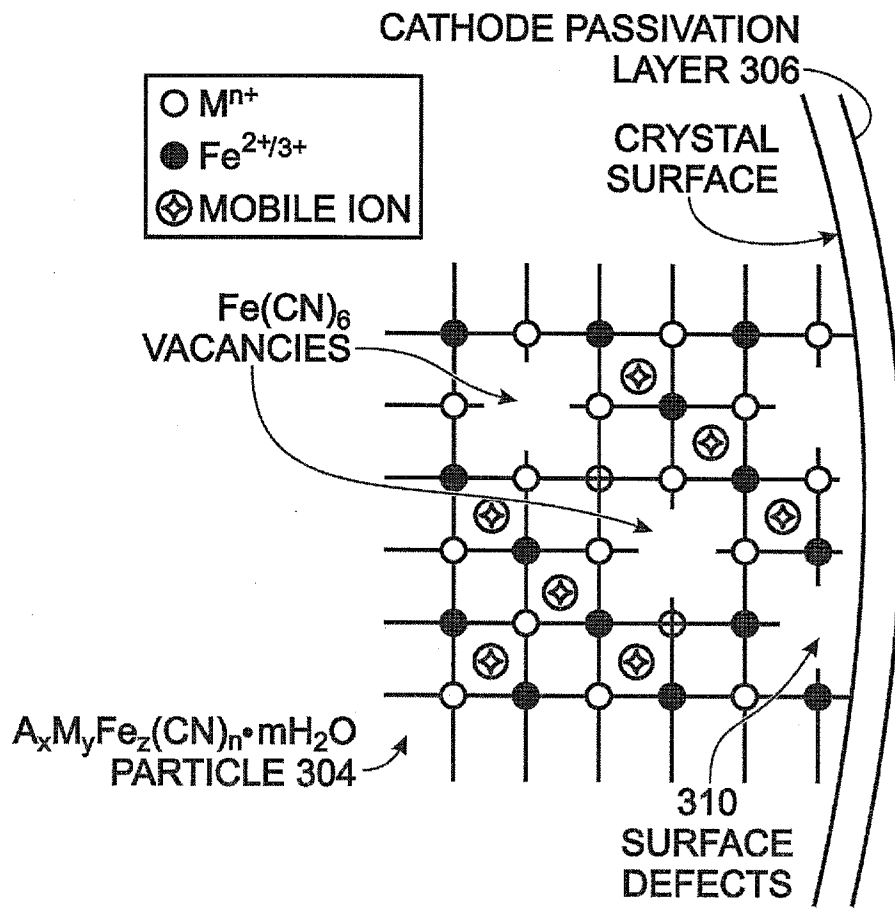


[Fig. 4]

FIG. 4

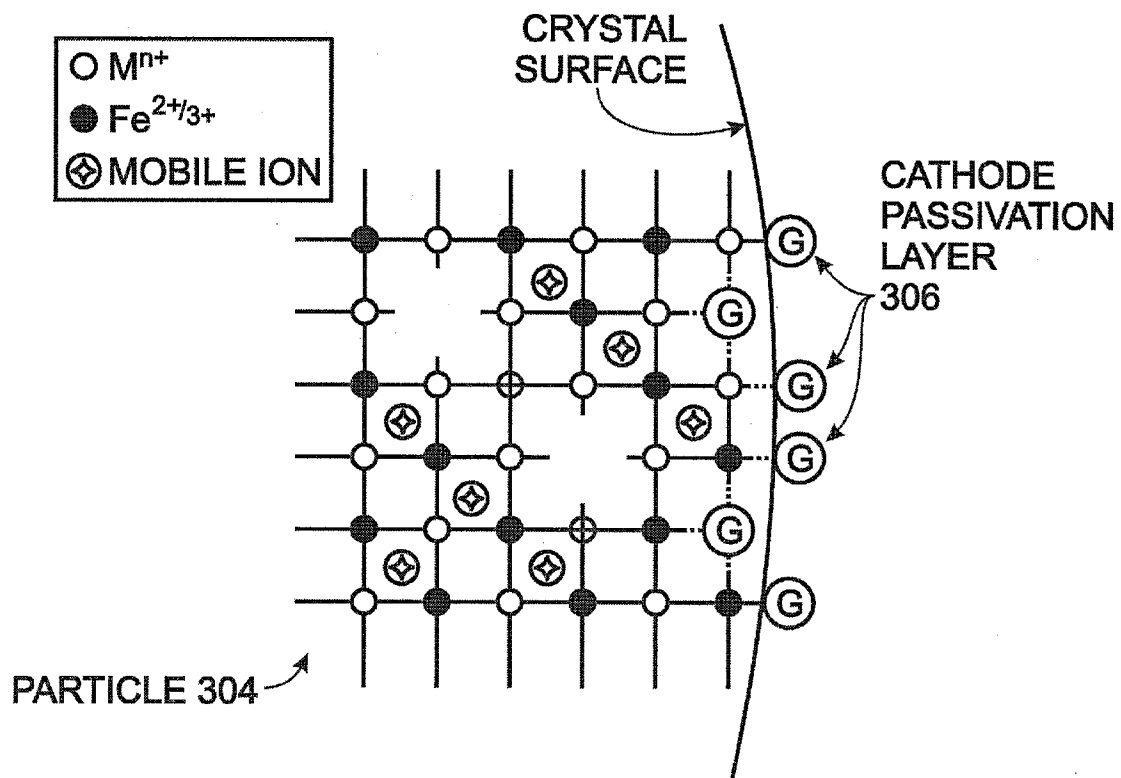


[Fig. 5]

FIG. 5

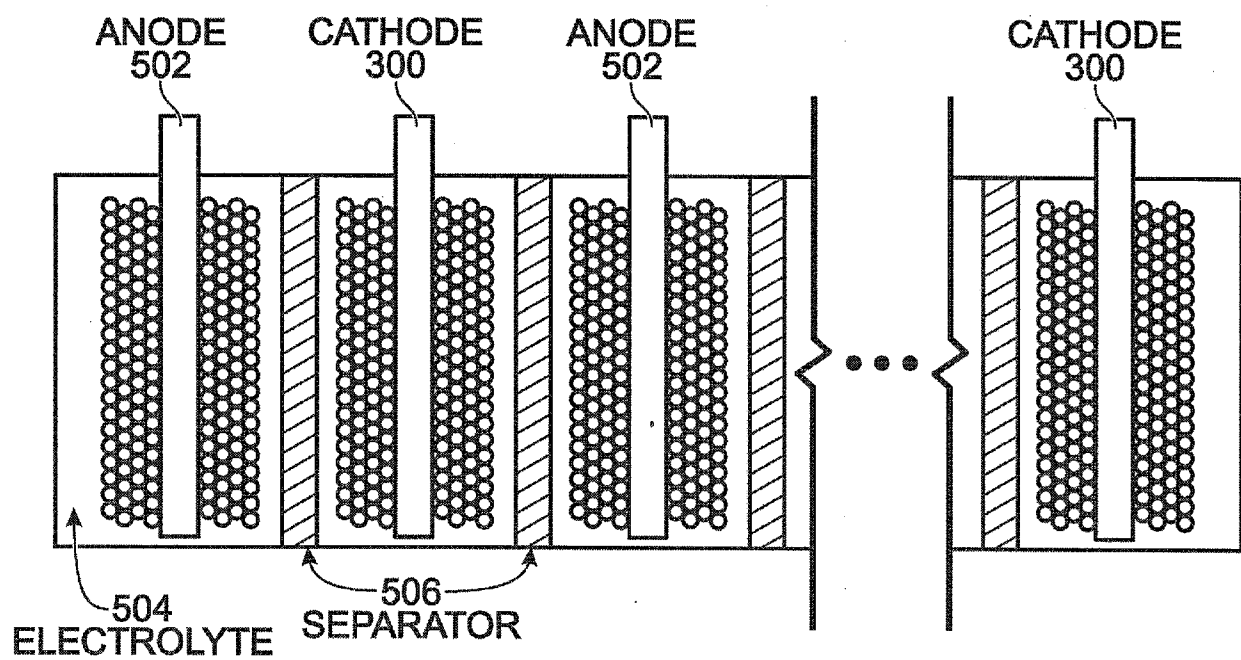


[Fig. 6A]

FIG. 6A

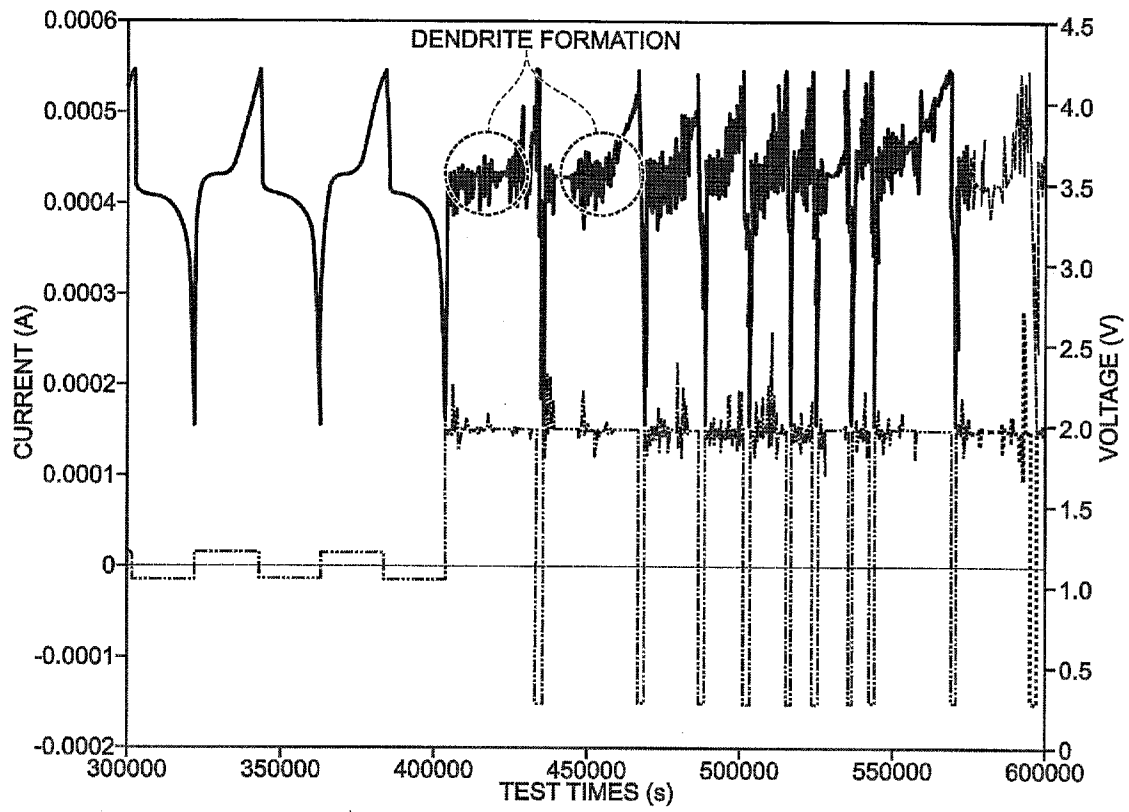


[Fig. 6B]

FIG. 6B

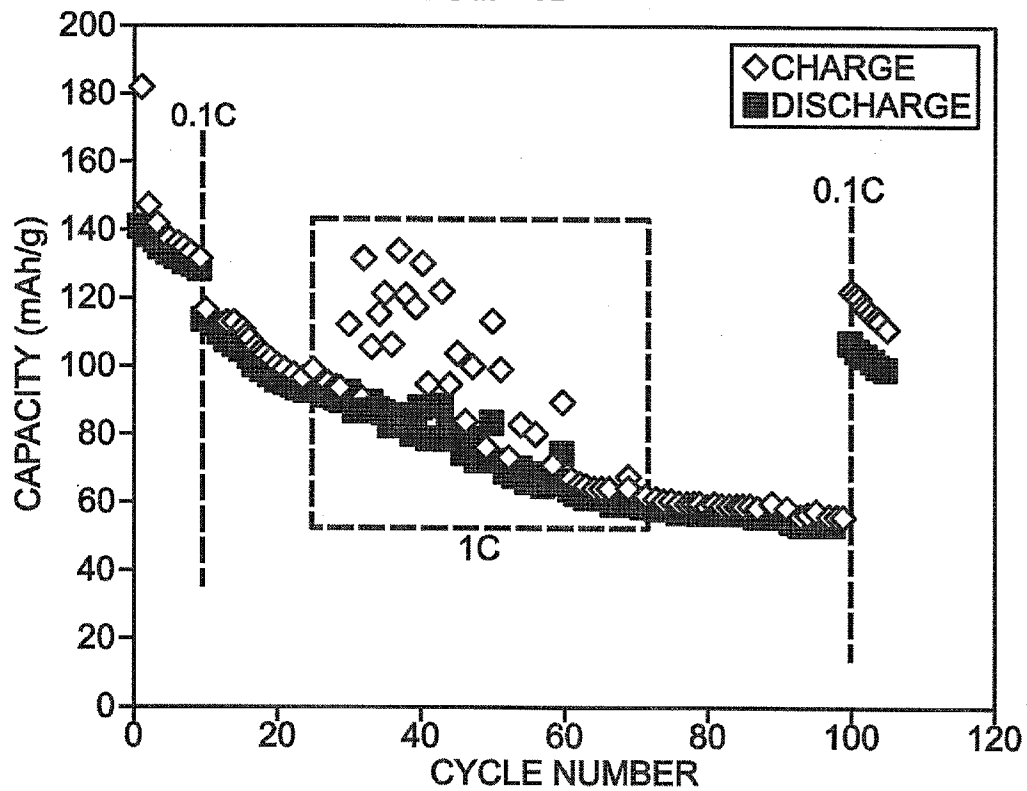


[Fig. 7]

FIG. 7

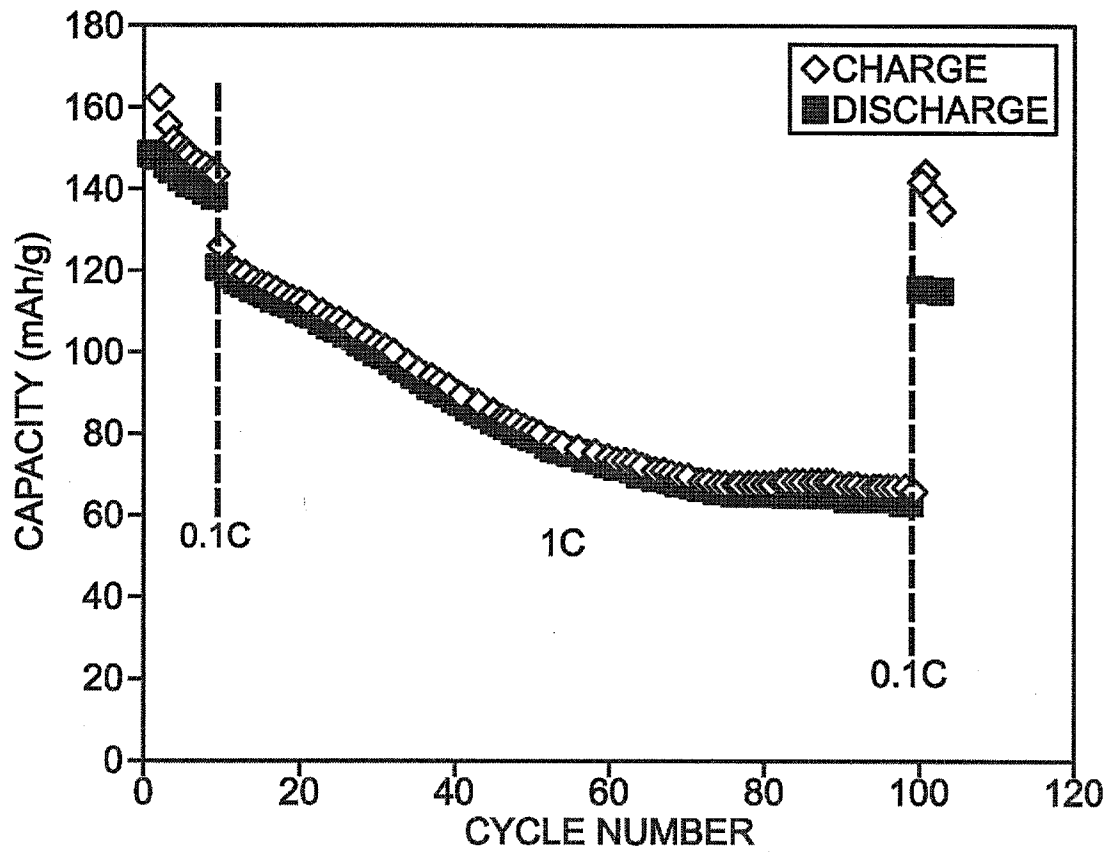


[Fig. 8]

FIG. 8

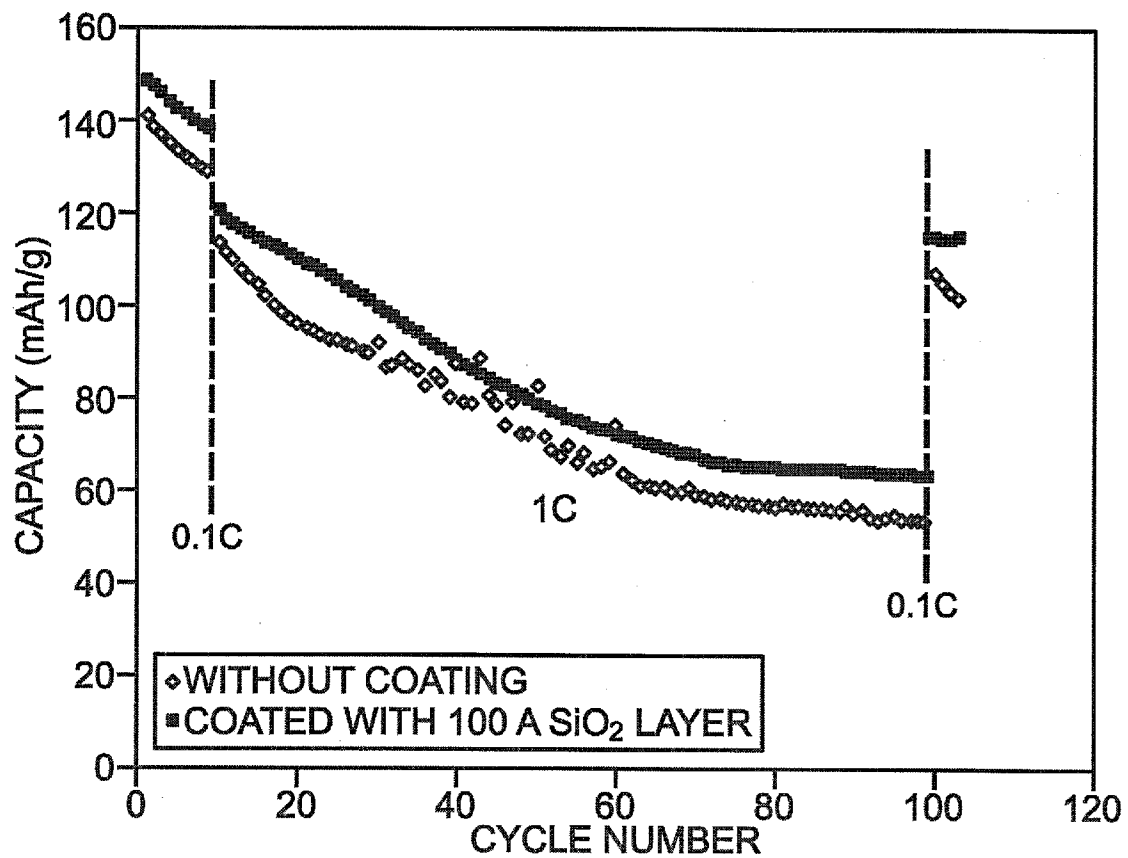


[Fig. 9]

FIG. 9

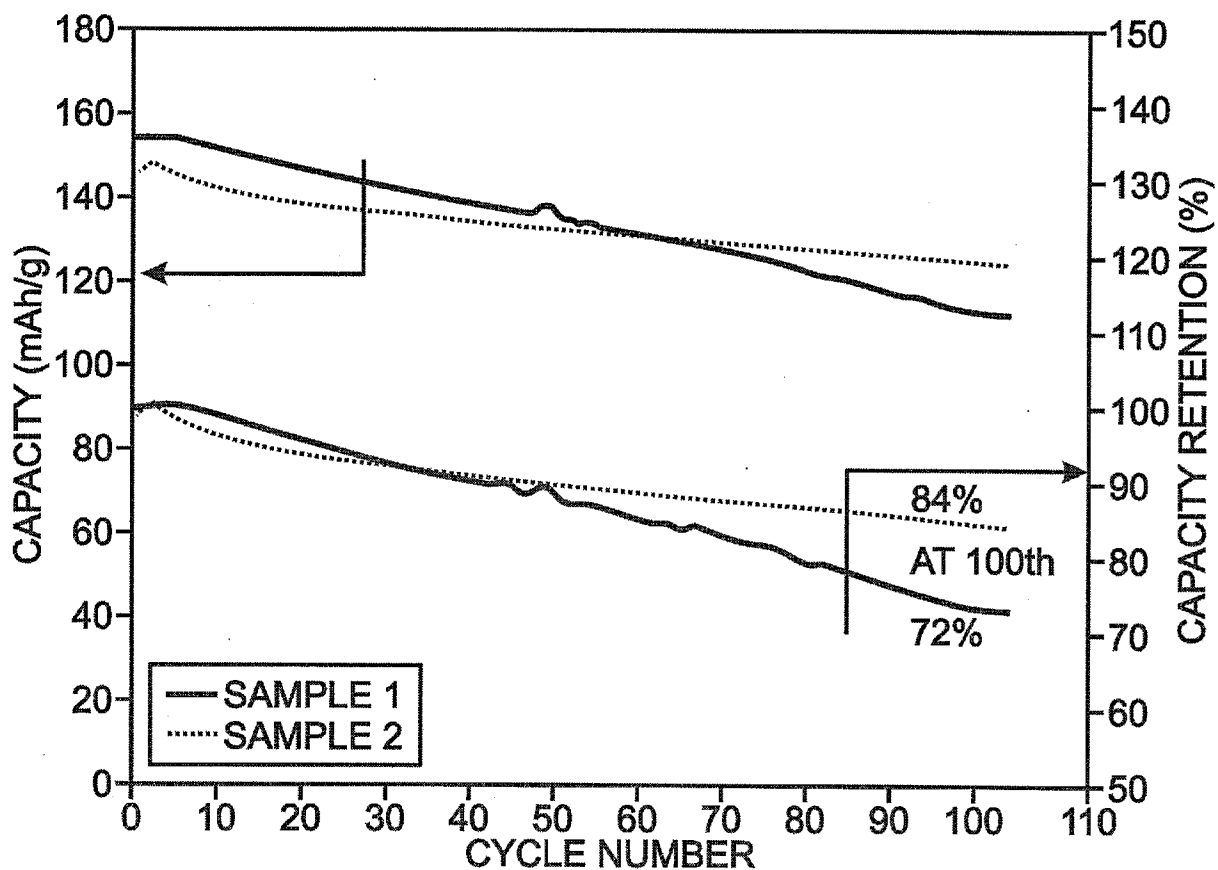


[Fig. 10]

FIG. 10

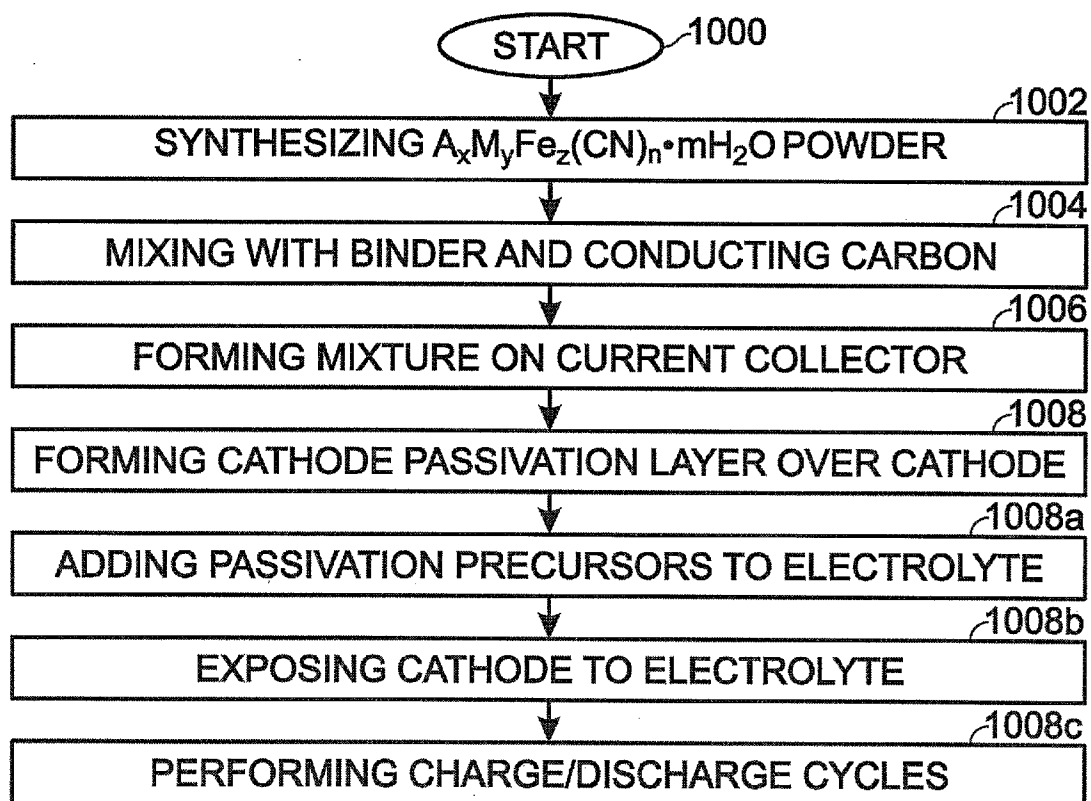

[Fig. 11]

FIG. 11

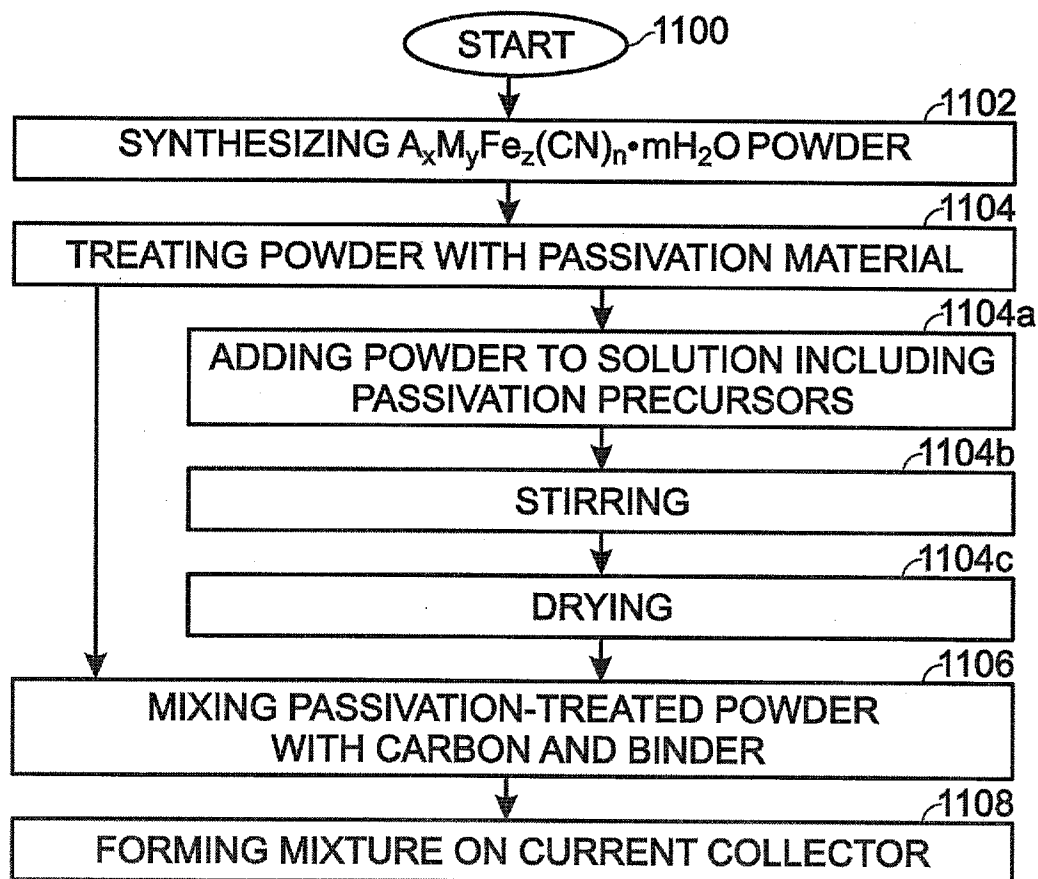

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2014/002143

A. CLASSIFICATION OF SUBJECT MATTER

Int.Cl. See extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int.Cl. H01M4/136, H01M4/1397, H01M4/36, H01M4/58, H01M10/054, H01M10/0566, H01M10/058

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Published examined utility model applications of Japan 1922-1996
 Published unexamined utility model applications of Japan 1971-2014
 Registered utility model specifications of Japan 1996-2014
 Published registered utility model applications of Japan 1994-2014

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	Daisuke Asakura et al., Bimetallic Cyanide-Bridged Coordination Polymers as Lithium Ion Cathode Materials: Core@Shell Nanoparticles with Enhanced Cyclability, Journal of American Chemical Society, 2013,135, American Chemical Society, 2013.02.07, pp.2793-2799	1, 4-6, 9, 11, 12, 17-22, 25, 26
Y	JP 10-021898 A (NIPPON GLASS FIBER CORPORATION) 1998.01.23, [0027] (No Family)	1, 2, 4-7, 9, 11-13, 16-23, 25, 26
Y	JP 2012-046399 A (NATIONAL INSTITUTE OF ADVANCED INDUSTRIAL SCIENCE AND TECHNOLOGY) 2012.03.08, [0017]-[0019] (No Family)	1, 2, 4, 6, 7, 9, 12, 13, 16, 17, 19, 23, 25



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

09.07.2014

Date of mailing of the international search report

22.07.2014

Name and mailing address of the ISA/JP

Japan Patent Office

3-4-3, Kasumigaseki, Chiyoda-ku, Tokyo 100-8915, Japan

Authorized officer

Yasuko YOSHIDA

Telephone No. +81-3-3581-1101 Ext. 3477

4X

4 4 9 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2014/002143

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 2012-022969 A (NISSAN MOTOR CO., LTD.) 2012.02.02, [0063] (No Family)	1, 2, 4, 6, 7, 9, 12, 13, 16, 17, 19, 23, 25
A	JP 2008-041502 A (SONY CORPORATION) 2008.02.21, [0006] (No Family)	1, 2, 4, 6, 7, 9, 12, 13, 16, 17, 19, 23, 25
A	JP 2011-180469 A (NATIONAL INSTITUTE OF ADVANCED INDUSTRIAL SCIENCE AND TECHNOLOGY) 2011.09.15, [0036]-[0038] (No Family)	1-26
A	JP 2011-246303 A (NATIONAL INSTITUTE OF ADVANCED INDUSTRIAL SCIENCE AND TECHNOLOGY) 2011.12.08, whole text (No Family)	1-26
A	WO 2012/177932 A2 (THE BOARD OF TRUSTEES OF THE LELAND STANFORD JUNIOR UNIVERSITY) 2012.12.27, whole text & US 2012/0328936 A1	1-26

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2014/002143

CLASSIFICATION OF SUBJECT MATTER

H01M4/136(2010.01) i, H01M4/1397(2010.01) i, H01M4/36(2006.01) i,
H01M4/58(2010.01) i, H01M10/054(2010.01) i, H01M10/0566(2010.01) i,
H01M10/058(2010.01) i